


XS_LABEL.X – version 06.12.29

Description

XS_LABEL.X is used to place station and elevation labels on each cross section as shown in the example below.

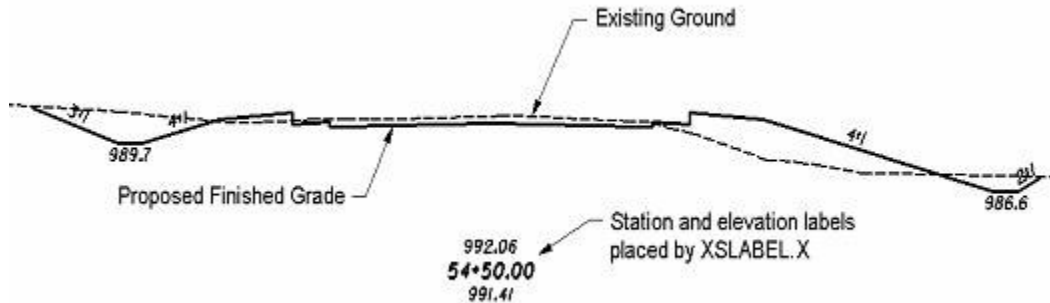

The criteria is intended for undivided highways only. The median criteria file MED301-4.EX will place the station and elevation labels for divided highways.

Inclusion Sequence

The ODOT Standard criteria file DEFINE.X contains default definitions for some of the Define Variables used by ODOT's criteria files. DEFINE.X must always be included first in any criteria run.

XS_LABEL.X can be inserted anywhere in the criteria sequence, after DEFINE.X. Typically, users will inset this criteria file last in the processing.

Define Variables

The text size for the station and elevation labels is determined by the value of the Define Variable “**xs annotation scale**” which is defined in DEFINE.X. See the documentation for DEFINE.X for more information.

Define DGN Variables

There are no define_dgn variables associated with this criteria file.

Labels and Symbology

Station and elevation labels are placed on level XS_P_Annotation.

Marked Points

There are no marked points stored by this criteria file that need to be referenced by another criteria file.