

STATE OF OHIO DEPARTMENT OF TRANSPORTATION ATB/TRU-SR7/VAR-18.62/VAR PART 1

MONROE TOWNSHIP
ASHTABULA COUNTY

FOR PART 2, SEE ATB/TRU-SR7/SR5-18.62/30.50
FOR PART 3, SEE ATB-193-20.14

FEDERAL PROJECT NUMBER

E220(484)

RAILROAD INVOLVEMENT

N/A

PROJECT DESCRIPTION

SUPERSTRUCTURE REPLACEMENTS AND ROADWAY APPROACH WORK ON SFN 0400904 ATB-07-25.01 AND SFN 0403482 ATB-84-25.98, BOTH OVER ASHTABULA CREEK.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA: ATB 07 - 0.33 ACRES
ATB 84 - 0.31 ACRES

ESTIMATED CONTRACTOR EARTH DISTURBED AREA: 0.25 ACRES
NOTICE OF INTENT EARTH DISTURBED AREA: N/A (NOI NOT REQUIRED)

2023 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS, CHANGES LISTED IN THE PROPOSAL, AND THE SUPPLEMENTAL SPECIFICATION 800 VERSION INDICATED ON THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.


I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY AND THAT DETOURS WILL BE PROVIDED AS INDICATED ON SHEETS 12-13.

DISTRICT DEPUTY DIRECTOR

Arthur G. Noiro Jr.
Arthur G. Noiro Jr., P.E.
04

DIRECTOR, DEPARTMENT OF TRANSPORTATION

Pamela Boratyn
Pamela Boratyn

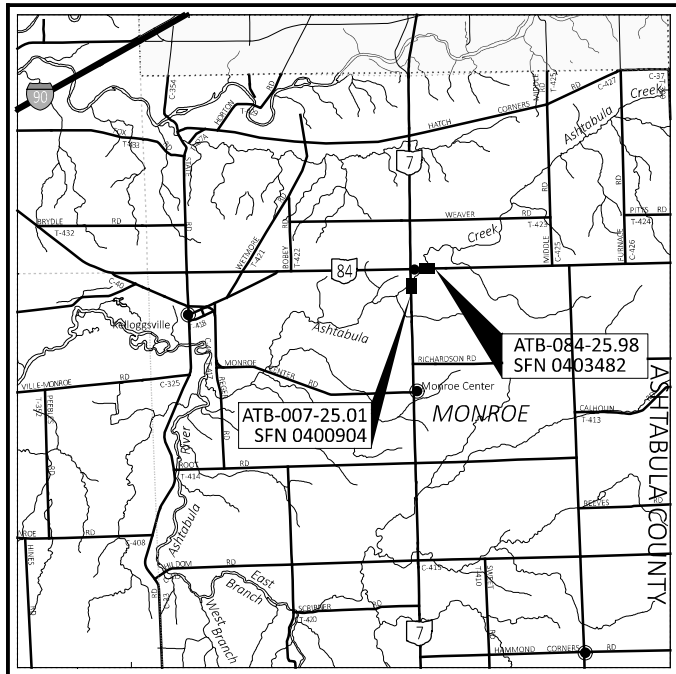

LOCATION MAP

S.R. 07: LATITUDE: 41°51'40" LONGITUDE: -80°51'40"
S.R. 84: LATITUDE: 41°51'45" LONGITUDE: -80°34'10"



PORTION TO BE IMPROVED	—————
INTERSTATE HIGHWAY	—————
FEDERAL ROUTES	—————
STATE ROUTES	—————
COUNTY & TOWNSHIP ROADS	—————
OTHER ROADS	—————

DESIGN DESIGNATION

	S.R. 07	S.R. 84
CURRENT ADT (2027)	1800	950
DESIGN YEAR ADT (2047)	2300	1300
DESIGN HOURLY VOLUME (2047)	300	90
DIRECTIONAL DISTRIBUTION	53%	50%
TRUCKS (24 HOUR B&C)	4%	4%
DESIGN SPEED	60 MPH	60 MPH
LEGAL SPEED	55 MPH	55 MPH
DESIGN FUNCTIONAL CLASSIFICATION:	04 MINOR ARTERIAL (RURAL)	05 MAJOR COLLECTOR (RURAL)
NHS PROJECT	NO	

DESIGN EXCEPTIONS

NONE

ADA DESIGN WAIVERS

NONE

UNDERGROUND UTILITIES
Contact Two Working Days Before You Dig

OHIO811.org
Before You Dig

OHIO811. 8-1-1. or 1-800-362-2764
(Non members must be called directly)

PLAN PREPARED BY:
CT CONSULTANTS
8150 STERLING COURT
MENTOR, OH 44060

INDEX OF SHEETS:

TITLE SHEET	P.1
SCHEMATIC PLAN	P.2
TYPICAL SECTIONS	P.3-P.7
GENERAL NOTES	P.8-P.9
MAINTENANCE OF TRAFFIC	P.10-P.13
GENERAL SUMMARY	P.14-P.15
SUBSUMMARIES	P.16-P.17
PLAN & PROFILE - S.R. 07	P.18-P.19
PLAN & PROFILE - S.R. 84	P.20
CROSS SECTIONS - S.R. 07	P.21-P.26
CROSS SECTIONS - S.R. 84	P.27-P.33
MISCELLANEOUS PROFILES	P.34
TRAFFIC CONTROL	P.35-P.36
STRUCTURES (OVER 20' SPAN) SFN 0400904	P.37-P.52
STRUCTURES (OVER 20' SPAN) SFN 0403482	P.53-P.70

STANDARD CONSTRUCTION DRAWINGS										SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS		
BP-3.1	1/19/24	DM-1.1	1/17/25	MT-97.10	7/18/25	AS-1-15	1/20/23			800-2023	1/16/26	ASBESTOS-ATB-7-25.01	12/09/22
BP-3.2	1/18/19	DM-1.2	1/17/25	MT-101.60	1/17/25	AS-2-15	7/21/23			832	7/18/25	ASBESTOS-ATB-84-25.98	12/09/22
BP-4.1	7/19/13	DM-3.1	1/18/13	MT-101.90	7/17/20					872	1/17/25		
BP-5.1	7/18/25	DM-4.1	7/17/20	MT-105.10	1/17/20	CS-1-24	7/19/24			874	4/17/20	ASBESTOS-ATB-7-18.61	6/30/23
		DM-4.3	1/15/16							875	1/17/25	ASBESTOS-ATB-7-20.12	6/30/23
MGS-1.1	7/16/21	DM-4.4	1/15/16	TC-41.20	10/18/13	DS-1-92	7/15/22			940	4/17/15	ASBESTOS-TRU-5-30.69	6/30/23
MGS-2.1	7/18/25			TC-42.10	10/18/13							ASBESTOS-ATB-193-20.14	4/04/22
MGS-2.3	7/18/25	HW-1.1	7/18/25	TC-42.20	10/18/13	PSBD-1-25	7/18/25						
MGS-3.3	7/18/25	HW-2.1	7/15/22	TC-52.10	10/18/13	PSBD-2-07	7/20/18						
MGS-4.2	7/18/25	HW-2.2	7/20/18	TC-52.20	1/15/21								
MGS-4.3	7/18/25			TC-61.30	7/19/24	SIKD-1-21	1/19/24						
MGS-5.3	7/15/16	MH-3	7/19/24	TC-64.10	7/21/23								
MGS-6.1	1/19/18					TST-2-21	1/17/25						

WATERWAY PERMIT -
ATB-SR7/SR84-25.01/25.98 4/29/2025

ENGINEER'S SEAL
ROADWAY
ENGINEER'S SEAL
BRIDGE

ATB-07/84-25.01/25.98 PART 1

MODEL: Sheet_PAPER: 34x22 (in.) DATE: 5/19/2026 TIME: 2:06:44 PM USER: Klein H:\2022\20169115013\401-Engineering_Consultants\Roadway\Sheets\115013_GTO01.dgn

TITLE SHEET

DESIGN AGENCY	
DESIGNER	TMK
REVIEWER	JMP 12/20/24
PROJECT ID	115013
SHEET	P.1
TOTAL	70