

SIGNS ARE TO BE 36"x36" FOR RESIDENTIAL AND DOWNTOWN AREAS AND 48"x48" ON MULTI-LANE, HIGH SPEED (45 MPH OR GREATER) ROADWAYS.


SIGN COC-327 (R/L) IS REQUIRED AT ALL PLATE LOCATIONS. SIGN COC-328 IS REQUIRED WHEN POSTED SPEED IS 35 MPH OR GREATER.

SIGNS SHOULD BE PLACED IN ALL DIRECTIONS THAT ARE AFFECTED. SIGN SPACING SHALL INCREASE TO 250' WHEN SPEED EXCEEDS 45 MPH.

SIGNS SHOULD BE DUAL MOUNTED ON MULTI-LANE, ONE-WAY ROADWAYS.

ALL SIGNS SHALL BE MOUNTED IN ACCORDANCE WITH THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (OMUTCD).

SIGNS SHALL NOT BE PLACED IN A MANNER THAT WOULD BLOCK PARKING, BIKE LANES, OR RESTRICT A PEDESTRIAN FROM USING ANY SIDEWALK INCLUDING CURB RAMPS. PAR SHALL BE MAINTAINED AT ALL TIMES.

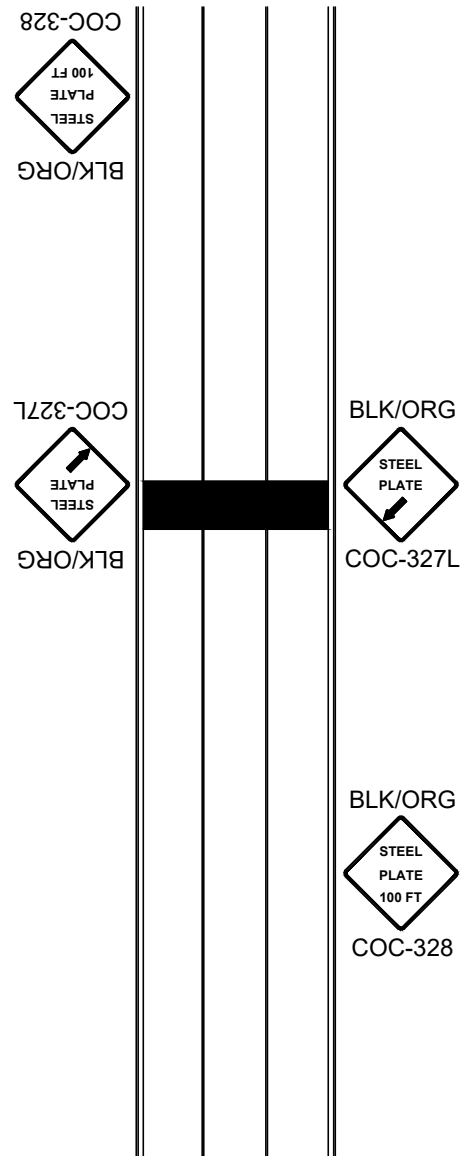

## STEEL PLATE REQUIREMENTS

# PAVEMENT & UTILITY CUT REPAIR STANDARDS

CITY OF COLUMBUS, OHIO  
DEPARTMENT OF PUBLIC SERVICE  
DIVISION OF DESIGN AND CONSTRUCTION

STD DWG

1441

4/22/2019

SHT 13 OF 13