

CALCULATED TD CHECKED NEM
HORIZONTAL SCALE IN FEET
0 25 50 100

TEMPORARY ROAD PLAN AND PROFILE


LIC-599-8.54

CURVE DATA
P.I. Sta. 4+50.00, @ Temp. Rd.
 $\Delta = 4^\circ 42' 00''$ LT
 $D_C = 4^\circ 42' 00''$
 $R = 1218.28'$
 $T = 50.00'$
 $L = 100.00'$
 $E = 1.03'$
 $e_{max} = 0.040$

CURVE DATA
P.I. Sta. 5+83.56, @ Temp. Rd.
 $\Delta = 27^\circ 03' 36''$ LT
 $D_C = 16^\circ 30' 00''$
 $R = 347.25'$
 $T = 83.56'$
 $L = 164.00'$
 $E = 9.91'$
 $e_{max} = 0.040$

CURVE DATA
P.I. Sta. 7+48.31, @ Temp. Rd.
 $\Delta = 27^\circ 17' 40''$ RT
 $D_C = 16^\circ 30' 00''$
 $R = 347.25'$
 $T = 84.31'$
 $L = 165.42'$
 $E = 10.09'$
 $e_{max} = 0.040$

CURVE DATA
P.I. Sta. 12+59.19, @ Temp. Rd.
 $\Delta = 09^\circ 16' 18''$ RT
 $D_C = 09^\circ 15' 00''$
 $R = 619.41'$
 $T = 50.23'$
 $L = 100.23'$
 $E = 2.03'$
 $e_{max} = 0.040$

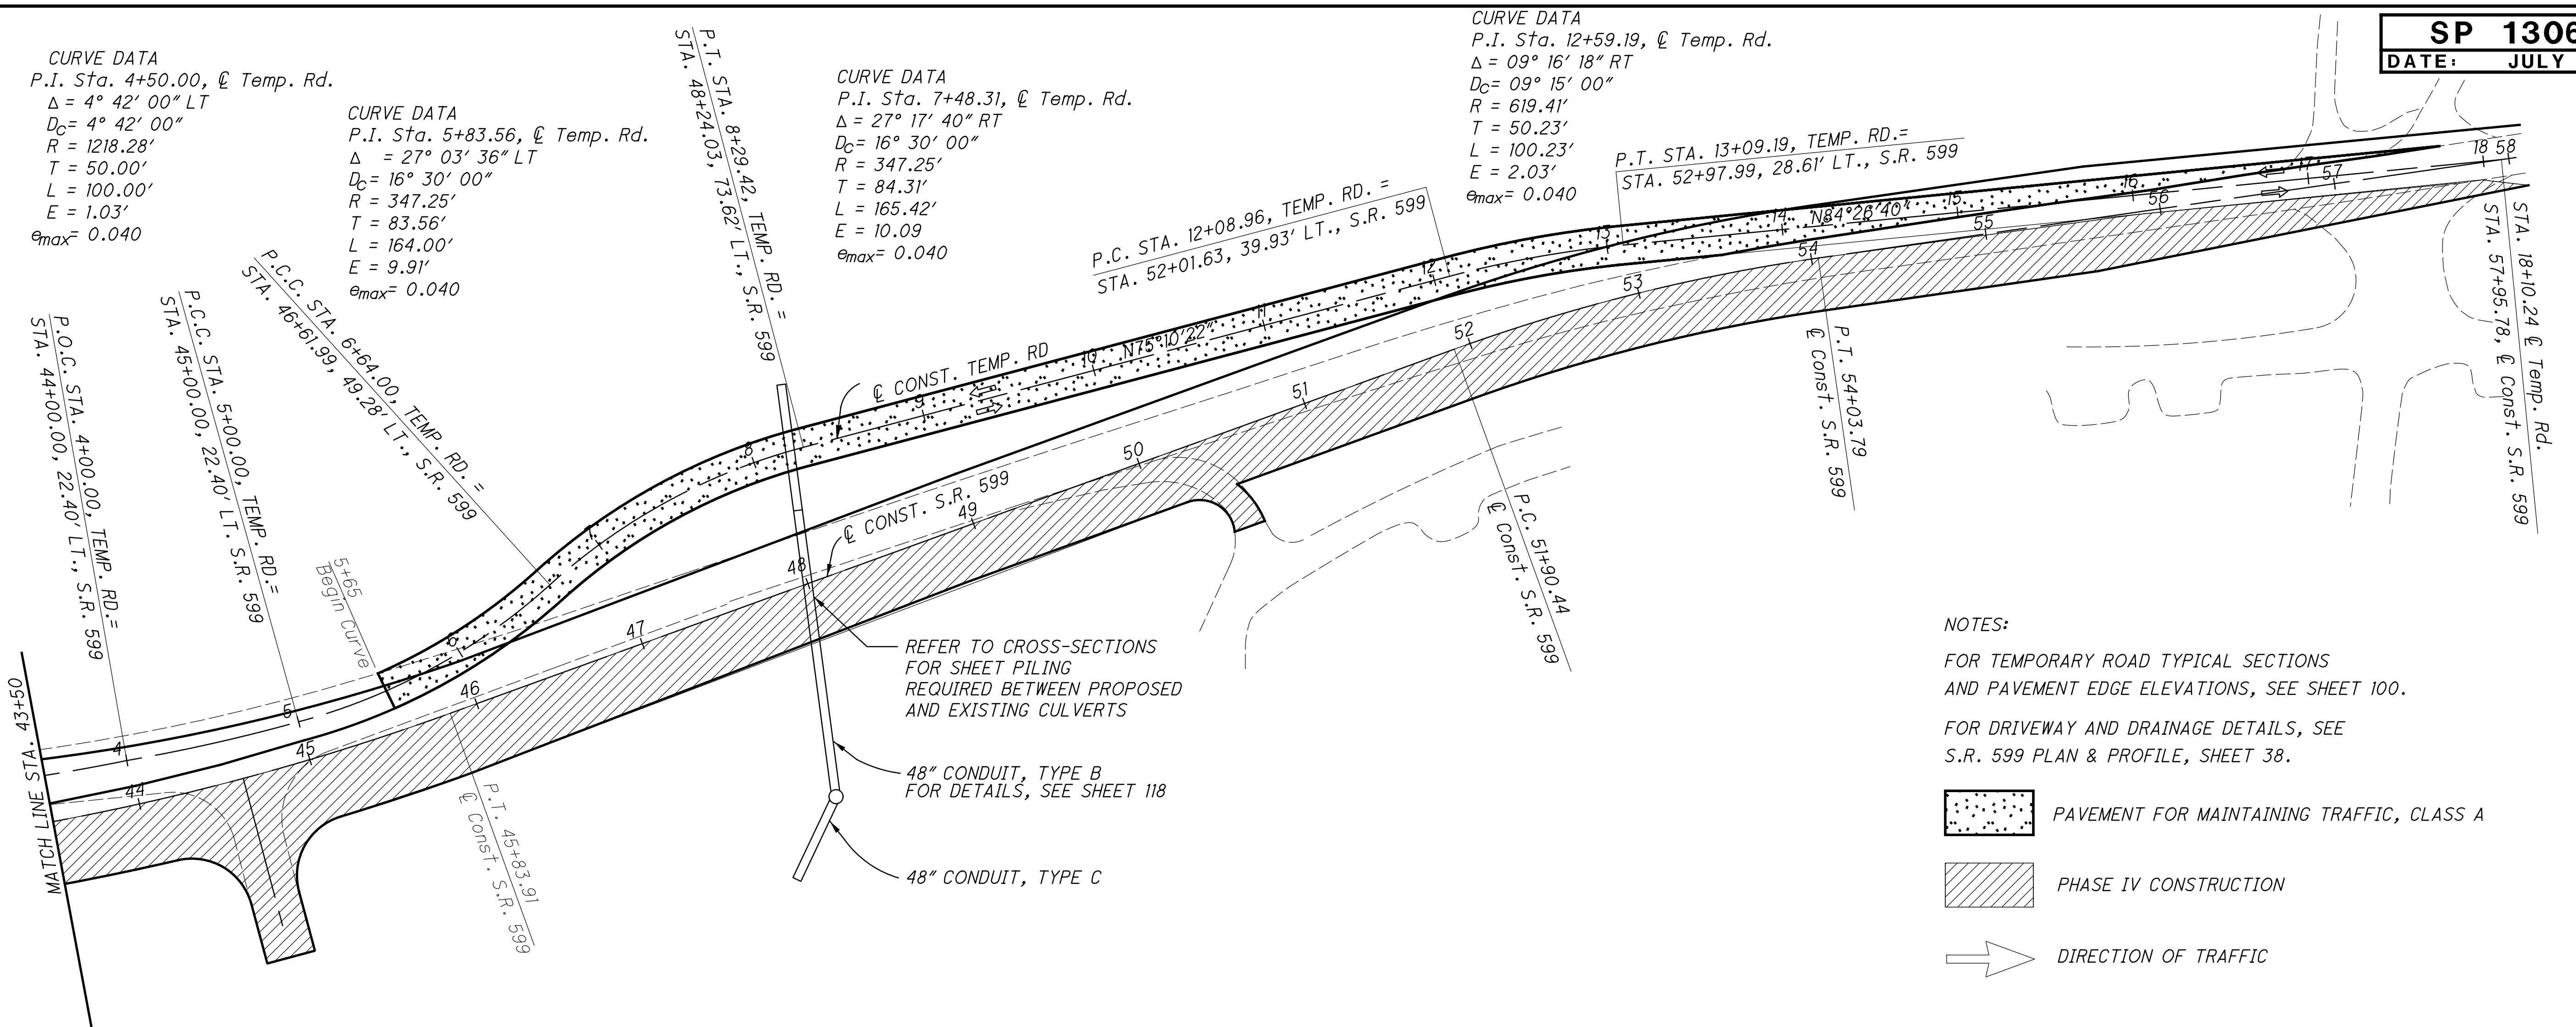

- NOTES:**
- FOR TEMPORARY ROAD TYPICAL SECTIONS AND PAVEMENT EDGE ELEVATIONS, SEE SHEET 100.
 - FOR DRIVEWAY AND DRAINAGE DETAILS, SEE S.R. 599 PLAN & PROFILE, SHEET 38.
- PAVEMENT FOR MAINTAINING TRAFFIC, CLASS A
 - PHASE IV CONSTRUCTION
 - DIRECTION OF TRAFFIC

