



OHIO DEPARTMENT OF TRANSPORTATION

AASHTO 93 Pavement Design

Default inputs based on July 2014 PDM

C-R-S: Ramp_35WB_to_435 - Using
ramp traffic

PID: 117955

Date calculated: 9/16/2024

Data entered by: L. Wright

ESAL Calculation

Input Parameters

Functional Classification = Rural Interstate
 Design period = 20 years
 Opening day ADT = 4,240
 Design year ADT = 7,280
 Directional distribution = 100 % (default 50%)
 Trucks (24 hour B&C) = 31 %
 B:C ratio = 7:1
 Number of lanes = 2 (both directions)
 Lane factor = 100 %

Flexible Pavement ESAL

B ESAL conversion factor = 0.98
 C ESAL conversion factor = 0.29
 Daily B-ESAL = 1,531
 Daily C-ESAL = 65
 Total ESAL 11 #NUM!
 Total W_{18} ESAL = 11,700,000
 Use 11,700,000

Flexible Pavement Design

Reliability, R = 90 %
 Standard normal deviate, Z_R = -1.282
 Overall standard deviation, S_0 = 0.49
 Design serviceability loss, ΔPSI = 2.0
 CBR = 7
 Resilient Modulus, M_r = 11,424 psi
 Log (W_{18}) = 7.068185862
 Trial Log (W_{18}) based on SN = 7.067408821
 Difference = 0.000777041
 Structural Number, SN = 4.29

AC Surface Courses 1.5 inches
 AC Intermediate Courses 1.75 inches
 AC Base Courses 6 inches
 Aggregate Base 6 inches
 Pavement Structural Number = 4.3975 OK

Rigid Pavement ESAL

B ESAL conversion factor = 1.53
 C ESAL conversion factor = 0.37
 Daily B-ESAL = 2,390
 Daily C-ESAL = 83
 Total ESAL 11 #NUM!
 Total W_{18} ESAL = 18,100,000
 Use 18,100,000

Rigid Pavement Design

Reliability, R = 90 %
 Standard normal deviate, Z_R = -1.282
 Overall standard deviation, S_0 = 0.39
 Design serviceability loss, ΔPSI = 1.7
 CBR = 7
 Resilient Modulus, M_r = 11,424 psi
 Subbase thickness, D_{SB} = 6 inch
 Subbase modulus, E_{SB} = 36,000 psi
 Composite Modulus, k_c = 588 pci
 Loss of Support, LS = 1
 Effective Modulus, k = 171 pci
 Doweled, Edge Support $J = 2.7$

Log (W_{18}) = 7.257678575
 Trial Log (W_{18}) based on D = 7.257689191
 Difference = -1.0616E-05
 Slab thickness, D = 10.13 inch
 Rigid Pavement Thickness = 10.5 inch



OHIO DEPARTMENT OF TRANSPORTATION

AASHTO 93 Pavement Design

Parameters for Rigid Pavement Design

Ramp_35WB_to_435 - Using
C-R-S: ramp traffic


PID: 117955

Date calculated: 9/16/2024

Data entered by: L. Wright

Composite Modulus of Subgrade Reaction

$M_r = 11,424$ psi
 $D_{SB} = 6$ inch
 $E_{SB} = 36,000$ psi
 $k_c = 588$ pci

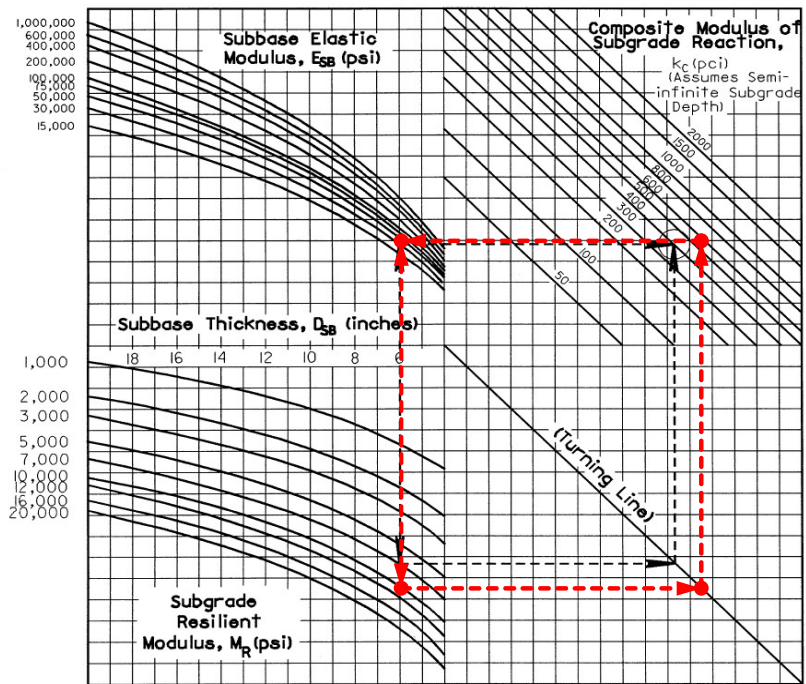

Effective Modulus of Subgrade Reaction

$k_c = 588$ pci
 $LS = 1$
 $k = 171$ pci

