

CROSS REFERENCE


Sht No	Item
84,85	Pavement Details
129	Storm Sewer Profile

For Pavement Details See Sheet No. 84

For Pavement Details See Sheet No. 85

ROADWAY

Ref. No.	Side	Location	Estimated Quantities		
			Pavement Removed	Guard Rail, Type 5 Standard Anchor Assembly	
S.Y.	L.F.	Ea.			
IPR	Lt. Rt.	441+40 to 442+37	370		
1G	Rt.	442+42 to 446+00		356.5	1
TOTAL			370	356.5	1

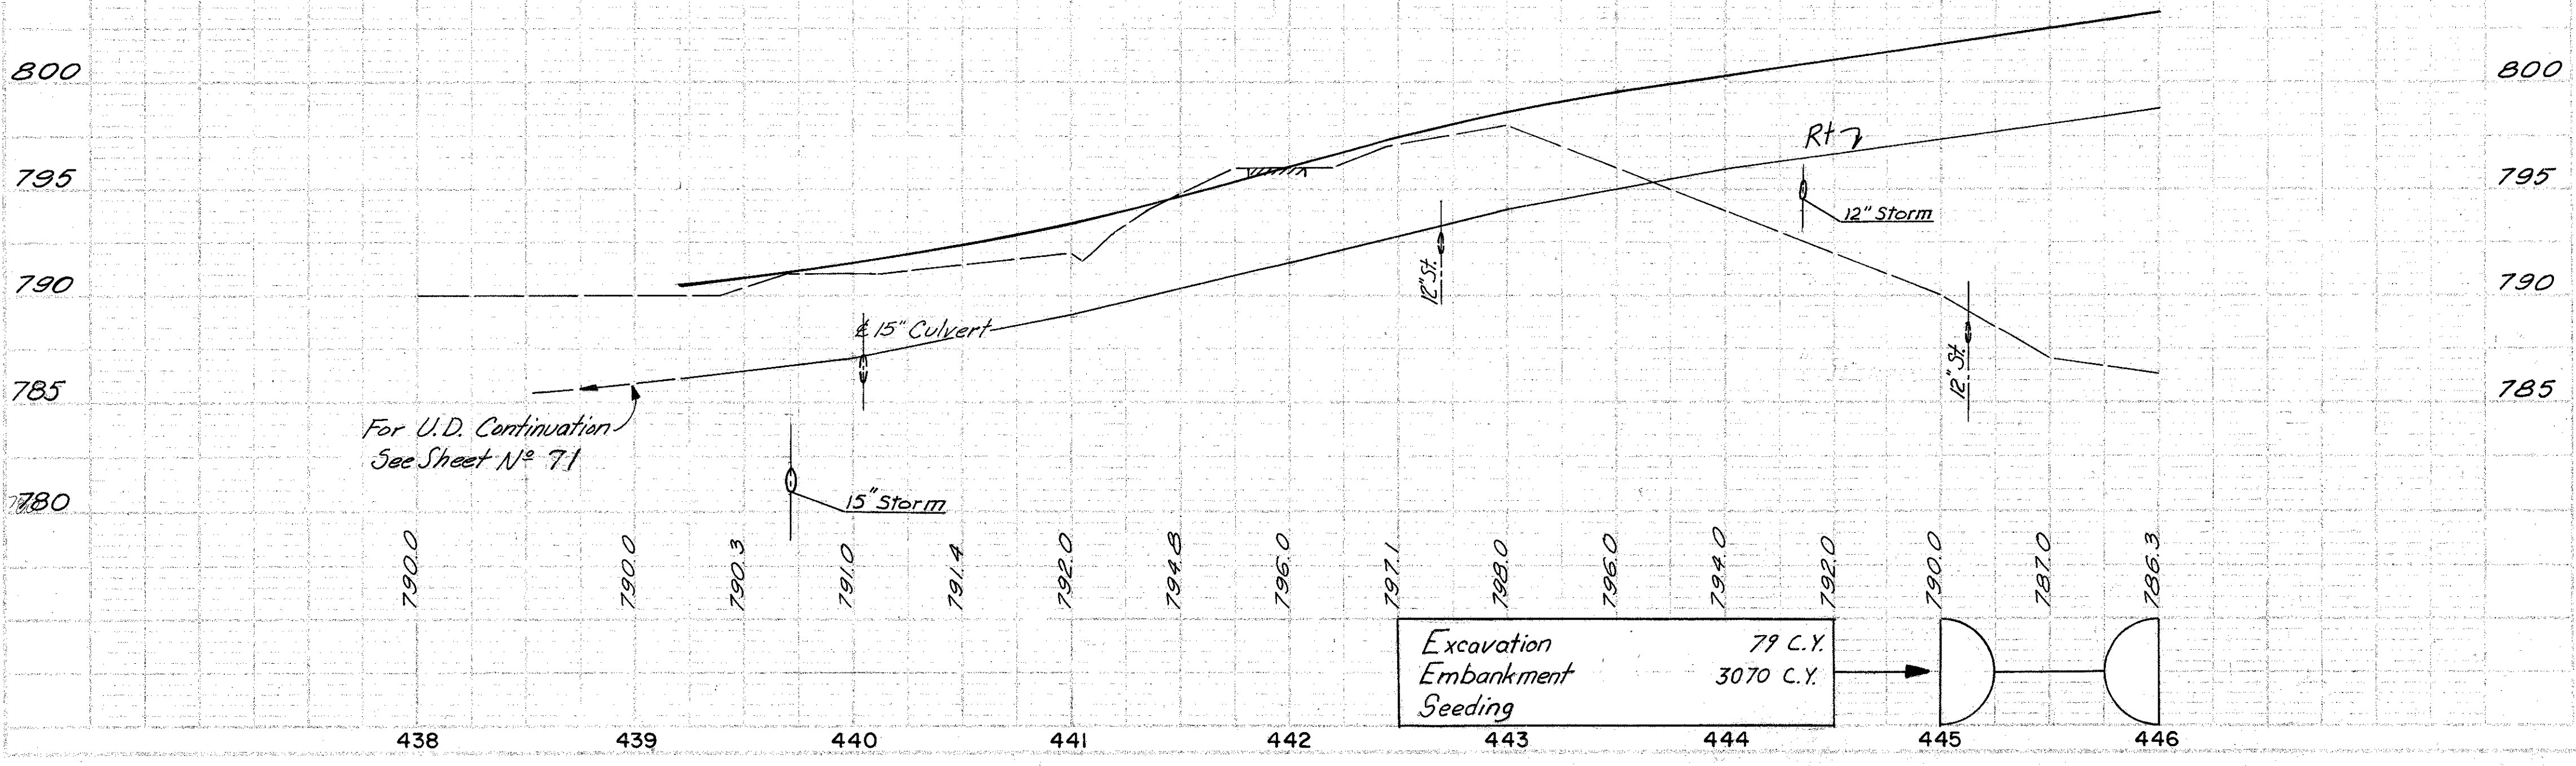

DRAINAGE

Ref. No.	Side	Location	Estimated Quantities						
			Rock Channel Protection, Type 18"	Concrete Masonry, Type B"	12" Cl. B. Bedding	12" Type "F"	6" Type "F"	Std No. 6 C.B. Bend & Branches	Shallow
C.Y.	C.Y.	L.F.	L.F.	L.F.	Ea.	L.F.			
1D	Lt. Rt.	585+50 (3/8) to 441+00	2.2	0.21	64	35	1		
1U	Rt.	439+22 to 446+00					10	668	
TOTAL			2.2	0.21	64	35	1	668	

Excavation 79 C.Y.
 Embankment 3070 C.Y.
 Seeding

E.J.K. 5/2/66
 A.J.F. 8/1/66