


# CONSOLIDATION TEST REPORT

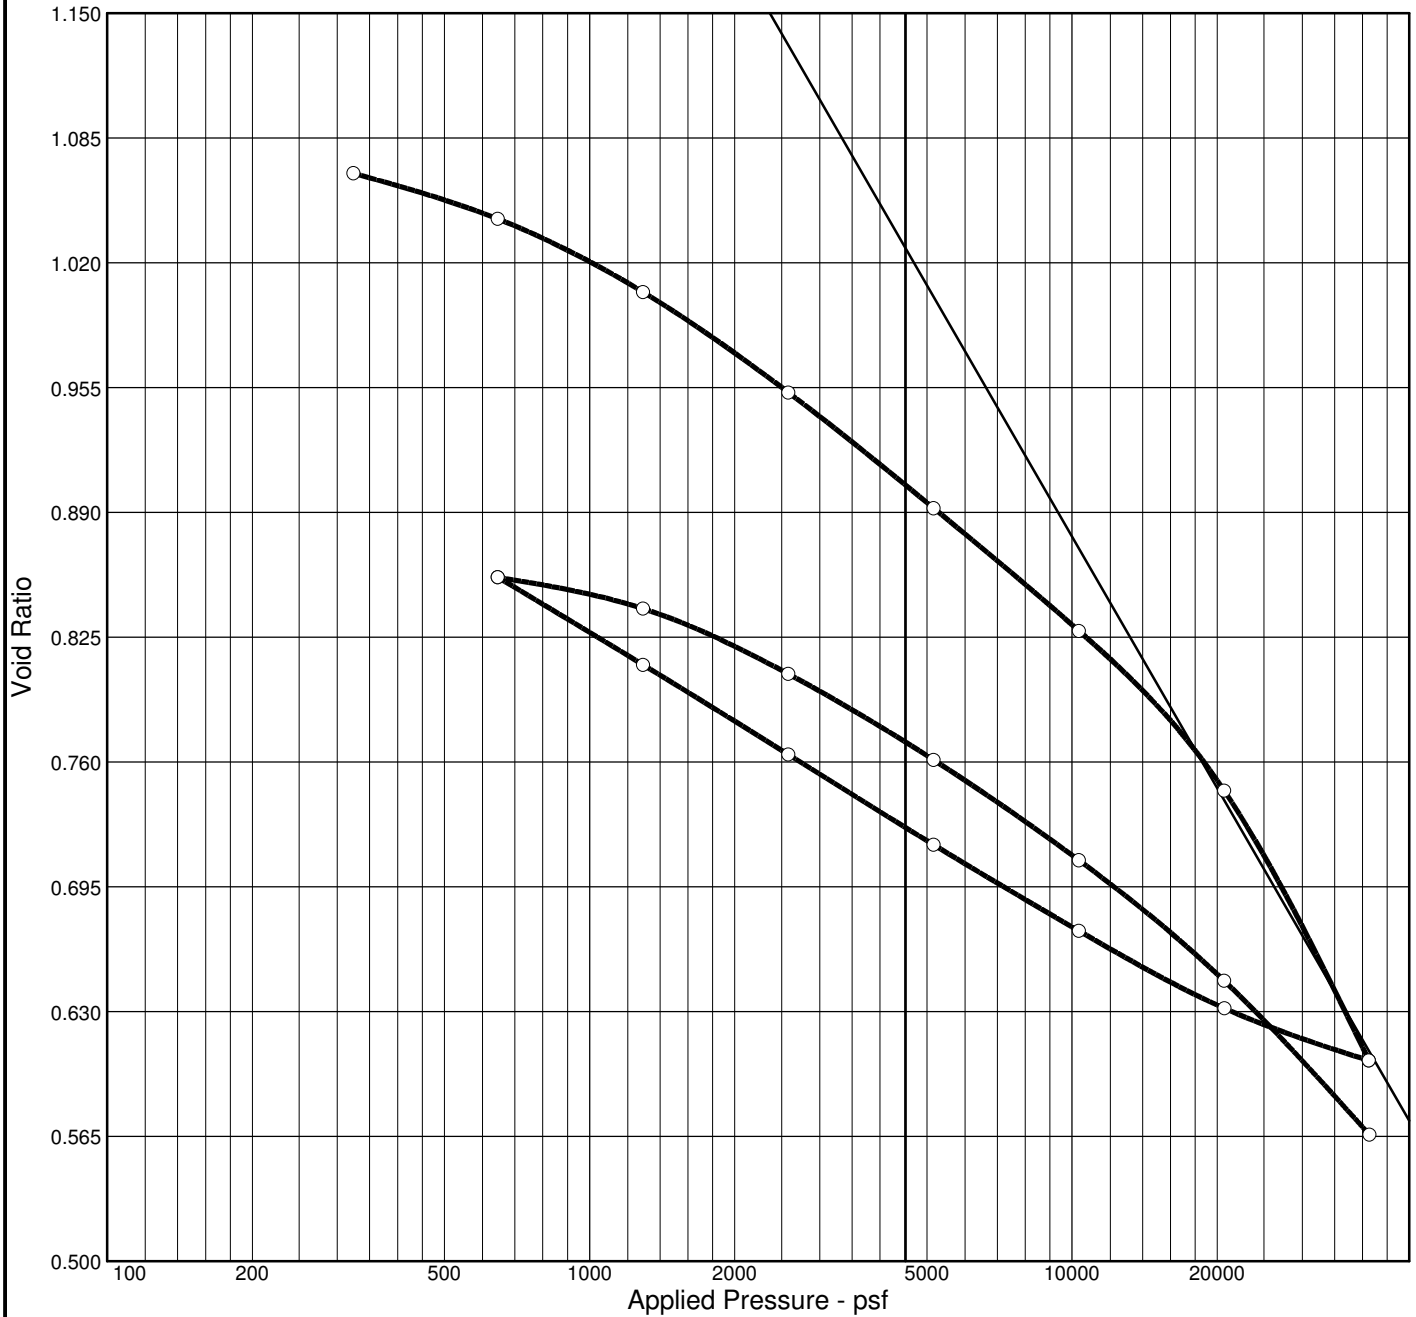

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
93.6 %	36.0 %	84.0	59	33	2.79	CH	A-7-6(38)	1.074

### MATERIAL DESCRIPTION

Fat clay

**Project No.** 0121-  
**Project:** SCI-823-0.00

**Client:** TranSystems, Inc.

**Remarks:**

**Source:** R-464

**Sample No.:** P1

**Elev./Depth:** 21.0



**Figure**