

STATE OF OHIO

DEPARTMENT OF TRANSPORTATION

ERI-2-30.51 AND VARIOUS
LOR-2-0.00 AND VARIOUS

CITY OF VERMILION
BROWNHELM TOWNSHIP
VERMILION TOWNSHIP
ERIE AND LORAIN COUNTIES

PROJECT DESCRIPTION

REHABILITATION OF 1.72 MILES OF EXISTING PAVEMENT AND SHOULDERS FOR ONGOING RESEARCH PROJECTS INCLUDING THE INSTALLATION OF WEIGH-IN-MOTION INSTRUMENTATION AND THE REHABILITATION OF BRIDGES UNDER WEST RIVER ROAD, VERMILION ROAD, VERMILION INTERCHANGE ROAD, SUNNYSIDE ROAD AND CLAUS ROAD AND OVER THE VERMILION RIVER AND BAUMHART ROAD.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA: 9.5 ACRES
ESTIMATED CONTRACTOR EARTH DISTURBED AREA: 2.6 ACRES
NOTICE OF INTENT EARTH DISTURBED AREA: 12.1 ACRES

LIMITED ACCESS

THIS IMPROVEMENT IS ESPECIALLY DESIGNED FOR THROUGH TRAFFIC AND HAS BEEN DECLARED A LIMITED ACCESS HIGHWAY OR FREEWAY BY ACTION OF THE DIRECTOR IN ACCORDANCE WITH THE PROVISIONS OF SECTION 5511.02 OF THE OHIO REVISED CODE.


2016 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS AND CHANGES LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL NOT REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY EXCEPT FOR THE RAMPS AND SIDE ROADS AS DESCRIBED ON SHEETS 16 & 17 AND AS SHOWN ON SHEETS 19-22, AND THAT PROVISIONS FOR THE MAINTENANCE AND SAFETY OF TRAFFIC WILL BE AS SET FORTH ON THE PLANS AND ESTIMATES.

APPROVED _____
DATE _____ DISTRICT DEPUTY DIRECTOR

APPROVED _____
DATE _____ DIRECTOR, DEPARTMENT OF TRANSPORTATION

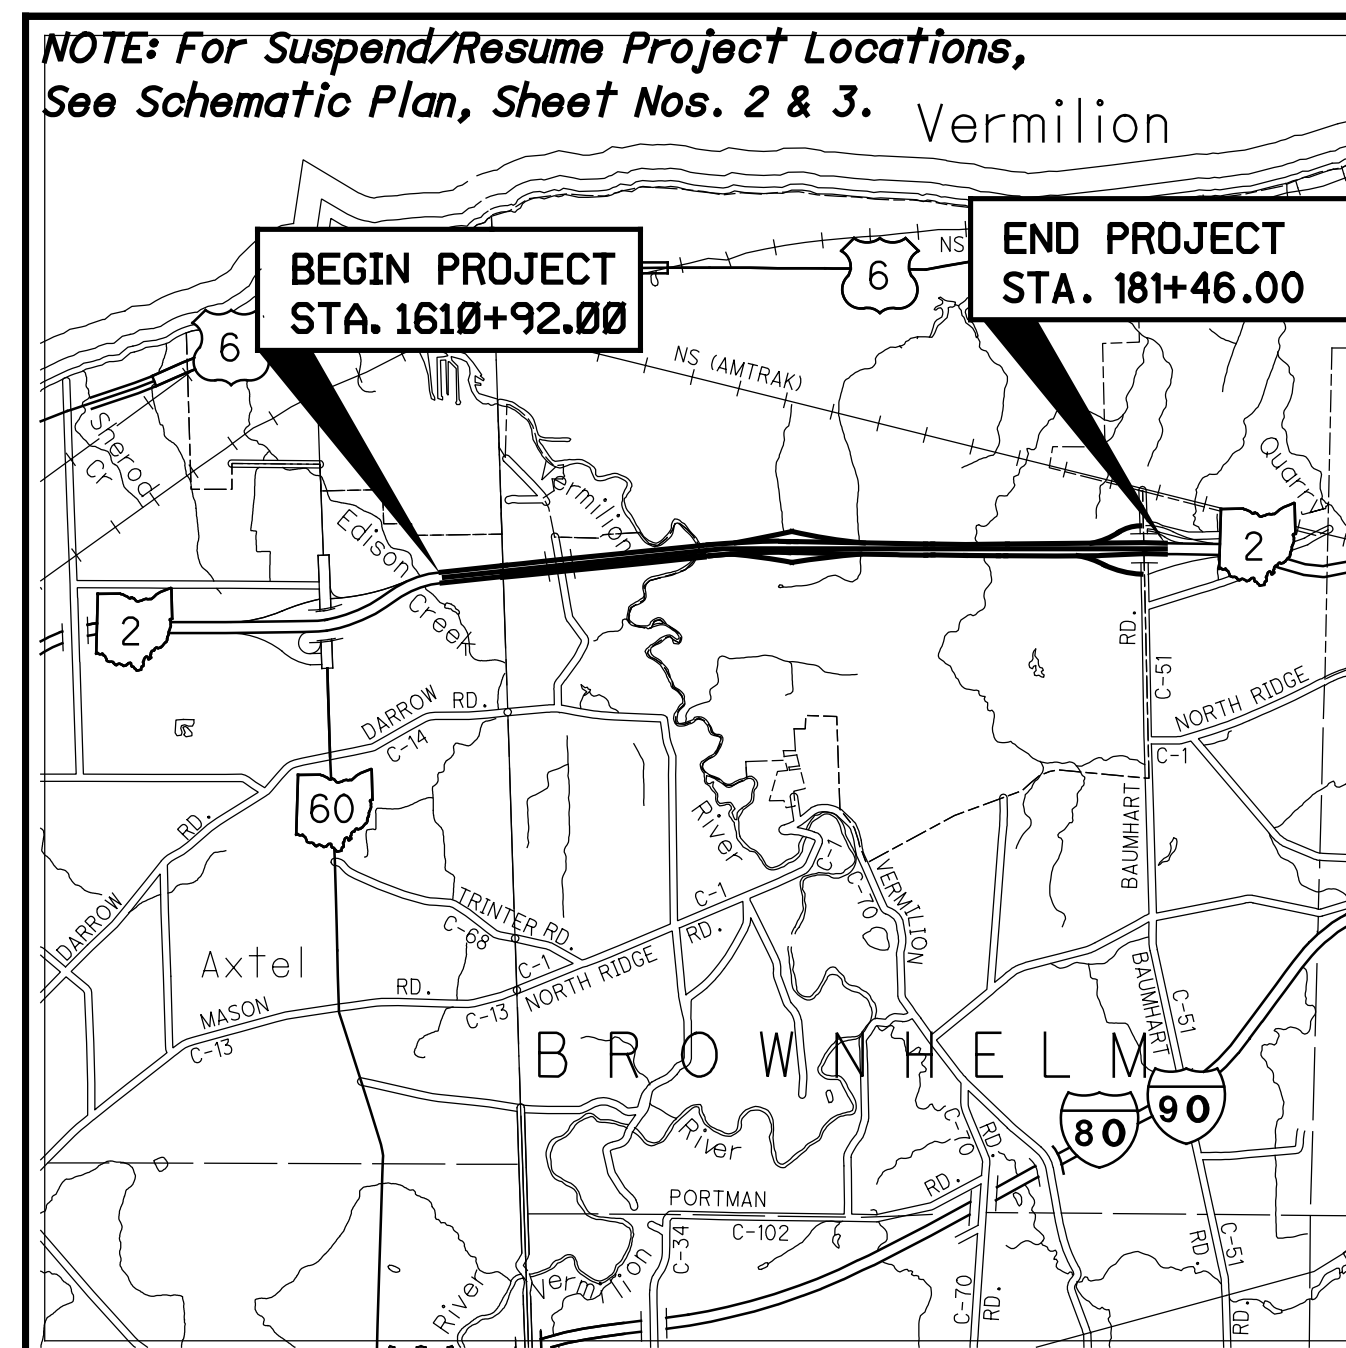

LOCATION MAP

LATITUDE: 41°24'10" LONGITUDE: 82°18'40"



PORTION TO BE IMPROVED	—————
INTERSTATE HIGHWAY	—————
FEDERAL ROUTES	—————
STATE ROUTES	—————
COUNTY & TOWNSHIP ROADS	—————
OTHER ROADS	—————

FOR DESIGN DESIGNATION AND DESIGN EXCEPTION INFORMATION, SEE SHEETS 2 AND 3.

INDEX OF SHEETS:

TITLE SHEET	1	DETAILS:	
SCHEMATIC PLAN	2-3	PAVEMENT JOINT REPAIR	144-146
TYPICAL SECTIONS	4-9	SHRP PAVEMENT REPAIR	147-154, 154A
GENERAL NOTES	10-15	PIER PROTECTION	155-156
MAINTENANCE OF TRAFFIC	16-59, 59A	APPROACH SLABS	157-158
GENERAL SUMMARY	60-62	CURB REMOVAL & SHOULDER REPLACEMENT	159-166
SUBSUMMARIES:		CONCRETE SHOULDER	167
GUARDRAIL	63	MEDIAN CROSSEVER	168
SEEDING	64	DRAINAGE	169, 169A
DRAINAGE	65-66	SUPERELEVATION TABLES	170-171
CALCULATIONS		PREFABRICATED STRUCTURES	172-179
JOINT REPAIR	74-80	WEITH-IN-MOTION DETAILS	180-185
PAVEMENT GRINDING	81	TRAFFIC CONTROL	186-205
JOINT SEALING	82-83	STRUCTURES OVER 20 FOOT SPAN	
SEEDING	84-85	LOR-2-3001	206-214
PROJECT SITE PLAN	89-90	LOR-2-9806	215-223
PLAN AND PROFILE - S.R.2	91-108	LOR-2-1070	224-233
CROSS SECTIONS - S.R.2	109-122	LOR-2-1511	234-242
SIDE APPROACHES:		LOR-2-2231	243-251
RAMPS - REST AREA	123-128	LOR-2-2621	252-261
RAMPS - VERMILLION INTERCHANGE	129-132	LOR-2-3331	262-267
RAMPS - BAUMHART INTERCHANGE	133-134	SOIL PROFILES	
WEST RIVER ROAD	135-136	SHEETS NOT USED	67-73, 86-88
VERMILLION ROAD	137-138		
VERMILLION INTERCHANGE ROAD	139		
SUNNYSIDE ROAD	140-141		
CLAUS ROAD	142-143		

UNDERGROUND UTILITIES
Contact Two Working Days Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764
(Non-members must be called directly)

PLAN PREPARED BY:
JOHN DOE CONSULTANTS, INC.
9999 ENGLISH DRIVE
COMPUTERLAND, OHIO 00000

ENGINEERS SEAL:
FOR ENTIRE PLAN EXCEPT STRUCTURES OVER 20'

SIGNED: Jane C. Smith
DATE: 11-11-14

ENGINEERS SEAL:
FOR STRUCTURES 20' & UNDER

SIGNED: John J. Doe
DATE: 11-11-14

STANDARD CONSTRUCTION DRAWINGS								SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS	
BP-1.1	7/28/00	MGS-1.1	7/19/13	HL-10.13	1/16/15	TC-18.24	1/17/14	800-2013	1/21/15	WATERWAY PERMIT
BP-2.1	7/19/13	MGS-2.1	7/19/13	HL-20.14	1/16/15	TC-22.20	1/17/14	832	1/17/14	1/23/14
BP-2.2	7/18/08	MGS-3.1	7/18/14	HL-30.11	1/16/15	TC-41.10	7/19/13			
BP-2.3	7/18/14	MGS-3.2	1/18/13	HL-30.21	1/17/14	TC-41.20	10/18/13			
BP-2.5	7/19/13	MGS-4.2	7/19/13	HL-30.31	1/17/14	TC-41.40	10/18/13			
BP-3.1	7/18/14	MGS-5.3	7/19/13	HL-30.32	1/17/14	TC-41.50	10/18/13			
BP-6.1	7/19/13	MGS-6.1	7/19/13	HL-40.10	1/17/14	TC-42.10	10/18/13			
CB-1.1	1/18/13	RM-4.2	6/4/14	MT-95.30	7/18/14	TC-51.11	1/17/14			
CB-2.2	1/17/14	RM-4.3	7/18/14	MT-95.31	7/18/14	TC-52.10	10/18/13			
CB-3.1	1/18/13	RM-4.4	7/18/14	MT-96.11	7/18/14	TC-52.20	7/18/14			
CB-3.2	1/18/13			MT-96.20	7/19/13	TC-65.10	1/17/14			
		AS-1-81	1/18/13	MT-96.26	7/19/13	TC-65.11	7/18/14			
DM-1.1	1/18/13	EXJ-4-87	7/19/02	MT-99.20	7/19/13	TC-72.20	7/18/14			
DM-4.4	7/20/12	RB-1-55	7/19/13			TC-82.10	10/18/13			