

STATE OF OHIO DEPARTMENT OF TRANSPORTATION

COS-751-3.86

OXFORD TOWNSHIP COSHOCTON COUNTY

FEDERAL PROJECT NUMBER

E191(298)

RAILROAD INVOLVEMENT

NONE

PROJECT DESCRIPTION


THIS PROJECT CONSISTS OF THE REHABILITATION OF THE COS-751-0386 BRIDGE BY MEANS OF ENCASEMENT OF THE EXISTING PIER PILES WITH A CONCRETE WALL ENCASEMENT AND RELATED WORK.


EARTH DISTURBED AREAS


PROJECT EARTH DISTURBED AREA: 0.30 ACRES
ESTIMATED CONTRACTOR EARTH DISTURBED AREA: 0.33 ACRES
NOTICE OF INTENT EARTH DISTURBED AREA: N/A ACRES

2023 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS, CHANGES LISTED IN THE PROPOSAL, AND THE SUPPLEMENTAL SPECIFICATION 800 VERSION INDICATED ON THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

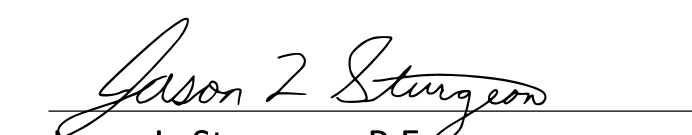

Jason L. Sturgeon, P.E.
District 05 Deputy Director


Jack Marchbanks, PhD
Director, Department of Transportation

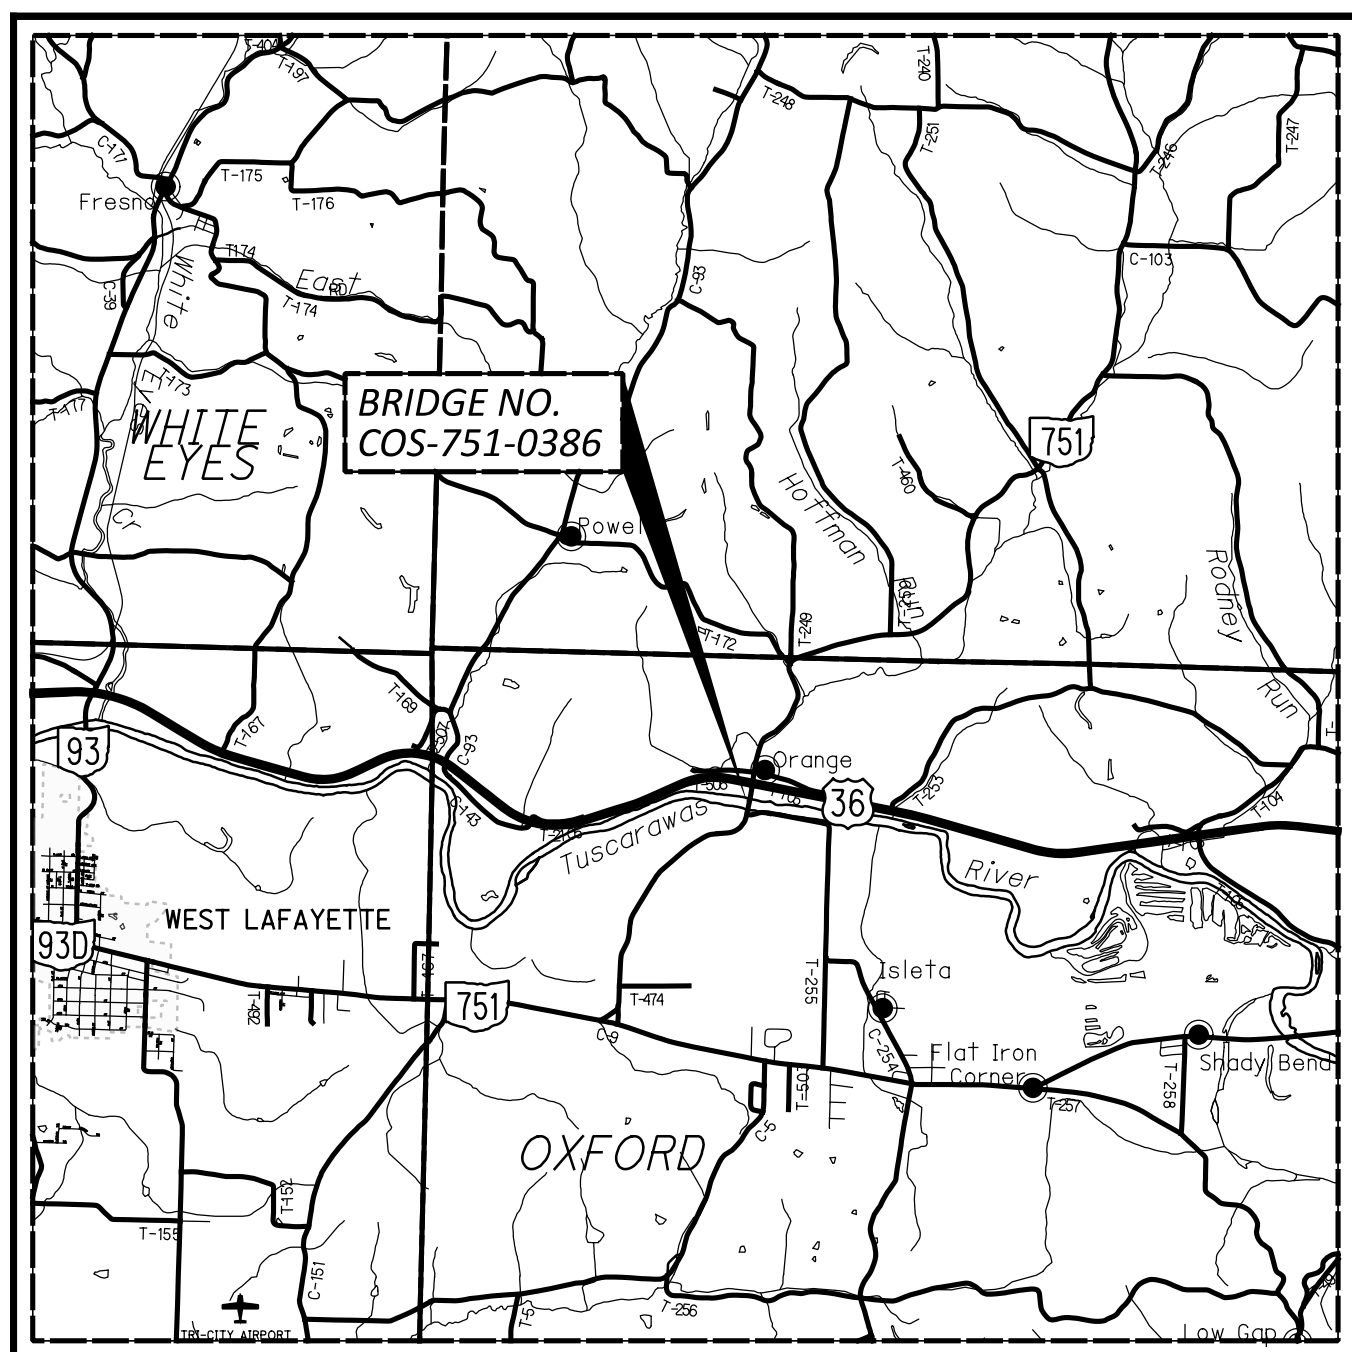

LOCATION MAP

LATITUDE: 40°17'06" LONGITUDE: -81°41'05"



PORTION TO BE IMPROVED	
INTERSTATE HIGHWAY	
FEDERAL ROUTES	
STATE ROUTES	
COUNTY & TOWNSHIP ROADS	
OTHER ROADS	

DESIGN DESIGNATION

CURRENT ADT (2023)	1,200
DESIGN YEAR ADT (2043)	1,200
DESIGN HOURLY VOLUME (2043)	100
DIRECTIONAL DISTRIBUTION	50.8%
TRUCKS (24 HOUR B&C)	100
DESIGN SPEED	55 MPH
LEGAL SPEED	55 MPH
DESIGN FUNCTIONAL CLASSIFICATION:	
RURAL MAJOR COLLECTOR	
NHS PROJECT	NO

DESIGN EXCEPTIONS

NONE

ADA DESIGN WAIVERS

NONE

UNDERGROUND UTILITIES Contact Two Working Days Before You Dig
 OHIO811.org Before You Dig
OHIO811, 8-1-1, or 1-800-362-2764 (Non members must be called directly)


PLAN PREPARED BY:
OHIO DEPARTMENT
OF TRANSPORTATION,
DISTRICT 5

INDEX OF SHEETS:

TITLE SHEET	1
SCHEMATIC PLAN	2
GENERAL NOTES	3-4
GENERAL SUMMARY	5
STRUCTURE REPAIR (COS-751-3.86)	6-9

STANDARD CONSTRUCTION DRAWINGS				SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
DM-4.4	1/15/16			800	1/19/24
MT-97.10	4/19/19			832	7/21/23

ENGINEER'S SEAL

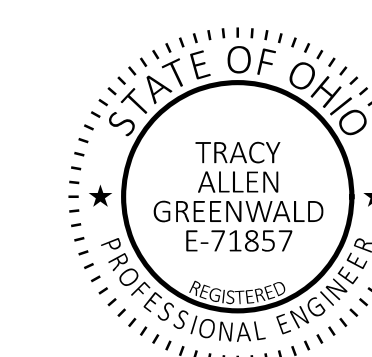

TITLE SHEET

DESIGN AGENCY


DESIGNER
CPS

REVIEWER
TAG 1/10/2024

PROJECT ID
110509

SHEET	TOTAL
P.1	9

COS-751-3.86

MODEL: Title Sheet PAPER SIZE: 34x22 (in.) DATE: 4/2/2024 TIME: 7:14:43 AM USER: Igreenwa pvc:\ohiodot-pw-bentley.com\ohiodot-pw-02\Documents\01 Active Projects\District 05\Coshocton\110509\400-Engineering\Roadway\Sheets\110509_GT001.dgn