

Preface

Purpose

Many manuals, policies, guides, standards etc. have been published regarding roadway design. Most of these have been written using wide ranges of design recommendations (minimums and maximums) since the contents were intended to apply nationally. The purpose of this manual is to reduce the selection of design alternatives to those most appropriate for the State of Ohio, to document Ohio's interpretation of various policies, and to include design criteria which may be unique to the State of Ohio.

Application

The criterion included in this manual has been developed to closely conform to the following publications:

- AASHTO - A Policy on Geometric Design of Highways and Streets (2004 Green Book)
- AASHTO - A Policy on Design Standards - Interstate System (2005)
- TRB Report 214 - Designing Safer Roads - Practices for Resurfacing, Restoration and Rehabilitation (1987)
- AASHTO - Roadside Design Guide (2006)

This manual is neither a textbook nor a substitute for engineering knowledge, experience or judgment. It is intended to provide uniform procedures for implementing design decisions, assure quality and continuity in design of highways in Ohio, and assure compliance with Federal criteria. Although the manual is considered a primary source of reference by personnel involved in highway design in Ohio, it must be recognized that the practices suggested may be inappropriate for some projects because of fiscal limitations or other reasons.

Consideration must also be given to design standards adopted by city, county or other local governments when designing facilities under their jurisdiction.

In lieu of the geometric design guidelines presented in this manual, the geometric design guidelines presented in the **AASHTO publication "Guidelines for Geometric Design of Very Low-Volume Local Roads (ADT # 400)" (2001)** may be used for very low-volume local roads with a design average daily traffic volume of 400 vehicles per day or less.

Preparation

The Roadway Design Manual has been developed by the Office of Roadway Engineering Services. Errors and omissions should be reported to the Office Administrator, Office of Roadway Engineering Services, Ohio Department of Transportation, 1980 West Broad Street, Columbus, Ohio, 43223.

Format and Revisions

Updating the manual is intended to be a continuous process and revisions will be issued periodically.

Each page has its publishing date shown. Users are encouraged to keep their copies up to date. Updates are available for viewing or downloading only from ODOT's **Design Resource Reference Center**, found on ODOT's web page. ODOT's Internet address is <http://www.dot.state.oh.us>.

Unit of Measure

Plans are to be prepared using the English system of units. Metric units are provided for reference only.

Design values are presented in both English and metric units and were developed independently within each system. For design purposes, the relationships between the two units are not exact or interchangeable. The user is therefore cautioned to work entirely within one system and not attempt to convert directly between the two.

In the text portion of this manual, metric units are shown in brackets following the English dimensions. The Figures are published in two sets, one for English units and one for metric units.

Ohio Counties

County	Code	District	County	Code	District
Adams	ADA	9	Licking	LIC	5
Allen	ALL	1	Logan	LOG	7
Ashland	ASD	3	Lorain	LOR	3
Ashtabula	ATB	4	Lucas	LUC	2
Athens	ATH	10			
Auglaize	AUG	7	Madison	MAD	6
			Mahoning	MAH	4
Belmont	BEL	11	Marion	MAR	6
Brown	BRO	9	Medina	MED	3
Butler	BUT	8	Meigs	MEG	10
			Mercer	MER	7
Carroll	CAR	11	Miami	MIA	7
Champaign	CHP	7	Monroe	MOE	10
Clark	CLA	7	Montgomery	MOT	7
Clermont	CLE	8	Morgan	MRG	10
Clinton	CLI	8	Morrow	MRW	6
Columbiana	COL	11	Muskingum	MUS	5
Coshocton	COS	5			
Crawford	CRA	3	Noble	NOB	10
Cuyahoga	CUY	12			
			Ottawa	OTT	2
Darke	DAR	7			
Defiance	DEF	1	Paulding	PAU	1
Delaware	DEL	6	Perry	PER	5
			Pickaway	PIC	6
Erie	ERI	3	Pike	PIK	9
			Portage	POR	4
Fairfield	FAI	5	Preble	PRE	8
Fayette	FAY	6	Putnam	PUT	1
Franklin	FRA	6			
Fulton	FUL	2	Richland	RIC	3
			Ross	ROS	9
Gallia	GAL	10			
Geauga	GEA	12	Sandusky	SAN	2
Greene	GRE	8	Scioto	SCI	9
Guernsey	GUE	5	Seneca	SEN	2
			Shelby	SHE	7
Hamilton	HAM	8	Stark	STA	4
Hancock	HAN	1	Summit	SUM	4
Hardin	HAR	1			
Harrison	HAS	11	Trumbull	TRU	4
Henry	HEN	2	Tuscarawas	TUS	11
Highland	HIG	9			
Hocking	HOC	10	Union	UNI	6
Holmes	HOL	11			
Huron	HUR	3	Van Wert	VAN	1
			Vinton	VIN	10
Jackson	JAC	9			
Jefferson	JEF	11	Warren	WAR	8
			Washington	WAS	10
Knox	KNO	5	Wayne	WAY	3
			Williams	WIL	2
Lake	LAK	12	Wood	WOO	2
Lawrence	LAW	9	Wyandot	WYA	1

ODOT Districts



<u>DISTRICT</u>	<u>ADDRESS</u>	<u>CITY</u>	<u>ZIP CODE</u>	<u>PHONE NUMBER</u>
District 1	1885 N. McCullough St.	Lima	45801	419-222-9055
District 2	317 E. Poe Rd.	Bowling Green	43402	419-353-8131
District 3	906 N. Clark St.	Ashland	44805	419-281-0513
District 4	2088 South Arlington Rd.	Akron	44306	330-786-3100
District 5	9600 Jacksontown Rd., S.E.	Jacksontown	43030	740-323-4400
District 6	400 E. William St.	Delaware	43015	740-363-1251
District 7	1001 St. Mary's Ave.	Sidney	45365	937-492-1141
District 8	505 S. State Route 741	Lebanon	45036	513-932-3030
District 9	650 Eastern Ave.	Chillicothe	45601	740-773-2691
District 10	338 Muskingum Dr.	Marietta	45750	740-373-0212
District 11	2201 Reiser Ave., S.E.	New Philadelphia	44663	330-339-6633
District 12	5500 Transportation Blvd.	Garfield Heights	44125	216-581-2100

Glossary

Arterial - A functional classification for a facility primarily used for through traffic, usually on a continuous route.

Attenuator (Crash Cushion) - Protective devices that prevent errant vehicles from impacting fixed objects by gradually decelerating or redirecting the vehicle.

Backslope - The slope from the back of a ditch to the existing ground surface. (Sometimes referred to as a cut slope.)

Barrier - A longitudinal device used to shield motorists from natural or manmade obstacles along the roadway. Occasionally used to protect others (pedestrian, bicyclists, etc.) from vehicular traffic.

Barrier Clearance - The distance required between the face of a barrier and the face of an obstacle to permit adequate shielding.

Barrier Grading - The shaping of the roadside when a barrier is required for slope protection. (See **Figure 307-4**).

Border - The area between the face of curb and the right of way line. Usually referred to as the border area when no sidewalk is used.

Buffer - The space between the face of the curb and the sidewalk for the purpose of providing snow storage, a buffer between cars and pedestrians, a place for signs and to improve aesthetics.

Clear Zone - The area along a highway beyond the edge of pavement and available for safe use by errant vehicles.

Clear Zone Grading - The shaping of the roadside using 4:1 or flatter foreslopes and traversable ditches within the clear zone area. (See **Figure 307-3**).

Cloverleaf Interchange - An interchange with loop ramps and outer ramps for directional movements. A full cloverleaf has ramps in every quadrant.

Collector - A functional classification for a facility in an intermediate functional category connecting smaller local or street systems with larger arterial systems.

Collector-Distributor (C-D) - A directional roadway adjacent to a freeway used to reduce the number of conflicts (merging, diverging and weaving) on the mainline facility.

Common Grading - The shaping of the roadside using 3:1 or flatter slopes and normal ditches. (See **Figure 307-4**).

Converging Roadway - Separate and nearly parallel roadways or ramps which combine into a single continuous roadway or ramp having a greater number of lanes beyond the nose than the number of lanes on either approach roadway.

Controlled Access - (Partial control of access) - Highway right of way where preference is given to through traffic. In addition to access connections with selected public roads, there may be some private drive connections.

Crest Vertical Curve - A vertical curve such that the point of intersection of the approach grades is above the roadway profile. Crest vertical curves are concave downward.

Critical Slope - A slope, steeper than 3:1, on which vehicles are likely to overturn.

Cross Slope - The rate of change of elevation along a straight line from one point in cross section to another.

Cut Slope - See Backslope.

Decision Sight Distance - The distance required for a driver to detect an unexpected or otherwise difficult to perceive information source or hazard in a roadway environment that may be visually cluttered, recognize the hazard or its threat potential, select an appropriate speed and path, and initiate and complete the required maneuver safely.

Degree of Curve (Arc Definition) - The angle subtended at the center by an arc of 100 foot length.

Design Exception - A document which explains the engineering and/or other reasons for allowing certain design criteria to be relaxed in extreme, unique, or unusual circumstances.

Design Hour - The 30th highest hourly volume of the design year.

Design Hourly Volume - The total volume of traffic in the design hour, usually a forecast of peak hour volume, measured in vehicles per hour.

Design Speed - A selected speed used to determine the various geometric design features of the roadway.

Diamond Interchange - The simplest and most common type of interchange, formed when one-way diagonal ramps are provided in each quadrant and left turns are provided on the minor highway.

Directional Interchange - An interchange, generally having more than one grade separation, with direct connections for all movements.

Diverging Roadway - Where a single roadway branches or forks into two separate roadways without the use of a speed change lane.

Expressway - A divided arterial highway with full or partial control of access and generally with grade separations at major intersections.

Fill Slope - See Foreslope.

Foreslope - The slope from the edge of the graded shoulder to the bottom of the ditch. (Also called Fill Slope.)

Freeway - An expressway with full access control and no at-grade intersections.

Functional Classification - The grouping of highways by the character of service they provide.

Glare Screen - A device used to reduce the amount of headlight glare resulting from opposing traffic.

Graded Shoulder - The area located between the edge of the pavement and the foreslope.

Headlight Sight Distance - The stopping sight distance required on an unlighted sag vertical curve.

Horizontal Sight Distance - The sight distance available in consideration of various horizontal alignment features, such as: degree of curvature and the horizontal distance to roadside obstructions.

Intersection Sight Distance (ISD) - The sight distance required within the corners of intersections to safely allow a variety of vehicular maneuvers based on the type of traffic control at the intersection.

Interstate - Those roadways on the Federal System which have the highest design speeds and the most stringent design standards.

"K" Factor - The length of a vertical curve divided by the algebraic difference in grades expressed as a percent. "K" factors are only applicable where the length of curve is greater than the necessary stopping sight distance.

Lateral Clearance - The distance measured horizontally from the edge of pavement to the face of an object (parapet, abutment, pier, wall, etc.).

Legal Speed - The legislated or agency authorized maximum speed limit of a section of roadway.

Level of Service - A qualitative measure describing the operational flow of traffic.

Limited Access (Full control of access) - Highway right-of-way where rights of access of properties abutting the highway are acquired, such that all access to and from the highway are prevented except at designated locations.

Local Road - A functional classification used for rural roadways whose primary function is to provide access to residences, businesses or other abutting properties.

Local Street - A functional classification used for urban roadways whose primary function is to provide access to residences, businesses or other abutting properties.

Normal Design Criteria - The criteria used for the design of new or reconstructed projects (all projects that do not qualify as 3R).

Normal Ditch - A trapezoidal-shaped ditch having a bottom width of 2 feet [0.6 m] and rounding of 4 feet [1.2 m] (See **Figure 307-4**).

Passing Sight Distance (PSD) - The visible length of highway required for a vehicle to execute a normal passing maneuver as related to design conditions and design speed.

Pavement Edge (Edge of Pavement) - The intersection of the treated or turf shoulder and the mainline pavement.

Peak Hour - The maximum traffic volume hour of the day.

Reconstructed Bridge - Any improvement to an existing bridge involving the replacement of the bridge deck or more.

Recoverable Ditch - A rounded ditch having a radius of either 20 or 40 feet [6 or 12 m] (See **Figure 307-2**).

Recoverable Slope - A slope of 4:1 or flatter, where vehicles may normally stop or slow down and return safely to the roadway.

Resurfacing, Restoration and Rehabilitation (3R) - Improvements to existing roadways, which have as their main purpose, the restoration of the physical features (pavement, curb, guardrail, etc.) without altering the original design elements.

Resurfacing, Restoration, Rehabilitation and Reconstruction (4R) - Much like 3R, except that 4R allows for the complete reconstruction of the roadway and alteration of certain design elements (i.e., lane widths, shoulder width, SSD, etc.).

Roadside - The area between the outside edge of the graded shoulder and the right-of-way limits.

Roadway - The portion of a highway for vehicle use measured either between the outside edges of the graded shoulders or face to face of guardrail.

Safety Grading - The shaping of the roadside using 6:1 or flatter slopes within the clear zone area and 3:1 or flatter foreslopes and recoverable ditches extending beyond the clear zone (See **Figure 307-1**).

Sag Vertical Curve - A vertical curve such that the point of intersection of the approach grades is below the profile line. Sag vertical curves are concave upward.

Shy Distance - The distance from the edge of the traveled way beyond which a roadside object will not be perceived as an obstacle by the typical driver to the extent that the driver will change the vehicle's placement or speed.

Sloped Curb (mountable) - Curbs 6 inches [150 mm] or less in height with a sloping face designed to be traversable by vehicles when required.

Spiral - A transition curve from a tangent to a circular curve, or a circular curve to a circular curve, designed to effect a more gradual change of direction. The Euler spiral (clothoid) is used in design.

Stopping Sight Distance (SSD) - The cumulative distance traversed from the time a driver sees a hazard necessitating a stop, actually applies the brakes and comes to a stop.

Superelevation - The cross-slope of the pavement used to compensate for the effect of centrifugal force on horizontal curves.

Temporary Road - Any crossover, ramp, roadway, etc. whose sole purpose is to temporarily maintain traffic during construction which is normally removed upon project completion.

Traveled Way - The portion of the roadway for the movement of vehicles, exclusive of shoulders.

Traversable Ditch (preferred ditch) - An open ditch with a preferred combination of foreslope, backslope, bottom width and rounding that allows the ditch shape to be used within the clear zone. (See **Figures 307-10 & 307-11**).

Traversable Slope - A slope steeper than 4:1 but not greater than 3:1, which may be safely traveled, but generally too steep to stop or return to the roadway.

Treated Shoulder - That portion of the graded shoulder which has some type of surface treatment.

Tree Lawn - see Buffer.

Trumpet Interchange - A semi-directional "T" interchange.

3R Values - Special values developed for certain design features on 3R improvements.

Vertical Clearance - The distance, measured vertically, from the surface (pavement, shoulder, ground, etc.) to a fixed overhead object (bridge superstructure, sign, signal, etc.).

Vertical Curb (barrier) - A steep faced curb 6 inches [150 mm] or more in height.

Design Reference Documents

ODOT Publications

Contact ODOT Office of Contracts (614) 466-3778 to purchase,
or link to them at <http://www.dot.state.oh.us/drrc/>.

The current revision of those listed should be used.

- Bridge Design Manual (ODOT)
- Construction and Material Specifications
- Location and Design Manual
 - Volume Two - Drainage Design
 - Volume Three - Highway Plan
- Ohio Manual of Uniform Traffic Control Devices
- Pavement Design & Rehabilitation Manual
- Railroad Project Procedure Manual
- Real Estate Policies and Procedures Manual
- State Highway Access Management Manual
- Specifications for Subsurface Investigations
- Standard Construction Drawings
 - Office of Roadway Engineering Services
 - Structural Engineering
 - Traffic Engineering
- Traffic Engineering Manual (and appendices)
 - Design Manual for Highway Lighting
 - Design Manual for Directional Guide Signs
 - Standard Sign Design Manual
 - Traffic Control Design Information Manual

AASHTO Publications

Phone: (202) 624-5800, Web site: <http://www.transportation.org>

- Guide for Erecting Mailboxes on Highways (1994)
- Guide for the Development of Bicycle Facilities (1999)
- Guidelines for Geometric Design of Very Low-Volume Local Roads (ADT 400) (2001)
- Policy on Design Standards - Interstate System (2005)
- Policy on Geometric Design of Highways and Streets (2004)
- Roadside Design Guide (2006)

TRB Publications

Phone: (202)334-3213, Web site: <http://www.nas.edu/trb/>

- Designing Safer Roads - Practices for Resurfacing, Restoration and Rehabilitation (TRB Special Report 214 - 1987)
- Highway Capacity Manual (TRB - 2010)
- Recommended Procedures for the Safety Performance Evaluation of Highway Features (NCHRP

This page is intentionally blank

Table of Contents

100 Design Controls and Exceptions

100.1	Introduction	1-2
101	Functional Classification	1-2
101.1	General.....	1-2
101.2	Urban & Rural	1-2
101.3	Classification Used In ODOT Design Criteria	1-2
102	Traffic Data	1-3
102.1	General.....	1-3
102.2	Traffic Data Content.....	1-3
103	Terrain & Locale.....	1-4
103.1	General.....	1-4
103.2	Terrain Types.....	1-4
104	Design & Legal Speed	1-4
104.1	General.....	1-4
104.2	Design Speed Values	1-5
104.3	Legal Speed Values.....	1-6
105	Design Exceptions.....	1-6
105.1	General.....	1-6
105.2	Federal-Aid Projects on the National Highway System	1-7
105.3	Other Projects.....	1-7
105.4	Local Projects	1-8
105.5	Design Exception Requests	1-8
106	Resurfacing Project Accident Analysis.....	1-10
106.1	General.....	1-10
106.2	Format	1-10
106.3	Processing and Approval Authority	1-11

200 Horizontal and Vertical Design

200.1	Introduction	2-1
201	Sight Distance	2-1
201.1	General.....	2-1
201.2	Stopping Sight Distance (SSD)	2-1
201.3	Intersection Sight Distance (ISD)	2-2
201.4	Passing Sight Distance (PSD).....	2-4

Table of Contents

201.5	Decision Sight Distance (DSD)	2-5
202	Horizontal Alignment.....	2-5
202.1	General.....	2-5
202.2	Maximum Centerline Deflection without Horizontal Curve	2-5
202.3	Degree of Curve (Curve Radius)	2-5
202.4	Superelevation.....	2-6
202.5	Spirals.....	2-8
203	Vertical Alignment	2-8
203.1	General.....	2-8
203.2	Grades.....	2-8
203.3	Vertical Curves	2-9
204	Horizontal and Vertical Alignment Considerations.....	2-10
204.1	General.....	2-10
204.2	Horizontal Considerations	2-10
204.3	Vertical Considerations	2-10
204.4	Coordination of Horizontal and Vertical Alignments.....	2-11

300 Cross Section Design

301	Roadway Criteria	3-1
301.1	Pavement	3-1
301.2	Shoulders	3-3
302	Bridge Criteria	3-5
302.1	General	3-5
303	Interchange Elements	3-5
303.1	General	3-5
304	Medians.....	3-5
304.1	General	3-5
304.2	Width.....	3-6
304.3	Types	3-6
304.4	U-turn Median Openings.....	3-7
305	Curbs.....	3-8
305.1	General	3-8
305.2	Types and Uses	3-8
305.3	Position of Curb.....	3-8
305.4	Curb Transitions	3-9

Table of Contents

306 Pedestrian Facilities	3-10
306.1 General	3-10
306.2 Sidewalk Design	3-10
306.3 Curb Ramps	3-12
306.4 Sidewalks for Highway Bridges/Underpasses	3-15
306.5 Pedestrian Overpasses and Underpasses	3-16
 307 Grading and Sideslopes	 3-16
307.1 General	3-16
307.2 Slopes	3-17
307.3 Ditches	3-18
307.4 Parallel Channels	3-19
307.5 Interchange Grading	3-19
307.6 Disposal of Construction Debris and Waste Material within ODOT R/W	3-21

400 Geometric Design

401 Intersections At-Grade.....	4-1
401.1 Intersection Locations.....	4-1
401.2 Intersection Traffic Control.....	4-1
401.3 Crossroad Alignment.....	4-1
401.4 Crossroad Profile.....	4-1
401.5 Approach Radii.....	4-2
401.6 Approach Lanes	4-3
401.7 Islands.....	4-5
401.8 Designing Roadways to Accommodate Pedestrians.....	4-7
 402 Two Way Left Turn Lanes (TWLTL)	 4-8
402.1 General.....	4-8
402.2 TWLTL Justification	4-8
402.3 TWLTL Design.....	4-9
402.4 Reversible Lanes	4-9
 403 Roundabouts.....	 4-9
403.1 General.....	4-9

Table of Contents

500 Interchange Design

501	Interchange Design	5-1
501.1	General.....	5-1
501.2	Interchange Type.....	5-1
502	Interchange Design Considerations	5-2
502.1	Determination of Interchange Configuration	5-2
502.2	Approaches to the Structure	5-2
502.3	Interchange Spacing	5-3
502.4	Uniformity of Interchange Patterns.....	5-3
502.5	Route Continuity	5-3
502.6	Signing and Marking	5-3
502.7	Basic Number of Lanes.....	5-3
502.8	Coordination of Lane Balance and Basic Number of Lanes	5-4
502.9	Auxiliary Lanes	5-4
502.10	Lane Reductions.....	5-4
502.11	Weaving Sections.....	5-4
503	Interchange Ramp Design	5-5
503.1	General.....	5-5
503.2	Ramp Design Speed.....	5-5
503.3	Vertical Alignment.....	5-6
503.4	Horizontal Alignment.....	5-6
503.5	Ramp Terminals.....	5-7
503.6	Single-Lane Ramp Terminals.....	5-7
503.7	Ramp At-Grade Intersections.....	5-9
504	Collector - Distributor (C-D) Roads	5-10
504.1	Use of C-D Roads.....	5-10
504.2	Design of C-D Roads	5-10
504.3	C-D Road Entrance and Exit Terminals	5-10
505	Multi-lane Ramp & Roadway Terminals and Transitions	5-10
505.1	Multi-lane Entrance Ramps and Converging Roadways.....	5-10
505.2	Multi-lane Exit Ramps and Diverging Roadways	5-12
505.3	Four Lane Divided to Two Lane Transition.....	5-13
506	Service Roads	5-13
506.1	Use of Service Roads	5-14
506.2	Design of Service Roads.....	5-14
550	Requests for New or Revised Access	5-14
550.1	General.....	5-14
550.2	Access Point Request Document.....	5-15

Table of Contents

550.3	Study Methodology	5-17
550.4	Environmental Studies	5-18
550.5	Review Process	5-18

600 Roadside Design

600.1	Introduction.....	6-1
600.2	Clear Zone.....	6-1
601	Warrants.....	6-3
601.1	Roadside Barrier Warrants	6-3
601.2	Median Barrier Warrants.....	6-5
601.3	NHS Criteria	6-5
601.4	Design Considerations for Large Trucks.....	6-6
602	Site Considerations.....	6-7
602.1	Roadside Protection	6-7
602.2	Median Protection.....	6-10
602.3	Gore Area Protection.....	6-11
602.4	Protection at Drives and Side Roads	6-12
602.5	Protection at Bridges	6-12
602.6	Protection at Drainage Structures.....	6-12
602.7	Sight Distance Considerations.....	6-14
603	Roadside Safety Devices.....	6-14
603.1	Longitudinal Barriers.....	6-14
603.2	Characteristics of Anchor Assemblies & Impact Attenuators.....	6-18
603.3	Anchor Assemblies.....	6-19
603.4	Impact Attenuators	6-21
603.5	Bridge Terminal Assemblies	6-23
603.6	Concrete Barrier End Treatment.....	6-24
604	Glare Screen.....	6-25
604.1	Median Glare Screen.....	6-25
604.2	Performance Characteristics	6-25
604.3	Glare Screen Options	6-25
605	Rumble Strips	6-26
605.1	Shoulder Rumble Strips.....	6-26
605.2	Rumble Strips in Traveled Lanes.....	6-28
606	Fence	6-29
606.1	Purpose.....	6-29

Table of Contents

606.2	Types	6-29
606.3	Fence on Freeways	6-29
606.4	Fence on Arterials	6-30
606.5	Fence on Collectors.....	6-31
606.6	Lateral Location of Fence	6-31
606.7	Fence Approval	6-31
606.8	Bridge Vandal Protection Fence	6-31

700 Multi-Modal Considerations

701	Railroads	7-1
701.1	Background.....	7-1
701.2	Crossing At-Grade	7-1
701.3	Lateral Clearances.....	7-1
701.4	Vertical Clearance.....	7-1

800 Access Control, R/W Use Permits and Drive Design

801	Access Control.....	8-1
801.1	Access Control Directives	8-1
801.2	Access Control Policies.....	8-1
802	Highway Use Permits	8-2
802.1	General R/W Use Permits	8-2
802.2	General Access Criteria	8-2
803	Drive Geometric Design	8-4
803.1	Mailbox Facilities.....	8-4
803.2	Rural Residential and Field Drives	8-4
803.3	Urban Residential Drives	8-5
803.4	Service Station Drives.....	8-5
803.5	Commercial Drives.....	8-6
803.6	Shopping Center and Industrial Drives (See Figure 803-9)	8-7
804	Drive Profile Design.....	8-7
804.1	Drive Profiles (Uncurbed Roadways)	8-7
804.2	Drive Profiles (Curbed Roadways)	8-7
804.3	Commercial Drive Profiles (Curbed Roadways)	8-8
805	Drive Pavement Design	8-8
805.1	Field Drives.....	8-8

Table of Contents

805.2 Residential Drives	8-8
805.3 Commercial Drives.....	8-9
805.4 Pavement Treatment of Undisturbed Drives.....	8-9

900 Non-Freeway Resurfacing, Restoration and Rehabilitation (3R) Improvements

901 3R Improvements and Values	9-1
901.1 3R Improvements.....	9-1
901.2 3R Values	9-1
901.3 Exceptions to 3R Values	9-2
901.4 3R Design Speed.....	9-2
902 3R Sight Distance	9-2
902.1 Stopping Sight Distance.....	9-2
903 3R Horizontal Alignment	9-2
903.1 Horizontal Curves	9-2
903.2 Superelevation	9-2
904 3R Vertical Alignment.....	9-2
904.1 Grades.....	9-2
904.2 Crest Vertical Curves	9-2
904.3 Sag Vertical Curves	9-3
905 3R Cross Section Elements	9-3
905.1 Roadway Criteria	9-3
905.2 Bridge Criteria.....	9-3
906 3R Special Considerations.....	9-3
906.1 Clear Zone	9-3
906.2 Barriers	9-3
907 Pavement Rehabilitation	9-4
907.1 Pavement	9-4
907.2 Shoulders	9-4

Table of Contents

Appendices

Appendix A

Interchange Justification/Interchange Modification Studies

- Access to the Interstate System
- IJS/IMS Report Outline
- Requirement Checklist

Appendix B

Roadway Sample Plan Notes

- R111 Connection Between Existing and Proposed Guardrail
- R112 Item 606 - Anchor Assembly, Type B
- R113 Item 606 - Anchor Assembly, Type E
- R116 Paving Under Guardrail
- R118 Item Special - Mailbox Support
- R123 Item 606 - Impact Attenuator, Type 1 (Unidirectional or Bidirectional)
- R124 Item 606 - Impact Attenuator, Type 2 (Unidirectional or Bidirectional)
- R125 Item 606 - Impact Attenuator, Type 3 (Unidirectional or Bidirectional)
- R127 Item 606 - Cable Guardrail

Appendix C

Design Software

- Default values and guidance

References

Procedures for Developing Design Designations for Non-Interstate Bridge Replacement/Rehabilitation Projects

Guidelines for Identifying Acceptable Locations for the Disposal of Waste Material and Construction Debris or The Excavation of Borrow Material Within ODOT Right-of-Way

Landscaping Guidelines

100 Design Controls and Exceptions

Table of Contents

100 Introduction	1-1
101 Functional Classification.....	1-1
101.1 General.....	1-1
101.2 Urban & Rural.....	1-1
101.3 Classification Used In ODOT Design Criteria.....	1-1
102 Traffic Data.....	1-2
102.1 General.....	1-2
102.2 Traffic Data Content.....	1-2
103 Terrain & Locale	1-3
103.1 General.....	1-3
103.2 Terrain Types	1-3
104 Design & Legal Speed.....	1-5
104.1 General.....	1-5
104.2 Design Speed Values	1-4
104.3 Legal Speed Values.....	1-4
105 Design Exceptions	1-5
105.1 General.....	1-5
105.2 Federal-Aid Projects on the National Highway System	1-5
105.3 Other Projects.....	1-8
105.4 Local Projects	1-6
105.5 Design Exception Requests.....	1-7
105.5.1 Format	1-7
105.5.2 Processing and Approval Authority	1-7
105.5.3 Amendments to Design Exceptions.....	1-8
106 Resurfacing Project Accident Analysis.....	1-8
106.1 General.....	1-8
106.2 Format.....	1-9
106.3 Processing and Approval Authority	1-10

100 Design Controls and Exceptions

Table of Contents

100 Introduction	1-1
101 Functional Classification.....	1-1
101.1 General.....	1-1
101.2 Urban & Rural.....	1-1
101.3 Classification Used In ODOT Design Criteria.....	1-1
102 Traffic Data.....	1-2
102.1 General.....	1-2
102.2 Traffic Data Content.....	1-2
103 Terrain & Locale	1-3
103.1 General.....	1-3
103.2 Terrain Types	1-3
104 Design & Legal Speed.....	1-5
104.1 General.....	1-5
104.2 Design Speed Values	1-4
104.3 Legal Speed Values.....	1-4
105 Design Exceptions	1-5
105.1 General.....	1-5
105.2 Federal-Aid Projects on the National Highway System	1-5
105.3 Other Projects.....	1-8
105.4 Local Projects	1-6
105.5 Design Exception Requests.....	1-7
105.5.1 Format	1-7
105.5.2 Processing and Approval Authority	1-7
105.5.3 Amendments to Design Exceptions.....	1-8
106 Resurfacing Project Accident Analysis.....	1-8
106.1 General.....	1-8
106.2 Format.....	1-9
106.3 Processing and Approval Authority	1-10

100 Design Controls and Exceptions

100 Introduction

In order to determine the criteria to be used for a project, it is necessary to initially identify some basic information about the facility. This information is known collectively as the design designation and includes: functional classification, traffic data, terrain, locale, design speed and legal speed. **Figure 100-1** shows how these design controls relate to many of the design features included in this manual.

101 Functional Classification

101.1 General

Functional classification, the systematic grouping of highways by the character of service they provide, is an important tool that has been used for many years in comprehensive transportation planning. Its adoption by highway designers to categorize basic highway systems serves as an effective transition from the planning process to the design process. Under a functional classification system, standards and level of service vary according to the function of the highway facility. Traffic volumes are used to refine the standards for each class.

101.2 Urban & Rural

Functional classification is initially divided into urban and rural categories. Urban areas are comprised of: (1) places with a population of 2,500 or more, that are incorporated as cities, villages, and towns but excluding the rural portions of extended cities; (2) census designated places with 2,500 or more persons; and (3) other territory, incorporated or unincorporated, included in urbanized areas.

Extended cities are those cities whose boundaries include territory that is essentially rural in character (e.g., uncurbed pavement with open drainage, where a rural typical section would be more consistent with the existing roadway).

Urbanized areas consist of one or more places (central places) and the adjacent densely populated surrounding territory (urban fringe) that together have a minimum population of 50,000. The urban fringe generally consists of contiguous territory having a density of at least 1,000 persons per square mile.

Rural areas are those outside the boundaries of urban areas.

101.3 Classification Used In ODOT Design Criteria

The rural and urban functional classifications are further defined for design purposes as follows:

- Interstate
- Other Freeways and Expressways
- Arterial Roads (rural) and Streets (urban)
- Collector Roads (rural) and Street (urban)
- Local Roads (rural) and Streets (urban)

100 Design Controls and Exceptions

The functional classifications for streets and highways in Ohio are kept on record in the Office of Systems Planning and Program Management.

102 Traffic Data

102.1 General

Traffic data is the foundation upon which designs are based; consequently, it is important that adequate traffic data be available early in the development of a project's design. It is equally important that this data be coordinated within various geographic regions of the State to avoid inconsistencies between projects under the same traffic influences.

All traffic data used shall be certified by the Office of Technical Services. However, design Traffic Data for non-interstate bridge replacement and rehabilitation projects may be developed according to the Procedures for Developing Design Designations for Non-Interstate Bridge Replacement/Rehabilitation Projects in the Reference Section.

102.2 Traffic Data Content

The design criteria tables in this manual require basic traffic data for the design year. The traffic design year is generally considered to be the following:

Project Type	Traffic Design Year (After Opening Day)
New Construction	20 years hence
Reconstruction	20 years hence
Major Pavement Rehab.	20 years hence
Minor Pavement Rehab.	12 years hence
Two-Lane Resurfacing	12 years hence
Local 3R	12 years hence

For most projects, the following data are required:

- Average Daily Traffic (ADT) for opening day (for lighting and signal warrants).
- Average Daily Traffic (ADT) for design year.
- Design Hourly Volume (DHV).
- The percentage of B and C trucks (T_{24}) during the 24-hour period for the design year.
- The percentage of B and C trucks (T_D) during the design hour traffic for the design year (for adjusting capacity analyses).
- Directional Distribution Factor (D) for the design year (used to obtain the Directional Design Hour Volume (DDHV) for the design hour).

Projects on low-volume facilities (current ADT<400) without a design year traffic forecast may use the current ADT for design purposes.

Average Daily Traffic (ADT) volumes should be subdivided into the following classes:

P - Passenger Cars - including station wagons, mini-vans, sport utility vehicles and motorcycles.

100 Design Controls and Exceptions

A - Commercial - including motorized recreational vehicles, school buses, and light delivery trucks such as panel trucks and pick-up trucks which do not use dual tires.

B - Commercial - including tractors, trucks with semi-trailers and truck-trailer combinations.

C - Commercial - including buses or dual tired trucks having either single or tandem rear axles.

Estimated Design Year ADT may be subdivided into P & A vehicles and B & C trucks if data for each vehicle class is not readily available, since these classes have similar operational characteristics. Current ADTs for various sections of Interstate, United States and State Highways for each county are available in the Traffic Survey Report published by the Office of Technical Services. Counts at specific points in the section may vary from the average and are available upon request from the Office of Technical Services.

103 Terrain & Locale

103.1 General

Many rural design features are significantly influenced by the topography of the land through which the roadway is constructed. To characterize variations, Ohio topography is categorized into three types of terrain: level, rolling or hilly. Locale is used to describe the type of area and generally refers to the character and extent of development in the vicinity. Urban, rural, residential, and commercial/industrial are characteristics often used to describe locale.

103.2 Terrain Types

Level - Any combination of grades and horizontal and vertical alignment permitting heavy vehicles to maintain approximately the same speed as passenger cars. This generally includes grades of no more than 2 percent for a distance of no more than 2 mile [0.8 km].

Rolling - Any combination of grades and horizontal and vertical alignment causing heavy vehicles to reduce their speeds substantially below those of passenger cars, but not causing heavy vehicles to operate at crawl speeds.

Hilly - Any combination of grades and horizontal and vertical alignment causing heavy vehicles to operate at crawl speeds. Hilly terrain in Ohio conforms to mountainous terrain used in the American Association of State Highway Transportation Officials (AASHTO) publications.

For design purposes a heavy vehicle is defined as a vehicle with a mass/power ratio of approximately 200 lb/hp [120 kg/kW]. This represents a typical semi-truck. Crawl speed is the maximum sustained speed that a heavy vehicle can maintain on an extended upgrade and varies with the weight of the vehicle and the steepness of the grade.

100 Design Controls and Exceptions

104 Design & Legal Speed

104.1 General

Design speed is defined in the AASHTO publication, "A Policy on Geometric Design of Highways and Streets" (Green Book), as a selected speed used to determine the various geometric design features of the roadway. The assumed design speed should be a logical one with respect to the topography, anticipated operating speed, the adjacent land use and the functional classification of highway.

104.2 Design Speed Values

The minimum design speed for all projects, except 3R projects, shall be equal to or greater than the legal speed for the facility and the preferred design speed shall be 5 mph [10km/h] higher than the legal speed. Design speeds shall be specified in 5 mph increments [even 10 km/h increments] as shown in **Figures 104-1 and 104-2**. For 3R projects the design speed is the legal speed [the metric equivalent of the design speed]. (See **Table 104-1**) Ramp design speeds are included in **Section 503.2**.

Design speeds of 50 mph [80 km/h] and higher are considered high speed and design speeds less than 50 mph [80 km/h] are considered low speed.

104.3 Legal Speed Values

Since metric design speeds are specified in kilometers per hour, but legal speeds are currently designated in miles per hour, the following conversion table is provided:

Table 104-1 METRIC EQUIVALENTS OF LEGAL SPEED	
Legal Speed	Metric Equivalent
(mph)	(km/h)
15	24
20	32
25	40
30	48
35	56
40	64
45	72
50	80
55	89
60	97
65	105

100 Design Controls and Exceptions

105 Design Exceptions

105.1 General

The designer should call attention to any substandard design feature as soon as possible, but no later than the Stage 1 review submittal as defined in the Location & Design Manual, Volume Three. All designs that do not meet the appropriate design criteria shall be noted in the design exception together with the reasons why the criteria cannot be met. (See **Figure 105-1** for appropriate design criteria.) The Stage 1 review is not considered complete until the design exception is submitted and approved. Design exceptions should be stand alone documents and should include attachments for clarity when needed.

The design elements set forth in **Sections 105.2 and 105.3** are to be considered "controlling" items. As such, whenever the proposed design of a project does not meet or exceed the criteria set forth in this Manual for these items, it will be necessary to prepare and process a formal request for a design exception. The criteria, format and procedures for processing such requests are set forth in **Section 105.5**.

Other design values, policies, practices, etc. that are mentioned in this Manual are guidelines intended to promote uniformity and good design. Deviation from these guidelines does not require a formal design exception; however, it may still be necessary to justify or otherwise seek approval from ODOT of the proposed design when deviations are necessary. This should be accomplished through the normal review process.

Ramps do not have continuous design speeds throughout their lengths. However, design exceptions are required for not meeting the lower range for speed related items (see **Section 503.2** for directional and loop ramps). In addition, design exceptions for non-speed related items (e.g., lane width, shoulder width, bridge width, and lateral clearance) are required.

Exceptions will not be required for projects that do not alter the basic highway cross-section or geometry; e.g. rest areas, lighting, signing, signalization, fencing, guardrail, slide corrections, etc.

Side roads with approach work that does not exceed 300 ft. [90 m] measured from the edge of mainline pavement do not require design exceptions.

Resurfacing projects on non-NHS routes should utilize the Resurfacing Accident Analysis (see **Section 106** for further guidance). On NHS routes, a traditional design exception will be required.

Where guardrail is needed, exceptions will not be granted for graded shoulder width that would permit the face of guardrail to be located closer than 4 ft. [1.2 m] to the edge of traveled way.

105.2 Federal-Aid Projects on the National Highway System

Exceptions must be processed for the following design features when the normal design criteria will not be attained:

1. Lane Width*
2. Graded/Curbed Shoulder Width*
3. Bridge Width
4. Structural Capacity

100 Design Controls and Exceptions

5. Horizontal Alignment
 - Excessive Deflections
 - Degree of Curve [Curve Radius]
 - Lack of Spirals
 - Transition (Taper) Rates
 - Intersection Angles
6. Vertical Alignment
 - Grade Breaks
7. Grades
8. Stopping Sight Distance
9. Pavement Cross Slopes
10. Superelevation
 - Maximum Rate
 - Transition
 - Position
11. Horizontal Clearance
12. Vertical Clearance

* Lane and graded shoulder widths do not require design exceptions on bridge projects where the lengths of roadway approach work including approach slabs do not exceed 100 ft. [30 m] in each direction.

In addition to the above geometric design features, design exceptions are also required when existing non-standard bridge parapets and curb configurations are to be retained. For details on non-standard bridge parapets see ODOT Bridge Design Manual, or contact the Office of Structural Engineering.

105.3 Other Projects

Federal-Aid projects that are not on the National Highway System and all projects that are 100% State-funded will require design exceptions for those items listed in **Section 105.2** except as stated below.

The following types of projects will not require a design exception for the elements cited where the lengths of roadway approach work including approach slabs do not exceed 100 ft. [30 m] in each direction:

1. Bridge/Culvert Replacement Projects
 - Lane Width
 - Shoulder Width
2. In addition, Bridge Rehabilitation Projects that utilize the existing substructure with no major modifications
 - Bridge Width

105.4 Local Projects

Projects on the non-NHS that do not have State funding and are under local jurisdictions that have established their own design standards and assumed responsibility for the development of those projects in accordance with ODOT Policy 25-001(P) - Locally Administered Transportation Projects generally do not require design exceptions from ODOT. Exceptions will be required for local projects that encroach upon the State system, producing substandard design features on the State roadway. With bridge replacement or rehabilitation projects the following exceptions may be encountered:

100 Design Controls and Exceptions

1. Vertical Clearance
2. Horizontal Clearance

105.5 Design Exception Requests

105.5.1 Format

Design exception request submissions must contain at least the following information:

1. A description of the existing facility (including type of highway, number of lanes, current traffic, legal speed, pavement width, shoulder width, bridge width, vertical profile, degree [radius] of curvature and superelevation rate). Include the existing speed for the deficient items if applicable.
2. A description of the proposed facility (including general project description, project length, design speed, design traffic and pavement width).
3. The controlling criteria affected by the proposed design exceptions. (As noted in **Figure 105-1**, normal design criteria must be used as the basis for all design exceptions, including those for 3R projects.)
4. A detailed analysis and discussion of each exception requested, including but not limited to:
 - a. A complete description of the deviation, including the proposed speed for the deficient item, if applicable, and L & D reference.
 - b. How the three-year accident history is related to the deviation. Where accident patterns are noted, the relationship to geometric features must be studied and discussed. (A simple reference to driver citations is not a valid indicator.)
 - c. How the deviation is expected to affect future traffic safety. (Exceptions will not be approved if the exception results in degrading the relative safety of the roadway.)
 - d. What the economic, environmental, and right-of-way impacts would be on adjacent property to meet the controlling design criteria. (A simple statement that the required design is not economically feasible is unacceptable.)
 - e. Proposed mitigation for the deviation.
 - f. Additional information pertinent to the proposed design exception (e.g., local standards and compatibility with the surrounding road network).
 - g. Support for the proposed deviation based upon sound engineering practices, cost comparison/ analysis, impact on the environment, etc.
5. A summary of the above information that supports the need for the requested design exception.

105.5.2 Processing and Approval Authority

1. All exception requests shall be prepared or processed by the District.

Design exceptions must be prepared and sealed by a licensed professional engineer.

100 Design Controls and Exceptions

Except for Local Public Agency (LPA) projects as noted below, all exception requests for ODOT projects will be submitted to the Office of Roadway Engineering for review and approval.

2. Design exceptions for Local-let projects in the LPA process will be approved by the District Planning and Engineering Administrator. Design exceptions for ODOT-let projects in the LPA process will be approved by the Office of Roadway Engineering.
3. Approval Authority:
 - a. All Federal-Aid projects on the Interstate System, and all other Federal-aid projects on the NHS subject to Federal oversight must be approved by ODOT and the Federal Highway Administration (FHWA). Additionally, any deficient vertical clearance of a structure on an exempt project that spans an Interstate highway must also be approved by both ODOT and FHWA.
 - b. The Office of Roadway Engineering has ODOT approval authority for design exceptions for all NHS projects exempt from federal oversight (other than those on the Interstate system), non-NHS projects and non-Federal-aid projects.
4. The Office of Roadway Engineering will be advised in writing of the action taken by the FHWA on Federal-aid projects on the NHS. The original of such correspondence will be retained by the Office of Roadway Engineering and copies will be forwarded to the District. The District shall advise all involved LPAs and the Office of Estimating.
5. A copy of all approved design exception requests will be retained by the Office of Roadway Engineering.

105.5.3 Amendments to Design Exceptions

A previously approved design exception may be amended to accommodate additional elements (that do not invalidate previously approved items) by submitting an addendum to the design exception. The original may be amended to change previously approved items or remove items that no longer require an exception by submitting a revision to the design exception. In either case, the procedure follows the same formatting and approval process as the original design exception.

106 Resurfacing Project Accident Analysis

106.1 General

Resurfacing projects require a review of all accidents over the past three years. This process is exclusively for non- NHS roadway. It does NOT apply to the NHS or Freeway System (defined by function class = 1, 11, 12 and operational access control = 1). The reviews are safety based and do not require any roadway elements to be noted unless there is a safety problem.

Where the accident rate or frequency is over the threshold value as prescribed on the Resurfacing Accident Analysis flowchart, the District must investigate to determine if design deficiencies of the roadway are the probable cause of the accidents. If it is determined design deficiencies are indeed the cause, either the design deficiencies must be improved with the resurfacing project or mitigation

100 Design Controls and Exceptions

strategies must be provided. Where mitigation strategies are not sufficient an abbreviated study must be performed.

Resurfacing Accident Analyses are limited to minor rehabilitation projects. Minor rehabilitation projects are specifically defined as pavement rehabilitation projects limited to a profile increase not to exceed 2 inches [50mm]. Special waivers may be granted for other minor rehabilitation projects from the Office of Roadway Engineering and FHWA.

Existing vertical clearance shall be maintained.

106.2 Format

Resurfacing Accident Analysis shall follow the flow charts in **Figure 106-1**. Accident rates will be evaluated/updated yearly. Depending on the current ADT, the accident thresholds will vary and either a **Note on the Scope Document (Table 106-1)** will be sufficient or an Accident Summary will need to be submitted to the Office of Roadway Engineering. The results of this process shall NOT be printed or referenced on the title sheet of plan packages. If an Accident Summary is required the following information must be provided:

1. A description of the project including the project location, project limits scope of work and ADT (in 0.5 mile increments) must be provided.
2. A tabular summary of the type of accidents in 0.5 mile [0.8 km.] increments must be provided. For ADT's greater than 2000, intersection and non-intersection accidents should be provided separately. A sum of all intersection crashes in the 0.5 mile [0.8 km.] segment shall be compared to the intersection crash frequency threshold on the flow chart **Figures 106-1** (regardless of the number of intersections in the 0.5 mile [0.8 km.] segment). The accident rate for each 0.5 mile [0.8 km.] segment that exceeds the threshold values (crash frequency or crash rate thresholds) shall include all intersection and section crashes and shall be provided on the Resurfacing Accident Analysis summary.
3. Collision diagrams for each 0.5 mile [0.8 km.] segment that exceeds the threshold value (i.e. every time an accident summary is required for a segment) shall be provided with the Resurfacing Accident Analysis summary.
4. Counter measures to mitigate 0.5 mile [0.8km.] section with crash frequencies and crash rates above the threshold values should be provided where feasible. The counter measures may refer to a scheduled future project or be part of the proposed project. Documentation must be provided to support all counter measure decisions (if no solution or a future study is recommended – explanation of the roadway segment is required).
5. A summary statement that supports the scope of the project based on the accident history or the proposed mitigation must be provided.

100 Design Controls and Exceptions

Table 106-1 is an example of *Note on Scope Document*.

Accident Investigation
Current Year ADT (Range): _____
One Page Summary Required: Yes _____ No _____
Submit to Central: Yes _____ No _____
Planning and Engineering Administrator: _____ Date _____

106.3 Processing and Approval Authority

A Note on the Scope Document is required with both the Planning and Engineering Administrator's signature for all minor rehabilitation projects utilizing this Resurfacing Accident Analysis process. The Office of Roadway Engineering has approval authority for Resurfacing Project Accident Analysis that requires an accident summary. Resurfacing Accident Analysis must be signed and sealed by a professional engineer.

All districts must inventory all minor rehabilitation projects utilizing the Resurfacing Project Accident Analysis.

100 Design Controls and Exceptions

List of Figures

<u>Figure</u>	<u>Date</u>	<u>Title</u>
100-1	October '08	Design Control/Design Feature Relationship
104-1	October '08	Rural New Construction & Reconstruction Design Speeds
104-2	October '08	Urban New Construction & Reconstruction Design Speeds
105-1	October '08	Appropriate Design Criteria Guide
106-1	October '11	Resurfacing Accident Analysis Flow Chart

Samples

Ex. 100-1	October '08	Sample Design Exception 1
Ex. 100-2	October '08	Sample Design Exception 2
Ex. 100-3	October '08	Sample Resurfacing Accident Analysis Request

DESIGN CONTROL/ DESIGN FEATURE RELATIONSHIP	100-1E
	REFERENCE SECTION 100.1

DESIGN FEATURES	DESIGN CONTROLS				
	Functional Classification	Traffic Data	Terrain	Local	Design Speed
Lane Width (Rural)	X	X	X		X
Lane Width (Urban)	X			X	
Shoulder Width & Type (Rural)	X	X			
Shoulder Width & Type (Urban)	X			X	
Guardrail Offset	X	X			
Degree of Curvature				X	X
Grades	X		X	X	X
Bridge Clearances (Horizontal & Vertical)	X	X			
Stopping Sight Distance					X
Passing & Intersection Sight Distances					X
Decision Sight Distance					X
Superelevation				X	X
Curve Widening					X
Design Speed (Rural)	X	X	X		
Design Speed (Urban)	X			X	
Vertical Alignment	X		X	X	X
Horizontal Alignment				X	X

RURAL NEW CONSTRUCTION & RECONSTRUCTION DESIGN SPEEDS	104-1E
	REFERENCE SECTION 104.2

Functional Classification	Terrain	RECOMMENDED DESIGN SPEED (mph) ⁽¹⁾					
		Design Year ADT					Any Volume
		< 50	50-249	250-400	401-2000	> 2000	
Interstate	Level						75
	Rolling						70
	Hilly						65
Other Freeways & Expressways	Level						70
	Rolling						60-70
	Hilly						50-60
Arterial Roads	Level						60-70
	Rolling						50-60
	Hilly						40-50
Collector Roads	Level	40	40	40	50	60	
	Rolling	30	30	30	40	50	
	Hilly	20	20	20	30	40	
Local Roads	Level	30	30	40	50	50	
	Rolling	20	30	30	40	40	
	Hilly	20	20	20	30	30	

The minimum design speed shall be equal to or exceed the legal speed for the facility.

URBAN NEW CONSTRUCTION & RECONSTRUCTION DESIGN SPEEDS	104-2E
	REFERENCE SECTION 104.2

Functional Classification	Locale ⁽⁴⁾	Typical Legal Speed (mph)	Recommended Design Speed (mph) ⁽¹⁾
Interstate	All Areas	55-65	65-75 ⁽²⁾
Other Freeways & Expressways	Rural & Urban Areas	55-60	60-70
	Urbanized Areas	45-55	50-60
Arterial Streets	Rural Areas	45-55	50-60
	Urban Areas	35-45	40-50
	Urbanized Areas	30-35	30-40
Collector Streets	Rural Areas	35-45	40-50
	Urban Areas	25-35	30-40
	Urbanized Areas	25	30
Local Streets ⁽³⁾	All Areas	15-25	20-30

- (1) The minimum design speed shall be equal to or exceed the legal speed for the facility.
- (2) A design speed of 50 mph may be used on the Interstate, but only in areas where right-of-way costs would be prohibitive and the legal speed is 50 mph or less.
- (3) Includes alleys and state park roads.
- (4) References to rural areas apply to urban roadways with rural characteristics (e.g., uncurbed roadways with open drainage).

APPROPRIATE DESIGN CRITERIA GUIDE	105-1E
	REFERENCE SECTION 105.1 & 105.5.1

Key Highway Design Features Requiring Design Exceptions	3R Values ⁽¹⁾		Normal Design Criteria ⁽²⁾	
	Section	Figure	Section	Figure
Lane Width	905.11	905-1	301.1.2 & 303.1	301-2 & -4, 303-1
Graded Shoulder Width	905.12	905-1	301.2.3 & 303.1	301-3 & -4, 303-1
Bridge Width	905.2	905-2	302.1	302-1, -2 & -3
Structural Capacity	905.2	905-2	302.1	see Bridge Design Manual
Horizontal Alignment	903		see below	see below
Excessive Deflections			202.2	202-1
Degree of Curve			202.3	202-2
Lack of Spirals			202.5	
Transition (Taper) Rates			301.1.4	
Intersection Angles			401.3	401-1
Vertical Alignment	904		203	see below
Grade Breaks			203.3.2	203-2
Grades	904.1		203.2	203-1
Stopping Sight Distance	902.1		201.2	201-1, 203-3, -4, -6 & -7
Pavement Cross Slopes	905.13		301.1.5	301-6
Superelevation	903.2	903-1 & -2	202.4	see below
Maximum Rate			202.4.1 & .4.3	202-3, -7 thru -10
Transition			202.4.5	202-4, -5 & -6
Position			202.4.6	202-5
Horizontal Clearance	905.2	905-2	302.1	302-1, -2, -3, 905-2
Vertical Clearance	905.2	905-2	302.1	302-1, -2, -3, 905-2


(1) 3R values may be used on specific improvements meeting the requirements outlined in **Section 901.1**.

(2) Normal design criteria must be used as the basis for all design exceptions.

RESURFACING ACCIDENT ANALYSIS FLOW CHART

106-1

REFERENCE SECTION
106.2

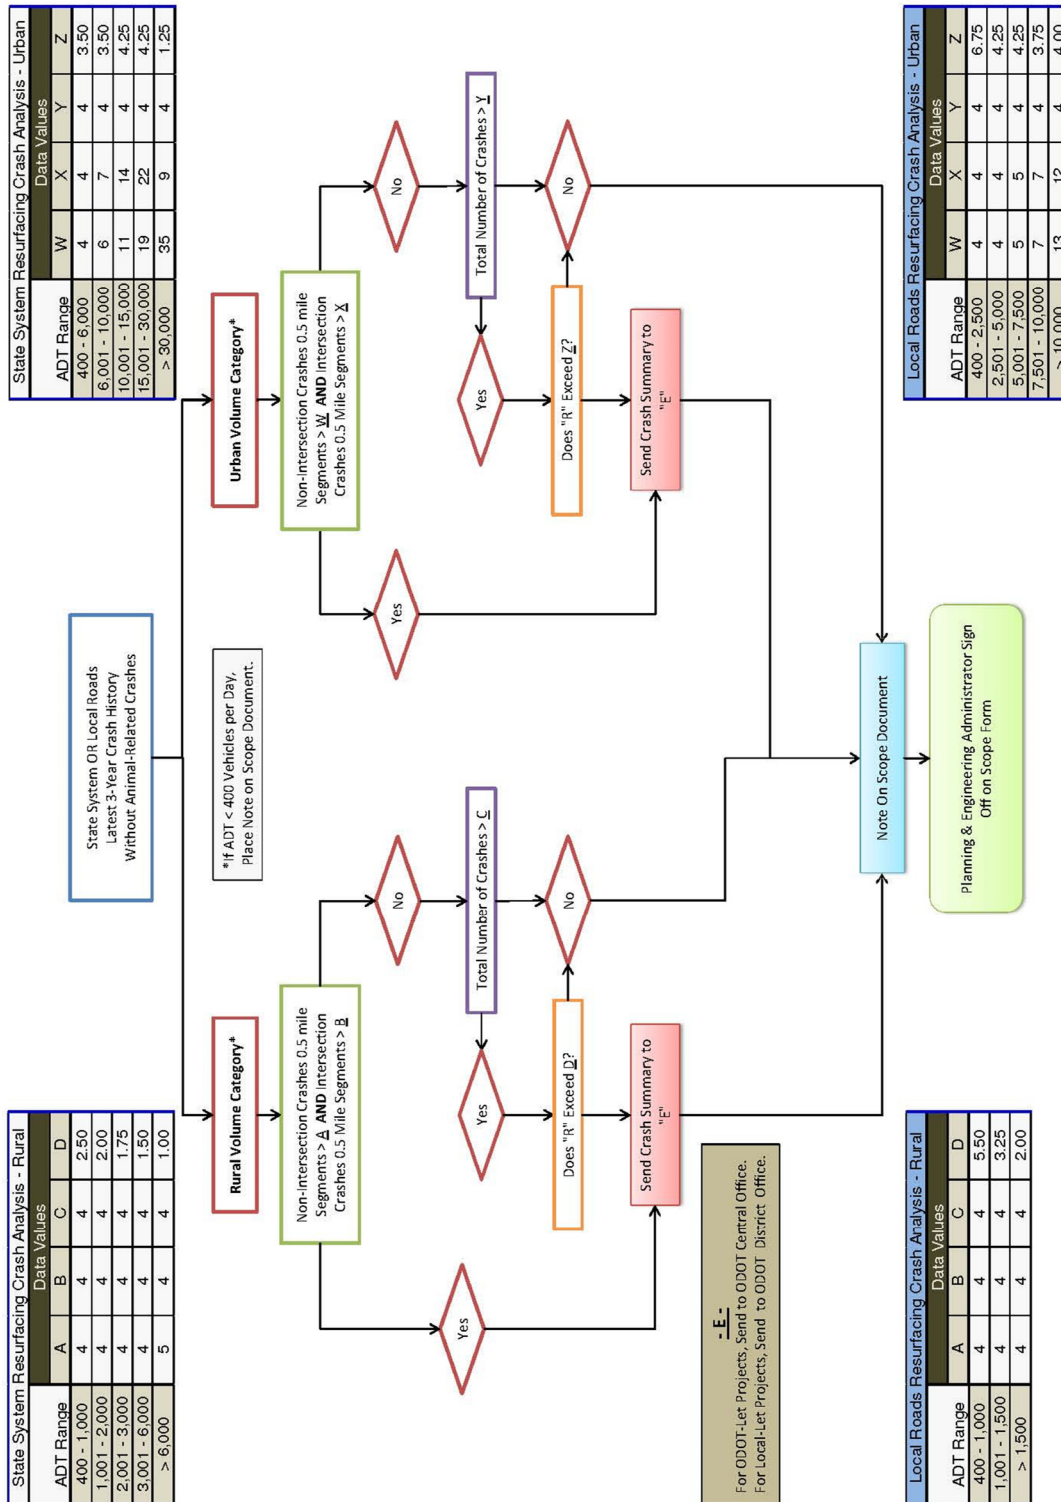

Sample Design Exception 1

INFORMATION FOR EXCEPTION TO THE MINIMUM DESIGN STANDARDS FOR:

PROJECT: MOT-335-0.22

(Chamber Road)

P.I.D. 99999

FEDERAL PROJECT NUMBER:

CHAMBER ROAD FUNCTIONAL CLASSIFICATION: URBAN ARTERIAL

EXISTING FACILITY:

The MOT-335-0.22 project is located within the City of Huber Heights in Montgomery County, approximately 1.5 miles south of Interstate 70. It involves the rehabilitation of the MOT-335-0022 structure over S.R. 4, turn signal and turn lanes at the S.R. 335/Ramp A-B intersection.

S.R. 335/Chamber Road is split into two segments inside the project limits: West of the S.R. 4/S.R. 335 interchange is Chamber Road maintained by the City of Huber Heights, between the S.R. 4/S.R. 335 ramp intersections is S.R. 335 maintained by ODOT.

Chambers Road is a two (2) lane uncurbed Urban Arterial, rural in character, with a current ADT of 7,980 vehicles per day with 5% truck traffic. The current legal speed limit is 45 mph. Existing conditions include two (2) 12 foot wide lanes containing reinforced concrete pavement resurfaced with asphalt pavement and aggregate shoulder that are 4 feet wide. The existing horizontal alignment is a tangent. The existing vertical alignment is a constant grade of approximately 0.79% leading into a 250 foot vertical sag curve at P.V.I. Station 144+75. The existing cross slope of Chamber Road is 0.0156 ft/ft.

There are no ditches as the existing drainage is sheet flow. The existing right-of-way is 40 feet wide.

PROPOSED FACILITY:

The proposed project involves rehabilitation of the existing MOT-335-0022 structure over S.R. 4; a signal and dedicated turn lanes at the S.R. 335/Ramp A-B intersection and the removal of the existing Slip Ramp A. The design speed is 55 mph. The projected design year ADT of Chamber Road is 8,860 with 5% truck traffic.

The proposed lane width of Chamber Road is 12 feet with a 10 foot graded shoulder width. The proposed horizontal and vertical alignments match existing. The proposed cross slope is 0.016 ft/ft.

The proposed ditch design is 3:1 foreslopes and 3:1 backslopes. The ditch bottom varies based upon BMP calculations.

The proposed permanent right-of-way varies from 40 feet to 60 feet wide.

Sample Design Exception 1

CONTROLLING CRITERIA:

Lane Width	_____	Grades	_____
Graded Shoulder Width (Chamber Road)	<u> X </u>	SSD (Vertical)	_____
Bridge Width	_____	Cross Slopes	_____
Structural Capacity	_____	Superelevation	_____
Horizontal Alignment	_____	Horizontal Clearance	_____
Vertical Alignment	_____	Vertical Clearance	_____

DETAILED ANALYSIS:

A.) Description of Deviation:

The required minimum graded shoulder width for an uncurbed Urban Arterial is 14 feet as shown in Figures 301-4 and 301-3 of the ODOT Location and Design Manual, Volume One. As requested by the City of Huber Heights, Chamber Road is designed to match their unpublished standard for 10 foot graded shoulder width, therefore not meeting ODOT standard design criteria. See the attached letter from the City of Huber Heights requesting the design approach.

B.) Accident Data:

There were only two (2) recorded accidents on Chamber Road west of the interchange in the area of the deficiency between the years 2004 and 2006. These two accidents were rear end collisions caused by a driver's failure to control.

The following accident data has also been included for reference even though Chamber Road switches to S.R. 335 just prior to the S.R. 335/Ramp A-B intersection. There were fifty-two (52) accidents reported at the S.R. 335/S.R. 4 Ramp intersections between the years 2004 and 2006. Eleven (11) of these accidents were results of vehicles failing to yield involving left turns at the intersection and nineteen (19) accidents involved rear ending. Twenty (20) accidents involved a driver's failure to control. The other two (2) accidents involved improper overtaking of stopped vehicles at the intersection. None of these accidents reported resulted in a fatality.

C.) Future Traffic Safety:

The deviation to the standards should not adversely affect traffic safety in the project area. The proposed 10 foot graded shoulder width (4 foot treated shoulder width) on Chamber Road is a substantial improvement over the existing 4 foot aggregate berm. Dedicated left turn lanes and a traffic signal will also be provided at the S.R. 335/Ramp A-B intersection located nearest the design deficiency, which will greatly enhance the future safety of the motoring public.

Sample Design Exception 1

D.) Impact on Adjacent Property:

In order to meet the controlling design criteria:

- Work limits would touch the structure on Parcel 7 at approximately 141+00 right and may result in complete taking.
- At a minimum, proximity damage caused by additional permanent right-of-way on Parcel 7 is estimated by the District to be between \$100,000 and \$150,000.
- Requires approximately 0.2 acres of additional permanent R/W on the south side and 0.2 acres on the north side of Chamber Road, for an estimated cost of \$4000.
- Requires additional permanent right-of-way from the property (Parcel 1) with a potentially historic barn.

E.) Proposed Mitigation:

There will be no mitigative measures for the deviation to the standards included as part of this project. Providing a dedicated left turn lane and a traffic signal will greatly reduce the congestion at the S.R. 335/Ramp A-B intersection.

F.) Additional Information:

The City of Huber Heights uses an unpublished standard for graded shoulder width of 10 feet (4 foot treated shoulder width). See the attached letter from the City of Huber Heights requesting the design approach.

G.) Support for Deviation:


There were no crashes attributed to deficient graded shoulders. The proposed typical section is an improvement to the existing condition. The limits of the proposed turn lanes are less than 1500' (Chamber Road Sta. 134+20 to S.R. 335 Sta. 148+52.75). The Chamber Road section represents 800 feet out of four miles of rural roadway incorporated by the City of Huber Heights. The City has no plans to improve this four mile section of uncurbed roadway. The S.R. 335 section is bound on the east by the existing bridge. The District has no plans to replace this structure within the next 15 years.

SUMMARY:

The proposed improvements will enhance the safety of the traveling public by reducing the amount of congestion at the S.R. 335/Ramp A-B intersection. The graded shoulder width was reduced as directed by the City of Huber Heights, whom will maintain this portion of the project. Analysis of accident data found the accidents in the project were due to the poor configuration of the existing intersection. The addition of dedicated left turn lanes and a traffic signal will greatly reduce congestion enhancing the future traffic safety without having any negative environmental impact on the surrounding area.

Sample Design Exception 1

Engineers Seal:



Signed: _____

Date: _____

Sample Design Exception 2

PROJECT: MOT-SR84-17.88

PID NUMBER: 98765

STATE JOB NUMBER: 123456

FEDERAL PROJECT NUMBER: E099(999)

FUNCTIONAL CLASSIFICATION: URBAN PRINCIPAL ARTERIAL

.....

EXISTING FACILITY:

The existing facility is located in Harrison Township, Montgomery County, Dayton, Ohio starting at S.L.M. 17.88 (STA 956+50) and ending at S.L.M. 18.16 (STA 971+46.97) for a total length of 0.28 miles. Existing legal speed is 45 mph.

The current Average Daily Traffic (ADT) from Shiloh Springs Road to Poplar Street is 21,320 (2006) with 2% trucks.

The project traverses generally level terrain through a highly commercialized area with an existing roadway width of 40 feet f/f of curb, two through lanes in each direction. The existing road is an asphalt pavement on a concrete or brick base, with curb and gutter on each side, which includes a 4 foot tree lawn and a 5 foot sidewalk.

Existing STATE ROUTE 84 has mainly a tangent horizontal alignment, except for the northern end (135.39 feet) of curve # 4, identified as follows: radius = 3,819.72 feet; length = 480.00 feet; and, Dc = 7° 12' 00" to the right, with normal crown. There is a 300 foot vertical curve (one percent and two percent grades) that is located between STA 956+50 and STA 959+50.

There are 5 intersecting side streets, numerous commercial and residential drives.

PROPOSED FACILITY:

The proposed facility is located in Harrison Township, Montgomery County, Dayton, Ohio starting at S.L.M. 17.88 and ending at S.L.M. 18.16 for a total length of 0.28 miles. It is a four-lane urban arterial highway, with two through lanes in each direction, on the Federal Aid System. A fifth, center turn lane will be located between Sta. 956+50 to 971+50. The proposed roadway will continue to have a legal speed of 45 mph with a design speed of 50 mph. The 2026 design year traffic is 24,790 with 3% trucks.

The proposed facility (0.28 mile in length) from Sta. 956+50.00 (S.L.M. 17.88) to the end of project Sta. 971+46.96 (S.L.M. 18.16), just past the intersection of Poplar Street will be replaced and widened with full depth flexible pavement. Proposed improvements will include new curb & gutter, sidewalks, a tree lawn and driveway approaches.

Sample Design Exception 2

The proposed widened roadway section from Shiloh Springs Road to Poplar Street, Sta. 956+50.00 to 971+46.97 will provide the following typical section: five (5) proposed lanes consisting of two 12-foot outside lanes, two 11-foot inside lanes, and one 10-foot center turn lane. There will be a 2-foot curbed shoulder width. Total roadway width will be 60 feet from f/f of curb. The 4 foot tree lawn and 5 foot sidewalk will be included.

CONTROLLING CRITERIA:

Lane Width	<u> X </u>	Grades	<u> </u>
Shoulder Width	<u> </u>	SSD	<u> </u>
Bridge Width	<u> </u>	Cross Slopes	<u> </u>
Structural Capacity	<u> </u>	Super Elevation	<u> </u>
Horizontal Alignment (Taper Rates)	<u> </u>	Horizontal Alignment (Intersection Angles)	<u> </u>
Vertical Alignment (Grade Breaks)	<u> </u>	Horizontal Clearance	<u> </u>
		Vertical Clearance	<u> </u>

DETAILED ANALYSIS:

A. Description of Deviations: Lane Width

The proposed single 11-foot through lane in each direction on State Route 84 does not meet the normal design criterion as shown in the Location and Design Manual Figure 301-4E. Figure 301-4E indicates that for an arterial street the minimum lane width required is a 12 foot lane. From Station 956+50.00 to the end of the project the full depth section consists of a 10 foot turn lane, two 11 foot through lanes, and two 12 foot through lanes.

B. Crash Data:

Crash data between the years of 2000 to 2002 was obtained along the entire length of this project. There were a total of twenty-two (22) crashes within the entire project area. Nineteen (19) crashes took place at intersections or driveways due to rear-end, angle, sideswipe, and backing crashes. Sixteen (16) crashes were on dry pavement which is roughly 73% of the total crashes on the project and twenty-one (21) during daylight conditions, or 95%.

Sample Design Exception 2

Segment	Total	Length	%
Segment Location	17.88 to 18.16	0.28 mi.	
Crash Locations			
Not An Intersection	3		14
Intersection	18		82
Driveway	1		4
Totals	22		100
Crash Conditions			
Dry	16		73
Wet	5		23
Snow	1		4
Unknown	0		0
Totals	22		100
Type of Crashes			
Motor Vehicle In Transport	22		100
Other Crashes	0		0
Totals	22		100
Pre-Crash Actions			
Straight Ahead	20		92
Backing	1		4
Changing Lanes	1		4
Turning Right	0		0
Turning Left	0		0
Other	0		0
Totals	22		100
Crash Types			
Rear End	11		50
Angle	4		18
Sideswipe	4		18
Fixed Object	2		9
Backing	1		5
Totals	22		100

There are a relatively high number of side street intersections, driveways to residences and businesses (including the Sienna Springs retirement community), and heavy traffic volume along this short project section of State Route 84. The number of intersection-related crashes in the project area is comparable to the statewide average for similar roadways and does not indicate a

Sample Design Exception 2

hazardous deficiency due to existing or proposed lane widths. The majority of crashes consisted of vehicles traveling straight ahead (92%), such as a rear-end collision. These crashes are not likely due to the deficient conditions associated with the design exception for lane width. Rear end crashes are related to stopping in the through lanes and angle crashes are related to intersection sight distance and intersection angle designs. The crashes of concern for a lane width deficiency are "side swipe" collisions comprising four (4), or 14 % of the total crashes. One of these crashes involved a motorist that swerved to avoid an impending rear end collision.

For the three year time period 2000-2002, there were no fatalities, and a total of nine (9) injuries within the State Route 84 project limits (41%). The crash data does not indicate any major problems on State Route 84 with respect to a lane width design exception.

C. Future Traffic Safety:

The deviation to the lane width design standard should not adversely affect traffic safety in the project area. The addition of the center two-way left-turn lane should allow for the safe and efficient movement of vehicles on and off State Route 84 in the project area. The net result of these changes will upgrade traffic safety and increase drivability on State Route 84.

In addition, the proposed project will provide an arterial with a smooth driving surface, clearly striped driving lanes with turn lanes, where needed, and an improved curb barrier. Driveway and parking lot accesses will be better defined. Sidewalk, curb ramps and cross walk areas will be improved. Existing controlling criteria will either be maintained or improved. Thus, the proposed improvements will enhance safety to the traveling public and pedestrians within the project limits.

D. Impact on Adjacent Property:

If the lanes are widened an additional 1-foot on both sides of State Route 84 within the project area to meet the 12-foot standard, the acquisition would adversely impact existing residences and businesses further and necessitate the taking of entire buildings. Additional utilities (overhead electrical and telecommunications) would also be further impacted by this same additional right of way need. Due to the topography along the project area, increased lane width would result in greater grading limits which would severely impact parking and access to remaining area businesses and residences. The retaining wall in the full depth section from Station 961+00 to Station 965+22.85 would have to be lengthened requiring Right-of-Way. The additional work would increase the total cost of the project, estimated at \$2,700,000, by \$900,000.

Exhibit 1 consists of a rough set of tabulations concerning the expected impacts on adjacent property in order to meet design criterion. These values were tabulated looking at the typical sections within the project limits and determining how much more land would be required to meet design criterion. Using rough calculations, additional acquisition from approximately 19 Parcels would be necessary to meet normal design criterion. Seven driveways that intersect areas which would need widening to meet normal design criterion would have to be graded to increase slopes. Parking lots and private lawns would also be disturbed by any additional widening. In addition to these estimates overhead utilities would be disturbed.

Sample Design Exception 2

E. Proposed Mitigation:

Raised pavement markings will be provided along the center lines to improve the ability of drivers to stay within their lanes. This entire project is proposed to help alleviate current traffic congestion and crash problems.

F. Support for Deviation: Lane Width

The proposed facility is being widened from Sta. 956+50.00 (S.L.M. 17.88) to the end of project at Sta. 971+46.96 (S.L.M. 18.16). This roughly 0.3 mile section of State Route 84 currently has a 4 lane configuration and lies between two 5 lane sections. This project will close a gap and provide a continuous 5-lane section with curb and gutter, a tree lawn, and sidewalks. In this area, one through lane in each direction and the two-way left turn lane are proposed to be less than the

normal design criterion for lane width. Increasing the width of these three lanes to meet the design criterion would result in greater cost (33% increase) and adverse impacts to adjacent properties. Since the proposed lane widths correspond to the existing lane widths south of Sta. 956+50.00 (S.L.M. 17.86) and are slightly wider than the existing lane width north of Poplar Street, meeting the normal design criterion for lane width does not seem justified.


SUMMARY:

This was also a safety and operational improvement for area residents of the Sienna Springs Retirement Community. As stated above, the proposed single 11-foot through lane in each direction on State Route 84 does not meet the normal design criterion as shown in the Location and Design Manual Figure 301-4E. Figure 301-4E indicates that for an arterial street the minimum lane width required is a 12 foot lane. From Station 956+50.00 to the end of the project the full depth section consists of a 10 foot turn lane, two 11 foot through lanes, and two 12 foot through lanes. Right of way and space for utility relocation are both very limited. It should be noted that other 4 lane sections of State Route 84 that begin at the Dayton Corporation limit, north to approximately Philadelphia Drive are being scoped to have this same typical section design for similar reasons.

In order to meet current design standards, the entire project scope and design would have to be altered for an additional 1-foot of widening on each side of State Route 84. This would involve purchasing additional R/W including the possible purchasing and demolition of several business and residential buildings. Utilities will also be further impacted from the current designed relocation. Overall, project widening would result in a significant increase in total project costs which may be cost prohibitive.

Sample Design Exception 2

Engineers Seal:



Signed: _____

Date: _____

Resurfacing Accident Analysis Request

County: Licking

PID: 25052

Route: U.S. 50

Federal No.: E050585

Section: 19.61 to 28.55

State Job No.: 455908

Functional Classification: Rural Major Collector


Accident Investigation

County-Route-Section: Licking S.R. 50-19.61 to 28.55

Current ADT: 19.61 to 28.10 = 3430, 28.10 to 29.41 = 8360

One page summary to Central Office Required: Yes X No

Sections above Threshold: 19.61 to 20.11, 20.63 to 21.13, 21.65 to 22.15, 22.67 to 23.17, 25.22 to 25.72, 26.24 to 26.74, 27.77 to 28.27

Planning and Engineering Administrator: 

Date: 8-22-05

Resurfacing Accident Analysis Request

Project Description

Licking County United States Route 50 from 19.61 to 28.55 is functionally classified as a rural major collector. The ADT in this project area varies from 3430 to 8360. The project consists of resurfacing 8.94 miles of existing roadway and related work. The project terminus is U.S. 50 from S.R. 13 to the East corporation limit of Brownsville.

Accident Data

Accident data between the years of 2002, 2003, and 2004 was logged in 0.5 mile segments within the entire length of this resurfacing project. There were a total of sixty-four (64) accidents in the entire section 73% (47 crashes) occurred on dry pavement, 22% (14 crashes) occurred on wet pavement, and 5% (3 crashes) occurred on snow and ice.

ADT: 2001-10000

After excluding animal crashes, five (5) locations were identified as exceeding the 1.75 crash rate tolerance.

- Segment 19.61 to 20.11, segment crash rate of 5.3 (4 rear end, 3 angle, 1 fixed object, 1 backing, 1 not stated)

Six of the ten non-animal accidents were at the intersection of U.S. 40 and S.R. 13.

- Segments 20.63 to 21.13, segment crash rate of 2.1 (3 angle, 1 animal, 1 fixed object)

Three of the four non-animal accidents were at the intersection of U.S. 40 with Somerset Road and Fairmont Road. All three were drivers along the township roads failing to observe their stop sign.

- Segment 22.67 to 23.17, segment crash rate of 3.7 (1 rear end, 2 animal, 5 fixed object, 1 not stated)

Four of the seven non-animal accidents were at the intersection of U.S. 40 and Linnville Road. Two of these accidents the vehicles failed to stop coming down a hill from Linnville Road to U.S. 40.

- Segment 26.24 to 26.74, segment crash rate of 3.2 (1 rear end, 1 sideswipe, 1 angle, 3 fixed object)

Three of the six accidents in this half mile segment were fixed object accidents. One driver lost control while swerving to miss a deer. Another driver fell asleep with driving.

- Segment 27.77 to 28.27, segment crash rate of 2.1 (1 rear end, 1 sideswipe, 2 angle, 1 fixed object, 1 backing)

These six accidents all occurred within the village of Brownsville. There are nine intersections in this half mile segment. Two of the three injury accidents in this segment were vehicles making a left turn from S.R. 668 to westbound U.S. 40.

Resurfacing Accident Analysis Request

Licking U.S. 50												
Log Point	ADT	Seg Crash Rate	Total Crashes	INT Crashes	Rear End	Side Swipe	Angle	Animal	Fixed Object	Back	Not Stated	Other
19.61 to 20.11	3430	5.3	12	4	4		3	2	1	1	1	
20.12 to 20.62	3430	1.1	3	0				1	2			
20.63 to 21.13	3430	2.1	5	3			3	1	1			
21.14 to 21.64	3430	0.0	3	0				3				
21.65 to 22.15	3430	1.6	3	0	1				2			
22.16 to 22.66	3430	1.1	3	0	1			1	1			
22.67 to 23.17	3430	3.7	9	4	1			2	5		1	
23.18 to 23.68	3430	1.1	2	1	2							
23.69 to 24.19	3430	1.1	3	1			1	1				1
24.20 to 24.70	3430	0.0	0	0								
24.71 to 25.21	3430	1.1	2	0	1				1			
25.22 to 25.72	3430	1.6	3	0	2				1			
25.73 to 26.23	3430	1.1	3	0				1	1			1
26.24 to 26.74	3430	3.2	6	0	1	1	1		2		1	
26.75 to 27.25	3430	0.0	1	0				1				
27.26 to 27.76	3430	0.0	0	0								
27.77 to 28.27	5106	2.1	6	0	1	1	2		1	1		
28.28 to 28.55	8360	0.0	0	0								
		Total	64	13	14	2	10	13	18	2	3	2

Counter Measures (U.S. 50)

- Segment 19.61 to 20.11

A Signal Ahead symbol sign (W3-3) is to be added in the west bound direction for the intersection of U.S. 50 and S.R. 13. Also, the supplement Advance Street Name plaque is to be added under the Signal Ahead sign in the eastbound and westbound directions.

- Segment 20.63 to 21.13

There is to be a 48" Stop sign (R1-1) placed where Somerset Road and where Fairmont Road intersect with U.S. 50. Also there is to be a Stop Ahead symbol sign (W3-1a) placed on both Somerset Road and Fairmont Road.

- Segment 22.67 to 23.17

There is to be a 48" Stop sign (R1-1) placed at the intersection of Linnville Road and U.S. 50.

- Segment 26.24 to 26.74

Resurfacing Accident Analysis Request

There is to be a modified Offset Crossroads sign (W2-H1a) placed eastbound prior to Sand Hollow Road, and one placed westbound prior to the intersection of U.S. 50 and Midland Oil Road/ Cooks Hill Road.


- Segment 27.77 to 28.27

There is to be dual 48" Stop signs (R1-1) placed at the end of S.R. 668. Also on S.R. 668 there is to be a Stop Ahead symbol sign (W3-1a).

Summary

In the five (5) locations identified above, eleven (11) of the forty-four (44) accidents were intersection related and five (5) were animal related. Given the counter measures listed above, within the limits of this project, we are requesting acceptance of the Resurfacing Accident Analysis Exception Process for this project.


Engineers Seal:




Signed: _____

Date: _____


Resurfacing Accident Analysis Request

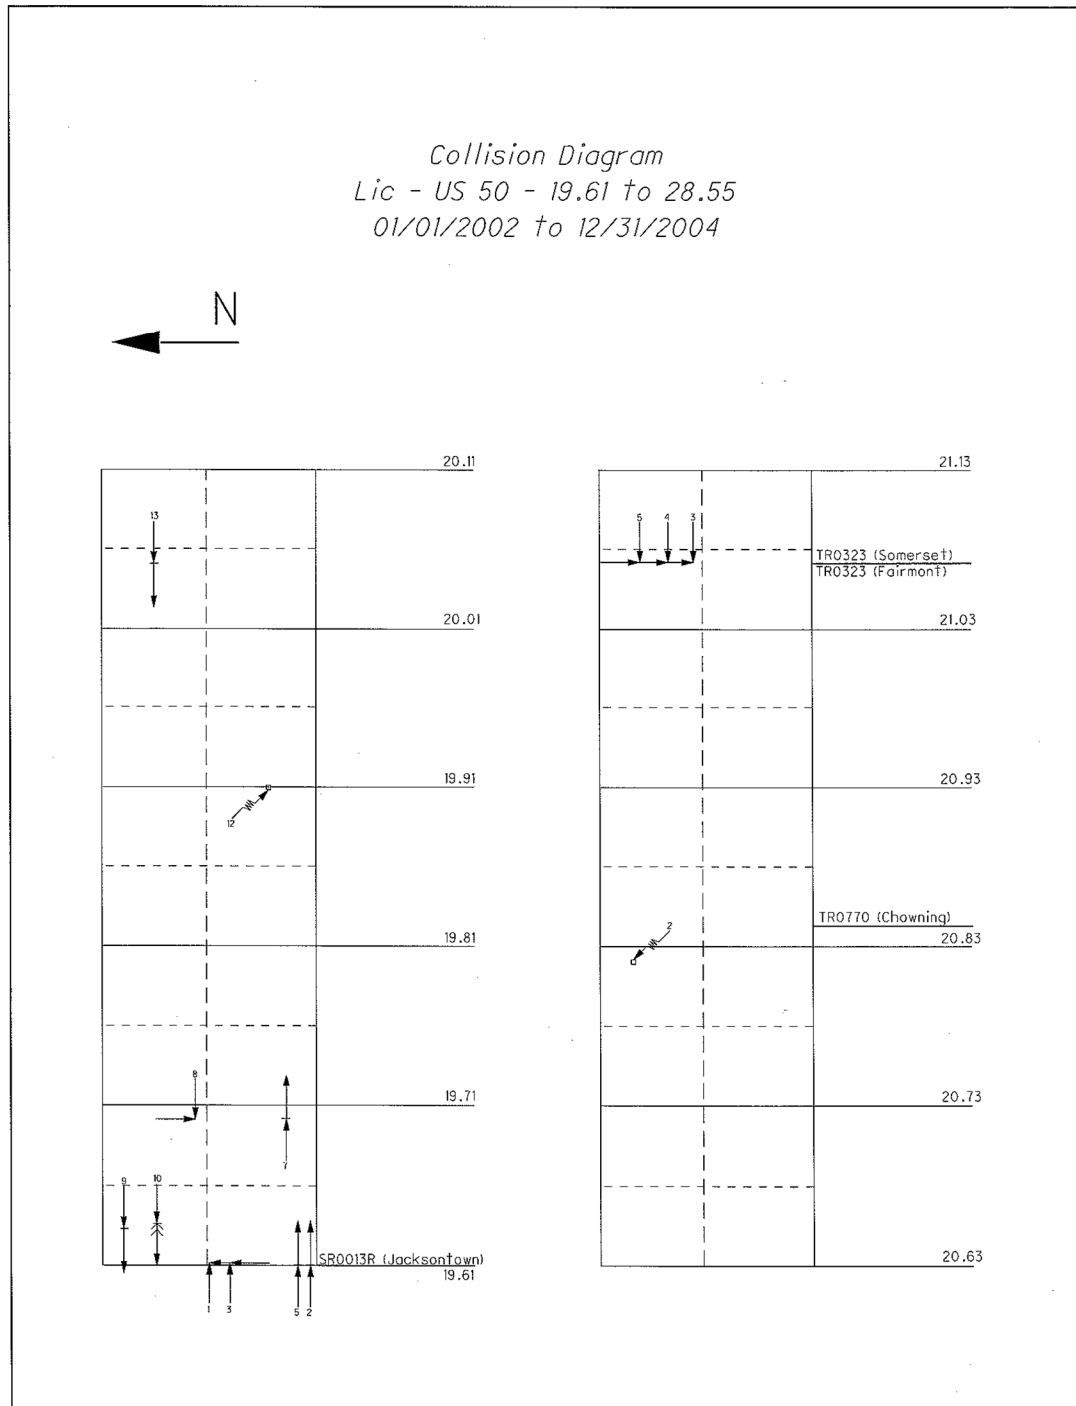

Resurfacing Accident Analysis Request

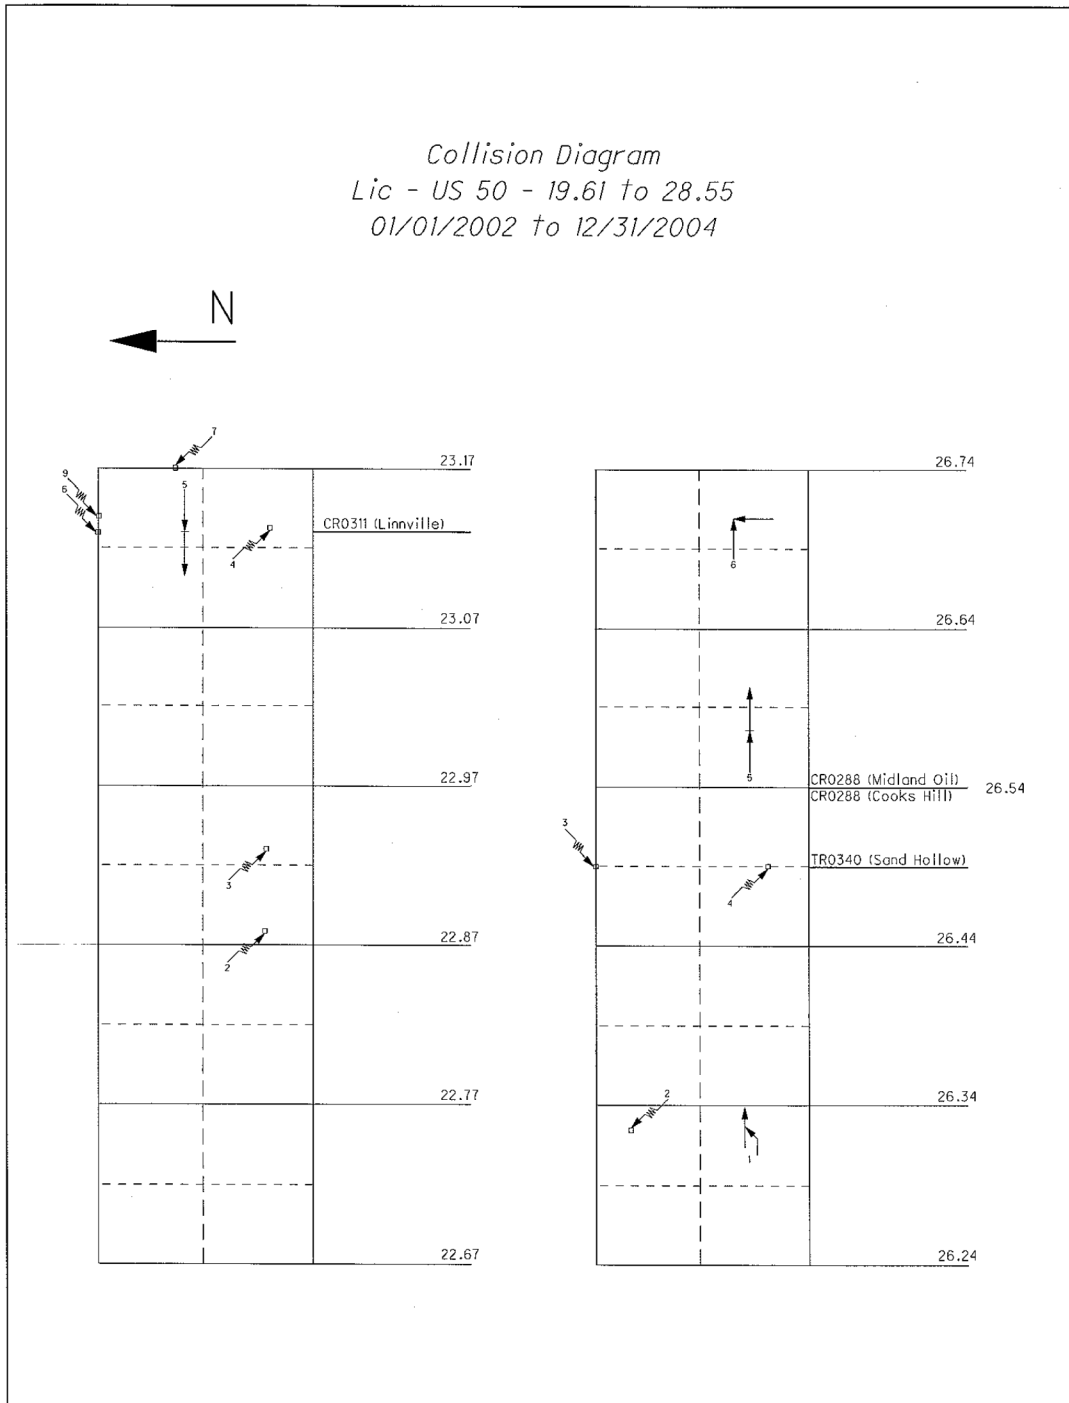

Resurfacing Accident Analysis Request

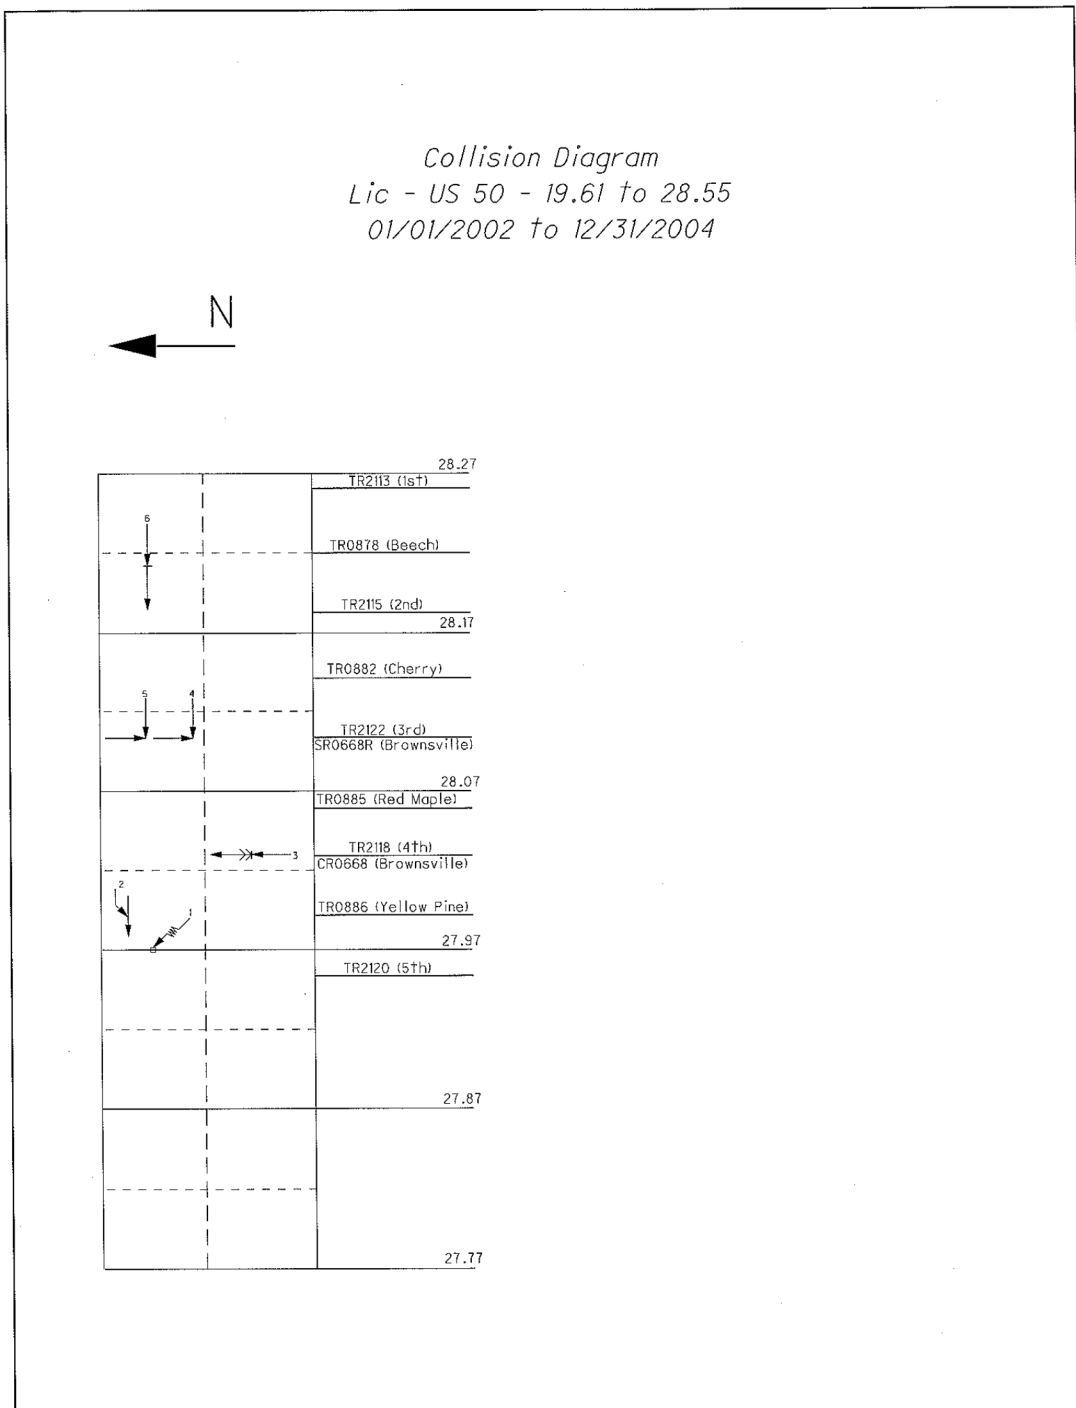

This page is intentionally blank

Table of Contents

Table of Contents	2-1
200.1 Introduction	2-1
201 Sight Distance	2-1
201.1 General	2-1
201.2 Stopping Sight Distance	2-1
201.2.1 Horizontal Sight Distance	2-2
201.2.2 Vertical Stopping Sight Distance	2-2
201.3 Intersection Sight Distance (ISD)	2-2
201.3.1 Sight Triangles	2-3
201.3.1.1 Identification of Sight Obstructions with Sight Triangles	2-3
201.3.2 Intersection Control	2-3
201.3.2.1 Left Turn from the Minor Road	2-4
201.3.2.2 Right Turn from the Minor Road	2-4
201.3.2.3 Crossing Maneuver from the Minor Road	2-4
201.3.3 Vertical ISD	2-5
201.4 Passing Sight Distance	2-5
201.4.1 Available Passing Sight Distance	2-5
201.5 Decision Sight Distance (DSD)	2-5
202 Horizontal Alignment	2-6
202.1 General	2-6
202.2 Maximum Centerline Deflection without Horizontal Curve	2-6
202.3 Degree of Curve (Curve Radius)	2-6
202.4 Superelevation	2-6
202.4.1 Superelevation Rate	2-6
202.4.2 Effect of Grades on Superelevation	2-7
202.4.3 Maximum Curvature Without Superelevation (Minimum Curve Radius Without Superelevation)	2-7
202.4.4 Superelevation Methods	2-7
202.4.5 Superelevation Transition	2-8
202.4.6 Superelevation Position	2-8
202.4.7 Profiles and Elevations	2-9
202.4.8 Superelevation Between Reverse Horizontal Curves	2-9
202.5 Spirals	2-9
203 Vertical Alignment	2-9
203.1 General	2-10
203.2 Grades	2-10
203.2.1 Maximum Grades	2-10
203.2.2 Minimum Grades	2-10
203.2.3 Critical Lengths of Grades	2-10
203.3 Vertical Curves	2-11
203.3.1 General	2-11
203.3.2 Grade Breaks	2-11

200 Horizontal and Vertical Design

203.3.3 Crest Vertical Curves	2-11
203.3.4 Sag Vertical Curves	2-11
203.3.5 Tangent Offsets for Vertical Curves	2-12
204 Horizontal and Vertical Alignment Considerations	2-12
204.1 General	2-12
204.2 Horizontal Considerations	2-12
204.3 Vertical Considerations	2-12
204.4 Coordination of Horizontal and Vertical Alignments.....	2-12
List of English Figures.....	2-14

200 Horizontal and Vertical Design

200.1 Introduction

This section provides a brief discussion together with several figures of design criteria needed to properly design horizontal and vertical alignments. More detailed information can be found in the 2004 edition of **A Policy on Geometric Design of Highways and Streets** (AASHTO Green Book) and the 2001 edition of **Guidelines for Geometric Design of Very Low-Volume Local Roads (ADT $\leq$ 400)**.

201 Sight Distance

201.1 General

A primary feature in highway design is the arrangement of the geometric elements so that sufficient sight distance is provided for safe and efficient operation. The most important sight distance considerations are: distance required for stopping, distance required for operation at intersections, distance required for passing vehicles and distance needed for making decisions at complex locations.

Stopping Sight Distance (SSD) is the cumulative distance traversed by a vehicle from the instant a motorist sights an unexpected object in the roadway, applies the brakes, and is able to bring the vehicle to a stop.

Intersection Sight Distance (ISD) is the distance a motorist should be able to see other traffic operating on the intersecting roadway in order to enter or cross the roadway safely and to avoid or stop short of any unexpected conflicts in the intersection area.

Passing Sight Distance (PSD) is the distance a motorist should be able to observe oncoming traffic on a two-lane, two-way road in order to pass a vehicle safely.

Decision Sight Distance (DSD) is the distance needed for a motorist to detect, recognize, select, initiate and complete an appropriate course of action for an unexpected or otherwise difficult-to-perceive condition in the roadway.

When evaluating sight distance, the two most critical features to be considered are the height of eye and the height of the object. The driver's height of eye remains constant at 3.5 ft. [1.08 m] for each of the sight distance categories. The height of the object, on the other hand, varies between 2 ft. [0.6 m] and 3.5 ft. [1.08 m]. The 2 ft. [0.6 m] object height, used for the decision and stopping sight distances, represents the taillight of the typical passenger vehicle. Research has shown that object heights below 2 ft. [0.6 m] would result in longer crest vertical curves without providing documented safety benefits. The 3.5 ft. [1.08 m] height, used for the intersection and passing sight distances, represents the portion of the vehicle that needs to be visible for another driver to recognize that vehicle.

201.2 Stopping Sight Distance

Stopping sight distance is the sum of two distances: (1) the distance traversed by the vehicle from the instant the driver sights an object necessitating a stop to the instant the brakes are applied; and, (2) the distance needed to stop the vehicle from the instant brake application begins. These two are referred to as brake reaction distance and braking distance, respectively. The recommended brake reaction time to compute the brake reaction distance is 2.5 seconds. The recommended deceleration rate to compute the braking distance is 11.2 feet per second squared [3.4 meters per second squared].

Figure 201-1 lists the recommended sight distance values for the given design speeds along with the corresponding equation.

200 Horizontal and Vertical Design

201.2.1 Horizontal Sight Distance

The sight distance on horizontal curves may be restricted by obstructions on the inside of a curve, such as bridge piers, buildings, median barriers, guardrail, cut slopes, etc. **Figure 201-2** shows the relation of sight distance, horizontal curvature, line of sight, and obstruction offset. In using this figure, the designer should enter the required stopping sight distance from **Figure 201-1** and the degree of curvature or radius [curve radius]. Where these two lines intersect, the offset of the obstruction needed to satisfy the sight distance requirements may be read from the curved lines.

Where the horizontal sight distance is restricted by a cut slope in the inside of the curve, the offset shall be measured to a point on the cut slope that is at the same elevation as the roadway. This would allow a line of sight which is 3.5 ft. [1.07 m] above the roadway to pass over a cut slope with 2.75 ft. [0.84 m] of vegetative growth and view a 2.0 ft. [0.6 m] high object on the far side.

When a combination of spirals, tangents and/or curves is present, the horizontal sight distance should be determined graphically.

201.2.2 Vertical Stopping Sight Distance

The sight distance on crest vertical curves is based on a driver's ability to see a 2.0 ft. [0.6 m] high object in the roadway without being blocked out by the pavement surface. The height of eye for the driver used in the calculation is 3.5 ft. [1.07 m]. See **Figures 203-4 & 203-7**.

The sight distance on sag curves is dependent on the driver's ability to see the pavement surface as illuminated by headlights at night. The height of headlight is assumed to be 2.0 ft. [0.6 m], the height of object 0" and the upward divergence angle of the headlight beam is assumed to be 1°00'. See **Figure 203-6 & 203-7**.

201.3 Intersection Sight Distance (ISD)

Intersections generally have a higher potential for vehicular conflict than a continuous section of roadway due to the occurrence of numerous traffic movements. Providing adequate sight distance at the intersection can greatly reduce the likelihood of these conflicts.

The driver of a vehicle approaching an intersection should have an unobstructed view of the entire intersection and sufficient lengths along the intersecting highway to permit the driver to anticipate and avoid potential collisions. When entering or crossing a highway, motorists should be able to observe the traffic at a distance that will allow them to safely make the desired movement.

The methods for determining sight distance needed by drivers approaching an intersection are based on the same principles as stopping sight distance, but incorporate modified assumptions based on observed driver behavior at intersections.

To enhance traffic operations, intersection sight distance should be provided at all intersections. If intersections sight distance cannot be provided due to environmental or right-of-way constraints, then as a minimum, the stopping sight distance for vehicles on the major road should be provided. By providing only stopping sight distance, this will require the major-road vehicle to stop or slow down to accommodate the maneuver of the minor-road vehicle. If the intersection sight distance cannot be attained, additional safety measures should be provided. These may include, but are not limited to, advance warning signs and flashers and/or reduced speed limit zones in the vicinity of the intersection.

200 Horizontal and Vertical Design

201.3.1 Sight Triangles

Specified areas along intersection approach legs and across their included corners should be clear of obstructions that might block a driver's view of potentially conflicting vehicles. These unobstructed areas are known as sight triangles (see **Figure 201-4**). The waiting vehicle is assumed to be located at a minimum of 14.4 ft. [4.4 m] and preferably 17.8 ft. [5.4 m] from the through road edge of pavement. The position of the waiting vehicle is the vertex of the sight triangle on the minor road, otherwise referred to as the decision point. It represents the typical position of the minor-road driver's eye when a vehicle is stopped relatively close to the major road. The left edge of the moving vehicle on the through road is assumed to be a $\frac{1}{2}$ lane width for vehicles approaching from the left, or $1\frac{1}{2}$ lane widths for vehicles approaching from the right. The design speed of the through road is used to select the appropriate ISD length (see **Figure 201-5**). The dimension "b" in **Figure 201-4** is the ISD length.

The provision of sight triangles allows the driver on the major road to see any vehicles stopped on the minor road approach and to be prepared to slow or stop, if necessary.

201.3.1.1 Identification of Sight Obstructions with Sight Triangles

The profiles of the intersecting roadways should be designed to provide the recommended sight distances for drivers on the intersection approaches. Within a sight triangle, any object at a height above the elevation of the adjacent roadways that would obstruct the driver's view should be removed or lowered, if practical. Particular attention should be given to the evaluation of sight triangles at interchange ramps or crossroad intersections where features such as bridge railings, piers, and abutments are potential sight obstructions.

The determination of whether an object constitutes a sight obstruction should consider both the horizontal and the vertical alignment of both intersecting roadways, as well as the height and position of the object. In making this determination, it should be assumed that the driver's eye is 3.5 ft. [1.08 m] above the roadway surface and the object to be seen is 3.5 ft. [1.08 m] above the surface of the roadway. When the object height and the driver's eye are equivalent, the intersection sight distances become reciprocal (i.e., if one driver can see another vehicle, then the driver of that vehicle can also see the first vehicle).

201.3.2 Intersection Control

The recommended dimensions of the sight triangles vary with the type of traffic control used at an intersection, because different types of control impose different legal constraints on drivers and, therefore, result in different driver behavior.

At signalized intersections and all-way stop control, the first vehicle stopped on one approach should be visible to the driver of the first vehicle stopped on each of the other approaches. Left turning vehicles should have sufficient sight distance to select gaps in oncoming traffic and complete left turns. Generally, sight distances are not needed for signalized intersections.

The most critical intersection control is the stop control on the minor roadway. Sight triangles for intersections with stop control on the minor road should be considered for three situations:

1. Left turns from the minor road
2. Right turns from the minor road
3. Crossing the major road from the minor road approach.

200 Horizontal and Vertical Design

201.3.2.1 Left Turn from the Minor Road

The intersection sight distance along the major road is determined by the following formula:

$$\text{English Units: } ISD = 1.47 \times V_{\text{major}} \times t_g$$

$$[\text{Metric Units: } ISD = 0.278 \times V_{\text{major}} \times t_g]$$

ISD = intersection sight distance (length of the leg of sight triangle along the major road) (ft) [m]

V_{major} = design speed of major road (mph) [km/h]

t_g = time gap for minor road vehicle to enter the major road (sec.)

The design values for intersection sight distance for passenger cars are shown in **Figure 201-5**.

The values for t_g can vary (see **Figure 201-5**) due to deviations of the intersection approach grade, truck usage, and the numbers of lanes of the facility. The values provide sufficient time for the minor-road vehicle to accelerate from a stop and complete a left turn without unduly interfering with major-road traffic operations. Where substantial volumes of heavy vehicles enter the major road (such as a ramp terminal), the t_g value for the single-unit or combination truck values should be considered.

Sight distances for left turns at divided highway intersections have special considerations. If the design vehicle can be stored in the median with adequate clearance to the through lanes, a sight triangle to the right for left turns should be provided for that design vehicle turning left from the median roadway. Where the median is not wide enough to store the design vehicle, a sight triangle should be provided for that design vehicle to turn left from the minor-road approach.

Also, the median width should be considered in determining the number of lanes to be crossed. The median width should be converted to equivalent lanes.

201.3.2.2 Right Turn from the Minor Road

The intersection sight distance for right turns is determined using the same methodology as that used for left turns, except that the time gaps differ. The time gap for right turns is decreased by 1.0 second. Also, the sight triangle for traffic approaching from the left should be used for right turns onto a major road. The design values for intersection sight distance for passenger cars are shown in **Figure 201-5**.

201.3.2.3 Crossing Maneuver from the Minor Road

In most cases, the sight distance provided by the sight triangles (for right or left turns) are adequate for a minor road vehicle to cross a major roadway. However, if the following situations exist, the sight distance for a crossing maneuver should, in of itself, be checked:

1. Where left and or right turns are not permitted from a particular approach and the crossing maneuver is the only legal maneuver
2. Where the crossing vehicle would cross the equivalent of more than six lanes

200 Horizontal and Vertical Design

3. Where substantial volumes of heavy vehicles cross the highway and steep grades that might slow the vehicle while its back portion is still in the intersection are present on the departure roadway on the far side of the intersection

The formula for the sight distance at a crossing maneuver is the same as that for right turns. The time gap adjustments listed in **Figure 201-5** must be used to modify the formula for a crossing maneuver.

201.3.3 Vertical ISD

Also shown on **Figure 201-5** are "K" curvature rates for crest vertical curves based on ISD. The K rates are derived using the height of eye as 3.50 ft. [1.07 m] and height of object as 3.50 ft. [1.07 m]. Appropriate equations are shown on **Figure 201-5**.

If a road or drive intersection occurs on or near a crest vertical curve, the length of curve should be at least as long as that calculated from the K rate for ISD or the K rate for stopping sight distance, whichever is greater.

In some areas, the sight distance will be limited due to projections above the pavement surface, such as raised medians, curb and sidewalks. An illustration of this type of obstruction is shown in **Figure 201-4**, Diagram B, where the left sight distance is limited by a portion of the bridge abutment. Locations such as this should be checked graphically and corrected by lengthening the vertical curve, eliminating the obstruction or moving the intersection.

201.4 Passing Sight Distance

Figure 201-3 lists the distance required for passing an overtaken vehicle at various design speeds. These distances are applicable to two-lane roads only. It is important to provide adequate passing sight distance for as much of the project length as possible to compensate for missed opportunities due to oncoming traffic in the passing zone.

Figure 201-3 also contains "K" curvature rates for crest vertical curves based on passing sight distance. The K rates are derived using a 3.50 ft. [1.07 m] height of eye and a 3.50 ft. [1.07 m] height of object. Appropriate equations are included on **Figure 201-3**.

201.4.1 Available Passing Sight Distance

On 2-lane highways with design hourly volume (DHV) exceeding 400, the designer should investigate the effect of available passing sight distance on highway capacity using the procedures contained in the current edition of **TRB Highway Capacity Manual**. The designer should select the level of service to be used for design in accordance with **Figure 301-1**.

If the available passing sight distance restricts the capacity from meeting the design level of service, adjustments should be made to the profile to increase the available passing sight distance. If, after making all feasible adjustments to the profile, capacity is still restricted below the design level of service due to the lack of sufficient passing sight distance, consideration should be given to providing passing lane sections or constructing a divided multi-lane facility.

201.5 Decision Sight Distance (DSD)

Although stopping sight distance is usually sufficient to allow reasonably competent and alert drivers to come to a hurried stop under ordinary circumstances, it may not provide sufficient visibility distances for drivers when information is difficult to perceive, or when unexpected maneuvers are required. In these circumstances, decision sight distance provides the greater length needed by drivers to reduce the likelihood for error in either information reception, decision making, or control actions.

200 Horizontal and Vertical Design

The following are examples of locations where decision sight distance should be provided: entrance ramps and exit ramps at interchanges; diverging roadway terminals; changes in cross section such as toll plazas and lane drops; and areas of concentrated demand where there is apt to be "visual noise" (i.e., where sources of information compete, as those from roadway elements, traffic, traffic control devices, and advertising signs).

The decision sight distances in **Figure 201-6**: (1) provide values for sight distances that are appropriate at critical locations and (2) serve as criteria in evaluating the suitability of the available sight distances at these critical locations. It is recommended that decision sight distances be provided at critical locations or that critical decision points be moved to locations where sufficient decision sight distance is available. If it is not practical to provide decision sight distance because of horizontal or vertical curvature constraints or if relocation of decision points is not practical, special attention should be given to the use of suitable traffic control devices for providing advance warning of the conditions that are likely to be encountered.

The decision sight distances listed in **Figure 201-6** vary depending on whether the location is on a rural or urban road and on the type of avoidance maneuver required to negotiate the location properly. For example, the recommended decision sight distance for a rural entrance ramp would be found in the avoidance maneuver C column opposite the appropriate design speed for the ramp location in question.

202 Horizontal Alignment

202.1 General

A horizontal change in direction should, as far as economically feasible, be accomplished in a safe and comfortable manner. In addition to sight distance requirements, the most important design features to horizontal alignment design are degree of curve [curve radius], superelevation and spirals

202.2 Maximum Centerline Deflection without Horizontal Curve

Figure 202-1 lists the maximum deflection angle which may be permitted without the use of a horizontal curve. The angle varies with the design speed of the facility.

202.3 Degree of Curve (Curve Radius)

The maximum degree of curve [minimum curve radius] is a limiting value of curvature for a given design speed and a maximum rate of superelevation. **Figure 202-2** shows this relationship.

202.4 Superelevation

202.4.1 Superelevation Rate

Superelevation rates for horizontal curves vary with location (urban/rural), degree of curvature [curve radius], and design speed.

Recommended superelevation rates for horizontal curves are shown in **Figures 202-7, 202-8, 202-9, 202-9a and 202-10**. The rates in **Figure 202-7** apply to all rural highways and are based on a maximum superelevation rate of 0.08. **Figure 202-8** contains the rates for high-speed urban highways (design speeds of 50 mph [80 km/h] or greater). These are based on a maximum rate of 0.06. **Figure 202-10** is an extension of **Figure 202-8** in that it provides superelevation rates for curves with design speeds of 25-45 mph [40-70 km/h] based on the maximum rate of 0.06. This table is to be used only for ramps or other interchange connector roadways in urban areas where horizontal alignment constraints preclude a higher

200 Horizontal and Vertical Design

design speed. The rates for low speed urban highways (45 mph [70 km/h] or less) are contained in **Figures 202-9 and 202-9a** and are based on a maximum rate of 0.04

The table rates are derived by first calculating the maximum degree of curvature [minimum curve radius] for the design speed and assigning the maximum rate of superelevation to this curve. The maximum rates for flatter curves with the same design speed are then derived using AASHTO Method 5 (**Figures 202-7, 202-8 and 202-10**) or AASHTO Method 2 (**Figures 202-9 and 202-9a**) as described in the AASHTO Green Book under "Horizontal Alignment".

In attempting to apply the recommended superelevation rates for low-speed urban streets (**Figures 202-9 & 202-9a**) in built-up areas, various factors may combine to make these rates impractical to obtain. These factors would include wide pavements, adjacent development, drainage conditions, and frequent access points. In such cases, curves may be designed with reduced or no superelevation, although crown removal is a recommended minimum.

A design exception for superelevation rate is required whenever the superelevation rate required by **Figures 202-7 through 202-10** is not provided. A design exception for superelevation rate will not be required if a higher superelevation rate than what is required by **Figures 202-7 through 202-10** is provided as long as the respective maximum superelevation rate (0.08, 0.06 or 0.04) is not exceeded. Prior to the current update of this Manual, the maximum superelevation rate for rural highways was 0.083. A design exception for superelevation rate will not be required for existing rural highways that provide a superelevation rate greater than 0.08 but less than or equal to 0.083.

202.4.2 Effect of Grades on Superelevation

On long and fairly steep grades, drivers tend to travel somewhat slower in the upgrade direction and somewhat faster in the downgrade direction than on level roadways. In the case of divided highways, where each pavement can be superelevated independently, or on one-way roadways, such as ramps, this tendency should be recognized to see whether some adjustment in the superelevation rate would be desirable and/or feasible. On grades of 4 percent or greater with a length of 1000 ft. [300 m] or more and a superelevation rate of 0.06 or more, the designer may adjust the superelevation rate by assuming a design speed which is 5 mph [10 km/h] less in the upgrade direction and 5 mph [10 km/h] higher in the downgrade direction, providing that the assumed design speed is not less than the legal speed. On two-lane, two-way roadways and on other multi-lane undivided roadways, such adjustments are less feasible, and should be disregarded.

202.4.3 Maximum Curvature Without Superelevation (Minimum Curve Radius Without Superelevation)

Figure 202-3 gives the maximum degree of curvature [minimum curve radius] which does not require superelevation based on the design speed and the rural/urban condition. This figure should be used in conjunction with **Figures 202-7, 8, and 9** to determine at what point in the "e_d" columns that superelevation becomes a design consideration. The corresponding data for **Figure 202-10** is contained on the figure.

202.4.4 Superelevation Methods

Figure 202-5 shows four methods by which superelevation is developed leading into and coming out of horizontal curves. Method 1 involves revolving the pavement about the centerline and is the most commonly used method. This method could be applied to multi-lane divided roadway sections where the divided segments are not crowned in a normal section. In this case, the median pavement edge acts as the "centerline".

200 Horizontal and Vertical Design

Method 2 shows the pavement being revolved about the inner edge of pavement and Method 3 uses the outer pavement edge as a rotation point. Both of these methods are used on a multi-lane divided roadway where the divided segments are crowned in a normal section. Since the control point for revolving the pavement is the median pavement edge, Method 2 would apply to the outer lanes and Method 3 would apply to the inner lanes. Method 2 is also used on undivided roadways where drainage problems preclude the use of Method 1. Method 4 revolves the pavement having a straight cross slope about the outside edge of pavement. Method 4 would apply to single-lane or multi-lane ramps or roadways that are not crowned.

In reference to the above discussion on the superelevation of divided roadways, it is always preferable to use the median pavement edge as the rotation point. This greatly reduces the amount of distortion in grading the median area.

202.4.5 Superelevation Transition

The length of highway needed to change from a normal crown pavement section to a fully superelevated pavement section is referred to as the superelevation transition. The superelevation transition is divided into two parts - the tangent runout and the superelevation runoff.

The tangent runout (" L_t ") is the length required to remove the adverse pavement cross slope. As is shown on Method 1 of **Figure 202-5**, this is the length needed to raise the "outside" edge of pavement from a normal slope to a half-flat section (cross section A to cross section B of **Figure 202-5**, Method 1).

The superelevation runoff (" L_r ") is the length required to raise the "outside" edge of pavement from a "half flat" section to a fully superelevated section (cross section B to cross section E of **Figure 202-5**, Method 1). The length of transition required to remove the pavement crown is the distance between cross section A and cross section C **Figure 202-5** and is generally equal to twice the " L_t " distance.

The minimum superelevation transition length is determined by multiplying the edge of pavement correction by the equivalent slope rate (" G ") shown on **Figure 202-4**. The rate of change of superelevation should be constant throughout the transition. The values for " L_r " given in **Figures 202-7, 8 and 9** are based on two 12-foot [3.6 m] lanes revolved about the centerline. " L_r " in **Figure 202-10** is based on one 16-foot [4.8 m] lane revolved about the pavement edge. Use the equations provided on **Figure 202-4** to determine " L_r " for cases involving other lane widths or where more than one lane is being revolved about the centerline or baseline.

Figures 202-5a through 202-5d have been provided to show the designer how to develop the superelevation transitions for a two-lane undivided highway (**Figure 202-5a**), a four-lane divided highway (**Figure 202-5b**) and a six-lane divided highway (**Figures 202-5c & d**). **Figure 202-5c** could also be used for a four-lane divided highway with future median lanes and **Figure 202-5d** could also be used for a four-lane divided highway with future outside lanes.

A design exception for superelevation transition will be required if the above requirements for superelevation transition rate or length are not provided.

202.4.6 Superelevation Position

Figures 202-5a through 202-5d show the recommended positioning of the proposed superelevation transition in relationship to the horizontal curve.

For those curves with spirals, the transition from adverse crown removal to full superelevation shall occur within the limits of the spiral. In other words, the spiral length shall equal the " L_r " value.

200 Horizontal and Vertical Design

For simple curves without spirals, the "L_r" transition shall be placed so that 50 percent to 70 percent of the maximum superelevation rate is outside the curve limits (P.C., P.T.). It is recommended that, whenever possible, 2/3 of the full superelevation rate be present at the P.C. and P.T. In addition, whenever possible, full superelevation should be maintained for at least 1/3 the length of the curve.

A design exception for superelevation position will be required if the above requirements for superelevation position is not provided.

202.4.7 Profiles and Elevations

Breakpoints at the beginning and end of the superelevation transition should be rounded to obtain a smooth profile. One suggestion is to use a "vertical curve" on the edge of pavement profile with a length in feet equal to the design speed in mph (i.e., 45 ft. for 45 mph) [One suggestion is to use a "vertical curve" on the edge of pavement profile with a length in meters equal to 20 percent of the design speed in km/h (i.e., 14 m for 70 km/h)].

The final construction plans should have superelevation tables or pavement details showing the proposed elevations at the centerline, pavement edges, and if applicable, lane lines or other breaks in the cross slope. Pavement or lane widths should be included where these widths are in transition.

Pavement edge profiles should be plotted to an exaggerated scale within the limits of the superelevation transition to check calculations and to determine the location of drainage basins. Adjustments should be made to obtain smooth profiles. These profiles should be submitted as part of the Stage 1 submission in order to facilitate review of the proposed data. Special care should be used in determining edge elevations in a transition area when the profile grade is on a vertical curve.

202.4.8 Superelevation Between Reverse Horizontal Curves

Figure 202-6 illustrates schematically two methods for positioning the superelevation transition between two reverse horizontal curves. In both diagrams each curve has its own "L_r" value (L_{r1}, L_{r2}) depending on the degree of curvature, and the superelevation is revolved about the centerline.

The first (top) diagram involves two simple curves. In the case of new or relocated alignment, the P.T. of the first curve and P.C. of the second curve should be separated by enough distance to allow a smooth continuous transition between the curves at a rate not exceeding the "G" value in the table on **Figure 202-4** for the design speed. This requires that the distance be not less than 50 percent nor greater than 70 percent of L_{r1} + L_{r2}. Two-thirds is the recommended portion. When adapting this procedure to existing curves where no alignment revision is proposed, the transition should conform as closely as possible to the above criteria. These designs will be reviewed on a case by case basis.

The second (or lower) diagram involves two spiral curves. Where spiral transitions are used, the S.T. of the first curve and the T.S. of the second curve may be at, or nearly at, the same point, without causing superelevation problems. In these cases, the crown should not be re-established as shown in **Figure 202-5**, but instead, both pavement edges should be in continual transition between the curves, as shown in **Figure 202-6**.

202.5 Spirals

The combination of high speed and sharp curvature leads to longer transition paths, which can result in shifts in lateral position and sometimes actual encroachment on adjoining lanes. Spirals make it easier for the driver to keep the vehicle within its own lane. Spirals are to be used on projects involving new alignment or substantial modifications to the existing alignment based on the maximum degree of curve as shown in **Figure 202-11**. The length of the spiral should be equal or to greater than the superelevation

200 Horizontal and Vertical Design

runoff length " L_r " for the curve, as determined in **Section 202.4.5**. This section also discussed the role of the spiral in attaining proper superelevation for the curve.

The above criterion for using spirals is not intended to discourage their use in other design situations. In fact, spirals are recommended for use as a good mitigation feature in achieving full superelevation regardless of design speed or degree of curvature [curve radius]. See **Figure 1303-2** of the **Location and Design Manual, Volume 3**, for more details on spiral curve elements and layout.

203 Vertical Alignment

203.1 General

In addition to sight distance requirements, design features most important to vertical alignment design are grades and vertical curves.

203.2 Grades

203.2.1 Maximum Grades

Maximum percent grades based on functional classification, terrain and design speed are shown in **Figure 203-1**. The maximum design grade should be used infrequently, rather than a value to be used in most cases.

203.2.2 Minimum Grades

Flat and level grades on uncurbed pavements are virtually without objection when the pavement is adequately crowned to drain the surface laterally. With curbed pavements, sufficient longitudinal grades should be provided to facilitate surface drainage. The preferred minimum grade for curbed pavements is 0.5 percent, but a grade of 0.3 percent may be used where there is a high-type pavement accurately crowned and supported on firm subgrade.

203.2.3 Critical Lengths of Grades

Freedom and safety of operation on 2-lane highways are adversely affected by heavily loaded vehicles operating on grades of insufficient lengths to result in speeds that could impede following vehicles.

The term "critical length of grade" is used to describe the maximum length of a designated upgrade on which a loaded truck can operate without an unreasonable reduction in speed.

The length of any given grade that will cause the speed of a typical heavy truck (200 lb/hp [120kg/kW]) to be reduced by various amounts below the average running speed of all traffic is shown graphically in **Figure 203-1a**. The curve showing a 10-mph [15-km/h] speed reduction is used as the general design guide for determining the "critical lengths of grade".

If after investigation of the project grade line, it is found that critical length of grade must be exceeded, an analysis of the effect of long grades on the level of service should be made. Where speeds resulting from trucks climbing up long grades are calculated to fall within the range of service level D, or lower, consideration should be given to constructing added uphill lanes on critical lengths of grade. When uphill lanes are added for truck traffic, the lane should extend a sufficient distance past the crest of the hill to allow truck traffic to obtain a reasonable speed before being required to merge into the through lanes.

200 Horizontal and Vertical Design

Where the length of added lanes needed to preserve the recommended level of service on sections with long grades exceeds 10 percent of the total distance between major termini, consideration should be given to the ultimate construction of a divided multi-lane facility.

203.3 Vertical Curves

203.3.1 General

A vertical curve is used to provide a smooth transition between vertical tangents of different slope rates. It is a parabolic curve and is usually centered on the intersection point of the vertical tangents.

One of the basic principles of parabolic curves is that the rate of change of grade at successive points on the curve is a constant amount for equal increments of horizontal distance. The total length (L) of a vertical curve divided by the algebraic difference in its tangent grades (A) reflects the distance along the curve at any point to effect a 1 percent change in gradient and is, therefore, a measure of curvature. The rate L/A , termed " K ", is useful in determining minimum lengths of vertical curves for the various required sight distances.

203.3.2 Grade Breaks

The maximum break in grade permitted without using a vertical curve is shown in **Figure 203-2**. The maximum grade change is based on comfort control and varies with the design speed.

203.3.3 Crest Vertical Curves

The major control for safe operation on crest vertical curves is the provision for ample sight distances for the design speed.

Figure 203-3 includes " K " values for crest vertical curves along with other appropriate equations.

Figures 203-4 and 203-5 show the relationship between the length of crest vertical curves to the stopping sight distance and passing sight distance, respectively.

In addition to being designed for safe stopping sight distance, crest vertical curves should be designed for comfortable operation and a pleasing appearance. Accordingly, the length of a crest vertical curve in feet should be, as a minimum, 3 times the design speed in mph. [Accordingly, the length of a crest vertical curve in meters, should be, as a minimum, 60 percent of the design speed in km/h].

203.3.4 Sag Vertical Curves

For sag vertical curves the primary design criteria is headlight sight distance. When a vehicle traverses an unlighted sag vertical curve at night, the portion of highway lighted ahead is dependent on the position of the headlights and the direction of the light beam. For overall safety on highways, the required headlight sight distance is assumed to be equal to stopping sight distance. Based on a headlight height of 2 ft. [0.6 m], and a 1 degree upward divergence of the light beam, equations showing the relationship of curve length, algebraic grade difference, and stopping sight distance are included on **Figure 203-6**. **Figure 203-7** shows this same relationship in graphic form.

It should be noted that, for sag curves, when the algebraic difference of grades is 1.75 percent or less, stopping sight distance is not restricted by the curve. In these cases the formula on **Figure 203-6** will not provide meaningful answers.

200 Horizontal and Vertical Design

Minimum lengths of sag vertical curves are necessary to provide a pleasing general appearance to the highway. Accordingly, the length of sag vertical curves in feet in should be, as a minimum, 3 times the design speed. [Accordingly, the length of sag vertical curves in meters should be, as a minimum, 60 percent of the design speed in km/h].

203.3.5 Tangent Offsets for Vertical Curves

For the designer's convenience, *Figure 203-8*, showing tangent offsets, is included.

204 Horizontal and Vertical Alignment Considerations

204.1 General

There are many controls to consider when designing horizontal and vertical alignments. These controls are separated into horizontal, vertical and horizontal/vertical coordination. It would be virtually impossible to meet each of these. Some even tend to conflict, and compromises will have to be made. The considerations listed in each category are guidelines and suggestions to assist the designer in obtaining a more optimal design.

204.2 Horizontal Considerations

- Alignment should be as directional as possible while still being consistent with topography and the preservation of developed properties and community values.
- Use of maximum degree of curvature [minimum curve radius] should be avoided wherever possible.
- Consistent alignment should be sought.
- Curves should be long enough to avoid the appearance of a sudden or abrupt change in direction.
- Tangents and/or flat curves should be provided on high, long fills.
- Compound curves should only be used with caution.

204.3 Vertical Considerations

- A smooth grade with gradual changes consistent with the type of facility and character of terrain should be strived for.
- The "roller-coaster" or the "hidden-dip" type of profile should be avoided.
- Undulating gradelines involving substantial lengths of steeper grades should be appraised for their effect on traffic operation since they may encourage excessive truck speeds.
- Broken-back gradelines (two crest or sag vertical curves separated by short tangent grade) generally should be avoided.
- Special attention should be given on curbed sections to drainage where vertical curves having a K value in excess of 167 [50] are used.
- It is preferable to avoid long sustained grades by breaking them into shorter intervals with steeper grades at the bottom.

204.4 Coordination of Horizontal and Vertical Alignments

Curvature and grades should be properly balanced. Normally horizontal curves will be longer than vertical curves.

- Vertical curvature superimposed on horizontal curvature is generally more pleasing. P.I.'s of both vertical and horizontal curves should nearly coincide.

200 Horizontal and Vertical Design

- Sharp horizontal curvature should not be introduced at or near the top of a pronounced crest vertical curve or at or near the low point of a pronounced sag vertical curve.
- On two-lane roads, long tangent sections are desirable to provide adequate passing sections.
- Horizontal and vertical curves should be as flat as possible at intersections.
- On divided highways the use of variable median widths and separate horizontal and vertical alignments should be considered
- In urban areas, horizontal and vertical alignments should be designed to minimize nuisance factors. These might include directional adjustment to increase buffer zones and depressed roadways to decrease noise.
- And vertical alignments may often be adjusted to enhance views of scenic areas.

This page is intentionally blank

200 Horizontal and Vertical Design

List of English Figures

<u>Figure</u>	<u>Date</u>	<u>Title</u>
201-1E*	January 06	Stopping Sight Distance
201-2E	January 06	Horizontal Sight Distance
201-3E	January 06	Minimum Passing Sight Distance
201-4E	January 06	Intersection Sight Triangles
201-5E*	January 06	Intersection Sight Distance
201-6E	January 06	Decision Sight Distance
202-1E	January 06	Maximum Centerline Deflection without Horizontal Curve
202-2E	January 06	Maximum Degree of Curve
202-3E	January 06	Maximum Degree of Curve without Superelevation
202-4E	January 06	Superelevation Transitions
202-5E	January 06	Methods of Superelevation Rotation
202-5aE	January 06	Superelevation Development Two-Lane Undivided
202-5bE	January 06	Superelevation Development Four-Lane Divided
202-5cE	January 06	Superelevation Development Six-Lane or More Divided (or Four-Lane Divided with Future Median Lanes)
202-5dE	January 06	Superelevation Development Six-Lane or More Divided (or Four-Lane Divided with Future Outside Lanes)
202-6E	January 06	Superelevation Transition between Reverse Horizontal Curves
202-7E*	January 06	Superelevation and Runoff Lengths for Horizontal Curves on Rural Highways
202-8E*	January 06	Superelevation and Runoff Lengths for Horizontal Curves on High-Speed Urban Highways
202-9E*	October 09	Superelevation and Runoff Lengths for Horizontal Curves on Low-Speed Urban Streets
202-9aE*	January 06	Superelevation Rates for Horizontal Curves on Low-Speed Urban Streets
202-10E	January 06	Superelevation and Runoff Lengths for Horizontal Curves on Low-Speed Urban Ramps and Other Interchange Roadways
202-11E	April 06	Maximum Curve Without a Spiral
203-1E	October 09	Maximum Grades
203-1aE	January 06	Critical Lengths of Grade
203-2E	October 09	Maximum Change in Vertical Alignment without Vertical Curve
203-3E*	January 06	Vertical Sight Distance: Crest Vertical Curves
203-4E	January 06	Vertical Sight Distance: SSD Design Controls Crest Vertical Curves
203-5E	January 06	Vertical Sight Distance: PSD Design Controls Crest Vertical Curves
203-6E	October 10	Vertical Sight Distance: Sag Vertical Curves
203-7E	January 06	Vertical Sight Distance: SSD Design Controls Sag Vertical Curves
203-8E	January 06	Tangent Offsets for Vertical Curves

* Note: For design criteria pertaining to Collectors and Local Roads with ADT's less than 400, please refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads (ADT $\leq$ 400).

This page is intentionally blank

STOPPING SIGHT DISTANCE**201-1E****REFERENCE SECTION****201.2 & 201.2.1**

HEIGHT OF EYE 3.50'

HEIGHT OF OBJECT 2.00'

$$SSD = 1.47Vt + 1.075V^2 \div a$$

SSD = stopping sight distance, ft;
 t = brake reaction time, 2.5s;
 V = design speed, mph;
 a = deceleration rate, 11.2ft/s²

DESIGN SPEED (mph)	DESIGN SSD (feet)	DESIGN SPEED (mph)	DESIGN SSD (feet)
20	115	45	360
21	120	46	375
22	130	47	385
23	140	48	400
24	145	49	415
25	155	50	425
26	165	51	440
27	170	52	455
28	180	53	465
29	190	54	480
30	200	55	495
31	210	56	510
32	220	57	525
33	230	58	540
34	240	59	555
35	250	60	570
36	260	61	585
37	270	62	600
38	280	63	615
39	290	64	630
40	305	65	645
41	315	66	665
42	325	67	680
43	340	68	695
44	350	69	715
45	360	70	730


HORIZONTAL SIGHT DISTANCE

201-2E

REFERENCE SECTION

201.2.1

NOTE: All angles are measured in degrees.

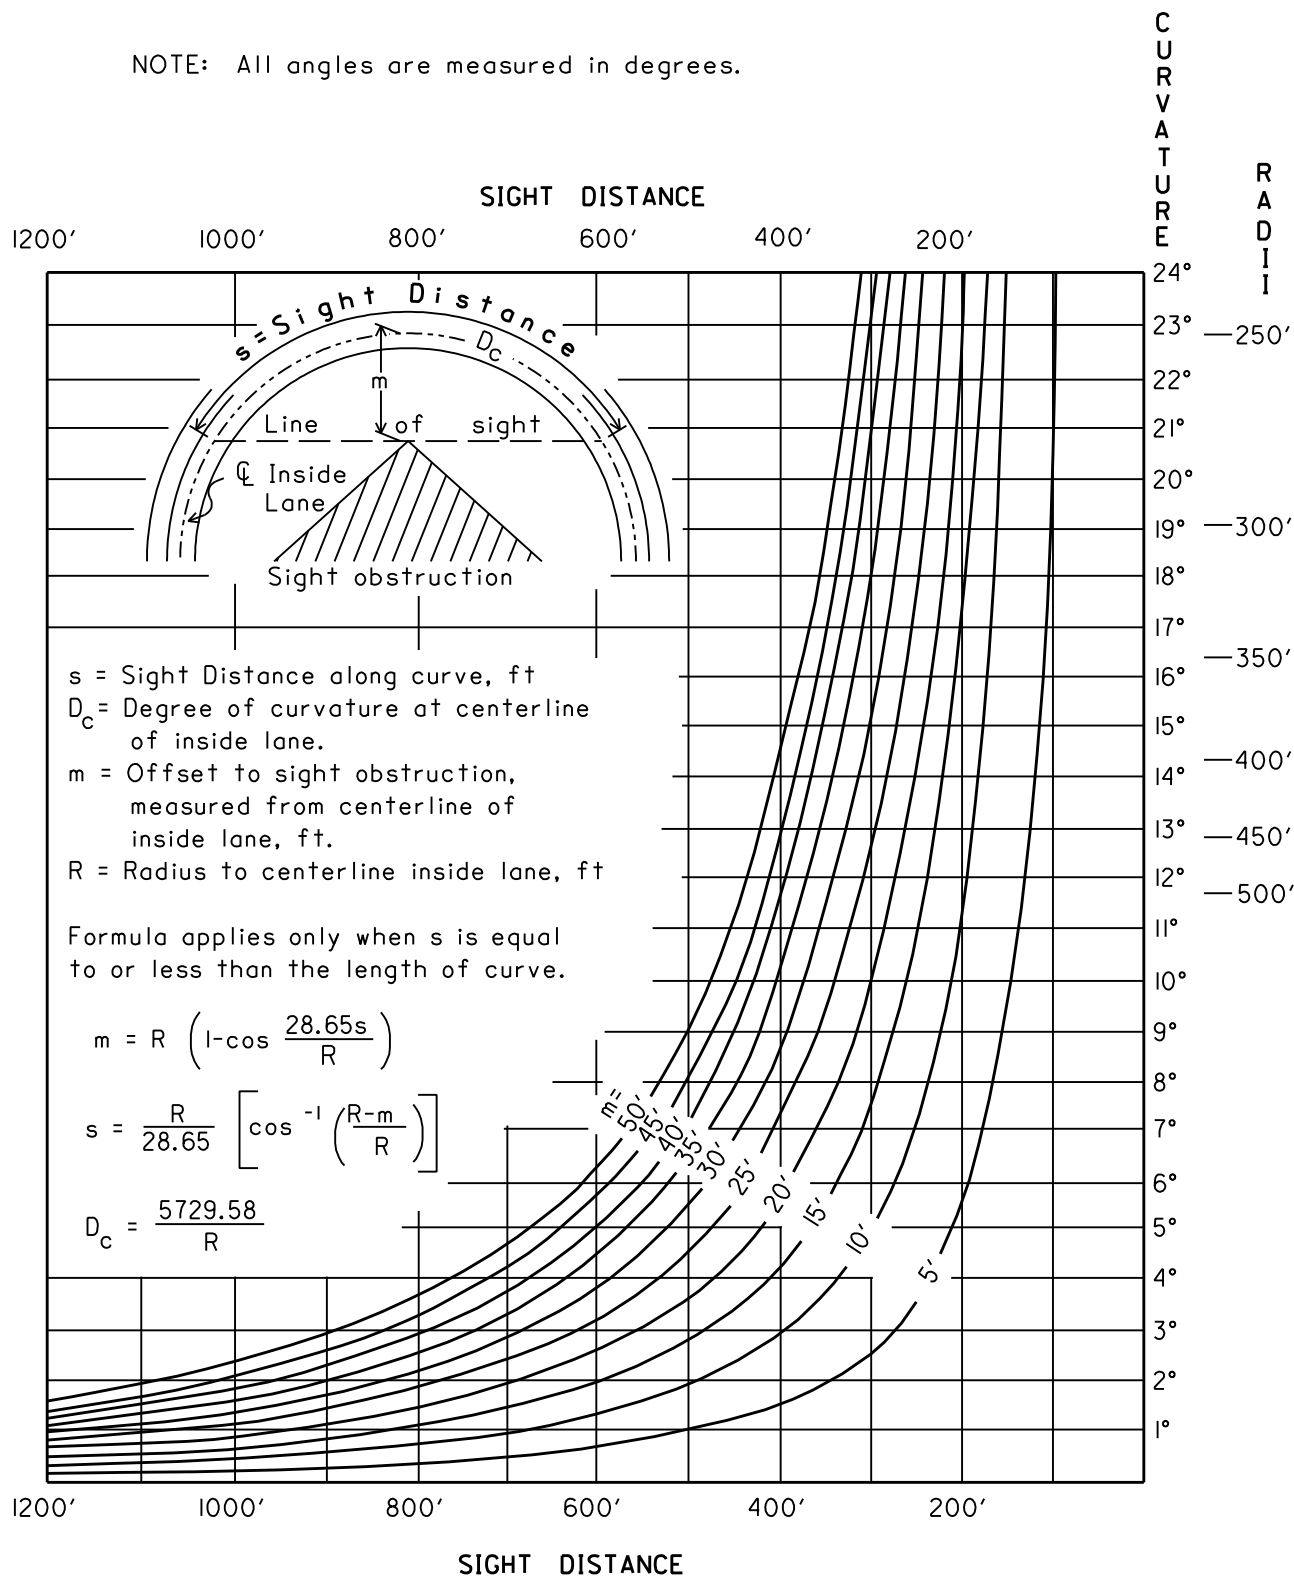

When a combination of spirals, tangents and/or curves are present, the horizontal sight distance should be determined graphically.

MINIMUM PASSING SIGHT DISTANCE

201-3E

REFERENCE SECTION
201.4

HEIGHT OF EYE 3.50'

-

HEIGHT OF OBJECT 3.50'

DESIGN SPEED (mph)	PASSING SIGHT DISTANCE (PSD)	
	Minimum PSD (ft.)	K-CREST VERT.CURV
20	710	180
25	900	289
30	1090	424
35	1280	585
40	1470	772
45	1625	943
50	1835	1203
55	1985	1407
60	2135	1628
65	2285	1865
70	2480	2197

Using:

S = Minimum Passing Sight Distance

L = Length of Crest Vertical Curve

A = Algebraic Difference in Grades (%), Absolute Value

K = Rate of Vertical Curvature

- For a given design speed and an "A" value, the calculated length "L" = $K \times A$

- To determine "S" with a given "L" and "A", use the following:


For $S < L$: $S = 52.92\sqrt{K}$, where $K = L/A$

For $S > L$: $S = 1400/A + L/2$

INTERSECTION SIGHT TRIANGLES

201-4E

REFERENCE SECTION
201.3.1 & 201.3.3

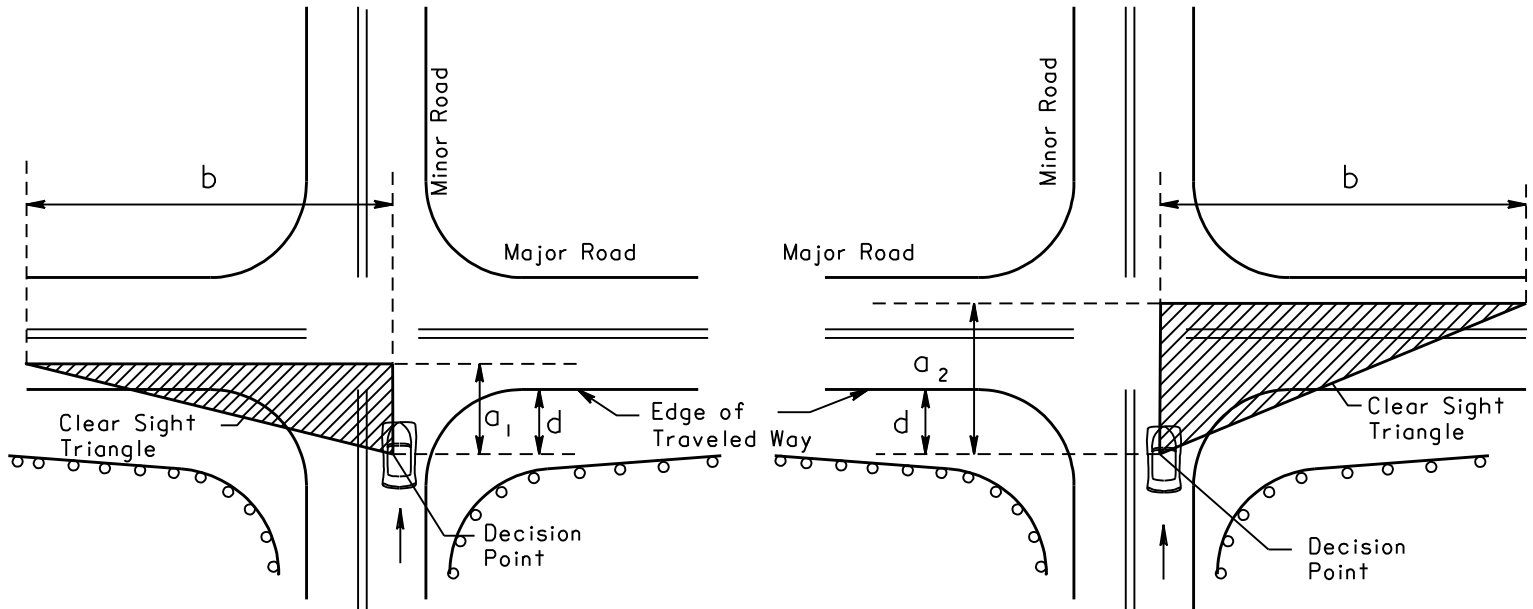

Sight Triangle for Viewing
Traffic Approaching from the Left

Sight Triangle for Viewing
Traffic Approaching from the Right

DIAGRAM A - SIGHT TRIANGLES

a_1 = The distance, along the minor road, from the decision point to 1/2 the lane width of the approaching vehicle on the major road.

a_2 = The distance, along the minor road, from the decision point to 1 1/2 the lane width of the approaching vehicle on the major road.

b = Intersection Sight Distance

d = The distance from the edge of the traveled way of the major road to the decision point. The distance should be a minimum of 14.4' and 17.8' preferred.

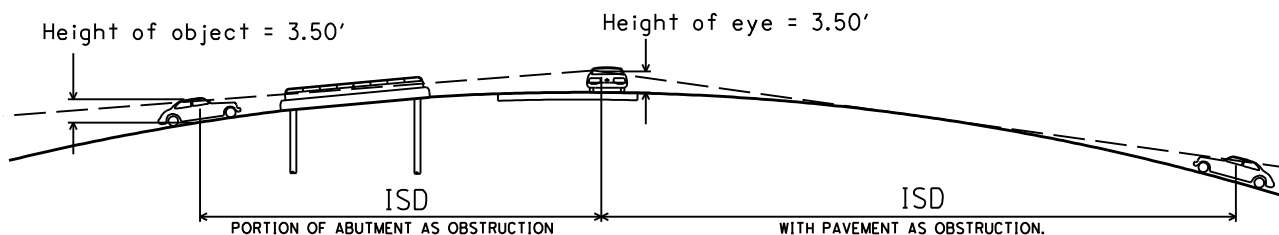


DIAGRAM B - VERTICAL COMPONENTS (Sec. 201.3.3)

INTERSECTION SIGHT DISTANCE**201-5E****REFERENCE SECTION
201.3, 201.3.1,
201.3.2 & 201.3.3**

(See Following Page for Additional Figures & Notes)

HEIGHT OF EYE 3.50'

HEIGHT OF OBJECT 3.50'

DESIGN SPEED (mph)	Passenger Cars Completing a Left Turn from a Stop (assuming a t_g of 7.5 sec.)		Passenger Cars Completing a Right Turn from a Stop or Crossing Maneuver (assuming a t_g of 6.5 sec.)	
	ISD (ft.)	K-CREST VERT. CURVE	ISD (ft.)	K-CREST VERT. CURVE
15	170	10	145	8
20	225	18	195	14
25	280	28	240	21
30	335	40	290	30
35	390	54	335	40
40	445	71	385	53
45	500	89	430	66
50	555	110	480	82
55	610	133	530	100
60	665	158	575	118
65	720	185	625	140
70	775	214	670	160

If ISD cannot be provided due to environmental or R/W constraints, then as a minimum, the SSD for vehicles on the major road should be provided.

$$ISD = 1.47 \times V_{\text{major}} \times t_g$$

ISD = intersection sight distance (ft.)

V_{major} = design speed of major road (mph)

t_g = time gap for minor road vehicle to enter the major road (sec.)

Using: S = Intersection Sight Distance

L = Length of Crest Vertical Curve

A = Algebraic Difference in Grades (%), Absolute Value

K = Rate of Vertical Curvature

- For a given design speed and an "A" value, the calculated length "L" = $K \times A$

- To determine "S" with a given "L" and "A", use the following:

For $S < L$: $S = 52.92 \sqrt{K}$, where $K = L/A$

For $S > L$: $S = 1400/A + L/2$

INTERSECTION SIGHT DISTANCE**201-5E****REFERENCE SECTION
201.3, 201.3.1,
201.3.2 & 201.3.3**

(Continued Figures & Notes)

Time Gaps		
	Design Vehicle	Time gap(s) at design speed of major road (t_g)
(A)	Left Turn from a Stop	
	Passenger car	7.5 sec.
	Single-unit truck	9.5 sec.
	Combination truck	11.5 sec.
(B)	Right Turn from a Stop or Crossing Maneuver	
	Passenger car	6.5 sec.
	Single-unit truck	8.5 sec.
	Combination truck	10.5 sec.

- A. Note: The ISD & time gaps shown in the above tables are for a stopped vehicle to turn left onto a two-lane highway with no median and grades of 3 % or less. For other conditions, the time gap must be adjusted as follows:

For multilane highways:

For left turns onto two-way highways with more than two lanes, add 0.5 seconds for passenger cars or 0.7 seconds for trucks for each additional lane, from the left, in excess of one, to be crossed by the turning vehicle.

For minor road approach grades:

If the approach grade is an upgrade that exceeds 3 %, add 0.2 seconds for each % grade for left turns.

- B. Note: The ISD & time gaps shown in the above tables are for a stopped vehicle to turn right onto a two-lane highway with no median and grades of 3 % or less. For other conditions, the time gap must be adjusted as follows:

For multilane highways:

For crossing a major road with more than two lanes, add 0.5 seconds for passenger cars or 0.7 seconds for trucks for each additional lane to be crossed and for narrow medians that cannot store the design vehicle.

For minor road approach grades:

If the approach grade is an upgrade that exceeds 3 %, add 0.1 seconds for each % grade.

DECISION SIGHT DISTANCE**201-6E****REFERENCE SECTION****201.5**

HEIGHT OF EYE 3.50'

HEIGHT OF OBJECT 2.00'

DESIGN SPEED (mph)	DECISION SIGHT DISTANCE (ft)				
	AVOIDANCE MANEUVER				
	A	B	C	D	E
30	220	490	450	535	620
35	275	590	525	625	720
40	330	690	600	715	825
45	395	800	675	800	930
50	465	910	750	890	1030
55	535	1030	865	980	1135
60	610	1150	990	1125	1280
65	695	1275	1050	1220	1365
70	780	1410	1105	1275	1445

The Avoidance Maneuvers are as follows:

A - Rural Stop

B - Urban Stop

C - Rural Speed/Path/Direction Change

D - Suburban Speed/Path/Direction Change

E - Urban Speed/Path/Direction Change

Decision Sight Distance (DSD) is calculated or measured using the same criteria as Stopping Sight Distance; 3.50 ft eye height and 2.00 ft object height.

Use the equations on Figures 201-2, 203-3, and 203-6 to determine the DSD at vertical and horizontal curves.

MAXIMUM CENTERLINE DEFLECTION WITHOUT HORIZONTAL CURVE

202-1E

REFERENCE SECTION

202.2

DESIGN SPEED		MAX. DEFLECTION *
LOW SPEED	25	5° 30'
	30	3° 45'
	35	2° 45'
	40	2° 15'
	45	1° 45'
HIGH SPEED	50	1° 15'
	55	1° 00'
	60	1° 00'
	65	0° 45'
	70	0° 45'

* **ROUNDED TO NEAREST 15'**

Based on the following formulae:

High Speed: $\tan \Delta = 1.0/V$

Low Speed: $\tan \Delta = 60/V^2$

Where: V = Design Speed

Δ = Deflection Angle

Note:

The recommended minimum distances between consecutive horizontal deflections is:

High Speed - 200'

Low Speed - 100'

MAXIMUM DEGREE OF CURVE	202-2E
	REFERENCE SECTION 202.3

DESIGN SPEED (mph)	MAX. DEGREE OF CURVE (A)			DESIGN SPEED (mph)	MAX. DEGREE OF CURVE (A)		
	RURAL	HIGH -SPEED URBAN	LOW-SPEED URBAN		RURAL	HIGH -SPEED URBAN	LOW-SPEED URBAN
	0.08	0.06	0.04		0.08	0.06	0.04
20	--	--	66°30'	45	9°45'	--	8°00'
21	--	--	58°15'	46	9°15'	--	--
22	--	--	51°15'	47	8°45'	--	--
23	--	--	45°15'	48	8°15'	--	--
24	--	--	40°15'	49	8°00'	--	--
25	42°30'	--	37°00'	50	7°30'	6°45'	--
26	38°00'	--	33°00'	51	7°15'	6°30'	--
27	34°00'	--	29°30'	52	6°45'	6°15'	--
28	31°15'	--	26°45'	53	6°30'	6°00'	--
29	28°30'	--	24°30'	54	6°15'	5°45'	--
30	26°45'	--	22°45'	55	6°00'	5°30'	--
31	24°30'	--	21°00'	56	5°45'	5°15'	--
32	22°30'	--	19°15'	57	5°30'	5°00'	--
33	21°15'	--	18°00'	58	5°15'	4°45'	--
34	19°45'	--	16°45'	59	5°00'	4°30'	--
35	18°15'	--	15°30'	60	4°45'	4°15'	--
36	16°45'	--	14°15'	61	4°30'	4°00'	--
37	15°45'	--	13°15'	62	4°15'	4°00'	--
38	14°45'	--	12°30'	63	4°15'	3°45'	--
39	13°45'	--	11°30'	64	4°00'	3°30'	--
40	12°45'	--	10°45'	65	3°45'	3°30'	--
41	12°15'	--	10°15'	66	3°45'	3°15'	--
42	11°45'	--	9°45'	67	3°30'	3°15'	--
43	11°00'	--	9°00'	68	3°30'	3°00'	--
44	10°30'	--	8°45'	69	3°15'	3°00'	--
45	9°45'	--	8°00'	70	3°15'	2°45'	--

(A) See Superelevation Tables 202-7, 8 & 9 for corresponding radii values.

MAXIMUM DEGREE OF CURVE WITHOUT SUPERELEVATION

202-3E

REFERENCE SECTION
202.4.3

		DEGREE OF CURVE			
		DESIGN SPEED (mph)	RURAL HIGHWAYS	URBAN STREETS & HIGHWAYS	
LOW SPEED		20	--	54°23'	FIGURE 202-9
		25	2°35'	29°20'	
		30	1°53'	17°30'	
		35	1°26'	11°28'	
		40	1°08'	7°42'	
		45	0°55'	5°40'	
HIGH SPEED		50	0°45'	0°47'	FIGURE 202-8
		55	0°38'	0°39'	
		60	0°32'	0°33'	
		65	0°28'	0°29'	
		70	0°25'	0°26'	

SUPERELEVATION TRANSITIONS

202-4E

REFERENCE SECTION 202.4.5 & 202.4.8

Maximum Relative Gradient for
Profiles Between the Edge of
Traveled Way and the Centerline or
Reference Line (Axis of Rotation)

Design Speed (mph)	Maximum Relative Gradient (Percent) "Δ"	Equivalent Maximum Relative Slope "G"
20	0.74	135:1
25	0.70	143:1
30	0.66	152:1
35	0.62	161:1
40	0.58	172:1
45	0.54	185:1
50	0.50	200:1
55	0.47	213:1
60	0.45	222:1
65	0.43	233:1
70	0.40	250:1

Adjustment Factors, b_w

Number of Lanes, Rotated n_l	Divided * Roadways b_w	Undivided Roadways b_w
1	1.00	1.00
1.5	1.00	0.83
2	1.00	0.75
2.5	1.00	0.70
3	1.00	0.67
3.5	1.00	0.64

* Interstates, Freeways,
Expressways and Ramps

In Figures 202-7, 202-8 and 202-10, the table values for the Minimum Length of Superelevation Runoff, L_r , were determined by the following equation:

$$L_r = \frac{(w \times n_l) e_d}{\Delta} (b_w) \times 100 \quad \text{or} \quad L_r = (w \times n_l)(e_d)(G)(b_w)$$

The equation can also be used to determine L_r , when more than one lane is rotated about the centerline or the edge or if the lane width is other than 12 feet for Figures 202-7 and 202-8 or 16 feet for Figure 202-10.

Once L_r has been determined, the Minimum Length of Tangent Runout, L_t , should be determined by the following equation:

$$L_t = (e_{NC} \div e_d) L_r$$

The equation for L_t can be used by Figures 202-7, 202-8, 202-9 and 202-10.

Where:

- L_r = minimum length of superelevation runoff, ft
- L_t = minimum length of tangent runout, ft
- Δ = maximum relative gradient, percent
- n_l = number of lanes rotated
- w = width of one traffic lane, ft (typically 12 ft)
- e_d = design superelevation rate
- e_{NC} = normal cross slope rate, (0.016)
- G = equivalent maximum relative slope, (the reciprocal of Δ)
- b_w = adjustment factor for number of lanes rotated


METHODS OF SUPERELEVATION ROTATION

202-5E


REFERENCE SECTION

202.4.4


METHOD 1 - PAVEMENT REVOLVED ABOUT THE CENTERLINE (Crowned)

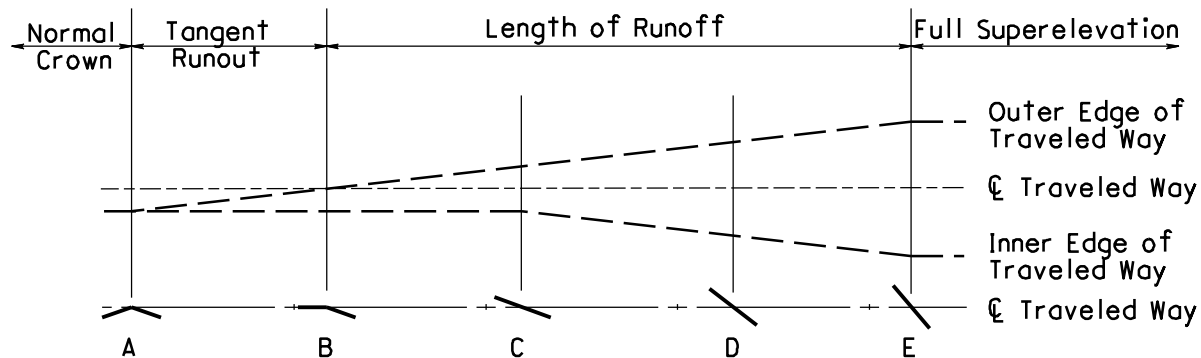


METHOD 2 - PAVEMENT REVOLVED ABOUT THE INNER EDGE (Crowned)

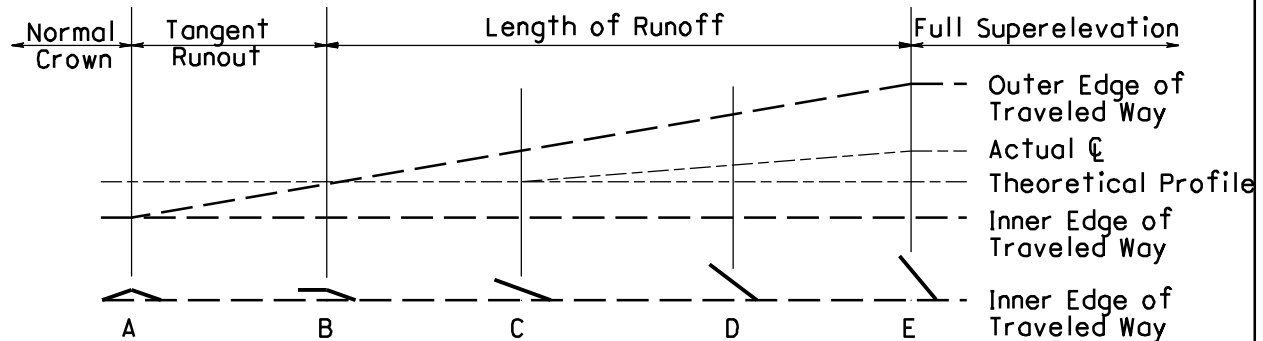


METHOD 3 - PAVEMENT REVOLVED ABOUT THE OUTER EDGE (Crowned)

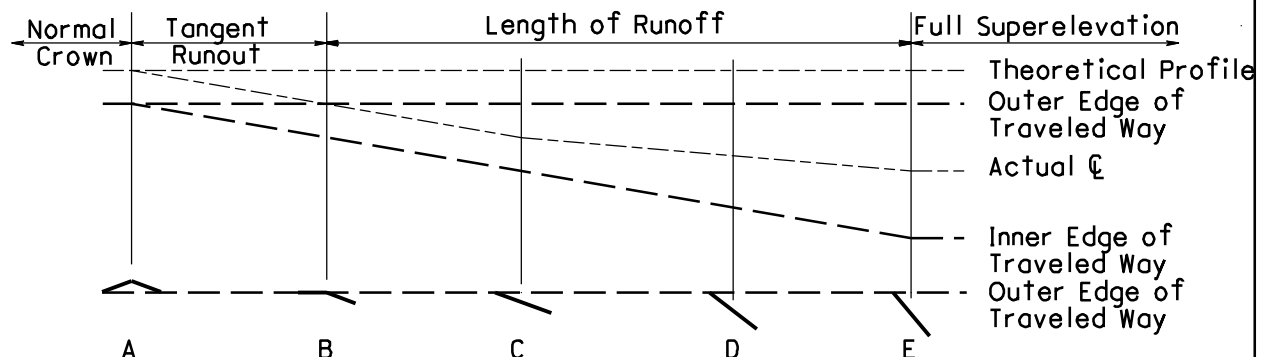

METHOD 4 - PAVEMENT REVOLVED ABOUT THE OUTER EDGE (Straight Cross Slope)

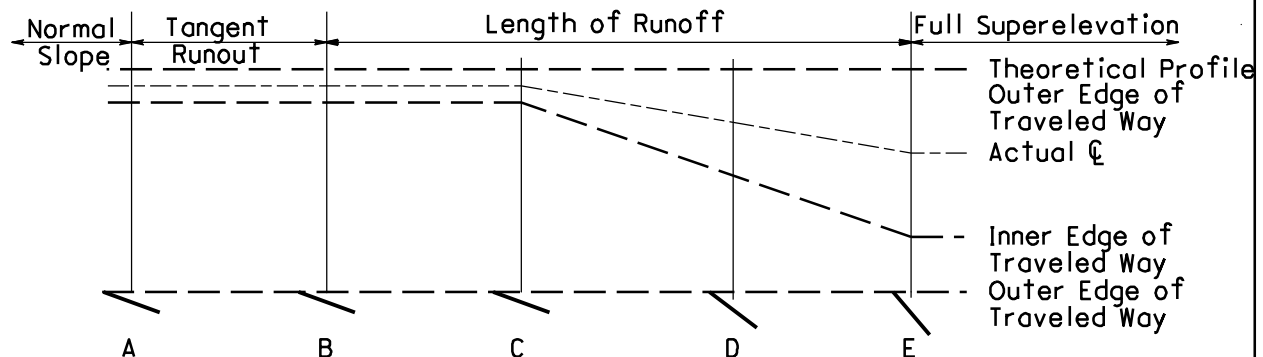


REFERENCE SECTION
202.4.4 - 202.4.6,
202.4.8




SUPERELEVATION DEVELOPMENT FOUR-LANE DIVIDED


202-5bE

REFERENCE SECTION
202.4.4 - 202.4.6,
202.4.8

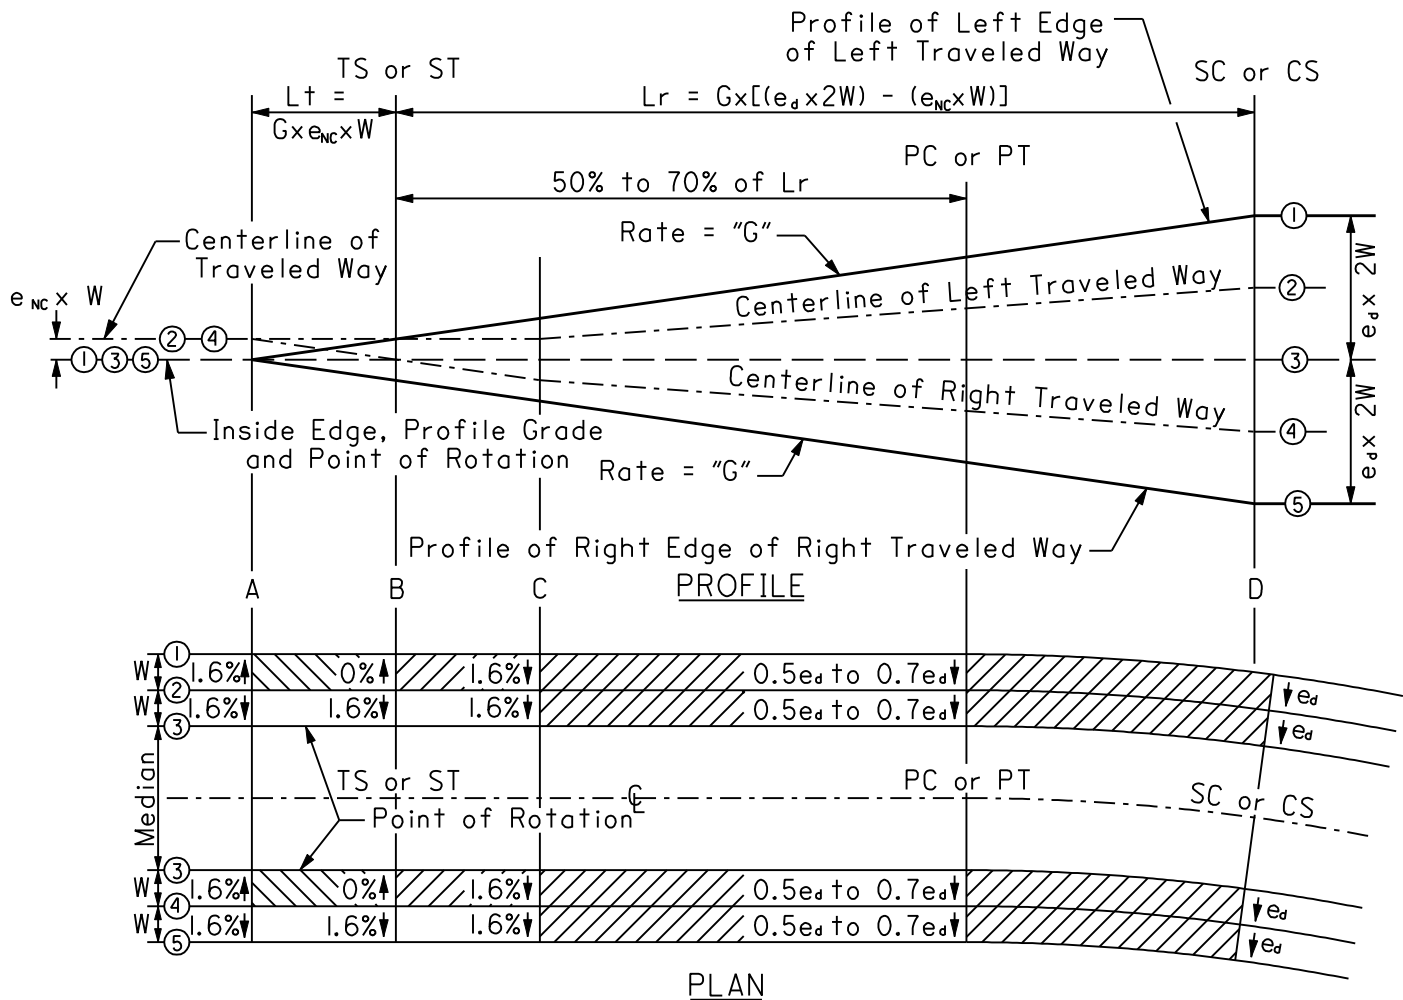

For Legend see
Figure 202-4

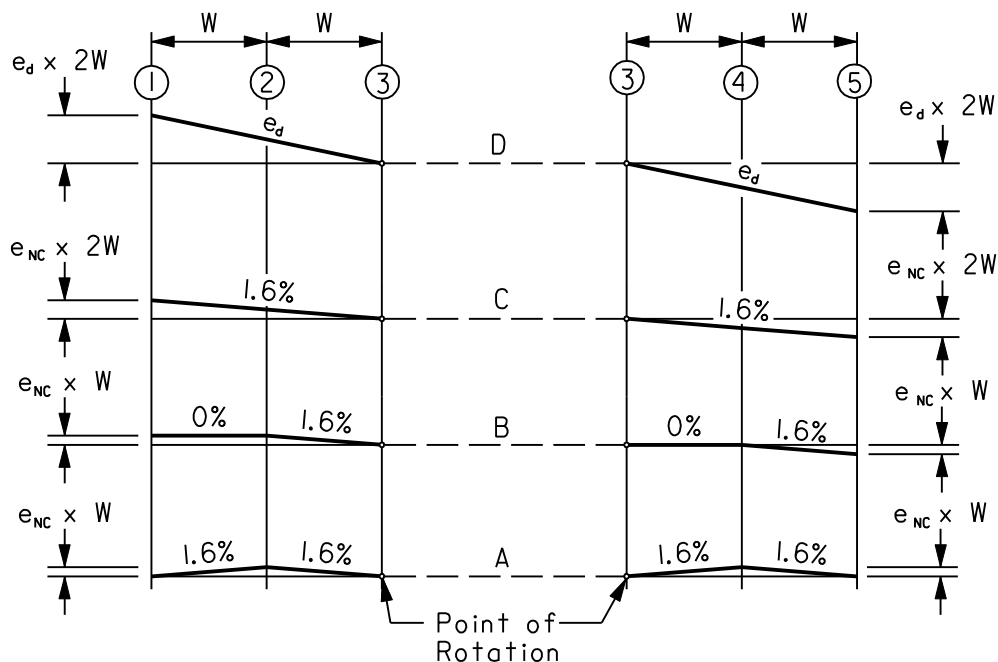


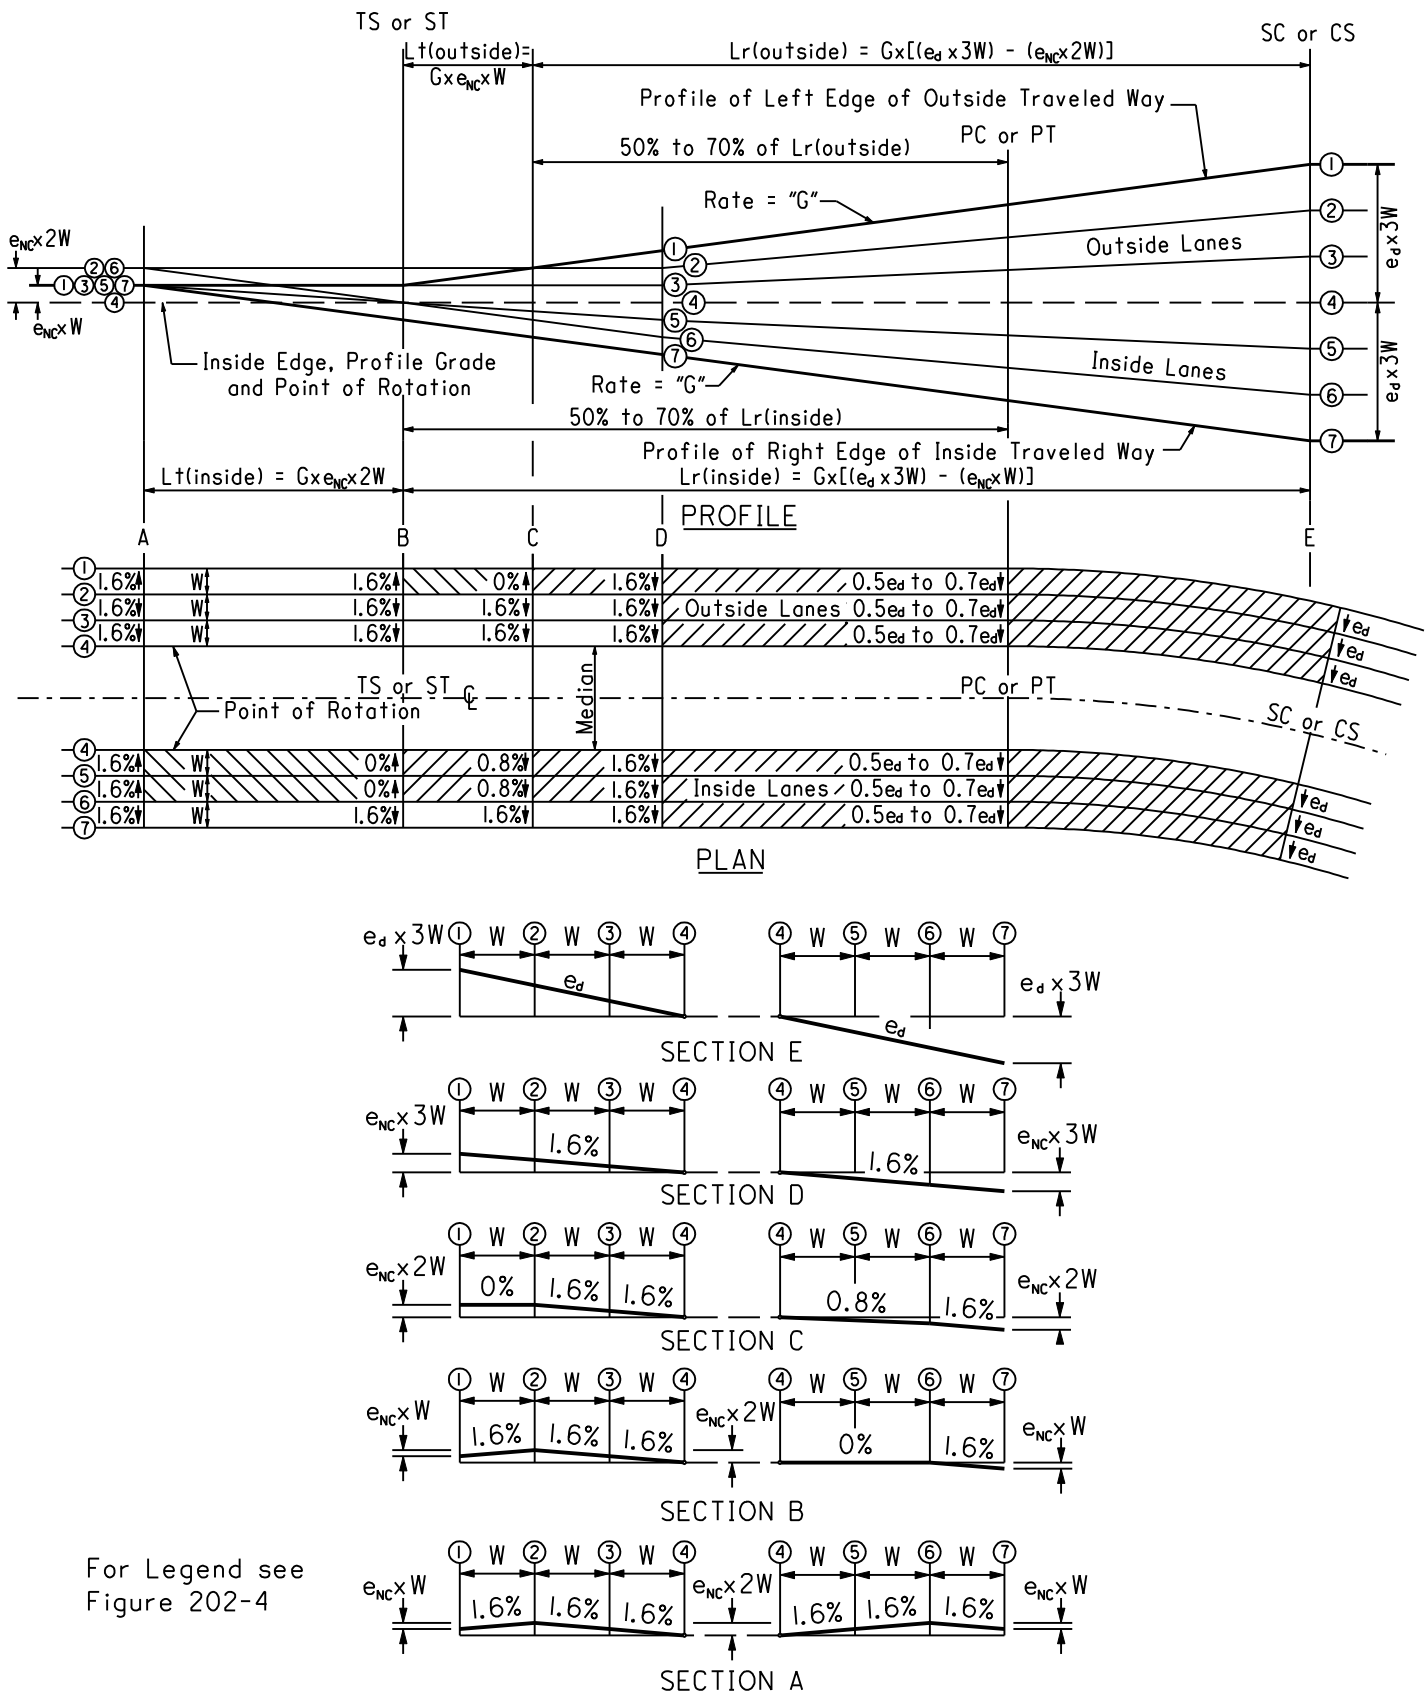

SUPERELEVATION DEVELOPMENT SIX-LANE OR MORE DIVIDED (OR FOUR-LANE DIVIDED WITH FUTURE OUTSIDE LANES)

202-5dE

REFERENCE SECTION
202.4.4 - 202.4.6,
202.4.8

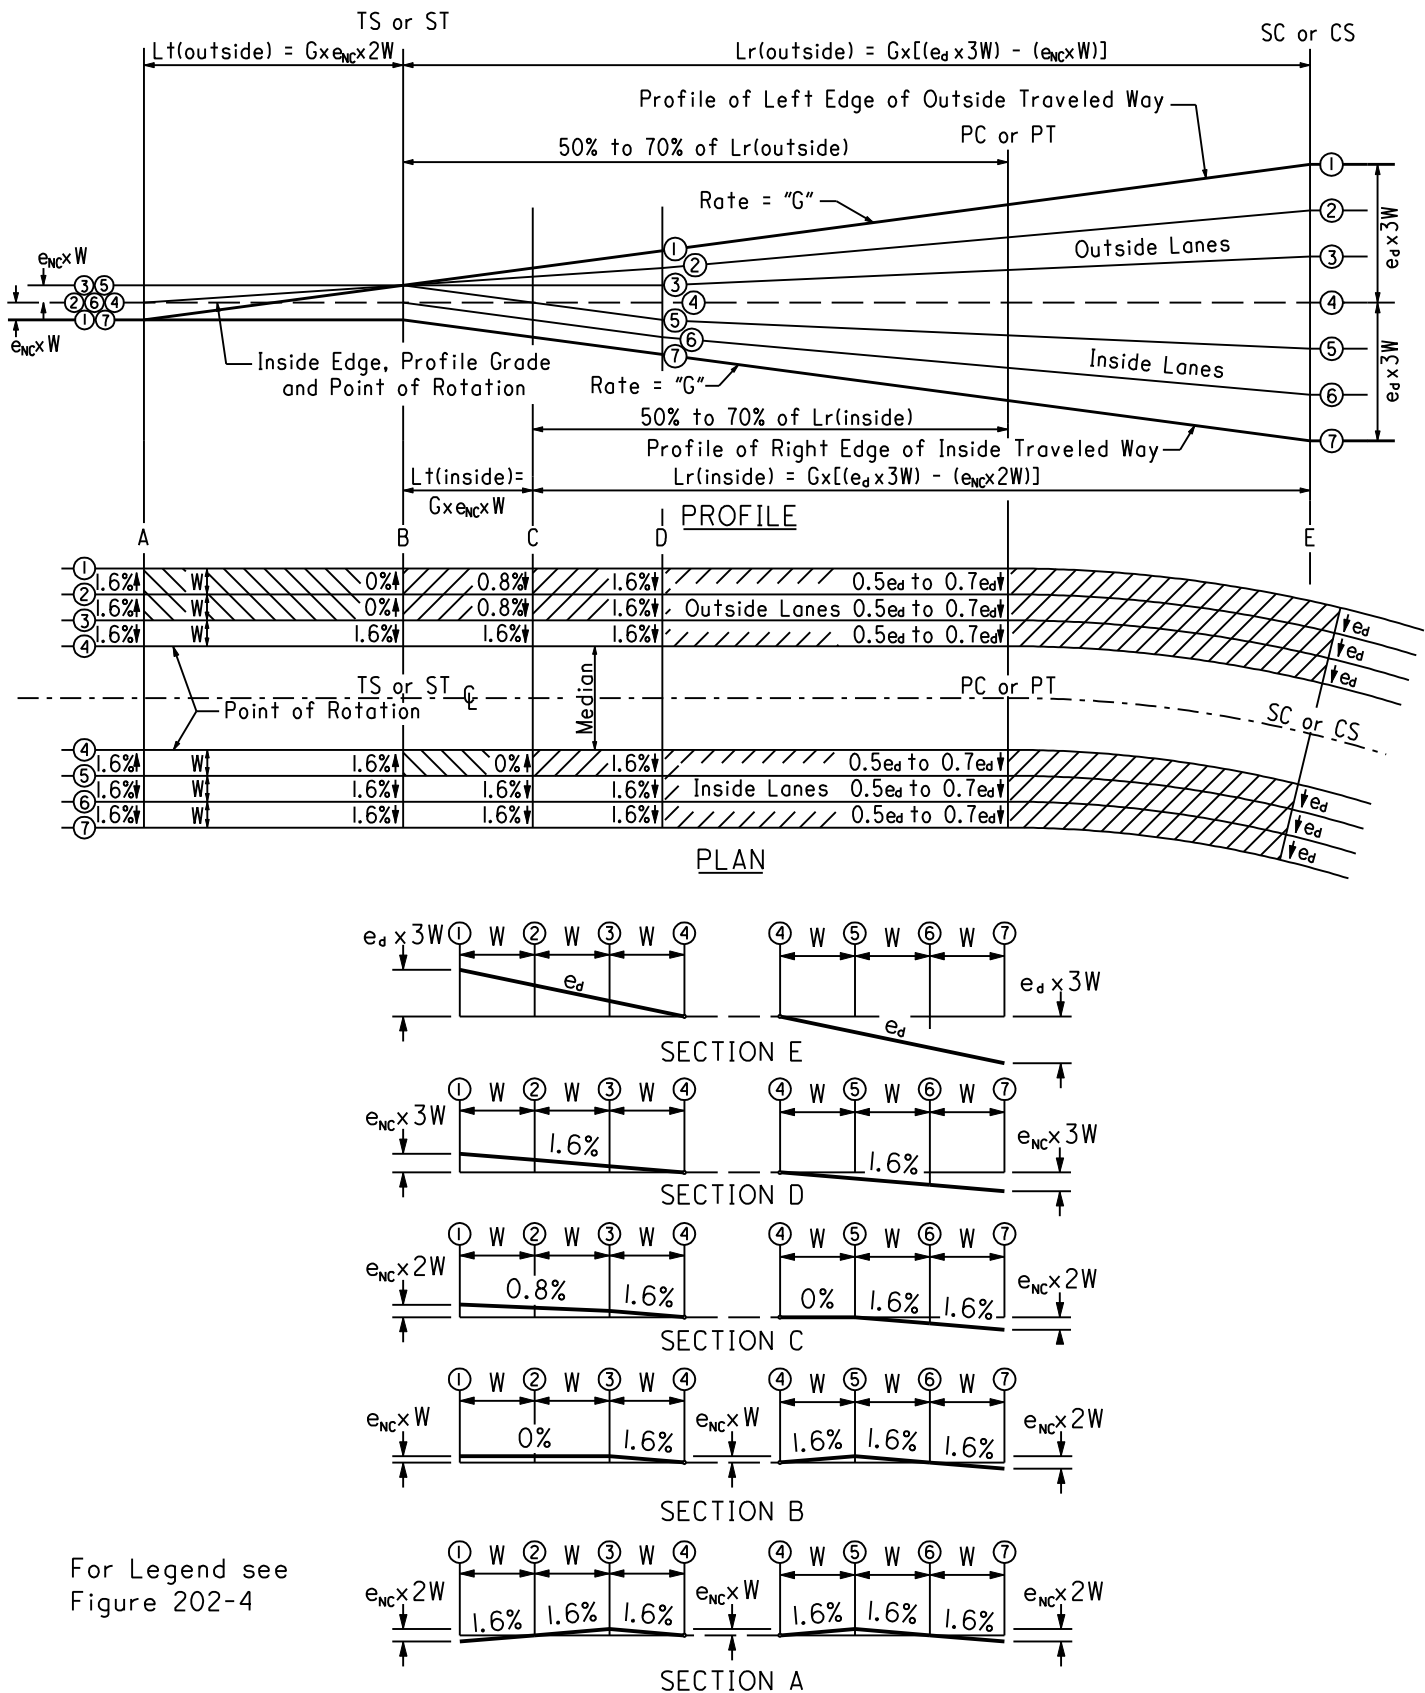


SUPERELEVATION TRANSITION BETWEEN REVERSE HORIZONTAL CURVES


202-6E

REFERENCE SECTION
202.4.8

PAVEMENT REVOLVED ABOUT THE CENTERLINE

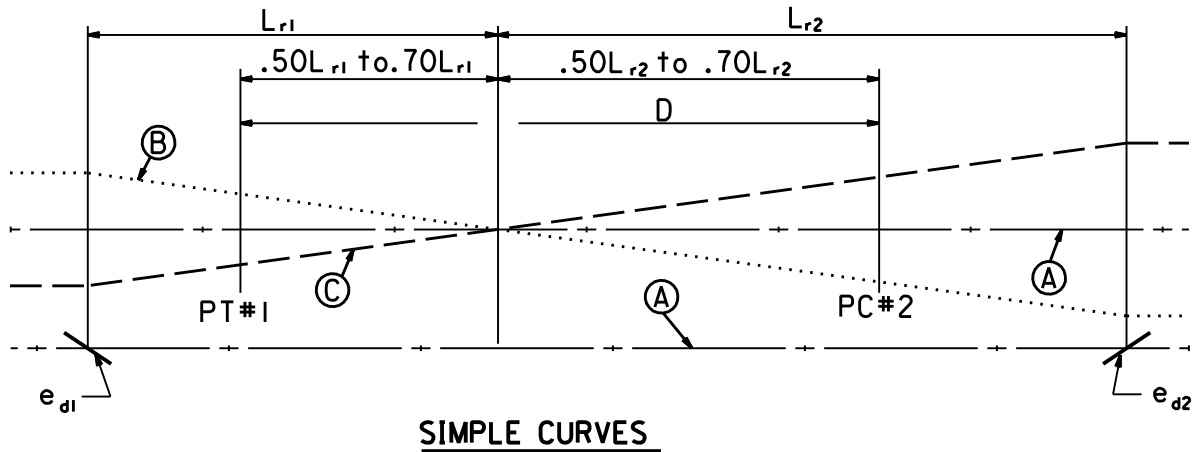

PAVEMENT REVOLVED ABOUT THE CENTERLINE

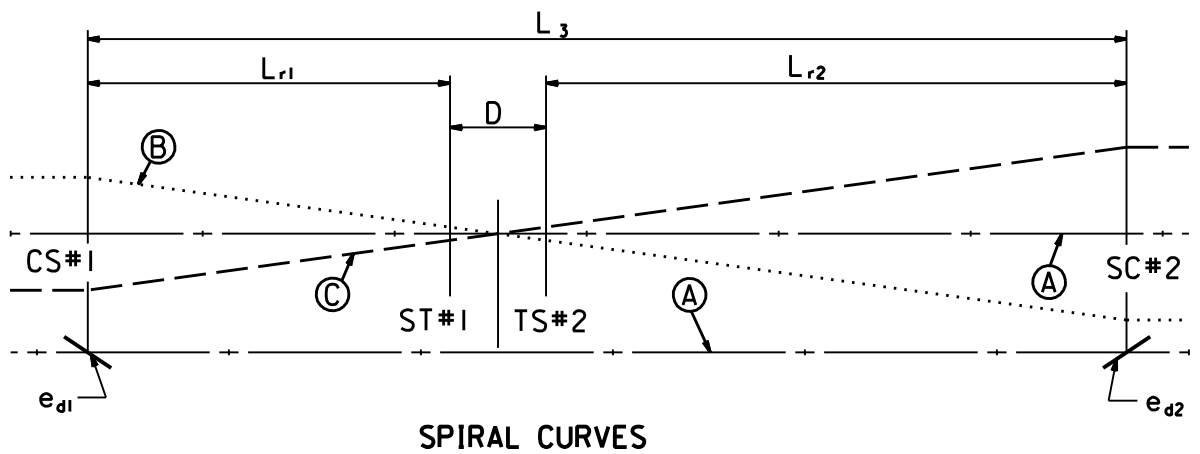

LEGEND:

- (A) - Centerline Pavement
- (B) - Outside E.P. Curve 1, Inside E.P. Curve 2
- (C) - Inside E.P. Curve 1, Outside E.P. Curve 2
- e_{d1} , e_{d2} = Design Superelevation Rates - Curves 1 & 2
- L_{r1} , L_{r2} = Superelevation Transition Lengths - Curves 1 & 2
- D = Distance Between Curves
- L_3 = Total Superelevation Transition Between Spiral Curves

**SUPERELEVATION AND RUNOFF LENGTHS
FOR HORIZONTAL CURVES ON RURAL
HIGHWAYS** - Based on Max. S.E. of 0.08 ft/ft -

202-7E

**REFERENCE SECTION
202.4.1, 202.4.3,
& 202.4.5**

		DESIGN SPEED																																									
Dc	RADIUS	25		30		35		40		45		50		55		60																											
		e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r																										
0°15'	22918	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--																										
0°30'	11459	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--																										
0°45'	7639	NC	--	NC	--	NC	--	NC	--	NC	--	.016	39	.019	49	.022	59																										
1°00'	5730	NC	--	NC	--	NC	--	NC	--	.017	38	.021	51	.025	64	.029	78																										
1°30'	3820	NC	--	NC	--	.017	33	.021	44	.025	56	.030	72	.035	90	.041	110																										
2°00'	2865	NC	--	.017	32	.022	43	.027	56	.032	72	.038	92	.045	116	.051	136																										
2°30'	2292	NC	--	.021	39	.026	51	.033	69	.039	87	.046	111	.053	136	.061	163																										
3°00'	1910	.018	31	.024	44	.031	60	.038	79	.045	100	.053	128	.060	154	.068	182																										
3°30'	1637	.021	37	.028	52	.035	68	.043	89	.050	111	.058	140	.066	169	.074	198																										
4°00'	1432	.024	42	.031	57	.039	76	.047	98	.055	123	.063	152	.071	182	.078	208																										
4°30'	1273	.026	45	.034	63	.042	82	.051	106	.059	131	.068	164	.075	192	.080	214																										
5°00'	1146	.029	50	.037	68	.046	89	.055	114	.063	140	.071	171	.078	200	△=4°45'																											
5°30'	1042	.031	54	.040	73	.049	95	.058	120	.066	147	.074	178	.080	205	△=0°32'																											
6°00'	955	.033	57	.042	77	.051	99	.061	126	.070	156	.077	185	.080	205	△=6°00'																											
6°30'	881	.035	61	.045	83	.054	105	.063	131	.072	160	.079	190																														
7°00'	819	.037	64	.047	86	.056	109	.066	137	.074	165	.080	192	△=0°38'																													
7°30'	764	.039	67	.049	90	.058	113	.068	141	.076	169	.080	192	△=7°30'		NC = Normal Crown																											
8°00'	716	.041	71	.051	94	.060	116	.070	145	.078	174																																
8°30'	674	.042	73	.052	95	.062	120	.072	149	.079	176	△=0°45'																															
9°00'	637	.044	76	.054	99	.064	124	.074	153	.080	178	△=9°45'		△ = Max. Dc for the Design Speed		△ = Max. Dc Without Superelevation																											
9°30'	603	.046	79	.055	101	.066	128	.075	155	.080	178							△=0°55'																									
10°00'	573	.047	81	.057	104	.067	130	.077	159	△=9°45'		△=0°55'																															
10°30'	546	.048	83	.058	106	.069	134	.078	161																																		
11°00'	521	.049	85	.059	108	.070	136	.079	164	△=12°45'		△=1°08'																															
11°30'	498	.050	86	.061	112	.071	138	.079	164																																		
12°00'	477	.051	88	.062	114	.073	142	.080	166	△=12°45'		△=1°08'																															
12°30'	458	.052	90	.063	115	.074	143	.080	166																																		
13°00'	441	.053	91	.064	117	.075	145	△=12°45'		△=1°08'																																	
13°30'	424	.054	93	.066	121	.076	147																																				
14°00'	409	.055	95	.067	123	.077	149	△=18°15'		△=1°26'																																	
14°30'	395	.056	97	.068	125	.077	149																																				
15°00'	382	.057	98	.069	126	.078	151	△=18°15'		△=1°26'																																	
16°30'	347	.059	102	.071	130	.079	153																																				
18°00'	318	.062	107	.074	135	.080	155	△=18°15'		△=1°26'																																	
20°00'	286	.064	110	.076	139	△=18°15'		△=1°26'																																			
22°00'	260	.067	115	.078	143																																						
23°00'	249	.068	117	.079	145	△=26°45'		△=1°53'																																			
25°00'	229	.071	122	.080	146																																						
26°30'	216	.072	124	.080	146	△=26°45'		△=1°53'																																			
28°00'	205	.074	127	△=26°45'																																							
31°00'	185	.076	131																																								
34°00'	169	.078	134	△=42°30'																																							
36°00'	159	.079	136																																								
38°00'	151	.079	136	△=42°30'																																							
40°00'	143	.080	138																																								
42°00'	136	.080	138	△=2°35'																																							

e_d = Design Superelevation Rate
L_r = Min. Runoff Length, 2-Lane Highway Rotated About the Centerline Lane Width of 12 feet

NC = Normal Crown

△ = Max. Dc for the Design Speed

⊙ = Max. Dc Without Superelevation

Dc	RADIUS	DESIGN SPEED			
		65		70	
		e _d	L _r	e _d	L _r
0°15'	22918	NC	--	NC	--
0°30'	11459	.017	48	.019	57
0°45'	7639	.025	70	.028	84
1°00'	5730	.032	90	.036	108
1°15'	4584	.039	110	.044	132
1°30'	3820	.046	129	.051	153
1°45'	3274	.052	146	.058	174
2°00'	2865	.058	163	.065	195
2°15'	2546	.063	177	.071	213
2°30'	2292	.068	191	.075	225
2°45'	2083	.072	202	.078	234
3°00'	1910	.075	210	.080	240
3°15'	1763	.078	219	△=3°15'	
3°30'	1637	.079	221	△=0°25'	
3°45'	1528	.080	224	△=3°45'	
				△=0°28'	

e_d = Design Superelevation RateL_r = Min. Runoff Length, 2-Lane Highway Rotated
About the Centerline, Lane Width of 12 feet

SUPERELEVATION AND RUNOFF LENGTHS FOR HORIZONTAL CURVES ON HIGH-SPEED* URBAN HIGHWAYS

202-8E
REFERENCE SECTION
202.4.1, 202.4.3,
& 202.4.5

- Based on a Maximum Superelevation of 0.06 ft/ft -

* 50 mph or greater

		DESIGN SPEED									
		50		55		60		65		70	
Dc	RADIUS	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r
0°15'	22,918	NC	--	NC	--	NC	--	NC	--	NC	--
0°30'	11,459	NC	--	NC	--	NC	--	.016	45	.018	54
0°45'	7,639	NC	--	.018	47	.021	56	.024	68	.026	78
1°00'	5,730	.020	48	.023	59	.027	72	.030	84	.033	99
1°30"	3,820	.028	68	.032	82	.037	99	.041	115	.046	138
2°00'	2,865	.035	84	.040	103	.045	120	.050	140	.055	165
2°30'	2,292	.040	96	.045	116	.051	136	.056	157	.059	177
3°00'	1,910	.045	108	.050	128	.055	147	.059	165	△=2°45'	△=0°26'
3°30'	1,637	.048	116	.054	139	.058	155	.060	168		
4°00'	1,432	.052	125	.057	146	.060	160	△=3°30'			
4°30'	1,273	.054	130	.059	151	△=4°15'		△=0°29'			
5°00'	1,146	.056	135	.060	154	△=0°33'					
5°30'	1,042	.058	140	.060	154						
6°00'	955	.059	142	△=5°30'							
6°30'	881	.060	144	△=0°39'							
		△=6°45'									
		△=0°47'									
NC = Nor											

NC = Normal Crown

△ = Max. Dc for the Design Speed

⊙ = Max. Dc Without Superelevation

e_d = Design Superelevation Rate

L_r = Min. Runoff Length, 2-Lane Highway Rotated
About the Centerline, Lane Width of 12 feet

See Figure 202-4 for the calculation of L_r and
adjustments to L_r when more than one lane is
rotated about the centerline or the lane width is
other than 12 feet.

**SUPERELEVATION AND RUNOFF LENGTHS
FOR HORIZONTAL CURVES ON LOW-SPEED
URBAN STREETS*** - Based on Max. S.E. of 0.04 ft/ft

202-9E

REFERENCE SECTION
202.4.1, 202.4.3,
& 202.4.5

		DESIGN SPEED																			
Dc	RADIUS	20		25		30		35		40		45									
		e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r								
5°00'	1146	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--								
5°30'	1042	NC	--	NC	--	NC	--	NC	--	NC	--	NC	--								
6°00'	955	NC	--	NC	--	NC	--	NC	--	NC	--	RC	36								
7°00'	819	NC	--	NC	--	NC	--	NC	--	NC	--	RC	36								
7°30'	764	NC	--	NC	--	NC	--	NC	--	NC	--	.027	61								
8°00'	716	NC	--	NC	--	NC	--	NC	--	RC	34	.039	87								
9°00'	637	NC	--	NC	--	NC	--	NC	--	RC	34	⚠=8°00' ⊕=5°40'									
9°30'	603	NC	--	NC	--	NC	--	NC	--	.017	37										
10°00'	573	NC	--	NC	--	NC	--	NC	--	.027	56	⚠=10°45' ⊕=7°42'									
10°30'	546	NC	--	NC	--	NC	--	NC	--	.036	75										
11°00'	521	NC	--	NC	--	NC	--	NC	--												
11°30'	498	NC	--	NC	--	NC	--	RC	31												
12°00'	477	NC	--	NC	--	NC	--	RC	31												
13°00'	441	NC	--	NC	--	NC	--	RC	31												
14°00'	409	NC	--	NC	--	NC	--	.020	40												
15°00'	382	NC	--	NC	--	NC	--	.035	67												
15°30'	370	NC	--	NC	--	NC	--	.040	78												
17°00'	337	NC	--	NC	--	NC	--	⚠=15°30' ⊕=11°28'													
17°30'	327	NC	--	NC	--	NC	--														
18°00'	318	NC	--	NC	--	RC	30														
20°00'	286	NC	--	NC	--	RC	30														
20°30'	279	NC	--	NC	--	RC	30														
21°00'	273	NC	--	NC	--	.021	38														
22°00'	260	NC	--	NC	--	.031	57														
22°45'	252	NC	--	NC	--	.039	72														
25°00'	229	NC	--	NC	--	⚠=22°45' ⊕=17°30'															
29°00'	198	NC	--	NC	--																
29°30'	194	NC	--	RC	28																
30°00'	191	NC	--	RC	28																
33°00'	174	NC	--	RC	28																
33°45'	170	NC	--	.016	28																
35°00'	164	NC	--	.025	44																
36°00'	159	NC	--	.033	57																
37°00'	155	NC	--	.040	69																
40°00'	143	NC	--	⚠=37°00' ⊕=29°19'																	
50°00'	116	NC	--																		
54°30'	105	RC	26																		
56°00'	102	RC	26																		
58°00'	99	RC	26																		
61°00'	94	RC	26																		
61°15'	93	.016	26																		
62°00'	92	.020	32																		
63°00'	91	.024	40																		
64°00'	90	.029	47																		
65°00'	88	.034	55																		
66°00'	87	.038	62																		
66°30'	86	.040	65																		

* 45 mph

NC = Normal Crown
RC = Remove Crown

e_d= Design Superelevation Rate
L_r= Minimum Runoff Length, 12-foot Wide Lane Rotated About the Centerline

⚠ = Maximum Degree of Curve for the
⊕ = Maximum Degree of Curve for Norm

See Figure 202-4 for the calculation of adjustments to L_r when more than one rotated about the centerline or the lane other than 12 feet.

* 45 mph or less

NC = Normal Crown

RC = Remove Crown

e_d = Design Superelevation Rate

L_r = Minimum Runoff Length, 12-foot Wide

Lane Rotated About the Centerline

△ = Maximum Degree of Curve for the Design Speed

⊙ = Maximum Degree of Curve for Normal Crown

See Figure 202-4 for the calculation of L_r and adjustments to L_r when more than one lane is rotated about the centerline or the lane width is other than 12 feet.


△=66°30'

⊙=54°23'

SUPERELEVATION RATES FOR HORIZONTAL CURVES ON LOW-SPEED URBAN STREETS

202-9aE

REFERENCE SECTION
202.4.1, 202.4.3,
& 202.4.5

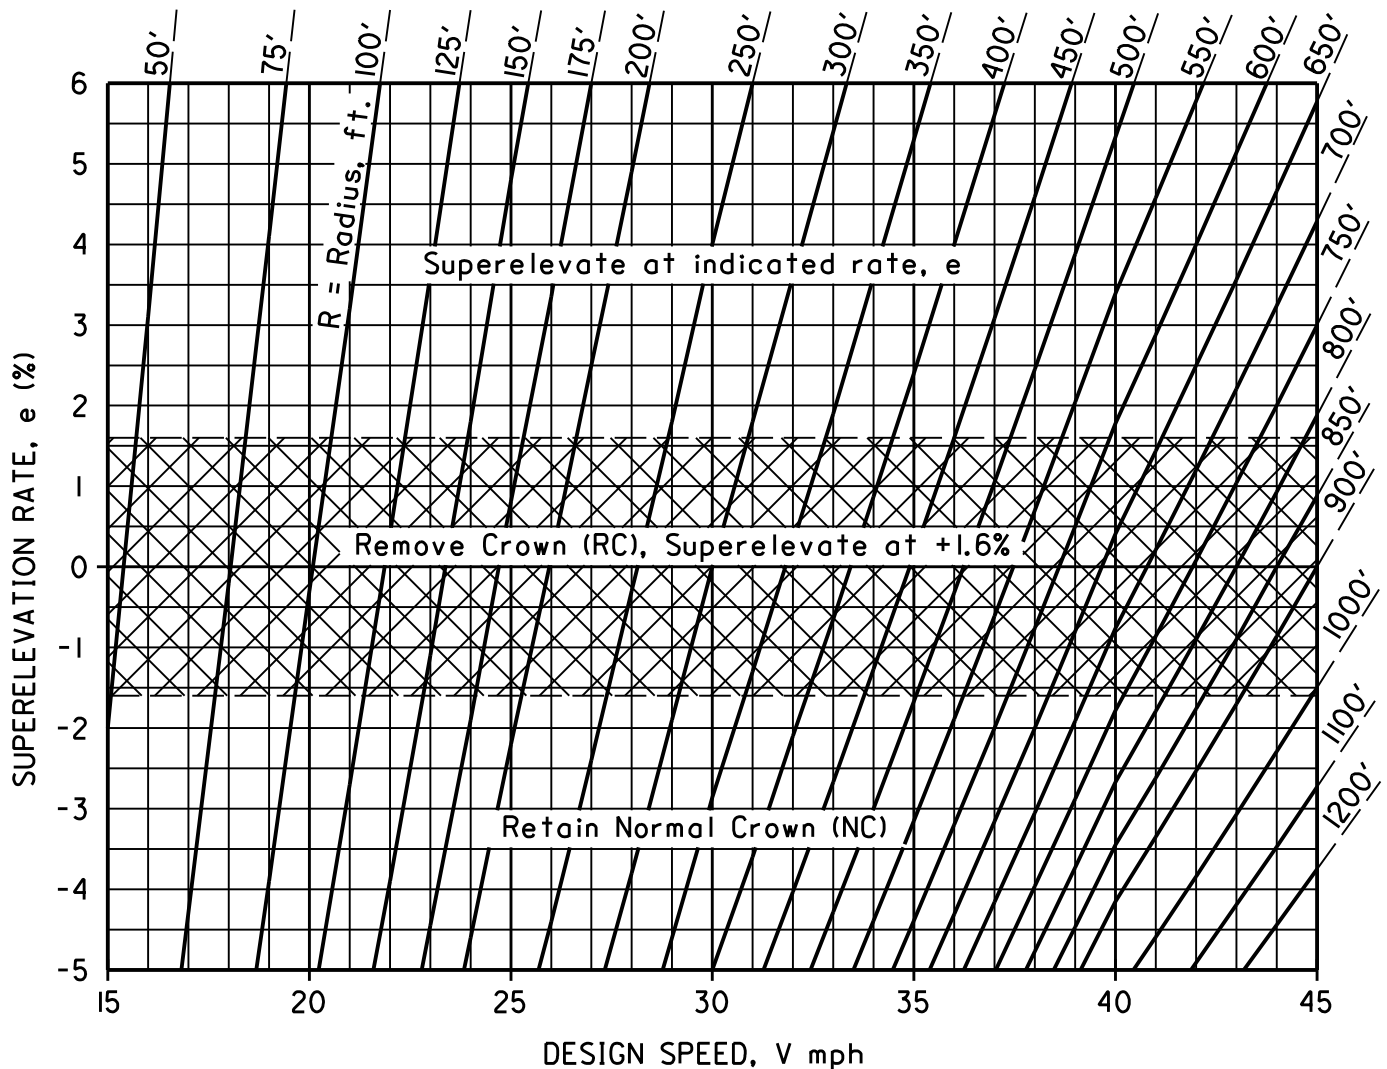

NOTES:

1. The Figure provides a range of curves and superelevation rates which apply to a selected design speed for low-speed urban streets. AASHTO Method 2 was used to distribute superelevation and side-friction.
2. For curves that fall within the shaded area, it is desirable to remove the crown and superelevate the roadway at a uniform slope of +1.6%.
3. $D_c = 5729.58 / R$

**SUPERELEVATION AND RUNOFF LENGTHS
FOR HORIZONTAL CURVES ON
LOW-SPEED* URBAN RAMPS AND OTHER
INTERCHANGE ROADWAYS** - Based on Max. S.E. of 0.06 ft/ft -

202-10E

**REFERENCE SECTION
202.4.1, 202.4.3,
& 202.4.5**

* = 45 m.p.h. or less

		DESIGN SPEED									
Dc	RADIUS	25		30		35		40		45	
		e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r	e _d	L _r
0°15'	22918	NC	--	NC	--	NC	--	NC	--	NC	--
0°30'	11459	NC	--	NC	--	NC	--	NC	--	NC	--
0°45'	7639	NC	--	NC	--	NC	--	NC	--	NC	--
1°00'	5730	NC	--	NC	--	NC	--	NC	--	.017	51
1°30'	3820	NC	--	NC	--	.016	42	.020	56	.024	72
2°00'	2865	NC	--	.016	39	.021	54	.025	69	.030	89
2°30'	2292	NC	--	.020	49	.025	65	.030	83	.035	104
3°00'	1910	.018	42	.023	56	.028	73	.034	94	.039	116
3°30'	1637	.020	46	.026	64	.032	83	.037	102	.043	128
4°00'	1432	.022	51	.028	69	.034	88	.040	111	.046	137
4°30'	1273	.024	55	.031	76	.037	96	.043	119	.049	146
5°00'	1146	.026	60	.033	81	.039	101	.045	124	.051	151
5°30'	1042	.028	65	.035	86	.041	106	.047	130	.053	157
6°00'	955	.030	69	.036	88	.042	109	.049	135	.055	163
6°30'	881	.031	71	.038	93	.044	114	.051	141	.057	169
7°00'	819	.033	76	.039	95	.045	116	.053	146	.058	172
7°30'	764	.034	78	.040	98	.047	122	.054	149	.059	175
8°00'	716	.035	81	.041	100	.048	124	.055	152	.060	178
8°30'	674	.036	83	.042	103	.050	129	.056	155	.060	178
9°00'	637	.037	85	.043	105	.051	132	.057	157	.060	178
9°30'	603	.038	87	.045	110	.052	135	.058	160	△=9°00' ⊙=0°57'	
10°00'	573	.038	87	.046	112	.053	137	.059	163		
10°30'	546	.039	90	.046	112	.054	140	.059	163	△=11°45' ⊙=1°10'	
11°00'	521	.040	92	.047	115	.055	142	.060	166		
11°30'	498	.040	92	.048	117	.056	145	.060	166	NC = 	

e_d = Design Superelevation Rate
L_r = Minimum Runoff Length, 16-foot Wide
Lane Rotated About the Edge

△ = Maximum Degree of Curve for the Design Speed
⊙ = Maximum Degree of Curve Without Superelevation

See Figure 202-4 for the calculation of L_r and adjustments to L_r when more than one lane is rotated about the edge or the lane width is other than 16 feet.

MAXIMUM CURVE WITHOUT A SPIRAL	202-11E
	REFERENCE SECTION 202.5

DESIGN SPEED (mph)	MAX. DEGREE OF CURVE	MIN. RADIUS (feet)
50	4°30'	1273
55	3°45'	1528
60	3°00'	1910
65	2°30'	2292
70	2°15'	2546

MAXIMUM GRADES (PERCENT)	203-1E
	REFERENCE SECTION 203.2.3

	FUNCTIONAL CLASSIFICATION	TERRAIN	DESIGN SPEED (mph)									
			25	30	35	40	45	50	55	60	65	70
URBAN	INTERSTATE, (A) OTHER FREEWAYS & EXPRESSWAYS	LEVEL ROLLING HILLY						4	4	3	3	3
								5	5	4	4	4
								6	6	6	5	5
	ARTERIAL STREET	LEVEL ROLLING HILLY		8	7	7	6	6	5	5		
				9	8	8	7	7	6	6		
				11	10	10	9	9	8	8		
	COLLECTOR (B) STREETS	LEVEL ROLLING HILLY	9	9	9	9	8	7	7	6		
			12	11	10	10	9	8	8	7		
			13	12	12	12	11	10	10	9		
	LOCAL STREETS	LEVEL ROLLING HILLY	10	9	9	9	9	8	8	7		
			13	12	12	11	11	10	10	8		
			15	15	15	14	14	12	12	10		
RURAL	INTERSTATE, (A) OTHER FREEWAYS & EXPRESSWAYS	LEVEL ROLLING HILLY						4	4	3	3	3
								5	5	4	4	4
								6	6	6	5	5
	ARTERIALS	LEVEL ROLLING HILLY				5	5	4	4	3	3	3
						6	6	5	5	4	4	4
						8	7	7	6	6	5	5
	COLLECTORS (B)	LEVEL ROLLING HILLY	7	7	7	7	7	6	6	5		
			10	9	9	8	8	7	7	6		
			11	10	10	10	10	9	9	8		
	LOCAL ROADS	LEVEL ROLLING HILLY	7	7	7	7	7	6	6	5		
			11	10	10	10	9	8	7	6		
			15	14	13	13	12	10	10			

- A. Grades 1% steeper may be used for extreme cases where development in urban areas precludes the use of flatter grades. Grades 1% steeper may also be used for one-way down-grades except in hilly terrain.
- B. Grades 1% steeper may be used for short lengths (less than 500 ft.), and on one-way down-grades. For rural highways with current ADT less than 400, grades may be 2% steeper.


CRITICAL LENGTHS OF GRADE

203-1aE

REFERENCE SECTION

203.2.3

Graph based on Typical Heavy Truck of 200 lb/hp,
Entering Speed = 70 mph

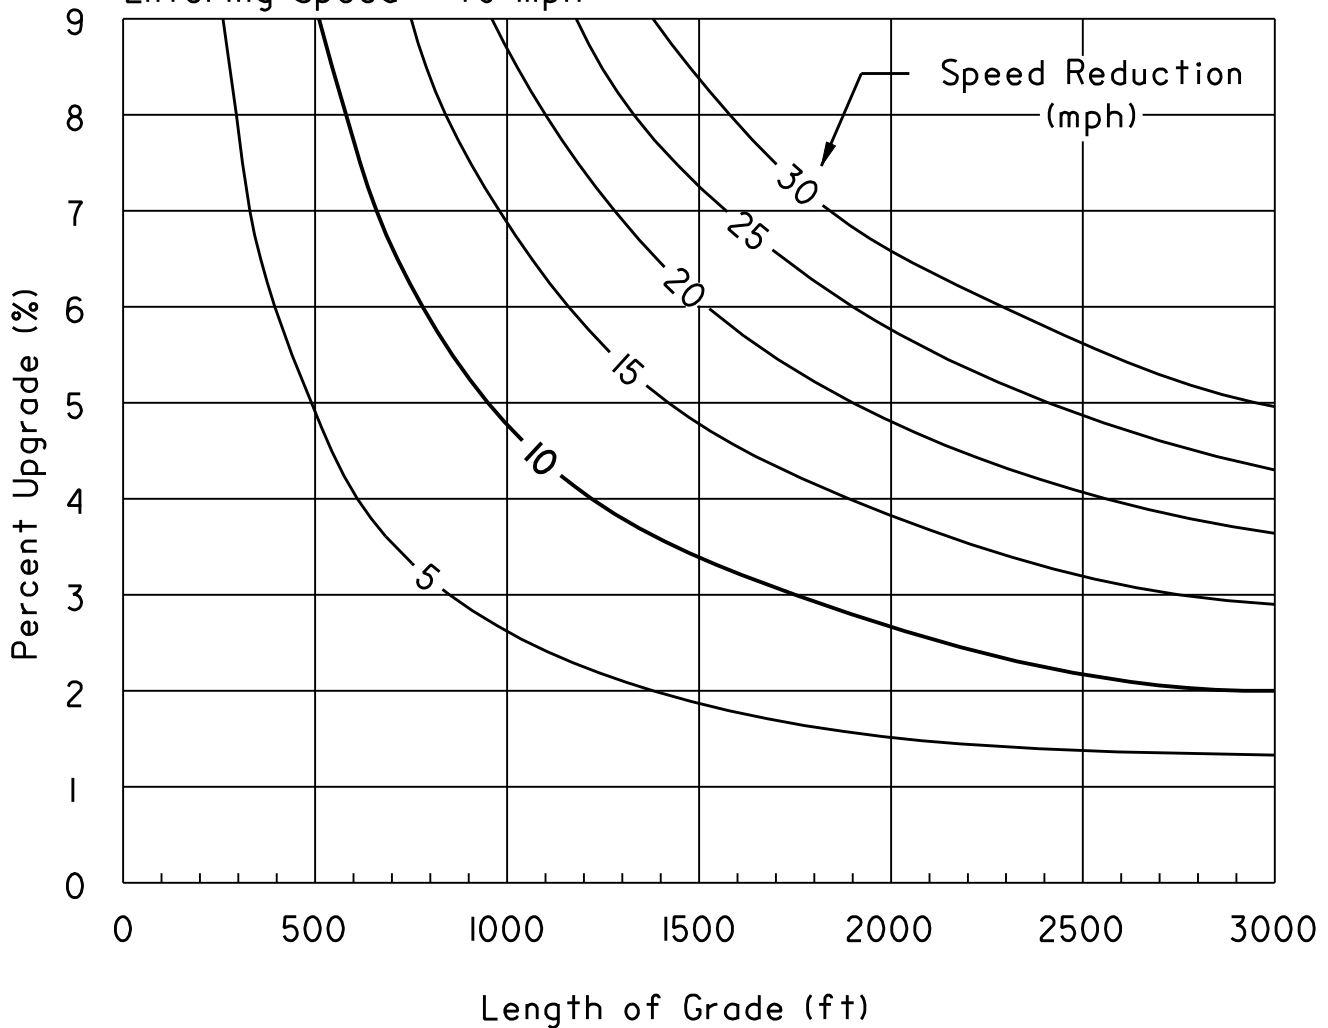

The above figure can also be used to compute the critical length of grade for grade combinations. For example, find the critical length of grade for a 4% upgrade preceded by 2000 feet of 2% upgrade and a tolerable speed reduction of 15 mph. From the figure, 2000 feet of 2% upgrade results in a speed reduction of 7 mph. Subtracting 7 mph from the tolerable speed reduction of 15 mph gives the remaining tolerable speed reduction of 8 mph. The figure shows that the remaining tolerable speed reduction of 8 mph would occur on 1000 feet of the 4 % upgrade.

The critical length of grade is the length of tangent grade. When a vertical curve is part of the critical length of grade, an approximate equivalent tangent grade should be used. Where $A \leq 3\%$, then the vertical tangent lengths can be used (VPI to VPI). Where $A > 3\%$, then about one-quarter of the vertical curve length should be used as part of the tangent grade.

CREST VERTICAL CURVES**203-3E**

REFERENCE SECTION

203.3.3

HEIGHT OF EYE 3.50' - HEIGHT OF OBJECT 2.00'

DESIGN SPEED	DESIGN SSD	DESIGN K	DESIGN SPEED	DESIGN SSD	DESIGN K
20	115	7	45	360	61
21	120	7	46	375	66
22	130	8	47	385	69
23	140	10	48	400	75
24	145	10	49	415	80
25	155	12	50	425	84
26	165	13	51	440	90
27	170	14	52	455	96
28	180	15	53	465	101
29	190	17	54	480	107
30	200	19	55	495	114
31	210	21	56	510	121
32	220	23	57	525	128
33	230	25	58	540	136
34	240	27	59	555	143
35	250	29	60	570	151
36	260	32	61	585	159
37	270	34	62	600	167
38	280	37	63	615	176
39	290	39	64	630	184
40	305	44	65	645	193
41	315	46	66	665	205
42	325	49	67	680	215
43	340	54	68	695	224
44	350	57	69	715	237
45	360	61	70	730	247

Using: S = Stopping Sight Distance, ft.

L = Length of Crest Vertical Curve, ft.

A = Algebraic Difference in Grades (%), Absolute Value

K = Rate of Vertical Curvature

- For a given design speed and an "A" value, the calculated length "L" = K x A
- To determine "S" with a given "L" and "A", use the following:


For S < L: $S = 46.45 \sqrt{K}$, where K = L/AFor S > L: $S = 1079/A + L/2$

DESIGN CONTROLS STOPPING SIGHT DISTANCE CREST VERTICAL CURVES

203-4E

REFERENCE SECTION

201.2.2 & 203.3.3

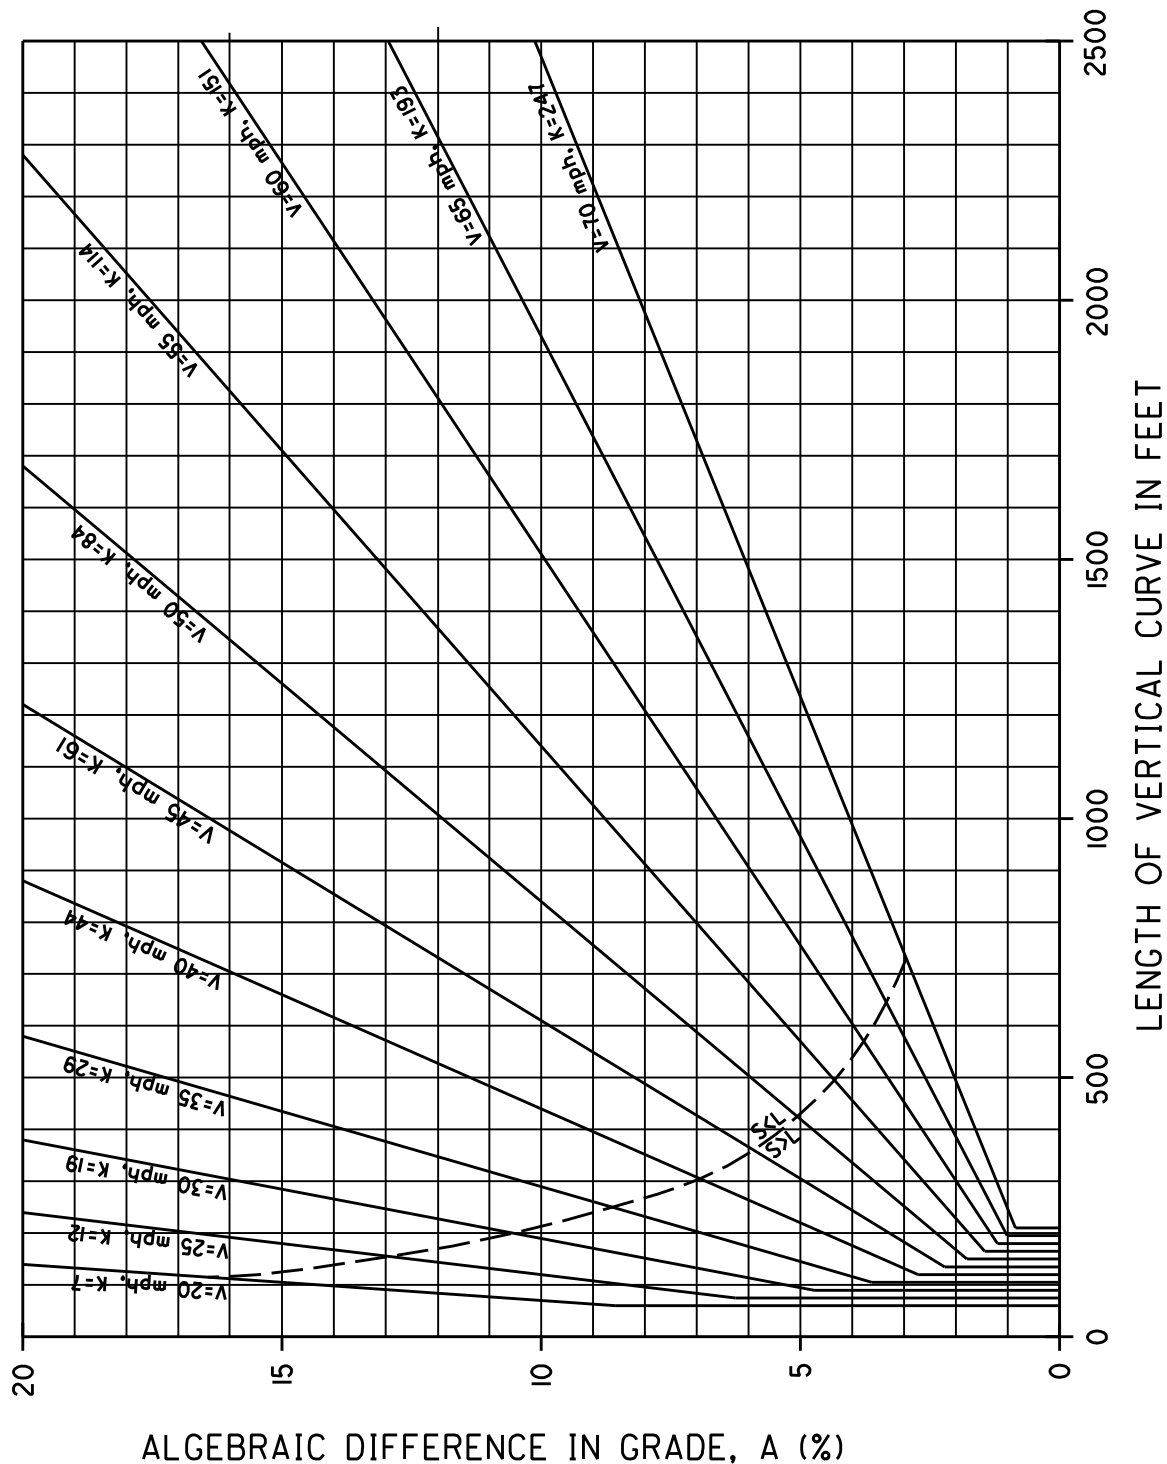

Note 1. Chart is based on equations shown on Figure 203-3 and $L_{min} = 3 \times V$, where "V" is the design speed in mph and L is in feet.

2. To determine the Design Speed for a given "A" and "L" when $S > L$, use equation for $S > L$ on Figure 203-3.


DESIGN CONTROLS PASSING SIGHT DISTANCE CREST VERTICAL CURVES

203-5E

REFERENCE SECTION

203.3.3

Note: Chart is based on equation shown on Figure 201-3

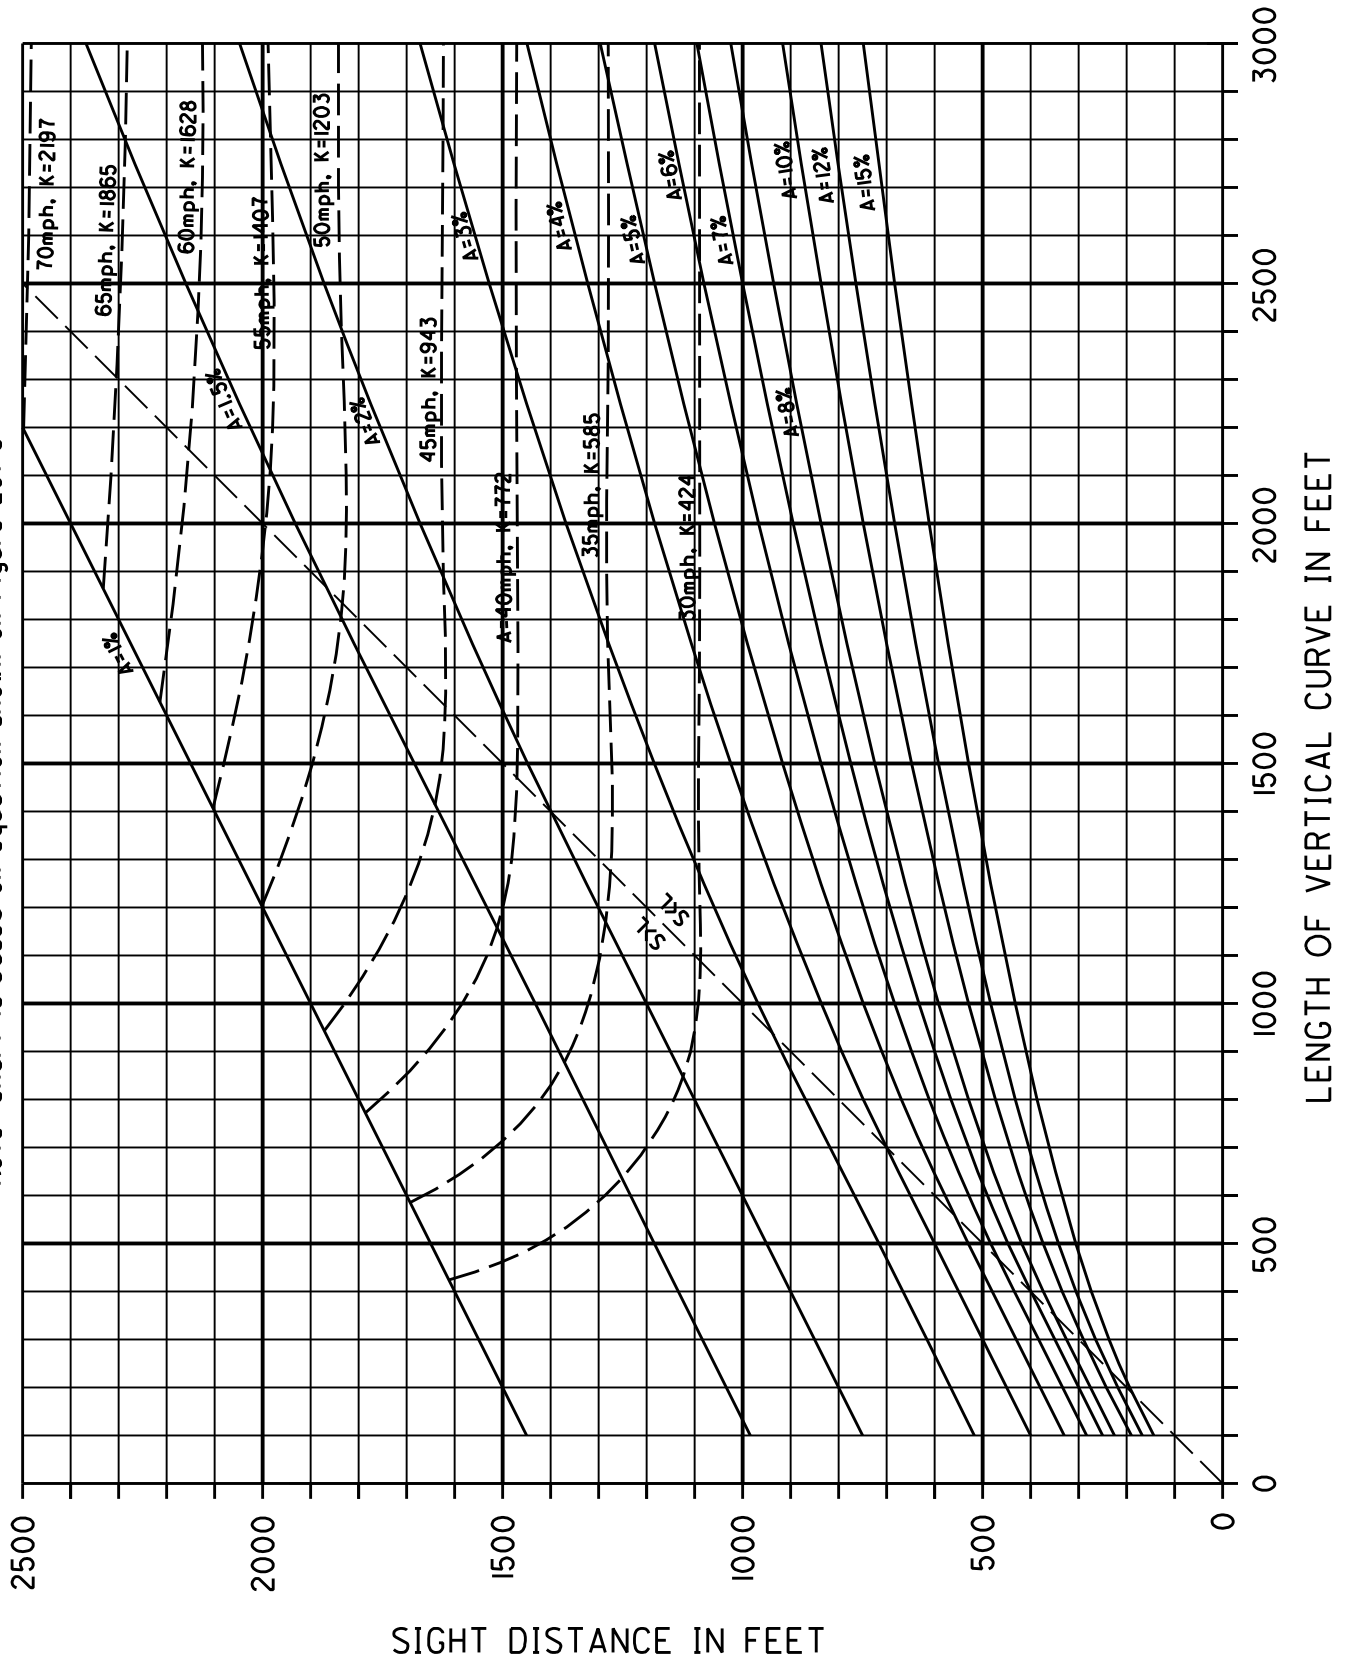

SAG VERTICAL CURVES

203-6E

REFERENCE SECTION

201.2.2 & 203.3.4

HEIGHT OF HEADLIGHT = 2.00'

UPWARD LIGHT BEAM DIVERGENCE = 1° 00'

DESIGN SPEED	DESIGN SSD	DESIGN K	DESIGN SPEED	DESIGN SSD	DESIGN K
20	115	17	45	360	79
21	120	18	46	375	83
22	130	20	47	385	85
23	140	22	48	400	89
24	145	24	49	415	93
25	155	26	50	425	96
26	165	28	51	440	100
27	170	29	52	455	104
28	180	32	53	465	107
29	190	34	54	480	111
30	200	37	55	495	115
31	210	39	56	510	119
32	220	42	57	525	123
33	230	44	58	540	128
34	240	47	59	555	132
35	250	49	60	570	136
36	260	52	61	585	140
37	270	55	62	600	144
38	280	57	63	615	148
39	290	60	64	630	153
40	305	64	65	645	157
41	315	66	66	665	162
42	325	69	67	680	167
43	340	73	68	695	171
44	350	76	69	715	176
45	360	79	70	730	181

Using: S = Stopping Sight Distance

L = Length of Sag Vertical Curve

A = Algebraic Difference in Grades (%), Absolute Value

K = Rate of Vertical Curvature

- For a given design speed and an "A" value, the calculated length "L" = $K \times A$
- To determine "S" with a given "L" and "A", use the following:

$$\text{For } S < L: S = \frac{3.5L + \sqrt{12.25L^2 + 1600AL}}{2A}$$

$$\text{For } S > L: S = (AL + 400)/(2A - 3.5)$$


Note: When the algebraic difference, A, is 1.75% or less, SSD is not restricted by the vertical curve.

DESIGN CONTROLS SSD DISTANCE SAG VERTICAL CURVES

203-7E

REFERENCE SECTION

201.2.2 & 203.3.4

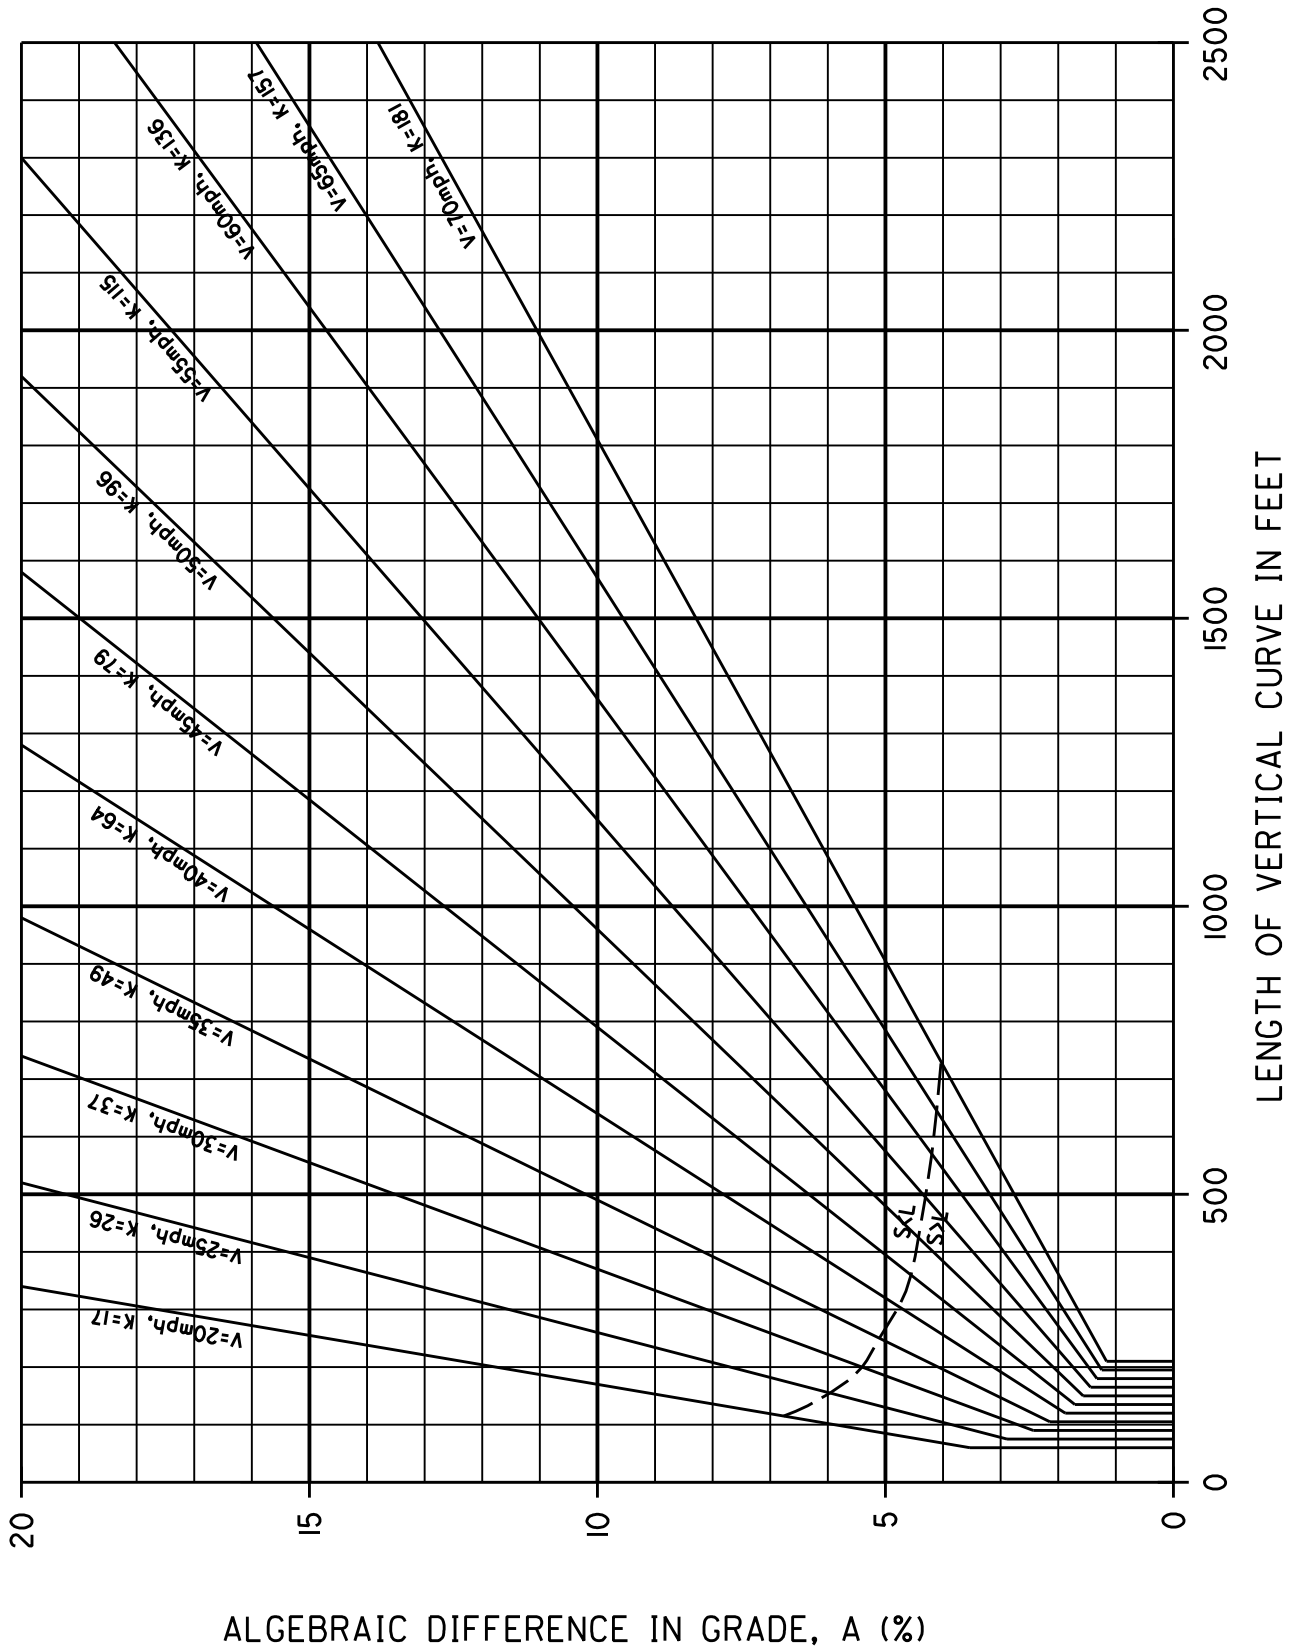

Note: Chart is based on equations shown on Figure 203-6 and $L_{min} = 3 \times V$,
where V is the design speed in mph and L is in feet.

INTERMEDIATE DISTANCES FROM P.C. OR P.T. IN FEET

300 Cross Section Design

Table of Contents

301 Roadway Criteria	3-1
301.1 Pavement	3-1
301.1.1 General	3-1
301.1.1.1 Disposition of Pavement Required Due to Maintenance of Traffic	3-1
301.1.2 Lane Width	3-2
301.1.3 Pavement Widening on Highway Curves	3-2
301.1.4 Pavement Transition/ Taper Rates	3-2
301.1.5 Pavement Cross Slope	3-3
301.2 Shoulders	3-3
301.2.1 General	3-3
301.2.2 Shoulder Type	3-4
301.2.3 Shoulder Width	3-4
301.2.3.1 Right Turn Lane Shoulder Width	3-4
301.2.3.2 Shoulder Taper Rate	3-4
301.2.4 Shoulder Cross Slope	3-4
301.2.5 Lateral Clearance	3-4
302 Bridge Criteria	3-5
302.1 General	3-5
303 Interchange Elements	3-5
303.1 General	3-5
304 Medians	3-5
304.1 General	3-5
304.2 Width	3-6
304.2.1 Rural	3-6
304.2.2 Urban	3-6
304.3 Types	3-6
304.3.1 Rural	3-6
304.3.2 Urban	3-6
304.4 U-turn Median Openings	3-7
304.4.1 Purpose	3-7
304.4.2 Location	3-7
304.4.3 Design Details	3-7
305 Curbs	3-8
305.1 General	3-8
305.2 Types and Uses	3-8
305.3 Position of Curb	3-8
305.3.1 Urban Areas (Design Speed less than 50 mph [80 km/h])	3-9
305.3.2 Urban and Rural High Speed Areas	3-9
305.3.3 Curb/Guardrail Relationship	3-9
305.4 Curb Transitions	3-9
305.4.1 Curb Vertical Height Tapers	3-9

300 Cross Section Design

305.4.2 Curbed to Uncurbed Transitions	3-9
305.4.3 Curbed Approach to Uncurbed Mainline	3-9
306 Pedestrian Facilities.....	3-10
306.1 General.....	3-10
306.2 Sidewalk Design	3-10
306.2.1 Sidewalk and Shoulder Installation.....	3-10
306.2.2 Sidewalk Widths.....	3-10
306.2.3 Obstacles and Protruding Objects.....	3-10
306.2.4 Buffer Widths	3-11
306.2.5 Grade and Cross Slope.....	3-11
306.2.6 Surface Treatments	3-12
306.3 Curb Ramps	3-12
306.3.1 Curb Ramp Locations	3-12
306.3.2 Design Considerations.....	3-13
306.3.3 Curb Ramps Components.....	3-13
306.3.4 Curb Ramp Types.....	3-13
306.3.5 Detectable Warnings.....	3-14
306.4 Sidewalks for Highway Bridges/Underpasses	3-14
306.4.1 General.....	3-14
306.4.2 Walks on Bridges	3-14
306.4.3 Walks under Bridges.....	3-15
306.5 Pedestrian Overpasses and Underpasses.....	3-15
306.5.1 General.....	3-15
306.5.2 Guidelines.....	3-15
307 Grading and Sideslopes	3-16
307.1 General.....	3-16
307.2 Slopes	3-16
307.2.1 Roadside Grading.....	3-16
307.2.2 Slope Transitions	3-17
307.2.3 Rounding of Slopes.....	3-17
307.2.4 Special Median Grading.....	3-17
307.2.5 Rock Slopes (See Figure 307-5)	3-17
307.2.6 Curbed Streets.....	3-17
307.2.7 Driveways and Cross Roads.....	3-18
307.3 Ditches	3-18
307.4 Parallel Channels	3-18
307.5 Interchange Grading	3-19
307.5.1 Crossroads	3-19
307.5.2 Ramps	3-19
307.5.3 Gore Area (See Figure 307-8).....	3-19
307.5.4 Trumpet Interiors (See Figure 307-8).....	3-19
307.5.5 Loop Interiors (See Figure 307-9)	3-19
307.5.6 Diamonds.....	3-20
307.6 Disposal of Construction Debris and Waste Material within ODOT R/W	3-20
307.6.1 Exit Ramps	3-21
307.6.2 Entrance Ramps	3-21
307.6.3 Loop Ramps	3-21

300 Cross Section Design

301 Roadway Criteria

301.1 Pavement

301.1.1 General

This section will assist the designer in determining lane width and pavement cross slope. The number of lanes required is determined through the use of a capacity analysis. This process is explained in detail in the current Highway Capacity Manual, published by the Transportation Research Board. **Figure 301-1** should be used as a guide for selection of design levels of service.

Pavement type is determined by the volume and composition of traffic, soil characteristics, performance of pavements in the area, availability of materials, initial cost, annual maintenance cost and service life cost. The determination of pavement type and structural design is included in the Pavement Design & Rehabilitation Manual published by the Office of Pavement Engineering.

301.1.1.1 Disposition of Pavement Required Due to Maintenance of Traffic

ODOT Policy 516-003(P), Traffic Management in Work Zones on Interstates and Other Freeways, establishes criteria intended to eliminate or reduce traffic delays caused by work zones. Application of this policy to major rehabilitation projects typically results in the need for additional pavement to satisfy the policy. In some situations, this has caused debate on whether the additional pavement should be permanent, full depth design that would be opened to traffic upon completion of the project or a temporary, thinner design that would be removed after construction. The following is intended to provide guidance in making these decisions. This guidance should be considered during the earliest steps of the Project Development Process, and should not supersede any planning or PDP requirements.

The Districts should first request 20 year design traffic for the project and run capacity analyses to determine the need for future permanent lanes. According to **Figure 301-1**, the goal is to achieve level-of-service C or better depending on the terrain and locale. Typically, level-of-service C is considered satisfactory for all roadways due to budgetary constraints. However, this guideline has been slightly modified in urbanized areas to permit level-of-service D, if approved by the MPO. If the analyses indicate additional lanes will be needed within the next 20 years, the District should proceed with the environmental documentation required, including a Major Investment Study (MIS) in Metropolitan Planning Organization (MPO) areas. This may result in changing the original project classification from a minor project (major rehabilitation with no additional lanes) to a major project. If stream coordination, noise impacts, air quality and planning requirements can be addressed satisfactorily, FHWA will support further development of a project which includes additional permanent, full-depth pavement. Gap closure will not be accepted as the principal Purpose and Need for adding permanent lanes in the future if the capacity analysis does not indicate a need. Median treatments must also be analyzed to determine barrier requirements.

Projects which are approved for additional pavement that will be opened to traffic upon completion must be submitted to TRAC for their concurrence even if Major New funds are not being requested.

Due to the 1 mile signing requirements on freeways to warn motorists of a lane drop ahead, the additional lane/s which were permanently added should not be opened to traffic unless their total length is 5 miles or greater if the adjoining pavement sections at either end of the project have not been widened to match. Where the need for additional lanes has been determined, the Districts should also look at the need for modifying any existing interchanges which are in the project boundaries of the additional through lanes. Since approval for Interchange Justification Studies are based on not degrading the level-of-service of the

300 Cross Section Design

Interstate or freeways from the no-build alternative to the build alternative, adding additional capacity to the roadway almost always permits existing interchanges to be expanded to handle additional traffic. Even if funding is not readily available for modifying interchanges at the time the additional through lanes are being added to the freeway, the District should still check the capacity need for modifying the existing interchanges. Many times auxiliary lanes are needed on the freeway from one interchange to another, and these lanes, along with bridge widening to accommodate these lanes could be performed at the same time the additional lanes are constructed.

If Districts determine additional capacity will not be needed within the next 20 years, the additional widening required to maintain traffic should be a temporary buildup sufficient for the duration of the construction project and then be removed upon completion of the project. It is not cost effective to construct full-depth pavement and open it to traffic at the conclusion of the project if the capacity is not required within a 20-year planning horizon.

301.1.2 Lane Width

Lane width in rural areas is dependent upon functional classification, traffic volumes and design speed and is shown in **Figure 301-2**. **Figure 301-4** shows lane widths in urban areas based on functional classification and locale.

301.1.3 Pavement Widening on Highway Curves

Additional widening may be necessary on curves depending on the design speed, curvature and pavement width. The Pavement Widening values in **Figures 301-5b and Figure 301-5c** are based on WB-50 [WB-15] and WB-62 [WB-19] vehicles, respectively, and are applicable to either one-way or two-way, two-lane pavements, and other similar type facilities. A WB-62 [WB-19] design vehicle is to be used on interstates, freeways, expressways, and arterials while a WB-50 [WB-15] design vehicle applies to collectors and local roads. Note that widening less than 2.0 ft. [0.6 m] is not required.

Curve widening should be placed on the inside edge of the curve. Where spirals are used, the widening should begin at the TS and reach maximum width at the SC. On alignments without spirals, the widening should be developed over the same distance as the superelevation transition. See **Section 202.4** and **Figure 301-5a**. The transition ends should be rounded to avoid an angular break at the pavement edge and intermediate points should be widened proportionately. The longitudinal center joint and the centerline pavement marking should be placed equidistant from the pavement edges.

301.1.4 Pavement Transition/ Taper Rates

Where traveled way widths decrease, the length of transition should be calculated using the following:

Design Speed of 50 mph [80 km/h] or more:

$$L = WS \quad [L = 0.6WS]$$

Design Speed of less than 50 mph [80 km/h]:

$$L = WS^2/60 \quad [L = WS^2/156]$$

Where: L = Taper length in feet [meters]

W = Offset width in feet [meters]

S = Design speed

300 Cross Section Design

The transition length for increases in traveled way width (diverging tapers) may be more abrupt, i.e. 5:1 ratio.

301.1.5 Pavement Cross Slope

Normal crowned pavements in Ohio are sloped at the rate of 0.016. There are occasions when, because of drainage or pavement type, this rate may be increased to 0.02. An increase in the 0.016 slope rate normally takes place on facilities maintained by local governmental agencies and usually at design speeds less than 50 mph [80 km/h].

Cross slope arrangements for normal crowned sections vary based on features such as the number of lanes, whether or not the highway is divided or undivided, the type and width of the median, and drainage. **Figure 301-6** shows examples normally used in Ohio. Generally the following are applicable on normal crowned pavements:

1. Crowns are to be located between lanes.
2. For three or four lane roadways, no more than two lanes should slope in the same direction.
3. When 3 or more lanes are sloped in the same direction on a high speed roadway (50 mph [80 km/h] or greater), the first two lanes from the crown point should have the normal cross slope of 0.016 and any adjacent outside lanes may have an increased maximum cross slope of 0.02.
4. Undivided pavement sections are to be crowned at the middle when the number of lanes are even and at the edge of the center lane when there is an odd number of lanes. When possible, the majority of the pavement should slope to the side which will best accommodate the drainage.
5. Narrow raised median sections are crowned such that the majority of the pavement will drain toward the outside.
6. Pavement sections on either side of wide, depressed medians are to be treated similar to undivided pavement sections (See Item 3 above), with the majority of the pavement sloped to the outside.

Special conditions on individual projects may result in deviations from the above and from those examples shown in **Figure 301-6**.

301.2 Shoulders

301.2.1 General

Shoulders are used to provide an area adjacent to the pavement to accommodate stopped vehicles, for emergency use, for use while maintaining traffic through construction work zones, for the lateral support of the pavement and to generally improve the safety of a highway. They are also available for the use of pedestrians and bicyclists. When discussing shoulders in this manual, the following meanings are applicable. (See **Figure 301-7**.)

Traveled Way - The portion of roadway used for the movement of vehicles, exclusive of shoulders.

Graded Shoulder Width - The width measured from the edge of the traveled way to the intersection of the shoulder slope and foreslope.

300 Cross Section Design

Treated Shoulder Width - The width of that portion of the graded shoulder improved with stabilized aggregate or better.

301.2.2 Shoulder Type

Four basic types of shoulders are used. These include paved, bituminous surface treated, stabilized aggregate, and turf. Structural design of shoulders and shoulder typical sections are covered in the Pavement Design & Rehabilitation Manual published by the Office of Pavement Engineering. **Figures 301-3 and 301-4** show the type shoulder to use based on functional classification and traffic or locale.

301.2.3 Shoulder Width

Graded and treated shoulder widths vary depending on functional classification and traffic or locale. The criteria for graded and treated shoulder widths are shown in **Figures 301-3 and 301-4**. Consideration should be given to providing paved shoulders of sufficient width and strength to accommodate temporary traffic on Interstates, other freeways and expressways.

301.2.3.1 Right Turn Lane Shoulder Width

Under normal roadway conditions, it is desirable to maintain the required mainline shoulder width throughout the length of the right turn lane. But for rare instances, where the roadway has constrained R/W limits and a low volume truck traffic, the width of the shoulder adjacent to the turn lane may be reduced, but to no less than 4 ft. [1.2 m] paved and 6 ft. [1.8 m] graded. The normal mainline shoulder width should still be maintained in advance of the diverging taper for the turn lane. The transition between the mainline shoulder width and the reduced shoulder width should take place during the span of the right turn taper. The reduced shoulder width may then be carried out throughout the length of the right turn lane. It should be noted that any shoulders or auxiliary lanes (i.e., right turn lanes) are considered part of the mainline clear zone.

301.2.3.2 Shoulder Taper Rate

A 25:1 taper should be used to transition to a reduced shoulder width. The transition length for increases in shoulder width (diverging tapers) may be more abrupt, i.e. 5:1 ratio.

301.2.4 Shoulder Cross Slope

Figures 301-8, 301-9 and 301-10 show cross slopes to be used depending on the shoulder type and pavement cross slope.

301.2.5 Lateral Clearance

In general, roadside objects and barriers should be placed as far away from the traveled way as conditions permit. Proper lateral placement enhances a driver's comfort level of the roadway, allows for a greater chance of recovery for errant vehicles, and provides for improved sight distance.

The distance from the edge of the traveled way, beyond which a roadside object will not be perceived as an obstacle and result in a motorist reducing speed or changing vehicle position on the roadway is called

300 Cross Section Design

the shy line offset. As a minimum, the designer should provide a shy line offset of at least 4 ft. [1.2 m]. When an obstacle is placed too closely to the traveled way, it may interfere with the sight distance of the roadway.

Typically, if a design exception is warranted for horizontal clearance, it will normally not be approved if the shy line distance is below the minimum 4 ft. [1.2 m] offset.

302 Bridge Criteria

302.1 General

This section provides overall physical bridge dimensions such as width, lateral clearance at underpasses and vertical clearance over roadways. This information is given for New and Reconstructed Bridges in **Figure 302-1** and for Existing Interstate and Other Freeway Bridges to Remain in **Figure 302-2**. Similar information for existing non-freeway bridges that are to be left in place and not reconstructed is shown in **Figure 302-3**. For additional design information, including Minimum Design Loading, refer to the Bridge Design Manual, published by the Office of Structural Engineering.

303 Interchange Elements

303.1 General

An interchange is a system of interconnecting roadways, with one or more grade separations, used to efficiently manage traffic between different types and levels of highways. Interchanges are composed of various elements such as Acceleration-Deceleration Lanes, One and Two-lane Directional Roadways, and Ramps. **Figure 303-1** shows information relating to the design of interchange elements including pavement and shoulder dimensions, as well as medians between adjacent ramps.

304 Medians

304.1 General

A median is the portion of the highway separating opposing directions of the traveled way. Medians are highly desirable elements on all streets or roads with four or more lanes. This is especially true on rural arterials. All rural arterials, on new locations requiring four or more lanes, should be designed with a median.

The principal functions of a median are to prevent interference of opposing traffic, to provide a recovery area for out-of-control vehicles, to provide areas for emergency stopping and left turn lanes, to minimize headlight glare and to provide width for future lanes. A median should be highly visible both day and night and in definite contrast to the roadway.

300 Cross Section Design

304.2 Width

The width of a median is the distance between the inside edges of the traveled way. See **Figure 304-1**. Width depends upon the type of facility, cost, topography and right-of-way.

304.2.1 Rural

In flat or rolling terrain, the desirable median width for rural freeways is 60 to 84 ft. [18 to 25 m]. The 84 foot [25 m] wide median allows for a future 12 foot [3.6 m] wide lane in each direction of travel, and the 60 ft. median. The minimum median width is normally 40 ft. [12 m]. However, in rugged terrain, narrower medians ranging from 10 to 30 ft. [3.0 to 9.0 m] may be used. A constant width median is not necessary and independent profiles may be used for the two roadways. For narrower medians, see **Section 601.2** for Median Barrier warrants.

304.2.2 Urban

Barrier medians are normally used in urban areas. The median width is dependent upon the width of the barrier and the shoulder width required in **Figure 301-4**. The minimum median width for a four-lane urban freeway should be 10 ft. [3.0 m] which provides for two 4 ft [1.2 m] shoulders and a 2 ft [0.6 m] median barrier. For freeways with six or more lanes, the minimum width should be 22 ft. [6.6 m]. The minimum median widths noted above do not take into account the extra width required if median piers are encountered. Where median piers are encountered either widen the median throughout or apply for a design exception. Preferably, use a 26 ft. [7.8 m] wide median when the DDHV for truck traffic exceeds 250 vehicles per hour to provide a wider median shoulder to accommodate a truck.

304.3 Types

Medians are divided into types depending upon width and treatment of the median area and drainage arrangement. In general, raised or barrier medians are applicable to urban areas, while wide, depressed medians apply to rural areas. See **Figure 304-1**.

304.3.1 Rural

Medians in rural areas are normally depressed to a swale in the center and constructed without curbs.

304.3.2 Urban

There are various types of medians applicable to urban areas. The type selected depends upon the traffic volume, speed, degree of access and available right-of-way.

On major streets with numerous business drives, a median consisting of an additional lane, striped as a continuous two-way left turn lane is desirable.

The solid 6-inch [150-mm] high concrete median, at a minimum width of 4ft. (See **Standard Construction Drawing RM-3.1**) may be used where the design speed is less than 50 mph [80 km/h] and where an all-paved section is appropriate and a wider median cannot be justified. Barrier medians, described in **Section 601.2**, are normally recommended for urban facilities where the design speed is 50

300 Cross Section Design

mph [80 km/h] or greater. However, care must be exercised when barrier medians are used on expressways with unsignalized at-grade intersections because of sight distance limitations.

304.4 U-turn Median Openings

304.4.1 Purpose

U-turn median openings may be provided on expressways, freeways or interstate highways with non-barrier medians where space permits as outlined below and when needed for proper operation of police and emergency vehicles, as well as equipment engaged in physical maintenance, traffic service, and snow and ice control.

304.4.2 Location

U-turn crossings should not be constructed in barrier-type medians.

When U-turn median openings are required, they should be spaced as close to 3-mile [5-km] intervals as possible.

Crossings should be located at points approximately 1,000 ft. [300 m] beyond the end of each interchange speed change lane. Additional crossings may be constructed at maintenance borders, District borders, State lines and other desired locations in accordance with the 3-mile [5-km] spacing interval requirement. Examples of the allowable number of crossings between interchanges, in addition to crossings provided at interchange speed change lanes, are shown below:

Interchange Spacing	Number of Crossings
3 miles [5 km] or less	None
3 to 6 miles [5 to 10 km]	One
6 to 9 miles [10 to 15 km]	Two
9 to 12 miles [15 to 20 km]	Three

U-turn median crossings should be located to fit the median drainage pattern. Each should be placed either immediately downstream from a catch basin or on a crest. They should be located so that visibility is not restricted by structures, vertical curves or horizontal curves.

304.4.3 Design Details

Median crossings should be constructed as shown on **Figure 304-2** which indicates geometric features applicable to the design of crossings located in medians of widths ranging from 40 to 84 ft. [12 to 25 m]. Tapers should be 200 ft. [60 m] in length for all median widths. The profile grade line should normally be an extension of the cross slope of the shoulder paving, rounded at the lowest point.

300 Cross Section Design

305 Curbs

305.1 General

The type of curb and its location affect driver behavior patterns which, in turn, affect the safety and utility of a road or street. Curbs, or curbs and gutters, are used mainly in low speed urban areas (See **Section 305.3**). Following are various reasons for justifying the use of curbs, or curbs and gutters:

1. Where required for drainage.
2. Where needed for channelization, delineation, control of access or other means of improving traffic flow and safety.
3. To control parking where applicable.
4. To reduce right-of-way requirements.

Conventional concrete or bituminous curbs offer little visible contrast to the pavement surface, particularly during fog or at night when the surface is wet. The visibility of the curbs can be greatly enhanced with the use of reflectorized paints. Curb markings should be placed in accordance with OMUTCD.

305.2 Types and Uses

There are two general types of curbs; vertical curbs and sloped curbs. Vertical curbs are relatively high (6 inches [150 mm] or more) and steep-faced. Sloped curbs are 6 inches [150 mm] or less in height and have flatter, sloping faces so that vehicles can cross them with varying degrees of ease.

The curb sections detailed on **Standard Construction Drawing BP-5.1** are approved types to be used as stated below:

Type 1 Curb (asphalt curb) is a sloping 6 inch [150 mm] curb used mostly for temporary situations, such as correcting special drainage problems.

Type 2, 2-A, and 2-B curbs are 6 inches [150 mm] high with a steep sloped face. They are widely used along pavement edges in urban areas where design speeds are less than 50 mph [80 km/h]. Type 2 curb is preferred to Type 6 curb to eliminate the joint between the curb and the gutter.

Types 3, 3-A, 3-B and Type 4, 4-A, 4-B and 4-C curbs are 4 inches [100 mm] high with a sloped face. They are used for channelizing islands and occasionally along medians and pavement edges. Type 3 is preferred for channelizing islands with the gutter sloped at the same rate as the adjacent pavement. Type 6 Curb is a 6 inch [150 mm] high steep faced vertical curb. It is used in situations similar to Type 2 described above.

Type 7 Curb is a vertical type used in low speed areas (design speed of less than 50 mph [80 km/h]) for protection at bridge approaches. It may also be used to control traffic in areas involving heavy trucks.

300 Cross Section Design

305.3 Position of Curb

305.3.1 Urban Areas (Design Speed less than 50 mph [80 km/h])

Curbs are normally used at the edge of traveled way on urban streets where the design speed is less than 50 mph [80 km/h]. Curbs at the edge of traveled way have an effect on the lateral placement of moving vehicles. Drivers tend to shy away from them. Therefore, all curbs should be offset at least 1 foot [0.3 m] and preferably 2 ft. [0.6 m] from the edge of the traffic lane. Where curb and gutter is used, the standard gutter width is 2 ft. [600 mm].

305.3.2 Urban and Rural High Speed Areas

On roads where the design speed is 50 mph [80 km/h] or greater, curbs should only be used in special cases. Special cases may include, but are not limited to, the use of curb to control surface drainage or to reduce right-of-way requirements in restricted areas. When it is necessary to use curbs on roads where the design speed is 50 mph [80 km/h] or greater, they should not be closer to the traffic than 4 ft. [1.2 m] or the edge of the treated shoulder, whichever is greater and their height should not exceed 4 inches.

305.3.3 Curb/Guardrail Relationship

Refer to *Section 602.1.5*.

305.4 Curb Transitions

305.4.1 Curb Vertical Height Tapers

The approach and trailing ends of curb and raised medians should be tapered from the curb height to 0 in 10 ft. [3.0 m].

305.4.2 Curbed to Uncurbed Transitions

When an urban type section with curbs at the edge of pavement changes to a rural type section without curbs, the curb should be transitioned laterally at a 4:1 (longitudinal: lateral) rate to the outside edge of the treated shoulder or 3 ft. [1 m], whichever is greater. See *Figure 401-4b*, Option 2.

305.4.3 Curbed Approach to Uncurbed Mainline

When a curbed side road intersects a mainline that is not curbed, the curb should be terminated no closer to the mainline edge of traveled way than 8 ft. [2.4 m] or the edge of the treated shoulder, whichever is greater. See *Figure 401-4a*.

300 Cross Section Design

306 Pedestrian Facilities

306.1 General

When pedestrians' facilities are to be constructed or reconstructed as part of a project, the facilities shall be designed to accommodate persons with disabilities. The pedestrian environment must be designed to accommodate the needs of all users, some of whom have a broad range of mobility, physical and cognitive skills.

Additional guidance in the design of pedestrian facilities may be found in The Access Board's Accessible Rights-of-Way - A Design Guide, and FHWA's Designing Sidewalks and Trails for Access, Part 2, Best Practices Design Guide and other publications.

306.2 Sidewalk Design

306.2.1 Sidewalk and Shoulder Installation

Sidewalks are the principal improvements used to accommodate pedestrians, but it is recognized that wide shoulders and unpaved walkable space may be acceptable in some instances. **Figure 306-1** provides a detailed listing of the recommended guidelines for the various roadway classifications for sidewalks/walkways.

While **Figure 306-1** recommends when and where to install sidewalks, sidewalks should be considered on projects with curb-and-gutter installations.

While no sidewalk requirements are specifically recommended for certain rural roadways, isolated residential areas should have a pedestrian connection to the rest of the rural community. A paved or unpaved shoulder should be provided as a minimum where it is impractical to provide a sidewalk along a paved rural road.

306.2.2 Sidewalk Widths

Minimum and desirable sidewalk widths are shown in **Figure 306-2**. The minimum recommended width is 5 ft. [1.5 m]. Under certain limited conditions, a 4 ft. [1.2 m] sidewalk width can be tolerated, although this width does not provide adequate clearance room or mobility for pedestrians passing in opposite directions. A 4 ft. [1.2 m] width can be provided if there are 5 ft. [1.5 m] wide passing sections at least every 200 ft. [60 m].

306.2.3 Obstacles and Protruding Objects

The sidewalk widths shown in **Figure 306-2** represent a clear or unobstructed pedestrian travel way. Still, be aware of the three dimensional corridor which makes up an accessible route and attempt to locate utilities, light poles, signs, fire hydrants, mail boxes, parking meters and street furniture (benches, shelters, bike racks, etc.) out of this sidewalk corridor. If unable to avoid keeping objects out of this space, then certain dimensional requirements must be maintained. See FHWA's Designing Sidewalks and Trails for Access, Part 2, Best Practices Design Guide, Section 4.1.3, for information.

300 Cross Section Design

Placement of utility covers, gratings and other covers should be off of the sidewalk to the maximum extent feasible.

306.2.4 Buffer Widths

A buffer width, also known as a tree lawn or planting strip, is the distance between the sidewalk and the adjacent roadway. Providing a buffer can improve pedestrian safety. The buffer width in a commercial area will be different than the buffer needs of a residential area. Buffer widths as measured from the face of curb are shown in **Figure 306-2**.

On-street parking or bike lanes can also act as a sidewalk buffer. In areas where there is no on-street parking or bike lane, the ideal width of a buffer is 6 ft. [1.8 m].

If a buffer cannot be provided, then the curb-attached sidewalk width should be at least 7 ft. [2.1 m] wide in residential areas. In commercial areas or along busy arterial streets, the minimum curb-attached sidewalk width should be 8 ft. [2.4 m] to provide space for light poles and other street furniture.

All roadways with curb attached sidewalks or buffers should be constructed with vertical curbing.

306.2.5 Grade and Cross Slope

Wherever possible, sidewalks and walkways should be designed with maximum grades of 5 percent. When the topography of an area leaves no other choice than to be use a steeper grade, **Table 306-1** provides a series of specific recommendations for each situation. The only exception to the recommendations is when the adjacent road grade is steeper than 5 percent and there is no other alternative alignment for the sidewalk.

Sidewalks should be constructed with a maximum cross slope of 2 percent. The cross slope is the slope that is measured perpendicular to the direction of travel.

**Table 306-1
SIDEWALK GRADE RECOMMENDATIONS**

Public Right -of- Way	
Maximum Sidewalk Grade Adjacent to Roadway	No limit if it follows the grade of the street
Maximum Cross Slope	0.02
Accessible Routes Not Adjacent to Roadway	
Max. Allowable Running Grade w/o Railings	0.05
Max. Ramp Grade w/ Handrails and Landings	0.083
Landing Spacing	
Landing Intervals for Accessible Routes	If the slope of a ramp is between 1:12 and 1:16, the max. rise shall be 30 inches [760] and the max. run shall be 30 ft. [9 m]. If the slope of the ramp is between 1:16 and 1:20, the max. rise shall be 30 inches [760 mm] and the max. run shall be 40 ft. [12 m]
Landing Dimensions	5 ft. [1.5 m] Length and Width

300 Cross Section Design

306.2.6 Surface Treatments

The sidewalk surface treatment can have a significant impact on the overall accessibility and comfort level of the facility. The requirement is that the surface be stable, firm and slip resistant. There shall be an unobstructed reduced vibration zone within a pedestrian access route, this minimum width being 48 inches [1.2 m].

Concrete, asphalt or gravel walks may be specified according to the location and the particular need:

1. Concrete walks are the most widely used type. They should normally be 4 inches [100 mm] thick. The exception is at driveway locations where the thickness is increased to 6 inches [150 mm], or drive thickness, whichever is greater.
2. Asphalt and gravel walks are used mostly in parks, rest areas, or for shared-use paths. Asphalt walks should be constructed of 2 inches [50 mm] of asphalt and 5 inches [125 mm] of aggregate base. Gravel walks should be constructed of 4 inches [100 mm] of compacted aggregate base. Increased thicknesses may be needed if maintenance or emergency vehicles will routinely use paths.

Specialty surface treatments are often desired for aesthetic reasons. But a disadvantage of either bricks or stamped concrete/brick decorative sidewalks is the problem seemingly small surface irregularities pose for certain wheelchair users. Designers should provide a zone of reduced vibration. It is possible to enhance sidewalk aesthetics while still providing a smooth walking surface by combining a smooth concrete walking area with a decorative edging. See FHWA's Designing Sidewalks and Trails for Access, Part 2, Best Practices Design Guide for information.

306.3 Curb Ramps

306.3.1 Curb Ramp Locations

Section 729.12 of the Ohio Revised Code requires that all new or reconstructed curbs shall have curb ramps at each pedestrian crosswalk so that the sidewalk and street blend to a common level.

All newly constructed or modified curb ramps must be ADA compliant. Curb ramps shall be provided on all plans where curb and walks are being constructed, reconstructed or altered at intersections and other major points of pedestrian curb crossing such as mid-block crosswalks.

If a project has curbs and pedestrians are allowed, curb ramps need to be installed wherever sidewalks are present. In areas without sidewalks, pedestrian curb cuts as shown on **Figure 306-4** are required if no curb ramps are provided.

Curb ramps are also to be installed in resurfacing projects as outlined in ODOT Policy 519-002(P) Curb Ramps Required in Resurfacing Plans.

It is desirable to provide a continuous path for the persons with disabilities. When a curb ramp is built on one side of a street, a companion curb ramp is required on the opposite side of the street. Therefore, when normal project or work limits end within an intersection, the work limits must be extended to allow construction of companion ramps. The basic requirement is that a crosswalk must be accessible via curb ramps from both ends, not one end only. In most cases, curb ramps will be installed in all quadrants of an intersection.

300 Cross Section Design

306.3.2 Design Considerations

Curb ramps should be designed to the least slope consistent with the curb height, available corner area and underlying topography. A level landing is necessary for turning, maneuvering or bypassing the sloped surface. Proper curb ramp design is important to users either continuing along a sidewalk path or attempting to cross the street.

306.3.3 Curb Ramps Components

The basic components to the standard curb ramp design are explained here and depicted on **Figure 306-3**.

1. Ramps - The grade of a ramp must not exceed 0.083. The cross slope must not be greater than 0.02. The recommended minimum width of a curb ramp is 4 ft. [1.2 m].
2. Gutters - Gutters require a counter slope at the point at which the ramp meets the street for proper drainage. This counter slope may not exceed 0.05, and the change in angle must be flush, without a lip, raised joint or gap. Lips or gaps between the curb ramp slope and counter slope can arrest forward motion by catching caster wheels or crutch tips. The algebraic difference between the ramp slope and the gutter counter slope cannot exceed 11 percent, or a 24 inch [600 mm] level strip must be provided between the two slopes. See **Figure 306-3**.
3. Landings - Landings provide a level area (less than 2 percent slope in any direction) for wheelchair users to maneuver into or out of the curb ramp, or to simply bypass it. A level landing 5 ft. [1.5 m] square is preferred.
4. Flares - Curb ramp flares are graded transitions from a curb ramp to the surrounding sidewalk. Flares are not intended to be wheelchair routes, and may be one of the cues used to identify the presence of a curb ramp. Flares are only needed in locations where the ramp edge abuts pavement. A curb edge is used as a visual cue where the ramp edge abuts grass or landscaping.

306.3.4 Curb Ramp Types

Three types of ramps are currently used in street corner designs. In all cases curb ramps should be located entirely within the marked crosswalks (where they exist). Drainage grates or inlets should not be located within the crosswalk area, where wheelchair casters or canes tips may be caught. Nonetheless, curb ramps need to be adequately drained. See **Figure 306-4** for a sketch of these types, and for details see **Standard Construction Drawing BP-7.1**.

Perpendicular Curb Ramps are generally perpendicular to the curb. Users will generally be traveling perpendicular to vehicular traffic when they enter the street at the bottom of the ramp. Advantages include providing a straight path of travel on tight radius corners at the expected crossing location for all pedestrians. Disadvantages are that they do not provide a straight path of travel on large radius corners and they require a level landing that takes up additional right-of-way. Perpendicular ramps are generally the best design for pedestrians, provided that a minimum 4 foot landing is available for each approach.

Parallel Curb Ramps have two ramps leading down towards a center level landing at the bottom between both ramps, with a level landing at the top of each ramp. They can be installed where the available space between the curb and property line is too tight to permit the installation of both a ramp and a landing, and are effective on steep terrain or at locations with high curbs. Unfortunately, sidewalk users have to negotiate two ramp grades. Since the landing is depressed and level, drainage of the ramp landing at the street must be carefully designed.

300 Cross Section Design

Diagonal Curb Ramps are a single curb ramp that is located at the apex of the corner. While a visually impaired person is aimed away from the crosswalk and into traffic, the entire lower landing area must fall within the crosswalk that the ramp serves and cannot be located in the traveled lane of opposing traffic. Level landings are required at the top and bottom of a ramp. Diagonal curb ramps are discouraged for new construction and existing diagonal ramps should be retrofitted with two perpendicular ramps, when possible.

306.3.5 Detectable Warnings

Detectable warnings are standardized surface features on walking surfaces to warn visually impaired people of the transition between the sidewalk and the street.

Truncated domes are specified as the detectable warnings to be used and are to be included in all connections to all street crossings to mark the street edge, where a sidewalk crosses a vehicular way. This includes islands and medians that are cut through level with the roadway.

Detectable Warnings should be used at the following locations:

- At the edge of depressed corners,
- At the border of raised crosswalks and raised intersections,
- At the base of curb ramps,
- At the border of median and islands,
- At street crossing for shared-use paths, and
- Where sidewalks cross railroad tracks.

Detectable Warnings are not needed where a sidewalk crosses an unsignalized driveway, nor where the sidewalk crosses an alley.

Truncated dome dimensions and alignment can be found on **Standard Construction Drawing BP-7.1**.

Existing curb ramps can remain in place if they were originally constructed to current standards. However, these curb ramp may need to have detectable warnings installed as shown on **Standard Construction Drawing BP-7.1**.

306.4 Sidewalks for Highway Bridges/Underpasses

306.4.1 General

Provisions should always be made to include some type of walking facility as part of a vehicular bridge or underpass, if only as an emergency exit path. If possible, sidewalk widths across bridges and through underpasses should be the same as the clear width of the existing connecting sidewalks.

306.4.2 Walks on Bridges

Walks should be provided on bridges located in urban or suburban areas having curbed typical sections under the following conditions:

1. Where there are existing walks on the bridge and/or bridge approaches, or

300 Cross Section Design

2. Where evidence can be shown through local planning processes, or similar justification, that walks will be required in the future (20 years). Anticipated pedestrian volumes of 50 per day would justify a walk on one side and 100 per day would justify walks on both sides.

Walks on bridges should preferably be 6 ft. [1.8 m] in residential areas and 8 ft. [2.4 m] in commercial areas measured from the face of curb to the face of parapet. The width should never be less than 5 ft. [1.5 m].

In rural areas or other sites where flush shoulders approach a bridge and light pedestrian traffic is anticipated on the shoulders, the shoulder width should be continued across the bridge using the preferred lateral clearance from **Figure 302-1**, or greater if deemed appropriate. A raised walkway should not be used in these areas. Where an existing bridge has a safety curb (used as a walkway) and removal is not economically justified, the ends of the walkway should be shielded with a traffic barrier or ramped into the approach shoulder at a vertical transition rate of approximately 20:1.

306.4.3 Walks under Bridges

The criteria for providing walks at underpasses are basically the same as described above for Walks on Bridges. An exception is in areas where there are no approach walks, space will be provided for future walks, but walks generally will not be constructed with the project unless there is concurrent approach walk construction.

Where the approach walks at underpasses include a tree lawn, the tree lawn width may be carried through the underpass wherever space permits.

306.5 Pedestrian Overpasses and Underpasses

306.5.1 General

Due to the high costs of constructing pedestrian-only structures, they should be considered only where other more standard and/or less costly solutions are not acceptable. Both pedestrian overpasses and underpasses need to meet ADA ramp criteria for maximum slopes (0.083), landings every 30 ft. [9 m] of run, and handrails; or elevators.

Freeways should not have pedestrian crossings at-grade and may require the occasional use of separate pedestrian structures.

Underpasses that are below grade should provide clear sight distances to and through the underpass. A minimum width of 14-16 ft. [4.2- 4.8 m] is desirable, but longer tunnels need to be wider for security. Likewise, vertical clearance of 8 ft. [2.4 m] is sufficient for short tunnels, but longer ones may need 10 ft. [3.0 m]. Heights of maintenance and emergency vehicles need to be addressed. Drainage must be carefully considered.

Both pedestrian overpasses and underpasses should be adequately illuminated.

306.5.2 Guidelines

Experience has shown that the primary location for pedestrian overpass/underpass is an urban area outside the central business district. Such a pedestrian crossing may be considered when the following conditions exist:

1. The community has expressed a strong desire for a pedestrian crossing.

300 Cross Section Design

2. A reasonable alternate route for pedestrian is not available.
3. There is no signal, stop intersection, or pedestrian crossing available within 660 ft. [200 m] of the proposed location.
4. Pedestrians can be prevented from crossing at grade.
5. Physical conditions permit construction.
6. The traffic volume and pedestrian volume are above those required to warrant the installation of pedestrian signals as stated in the Ohio Manual of Uniform Traffic Control Devices for Streets and Highways (OMUTCD). This stipulation can be waived in special cases such as when sight distances are limited.
7. Where there are a large number of pedestrians who must regularly cross a high-speed, high volume roadway.

307 Grading and Sideslopes

307.1 General

This section is concerned with the design of slopes, ditches, parallel channels and interchange grading. It incorporates into the roadside design, the concepts of vehicular safety developed through dynamic testing. Designers are urged to consider flat foreslopes and backslopes, wide gentle ditch sections and elimination of barriers in their initial design approach.

307.2 Slopes

307.2.1 Roadside Grading

There are several combinations of slopes and ditch sections that may be used in the grading of a project. Details and use of these combinations are discussed in subsequent paragraphs. In general, slopes should be made as flat as possible to minimize the necessity for barrier protection and to maximize the opportunity for a driver to recover control of a vehicle after leaving the traveled way. Regardless of the type of grading used, projects should be examined in an effort to obtain flat slopes at low costs. For instance, fill slopes can be flattened with material which otherwise might be wasted and backslopes can be flattened to reduce borrow.

In order to more fully understand the discussions on the various types of grading, the designer should become familiar with the need for barrier protection and the clear zone concept covered in **Section 600**.

Safety grading is the shaping of the roadside using 6:1 or flatter slopes within the clear zone area (**Section 600.2**) and 3:1 or flatter foreslopes and recoverable ditches extending beyond the clear zone. Safety grading is used on Interstate, other freeways and expressways. **Figures 307-1 and 307-2** show many of these details.

Clear zone grading is the shaping of the roadside using 4:1 or flatter foreslopes and traversable ditches within the clear zone area. Foreslopes of 3:1 may be used, but are not measured as part of the clear zone distance. Clear zone grading is recommended for undivided rural facilities where the design speed is 50 mph [80 km/h] or greater, the design hourly volume is 100 or greater, and when at least one of the following conditions exists:

1. The wider cross section is consistent with present or future planning for the facility.

300 Cross Section Design

2. The project is new construction or major reconstruction involving significant length.
3. The wider cross section can be provided at little or no additional cost.

Figure 307-3 shows examples of clear zone grading and traversable ditches.

Common grading is the shaping of the roadside using 3:1 or flatter foreslopes and normal ditches. It is used on undivided facilities where the conditions for the use of safety grading or clear zone grading do not exist. The designer should ensure that all obstacles within the clear zone receive proper consideration. **Figure 307-4** shows examples of common grading and normal ditches.

Barrier grading is the shaping of the roadside when barrier is required for slope protection. Normally 2:1 foreslopes and normal ditch sections are used. **Figure 307-4** gives an example of barrier grading.

307.2.2 Slope Transitions

When clear zone grading is used to eliminate the need for barrier protection of a fixed object, the length of slope transition should be determined using the length of need concept described in **Section 602.1**. The clear zone measurement should be used for the Lateral Extent of the Hazard ("L_H"). Clear Zone grading should not be utilized unless the required lane and shoulder widths are present.

As shown in these conditions, Clear Zone grading is desirable throughout a roadway corridor. It does little to increase the safety of a roadway if Clear Zone grading is only done on spot projects such as culvert replacements, if the rest of the corridor will be maintained with common grading.

307.2.3 Rounding of Slopes

Slopes should be rounded at the break points and at the intersection with the existing ground line to reduce the chance of a vehicle becoming airborne and to harmonize with the existing topography. Recommended rounding at the edge of the graded shoulder is shown in **Figure 301-3**. Rounding at other locations is shown in **Figures 307-1, 307-3 and 307-4**.

307.2.4 Special Median Grading

Figure 307-5 shows some examples of median grading when separate roadway profiles are used.

307.2.5 Rock Slopes (See Figure 307-5)

In rock cuts, determine the cut slope angle(s) and necessary slope benches using design guidance presented in Geotechnical Bulletin 3, "Rock Cut Slope and Catchment Design". The designer should examine the project to ascertain whether flatter slopes could be used to the advantage of reducing borrow within a reasonable haul distance. Such a situation should also be discussed with the Office of Geotechnical Engineering.

307.2.6 Curbed Streets

The slope treatment adjacent to curbed streets is shown on **Figure 307-6**.

300 Cross Section Design

307.2.7 Driveways and Cross Roads

At driveways or crossroads, where the roadside ditch is within the clear zone distance and where clear zone grading can be obtained, the ditch and pipe should be located as shown on **Figure 307-7**.

Requirements for pipe location should be applied to all new construction, reconstruction, widening and resurfacing projects if regrading of the roadsides to safety or clear zone grading is included in the work. New driveways constructed by permit should also conform to the above if other such installations on the route conform, otherwise the new driveway pipe may be located in the existing roadside ditch.

307.3 Ditches

When the depth or velocity of the design discharge accumulating in a roadside or median ditch exceeds the desirable maximum established for the various highway classifications, a storm sewer will be required to intercept the flow and carry it to a satisfactory outlet. If right-of-way and earth work considerations are favorable, a deep parallel side ditch (see **Figure 307-5**) may be more practical and should be considered instead of a storm sewer.

In some cases where large areas contribute flow to a highly erodible soil cut, an intercepting ditch may be considered near the top of the cut to intercept the flow from the outside and thereby relieve the roadside ditch.

Constant depth ditches (usually 18 inches [0.5 m] deep) are desirable. Where used, the minimum pavement profile grades should be 0.24% to 0.48%. Where flatter pavement grades are necessary, separate ditch profiles are developed and the ditch flow line elevations are shown on each cross section.

307.4 Parallel Channels

Where it is desirable that a stream intercepted by the improvement be relocated parallel to the roadway, the channel should be located beyond the limited access line in a channel easement. This does not apply to conventional intercepting erosion control ditches located at the top of cut slopes in rolling terrain. This arrangement locates the channel beyond the right-of-way fence. See **Figure 307-5**.

In areas of low fill and shallow cut, protection along a channel by a wide bench is usually provided. Fill slopes should not exceed 6:1 when this design is used and the maximum height from shoulder edge to bench should generally not exceed 10 ft. [3 m]. If it should become necessary to use slopes steeper than 6:1, guardrail may be necessary and fill slopes as steep as 2:1 may be used.

In cut sections 5 ft. [1.5 m] or more in depth, earth barrier protection can be provided. Where very deep channels are constructed, this design probably affords greater protection and requires less excavation. See **Figure 307-5**. Where the sections alternate between cut and fill and it is desired to use a single design, earth barrier protection would be less costly if waste is a problem. Likewise, bench protection would be less costly if borrow is needed.

Earth bench or earth barrier protection provided adjacent to parallel channels should not be breached for any reason other than to provide an opening for a natural or relocated stream requiring a drainage structure larger than 42 inches [1050 mm] in rise. Outlet pipes from median drains or side ditches shall discharge directly into the parallel channel.

Channels and toe-of-slope ditches, used in connection with steep fill slopes, should be removed from the normal roadside section by benches. The designer shall establish control offsets to the center of each

300 Cross Section Design

channel or ditch at appropriate points which will govern their alignment so they will flow in the best and most direct course to the outlet. Bench width shall be varied as necessary (See **Figure 307-5**).

307.5 Interchange Grading

Interchange interiors should be contour graded so the least amount of guardrail is required and so maximum safety is provided with corresponding ease of maintenance. Sight distance is critical for passenger vehicles on ramps as they approach entrance or merge areas, especially if barrier is erected on the merging side of the vehicle. Therefore, sight distance shall be unobstructed by landscaping, earth mounds or other barriers.

307.5.1 Crossroads

At a road crossing within an interchange area, bridge spill-through slopes should be 2:1, unless otherwise required by structure design. They should be flattened to 3:1 or flatter in each corner cone and maintained at 3:1 or flatter if within the interior of an interchange. Elsewhere in interchange interiors, fill slopes should not exceed 3:1.

307.5.2 Ramps

Roadside design for ramps should be based on the mainline grading concept.

307.5.3 Gore Area (See Figure 307-8)

Gore areas of trumpets, diamonds and exteriors of loops adjacent to the exit point, should be graded to obtain slopes (6:1 or flatter) which will not endanger a vehicle which is unable to negotiate the curvature because of excessive speed.

307.5.4 Trumpet Interiors (See Figure 307-8)

Interior areas of trumpets should be graded to slopes not in excess of 8:1, sloping downward from each side of the triangle to a single rounded low point. Roadside ditches should not be used. Exteriors should be graded in accordance with the mainline or ramp standards.

307.5.5 Loop Interiors (See Figure 307-9)

In cut, the interior should be graded to form a normal ditch section adjacent to the lower part of the loop and the backslope should be extended to intersect the opposite shoulder of the upper part of the loop, unless the character and the amount of material or the adjacent earth work balances indicate that the cost would be prohibitive. Roadside cleanup and landscaping should be provided in undisturbed areas of loop interiors.

If channels are permitted to cross the loop interior, slopes should not be steeper than 4:1.

300 Cross Section Design

307.5.6 Diamonds

If the location of the ramp intersection at the crossroad is relatively near to the main facility, a continuous slope between the upper roadway shoulder and the lower roadway ditch will provide the best and most pleasing design.

If the ramp intersection at the crossroad is located a considerable distance from the main facility, then both ramp and mainline roadsides should have independent designs, until the slopes merge near the gore. If the quadrant is entirely, or nearly so, in cut, it is suggested that the combination of a 3:1 backslope at the low roadway ditch and a gentle downslope from the high roadway shoulder will provide the best design in the wide portion of the quadrant. Approaching the gore, the slopes should transition to continuous 4:1 and 6:1 or flatter slopes.

Quadrants located entirely in fill areas should have independently designed roadways for ramp, mainline and crossroad. Each should be provided with normal slopes not greater than 3:1, with the otherwise ungraded areas sloped to drain without using ditches.

If the quadrant is located partially in cut and partially in fill, the best design would feature a gentle fill slope at the upper roadway and a gentle backslope at the lower roadway joined to a bench at the existing ground level which is sloped to drain.

The combination of a long diamond ramp having gentle alignment with a loop ramp in the same interchange quadrant is not to be treated as a trumpet. Each ramp should be designed independently of the other in accordance with the suggested details set forth above.

307.6 Disposal of Construction Debris and Waste Material within ODOT R/W

All projects with pavement removal, particularly non-recyclable concrete pavement, or an excess of excavation should be evaluated for acceptable disposal areas within the state right-of-way. This material cannot be arbitrarily dumped within the limits of state right-of-way. If improperly placed, the material may interfere with adequate sight distance and may create an unnecessary hazard.

Acceptable disposal areas would preferably enhance highway operations and should not in any way reduce safety. Instead of hauling the material offsite or improperly placing the material, the excess fill may be used throughout the state right-of-way limits to improve grading and general roadside safety. For example, all interstate and interstate look-alike systems should use safety grading. If safety grading currently exists, consider extending it to the right-of-way limit. If clear zone grading currently exists, consider using safety grading or extend the clear zone grading to the right-of-way limit. Each barrier location should be evaluated to see if the application of safety grading, or at a minimum clear zone grading, would eliminate the need for barrier. Adjustments to drainage or drainage structures may also be required.

The determination as to whether or not to allow the disposal of waste material within the right-of-way of a project should be made as soon as possible in the project development process. Possible waste areas within the project right-of-way limits should be identified during the field review prior to final scope preparation. Areas deemed acceptable should be identified accordingly in the construction plans. If none of the areas are considered acceptable, this should also be clearly noted in the construction plans in the form of a plan note.

For the full text of the guidelines see Guidelines for Identifying Acceptable Locations for the Disposal of Waste Material and Construction Debris or the Excavation of Borrow Material within ODOT Right-of-Way located in the Reference section of this manual.

300 Cross Section Design

307.6.1 Exit Ramps

Fill material may be placed in the infield areas of exit ramps as long as the decision sight distance is provided and 6:1 or flatter slopes are provided in the gore areas. Decision sight distances, Avoidance Maneuver A or B, as per **Figure 201-6** should be provided for the design speed of the ramp. Also note that with respect to a diamond interchange, the placement of the fill material in the infields should not be such that it interferes with the intersection sight distance at the intersection of the crossroad and the exit ramp.

307.6.2 Entrance Ramps

Excess or disposable fill material should not be placed adjacent to an entrance ramp such that it interferes with the available sight distance. Decision sight distance, Avoidance Maneuver C or E, as per **Figure 201-6** should be provided for the design speed of the ramp. The decision sight distance is measured from a point on the ramp where the driver, on the ramp, has an unobstructed view of the mainline to where the lane width becomes less than 10 ft. [3.0 m] and the driver must merge. This is the distance that the driver merging from the ramp has to decide where he can safely merge into the mainline traffic. This distance should also be unobstructed for the mainline driver to react to the ramp vehicle by either a lane or speed change.

307.6.3 Loop Ramps

In general, the infields of loop ramps should not be filled unless it is to eliminate barrier or provide safety graded slopes. Filling these areas may decrease sight distance and diminish the driver's ability to anticipate the sharpness and total path of the ramp. It is important to have an unobstructed view of the ramp in order that driver may have adequate time to react to possible obstructions and delays ahead. Loop ramps are more susceptible to run off the road accidents due to the sharp curvature and high speeds.

If a designer chooses to fill the infield, as a minimum, the decision sight distance, Avoidance Maneuver A or B, as per **Figure 201-6**, using the ramp design speed, should be provided for the exit portion of the ramp. Likewise, Avoidance C or E, using the ramp design speed, should be provided for the entrance portion of the ramp. The fill height should not exceed 20 ft. [6 m] in height or as determined by the Office of Geotechnical Engineering. Slopes should not exceed 4:1 for ease of maintenance.

This page is intentionally blank

List of Figures

Figure	Date	Title
301-1E	November 02	Guide for Selection of Minimum Design Levels of Service
301-2E*	October 08	Rural Lane Widths
301-3E*	October 08	Rural Shoulder Criteria
	July 06	Notes to Figure 301-3E
301-4E	October 08	Urban Roadway Criteria Lane & Shoulder Widths
301-5aE	November 02	Pavement Widening at Curves
301-5bE	October 08	Pavement Widening on Highway Curves for WB-50 Design Vehicle
301-5cE	October 08	Pavement Widening on Highway Curves for WB-62 Design Vehicle
301-6E	November 02	Normal Cross Slope Arrangements
301-7E	November 02	Graded and Treated Shoulder Widths
301-8E	November 02	Paved Shoulder Cross Slopes
301-9E	November 02	Bituminous Surface Treated or Stabilized Aggregate Shoulder Cross Slopes
301-10E	November 02	Turf Shoulder Cross Slopes
302-1E*	April 10	Design Criteria - New and Reconstructed Bridges
	April 10	Notes to Figure 302-1
302-2E	November 02	Criteria for Existing Interstate and Other Freeway Bridges to Remain
302-3E*	November 02	Criteria for Existing Non-Freeway Bridges to Remain
303-1E	October 10	Interchange Elements - Pavements, Shoulders and Medians
304-1E	November 02	Typical Median Designs
304-2E	January 05	Standard U-Turn Median Opening
306-1E	November 02	Guidelines for New Sidewalk/Walkway Installations
306-2E	November 02	Walk Designs
306-3E	November 02	Curb Ramp Components
306-4E	October 10	Curb Ramp Types
306-5E	October 10	Truncated Domes
307-1E	January 05	Safety Grading Sections
307-2E	January 05	Ditch Sections for Safety Grading
307-3E	November 02	Clear Zone Grading Sections (Traversable Ditch Sections)
307-4E	January 07	Common and Barrier Grading Sections (Normal Ditch Sections)
307-5E	April 11	Special Designs
307-6E	January 07	Slope Treatment Adjacent to Curbed Streets
307-7E	November 02	Slope and Ditches at Driveways and Crossroads
307-8E	November 02	Contour Grading of Trumpet Interiors
307-9E	November 02	Contour Grading of Loop Interiors in Cut
307-10E	November 02	Preferred Cross Sections for Ditches with Abrupt Slope Changes
307-11E	November 02	Preferred Cross Sections for Ditches with Gradual Slope Changes

* Note: For the design criteria pertaining to Collectors and Local Roads with ADT=s of 400 or less, refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads ADT#400)

This page is intentionally blank

GUIDE FOR SELECTION OF MINIMUM DESIGN LEVELS OF SERVICE

301-1E

REFERENCE SECTIONS
201.4.1 & 301.1.1

Functional Classification	Locale and Terrain			
	Rural			Urban & Urbanized
	Level	Rolling	Hilly	
Interstate, Other Freeways and Expressways	B	B	C	C
Arterial	B	B	C	C
Collector	C	C	D	D
Local	D	D	D	D

LEVELS OF SERVICE

- A - Free flow, with low volumes and high speeds.
- B - Stable flow, speeds beginning to be restricted by traffic conditions.
- C - In stable flow zone, but most drivers are restricted in freedom to select own speed.
- D - Approaching unstable flow; drivers have little freedom to maneuver.
- E - Unstable flow, may be short stoppages.
- F - Forced or breakdown flow.

RURAL LANE WIDTHS ^(A)	301-2E
	REFERENCE SECTIONS 301.1.2

Functional Classification	Traffic	Minimum Lane Widths (ft.) ^(B)										
	Design Year ADT	Design Speed (mph)										
		20	25	30	35	40	45	50	55	60	65	70 or >
Interstate, Other Freeways and Expressways	ALL	--	--	--	--	--	--	12	12	12	12	12
Arterial	> 2000	--	--	--	--	12	12	12	12	12	12	12
	1501 to 2000	--	--	--	--	11	11	12	12	12	12	12
	400 to 1500	--	--	--	--	11	11	11	11	12	12	12
	< 400	--	--	--	--	11	11	11	11	12	12	12
Collector	> 2000	12	12	12	12	12	12	12	12	12	--	--
	1501 to 2000	11	11	11	11	11	11	11	12	12	--	--
	400 to 1500	10	10	10	11	11	11	11	11	11	--	--
	< 400	10	10	10	10	10	10	10	11	11	--	--
Local	> 2000	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	12 ^(C)	--	--
	1501 to 2000	11	11	11	11	11	11	11	12 ^(C)	12 ^(C)	--	--
	400 to 1500	10	10	10	10	10	11	11	11	11	--	-
	< 400	9	9	9	9	9	10	10	11	11	--	--

NOTES:

- (A) There may be some rural locations that are urban in character. An example would be a village where adjacent development and other conditions resemble an urban area. In such cases, urban design criteria (**Figure 301-4**) may be used.
- (B) The number of lanes should be determined by a capacity analysis.
- (C) An 11 ft. lane width may be retained on reconstructed highways if the alignment and safety records are satisfactory.

Note: For the design criteria pertaining to Collectors and Local Roads with ADT's of 400 or less, refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads ADT ≤ 400).

RURAL SHOULDER CRITERIA ^(A)	301-3E
	REFERENCE SECTIONS 301.2.2, 301.2.3, 307.2.3 & 602.1.1

Functional Classification	Traffic	Graded Width		Treated Width	Type (I)	Rounding (K)		Guardrail Offset (From Traveled Way)
	Design Year ADT	With Barrier or Foreslope Steeper than 6:1	Without Barrier 6:1 or Flatter Foreslope			Design Speed		
						≥50	<50	
Interstate, Other Freeways & Expressways	All	17' Rt. 9' Med. (B)	12' Rt. 4' Med. (D)	12' Rt. (C) 4' Med.(D)	Paved	10'	--	(L) (G)
Arterial (N)	> 2000	12'	8'	8'	PVD (O)	8'	4'	10' (G)
	1501 to 2000	10'	6'	6'	PVD (O)	8'	4'	8' (G)
	400 to 1500	10'	6'	6'	PVD (O)	4'	4'	8' (G)
	< 400	8'	4'	4'	PVD (O)	4'	4'	6' (G)
Collector (N)	> 2000	10'	8'	4'	BIT. SRF. TRT. (J)	8'	4'	8' (M)
	1501 to 2000	8'	6' (E)	4'	STBL. AGG.	8'	4'	6' (M)
	400 to 1500	6'	5'	4'	STBL. AGG.	4'	4'	4'
	< 400	6'	(F)	(F)	STBL. AGG.	4'	4'	4'
Local	> 2000	10'	8' (H)	4'	BIT. SRF. TRT. (J)	8'	4'	8' (M)
	1501 to 2000	8'	6' (E)	4'	STBL. AGG.	8'	4'	6' (M)
	400 to 1500	6'	5'	4'	STBL. AGG.	4'	4'	4'
	< 400	6'	(F)	(F)	STBL. AGG.	4'	4'	4'

See following sheet for corresponding notes.

Note: For the design criteria pertaining to Collectors and Local Roads with ADT's of 400 or less, refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads ADT#400).

Notes to Figure 301-3: Rural Shoulder Criteria

- (A) There may be rural locations that are urban in character. An example would be a village where adjacent development and other conditions resemble an urban area. In such cases, urban design criteria (**Figure 301-4**) may be used.
- (B) If 6 or more lanes, use 17 ft. If the truck traffic is less than 250 DDHV use 15 ft.
- (C) Use 10 ft. if truck traffic is less than 250 DDHV. If 10 ft. treated width is used, graded width may be reduced by 2 ft.
- (D) If 6 or more lanes, use 12 ft. If truck traffic is less than 250 DDHV, 10 ft. treated width may be used.
- (E) A 6 ft. turf shoulder may be used with a 4:1 or flatter foreslope.
- (F) See AASHTO'S Guidelines for Geometric Design for Very Low-Volume Local Roads for values.
- (G) Concrete barrier may be placed at the edge of treated shoulder when used in lieu of guardrail.
- (H) An 8 ft. graded shoulder may be used with a 4:1 or flatter foreslope.
- (I) Turf shoulders may be used on non-state maintained roads at option of local government if current year ADT includes less than 250 B and C trucks. Turf shoulders are not to be used on State maintained roads.
- (J) Stabilized aggregate may be used on State maintained roads if the design year ADT includes less than 250 B and C truck units. Paved shoulders are recommended if the design year ADT includes over 1000 B and C truck units.
- (K) Rounding should be 4 ft. where the foreslope begins beyond the clear zone or where guardrail is installed and foreslope is steeper than 6:1. No rounding is required when the foreslope is 6:1 or flatter.
- (L) Guardrail offset is treated width plus 2 ft.
- (M) Whenever a design exception is approved for graded shoulder width, the guardrail offset may be reduced but shall not be less than 4 ft.
- (N) The median and right shoulder width criteria for Interstates, other freeways and expressways shall apply to the shoulders of divided arterials and divided collectors.
- (O) A fully paved shoulder is preferred, but may not be economically feasible. Therefore, a minimum 2 ft. of the treated shoulder should be paved. The remainder of the treated shoulder may be either stabilized aggregate or bituminous surface treated material according to the criteria stipulated in Note (J).

URBAN ROADWAY CRITERIA LANE & SHOULDER WIDTHS ^(A)	301-4E
	REFERENCE SECTIONS 301.1.2, 301.2.2, 301.2.3 & 304.2.2

Functional Classification	Locale	Lane Width (ft.)		Minimum Curbed Shoulder Width (ft.) (G)	
		Min.	Pref'd	w/o Parking Lane	with Parking Lane (F)
Interstate, Other Freeways and Expressways	All	12	12	12 Rt. Paved (I) 4 Med. Paved (D)	
Arterial Streets	50 mph or more	12	12	10 Each Side Paved (E) (H)	
	Less than 50 mph	11 (B)	12	1-2 Paved	10-12 Paved
Collector Streets (J)	Commercial / Industrial	11	12	1-2 Paved	8 - 11 Paved
	Residential	11	12	1-2 Paved	7 - 8 Paved
Local Streets (J)	Commercial / Industrial	11	12	1-2 Paved	8 Paved
	Residential	10 (C)	11	1-2 Paved	7 Paved

NOTES:

- (A) Use rural criteria (**Figures 301-2 or 301-3**) for uncurbed shoulders. Rural functional classification should be determined after checking the urban route extension into a rural area.
- (B) On all Federal Aid Primary (FAP) roadways at least one 12 ft. lane in each direction is required. FAP listings may be obtained from **Office of Technical Services' Roadway Inventory** reports.
- (C) Lane width may be 9 ft. where right-of-way is limited and current ADT is less than 250.
- (D) Use 10 ft. median shoulder on facilities with 6 or more lanes. Use 12 ft. median shoulder on facilities with 6 or more lanes and when truck traffic exceeds 250 DDHV
- (E) May be reduced to 8 ft. if DHV is less than 250.
- (F) Use minimum lane width if, in the foreseeable future, the parking lane will be used for through traffic during peak hours or continuously.
- (G) See **Sections 305.3.2 and 305.3.3** for use of curbs and notes on curb/guardrail relationships.
- (H) The median and right shoulder width for divided arterials shall follow the median criteria for Interstates, other Freeways and Expressways.
- (I) May be reduced to 10 ft. if the truck traffic is less than 250 DDHV.
- (J) The AASHTO Publication – Guidelines for Geomatic Design of Very Low-Volume Local Roads (ADT ≤ 400) may be used for the design criteria of Collector and Local Streets with ADT's of 400 or less.


PAVEMENT WIDENING AT CURVES

301-5aE


REFERENCE SECTIONS
301.1.3

LOCATION OF PAVEMENT TRANSITION IN RELATIONSHIP TO THE SUPERELEVATION TRANSITION

Pavement Widening for a Simple Curve:

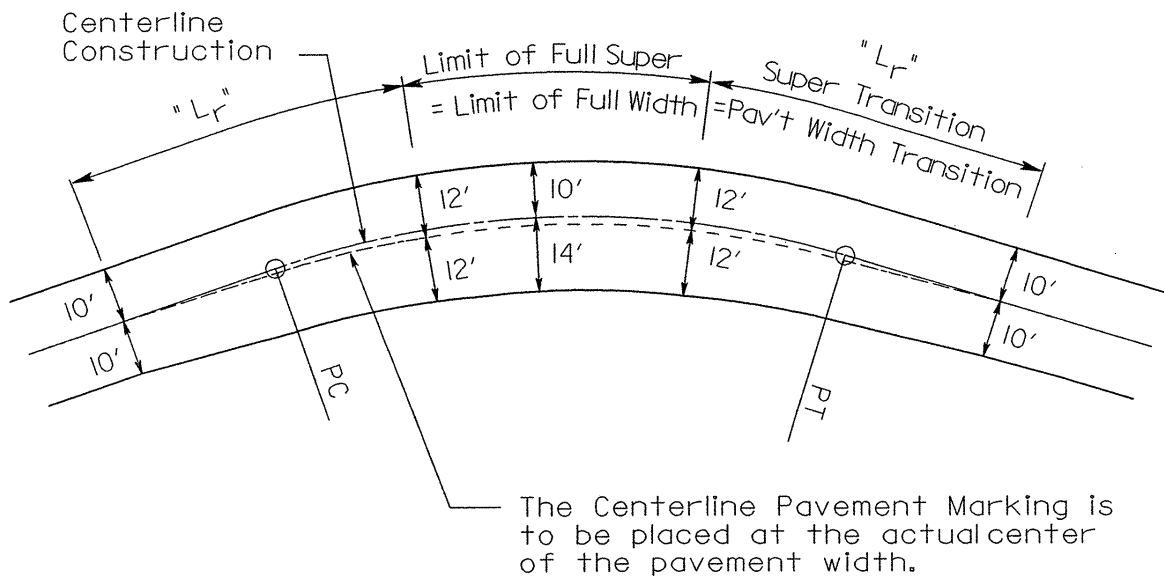

Pavement Widening for a Spiral Curve:

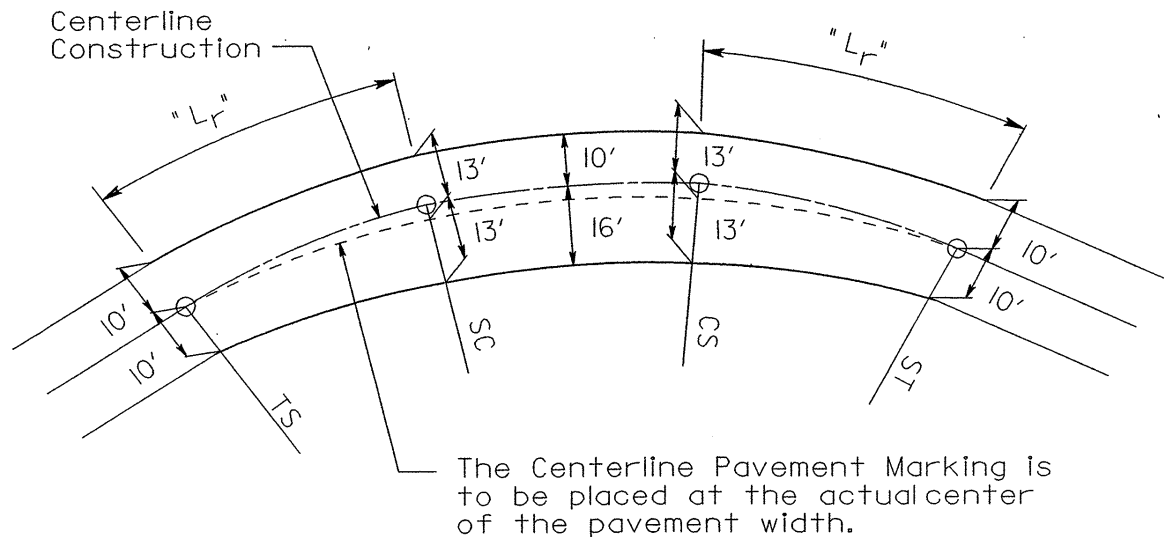

PAVEMENT WIDENING ON HIGHWAY CURVES FOR WB-50 DESIGN VEHICLES

301-5bE

REFERENCE SECTIONS
301.1.3

D _c	RADIUS	PAVEMENT WIDTH ON TANGENT (ft.)												
		24 ft.					22 ft.				20 ft.			
		Design Speed (mph)					Design Speed (mph)				Design Speed (mph)			
		30 to 39	40 to 49	50 to 59	60 to 69	≥ 70	30 to 39	40 to 49	50 to 59	≥ 60	30 to 39	40 to 49	50 to 59	≥ 60
1°00'	5730'	0	0	0	0	0	1.0	1.0	1.0	1.0	1.5	2.0	2.0	2.0
2°00'	2865'	0	0.5	0.5	0.5	0.5	1.0	1.5	1.5	1.5	2.0	2.5	2.5	2.5
3°00'	1910'	0.5	1.0	1.0	1.0	1.0	1.5	2.0	2.0	2.0	2.5	3.0	3.0	3.0
4°00'	1432'	1.0	1.0	1.5	1.5	1.5	2.0	2.0	2.5	2.5	3.0	3.0	3.5	3.5
5°00'	1146'	1.5	1.5	2.0	2.5		2.5	3.0	3.0	3.0	3.5	3.5	4.0	4.0
6°00'	955'	2.0	2.0	2.5	2.5		3.0	3.0	3.5	3.5	3.5	4.0	4.5	4.5
7°00'	819'	2.0	2.0	3.0			3.0	3.5	4.0		4.0	4.5	5.0	
8°00'	716'	2.5	3.0	3.0			3.5	4.0	4.0		4.5	5.0	5.0	
9°00'	637'	3.0	3.0	3.5			4.0	4.0	4.5		5.0	5.0	5.5	
10°00'	573'	3.0	3.5				4.0	4.5			5.5	5.5		
11°00'	521'	3.5	4.0				4.5	5.0			5.5	6.0		
12°00	477'	4.0	4.0				5.0	5.0			6.0	6.0		
13°00'	441'	4.0	4.0				5.0	5.0			6.0	6.0		
14°00'	409'	4.5	4.5				5.5	5.5			6.5	6.5		
14°30'	395'	4.5	5.0				5.5	5.5			6.5	6.5		
15°00'	382'	5.0					6.0				7.0			
18°00'	318'	5.5					7.0				7.5			
19°00'	300'	6.0					7.0				8.0			
21°00'	265'	6.5					7.5				8.5			
22°00'	260'	6.5					7.5				8.5			
25°00'	229'	7.5					8.5				9.5			
26°00'	223'	7.5					8.5				9.5			
26°30'	219'	8.0					9.0				10.0			

Note: Values less than 1.0 ft. per lane may be disregarded. Multiply Table values by 1.5 for 3-lanes and by 2.0 for 4-lanes.

October 2008

TRAVELED WAY WIDENING ON OPEN HIGHWAY CURVES FOR WB-62 DESIGN VEHICLES	301-5cE
	REFERENCE SECTIONS 301.1.3

D _c	RADIUS	TRAVELED WAY WIDTH ON TANGENT (ft.)												
		24 ft.					22 ft.				20 ft.			
		Design Speed (mph)					Design Speed (mph)				Design Speed (mph)			
		30 to 39	40 to 49	50 to 59	60 to 69	≥ 70	30 to 39	40 to 49	50 to 59	≥ 60	30 to 39	40 to 49	50 to 59	≥ 60
1°00'	5730'	0	0	0	0	0	1.0	1.0	1.0	1.0	1.5	2.0	2.0	2.0
2°00'	2865'	0	1.0	1.0	1.0	1.0	1.5	1.5	1.5	1.5	2.5	3.0	3.0	3.0
3°00'	1910'	1.0	1.5	1.5	1.5	1.5	2.0	2.5	2.5	2.5	3.0	3.5	3.5	3.5
4°00'	1432'	1.5	1.5	2.0	2.0	2.0	2.5	2.5	3.0	3.0	3.5	3.5	4.0	4.0
5°00'	1146'	2.0	2.0	2.5	3.0		3.0	3.5	3.5	3.5	4.0	4.0	4.5	4.5
6°00'	955'	2.5	2.5	3.0	3.5		4.0	4.0	4.5	4.5	4.5	5.0	5.5	5.5
7°00'	819'	3.0	3.0	4.0			4.0	4.5	5.0		5.0	5.5	6.0	
8°00'	716'	3.5	4.0	4.0			4.5	5.0	5.0		5.5	6.0	6.0	
9°00'	637'	4.0	4.0	4.5			5.0	5.0	5.5		6.0	6.0	6.5	
10°00'	573'	4.0	4.5				5.0	5.5			6.5	6.5		
11°00'	521'	5.0	5.5				6.0	6.5			7.0	7.5		
12°00	477'	5.5	5.5				6.5	6.5			7.5	7.5		
13°00'	441'	5.5	5.5				6.5	6.5			7.5	7.5		
14°00'	409'	6.0	6.0				7.0	7.0			8.0	8.0		
14°30'	395'	6.0	6.5				7.0	7.0			8.0	8.5		
15°00'	382'	6.5					7.5				9.0			
18°00'	318'	7.5					9.0				9.5			
19°00'	300'	8.0					9.0				10.5			
21°00'	265'	9.0					10.0				11.0			
22°00'	260'	9.0					10.0				11.0			
25°00	229'	10.5					11.5				12.5			
26°00'	223'	10.5					11.5				12.5			
26°30'	219'	11.0					12.0				13.0			

NOTE:


Values are for two-lane highways, one-way or two-way. Values less than 1.0 ft. per lane may be disregarded. Multiply table values by 1.5 for 3-lanes and by 2.0 for 4-lanes.

NORMAL CROSS SLOPE ARRANGEMENTS


301-6E

REFERENCE SECTIONS
301.1.5


UNDIVIDED

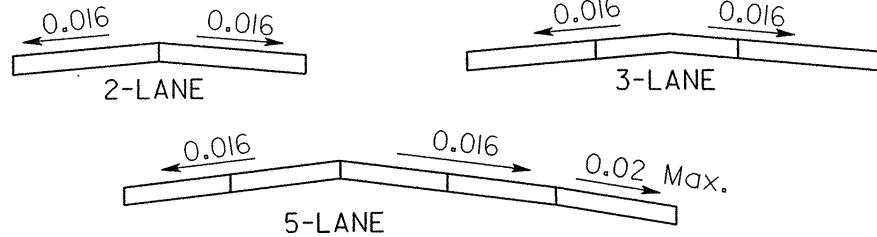

DIVIDED (RAISED MEDIAN)

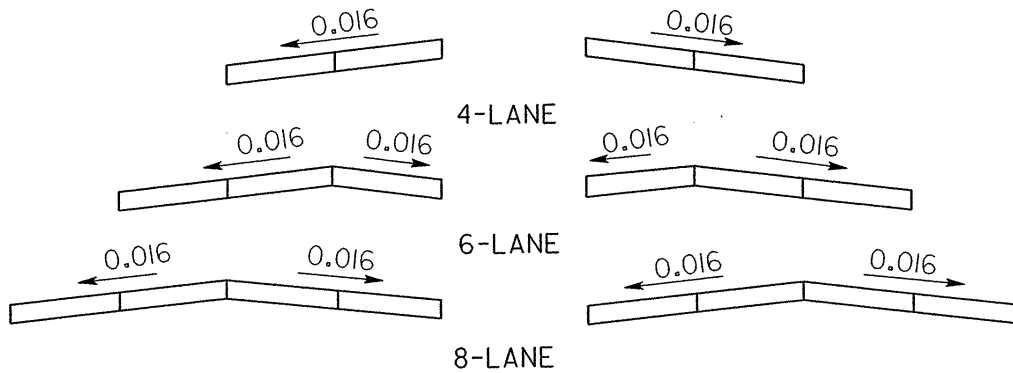

DIVIDED (DEPRESSED MEDIAN)

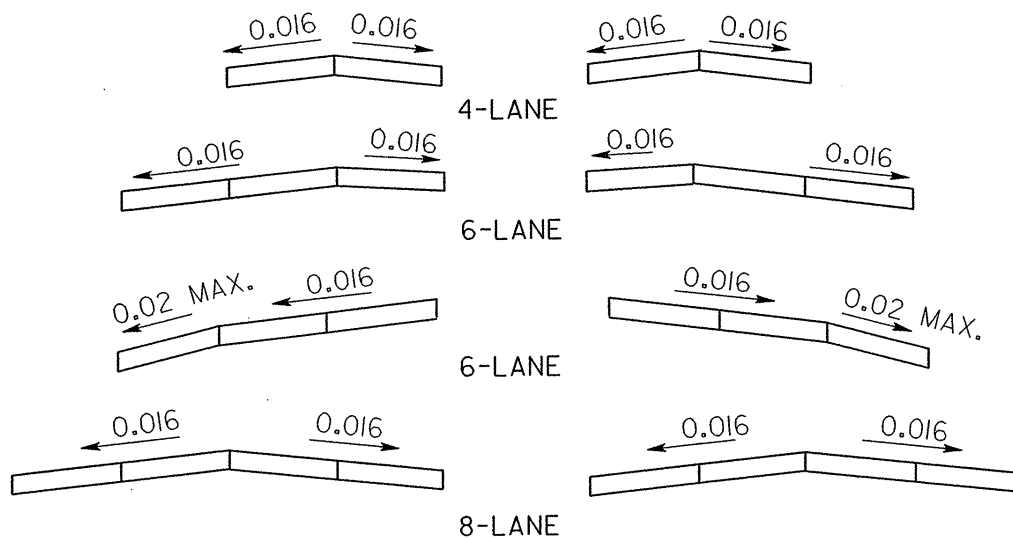

Note: All grade breaks should not exceed 0.032.


November 2002

GRADED AND TREATED SHOULDER WIDTHS


301-7E

REFERENCE SECTIONS
301.2.1

See Figure 301-3 for recommended dimensions

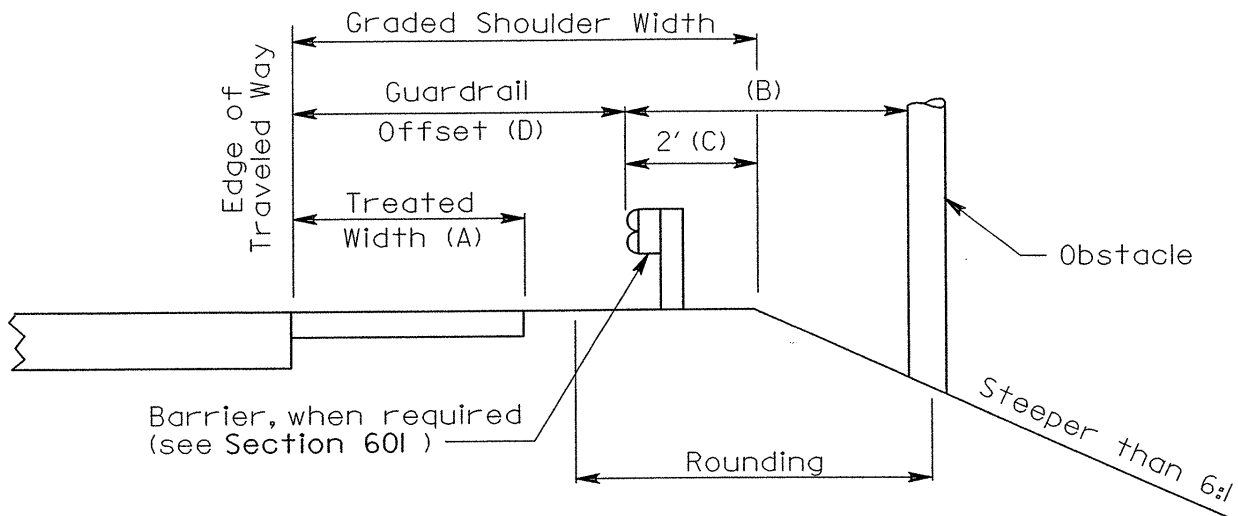

WITH BARRIER OR FORESLOPE STEEPER THAN 6:1

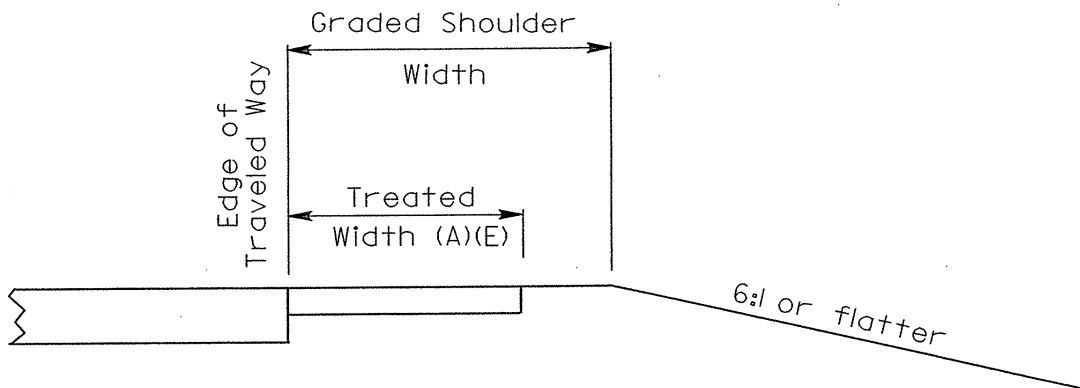

WITHOUT BARRIER AND FORESLOPE 6:1 OR FLATTER

NOTES:

- (A) The "Treated Width" is that portion of the shoulder improved with stabilized aggregate or better.
- (B) See Figure 603-2 for minimum barrier clearance.
- (C) 3 ft. on interstate, other freeways and expressways.
- (D) Concrete barrier may be placed at the edge of treated shoulder when used in lieu of guardrail.
- (E) Treated shoulder width may equal graded shoulder width in some cases.


November 2002

PAVED SHOULDER CROSS SLOPES


301-8E

REFERENCE SECTIONS
301.2.4


NORMAL AND LOW SIDE OF SUPERELEVATED SECTIONS

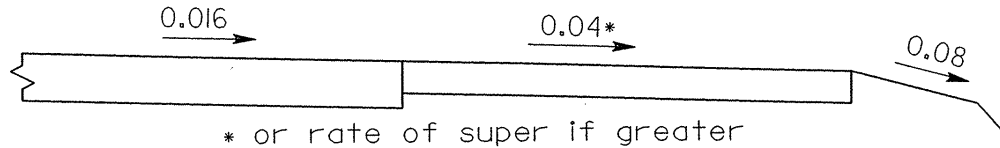

CURBED-HIGH SIDE OF SUPERELEVATED SECTIONS

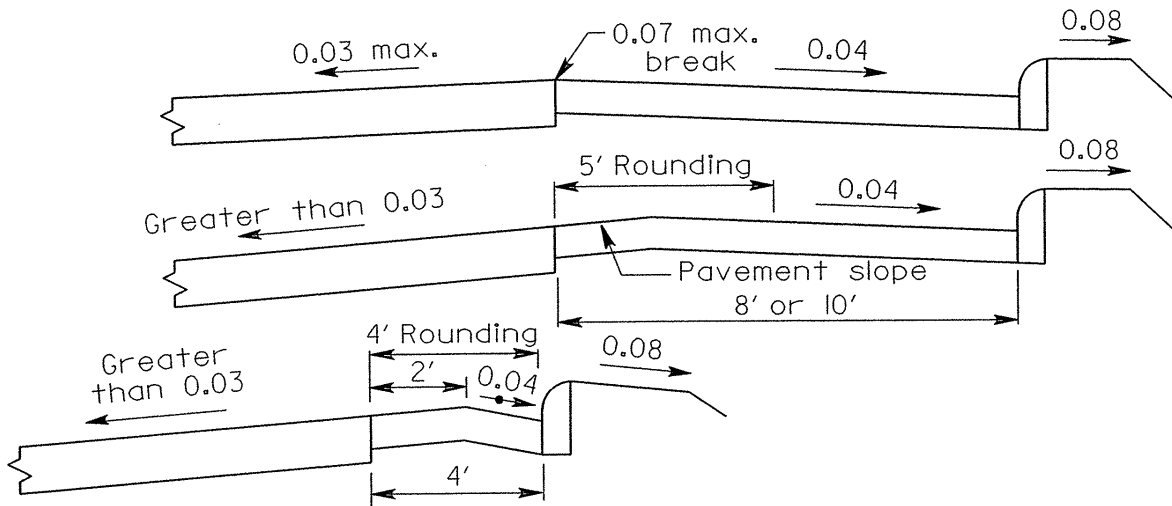

UNCURBED-HIGH SIDE OF SUPERELEVATED SECTIONS

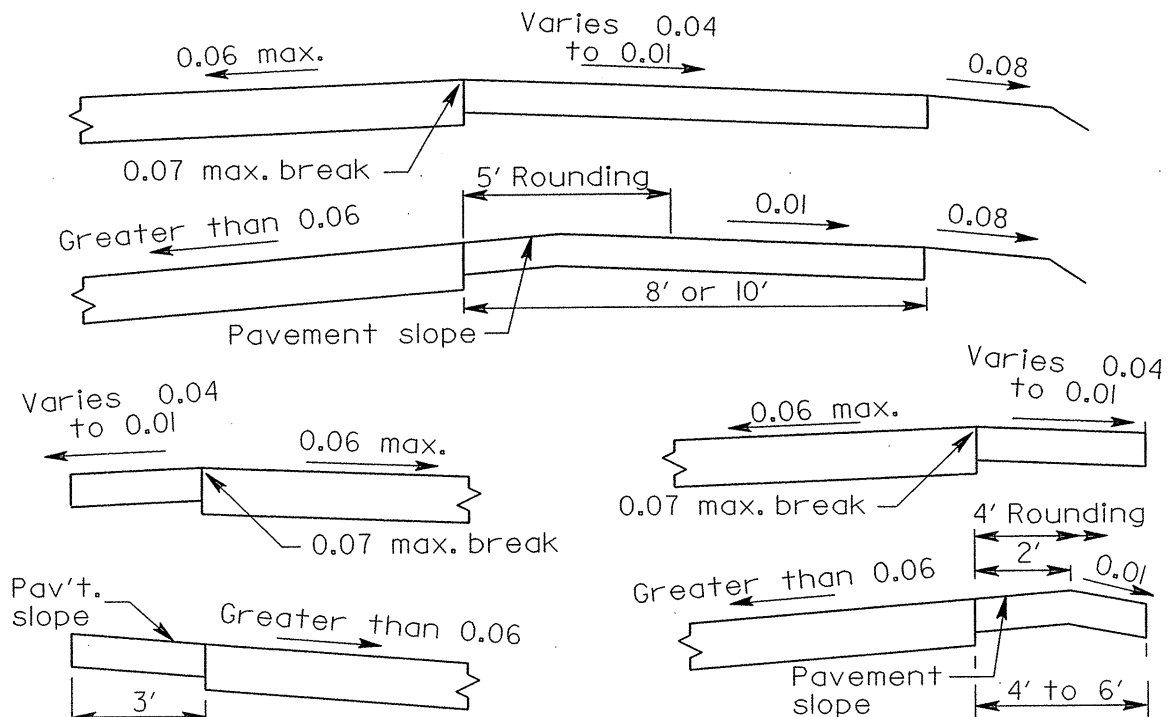


BITUMINOUS SURFACE TREATED OR STABILIZED AGGREGATED SHOULDER CROSS SLOPES

301-9E



**REFERENCE SECTIONS
301.2.4**

NORMAL AND LOW SIDE OF SUPERELEVATED SECTIONS

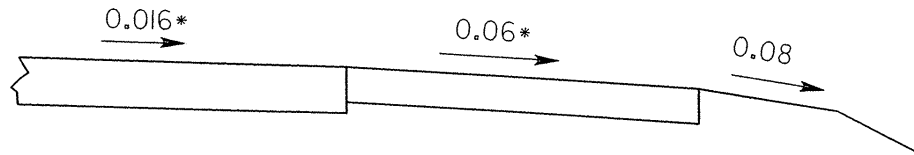


* or rate of super if greater

HIGH SIDE OF SUPERELEVATED SECTIONS

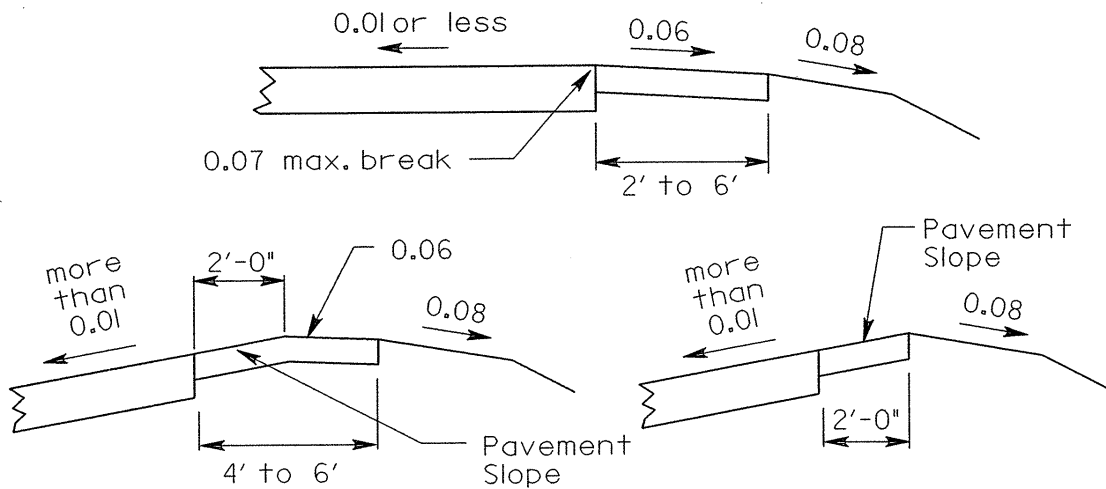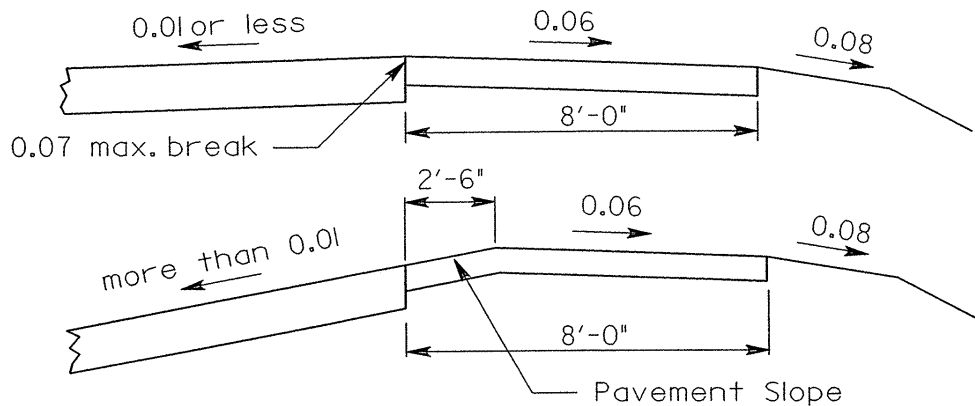


TURF SHOULDER CROSS SLOPES	301-10E
	REFERENCE SECTIONS 301.2.4


NORMAL AND LOW SIDE (INNER SIDE) SUPERELEVATED SECTIONS

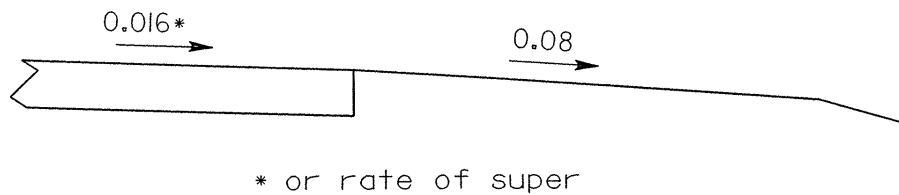

RISING SIDE (OUTER SIDE) OF SUPERELEVATED SECTIONS IN TRANSITION

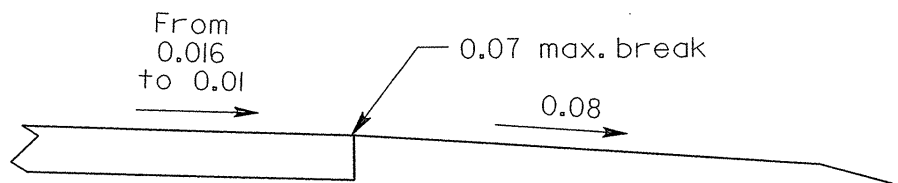

HIGH SIDE OF SUPERELEVATED SECTIONS

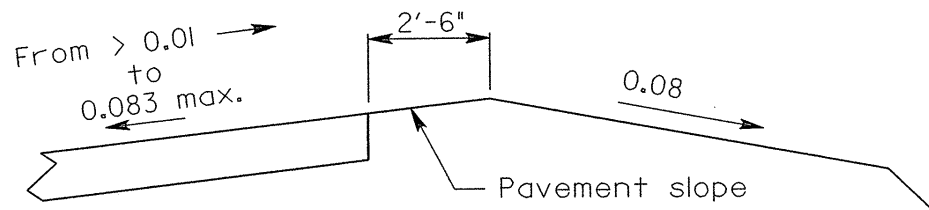

The break at the edge of the traveled way shall not exceed 0.07.

DESIGN CRITERIA NEW AND RECONSTRUCTED BRIDGES	302-1E
	REFERENCE SECTIONS 302.1

Functional Classification	Traffic	Lateral Clearance					Vertical Clearance Over Roadway (J)		
	Design Year ADT	On Bridge (A)		Under Bridge (H)					
		Rural							Urban
		Min.	Pref.	Min.	Min.	Pref.	Min.	Pref.	
Interstates, Other Freeways & Expressways	All	12' Rt. (B)(E)	14' Rt.(E)	For curbed shoulders, use shoulder widths from Figure 301-4 For uncurbed shoulders, use rural criteria at left	Curbed or treated shoulder widths, see Figures 301-3 & 301-4 plus barrier clearance from Figure 603-2	Clear Zone width, see Figure 600-1	16.5' (K)	17.0'	
		4' Lt. (F)	6' Lt. (G)						
Arterial	> 2000	8' (B)	10'						
	1501 – 2000	6' (B)	8'				(I)	16.5' (K)	17.0'
	400 – 1500	6' (B)	8'						
	< 400	4'	6'						
Collector	> 2000	4' (C)	8'						
	1501 – 2000	4' (C)	6'						
	400 – 1500	4' (C)	4'						
	< 400	(D)	4'						
Local	> 2000	4' (C)	8'				(I)	14.5'	15.0'
	1501-2000	3'	6'						
	400 – 1500	3'	4'						
	< 400	(D)	4'						

SEE THE FOLLOWING SHEET FOR CORRESPONDING NOTES.

For structure design criteria not contained in this table such as minimum design loading, refer to the Bridge Design Manual from the Office of Structural Engineering.

WHERE THE APPROACH ROADWAY WIDTH (TRAVELED WAY PLUS SHOULDERS) IS SURFACED, AT A MINIMUM, THAT SURFACE WIDTH SHOULD BE CARRIED ACROSS THE STRUCTURE.

Notes to Figure 302-1: Design Criteria - New & Reconstructed Bridges

- A. Lateral Clearance is the distance measured from the edge of the traveled lane to the face of curb (or railing if no curb is present).
- B. If bridge is considered to be a major structure having a length of 200 ft. or more, the width may be reduced, subject to economic studies, but not less than a lateral clearance of 4 ft.
- C. May be 3 ft. wide if bridge length exceeds 100 ft.
- D. See AASHTO's Guidelines for Geometric Design for Very Low-Volume Local Roads ($ADT \leq 400$) for values.
- E. Where the truck DDHV is 250 or less, may be reduced 2 ft.
- F. If 6 or more lanes, provide 12 ft. width except where truck DDHV is 250 or less, the left lateral clearance may be reduced 2 ft.
- G. If 6 or more lanes, provide 14 ft. width except where truck DDHV is 250 or less, the left width may be reduced 2 ft.
- H. Distance measured from the edge of the traveled lane to the face of walls of abutments and piers.
- I. May be reduced to a clearance of 2 ft. plus barrier clearance (Figure 603-2) on urban streets with restricted right-of-way and a design speed less than 50 mph.
- J. The minimum vertical clearance includes an allowance for future resurfacing equal to 0.5 ft. Sign supports and pedestrian structures shall have a 1 ft. additional clearance. Clearances shown shall be over paved shoulder as well as traveled way width.
- K. A 15.5 ft. minimum clearance may be used in highly developed urban areas if attainment of 16.5 ft. clearance would be unreasonably costly **and** if there is an alternate freeway route or bypass which provides a minimum 16.5 ft. vertical clearance.

CRITERIA FOR EXISTING INTERSTATE AND OTHER FREEWAY BRIDGES TO REMAIN	302-2E
	REFERENCE SECTIONS 302.1

Functional Classification	Design Year ADT	Minimum Lateral Clearance		Minimum Vertical Clearance (E)
		On Bridge (A)	Under Bridge (C)	
Urban Interstate	All	10' Rt. (B) 3.5' Lt.	Curbed or Treated Shoulder Width Plus Barrier Clearance (D)	14.5' (F)
Rural Interstate	All	10' Rt. (B) 3.5' Lt.		16.0'
Other Freeways	All	10' Rt. (B) 3.5' Lt.		14.5'

This table is applicable to all bridges except those classified as new or reconstructed. (See **Figure 302-1.**)

For structural criteria not contained in this table, including Minimum Design Loading, see **Structural Engineering's Bridge Design Manual**.

NOTES:

- (A) Distance measured to curb or railing, whichever is less, in no case shall the minimum width be less than the approach roadway (traveled way plus shoulders).
- (B) On mainline bridges that are 200 ft. long or longer, the minimum may be reduced to 3.5 ft. for Interstate and 3 ft. for other freeways.
- (C) Distance measured to face of walls, abutments or piers.
- (D) See **Figure 603-2** for minimum barrier clearance.
- (E) Includes height over shoulders
- (F) Minimum vertical clearance is 16 ft. if there is no alternative Interstate routing with the minimum 16 ft. vertical clearance.

CRITERIA FOR EXISTING NON-FREEWAY BRIDGES TO REMAIN	302-3E
	REFERENCE SECTIONS 302.1

Functional Classification	Design Year ADT	Minimum Lateral Clearance (A)		Minimum Vertical Clearance
		On Bridge (B)	Under Bridge (E)	
Expressways and Arterials	> 4000	6 ft. (C)	Curbed or Treated Shoulder Width Plus Barrier Clearance (F)	14 ft.
	≤ 4000	3 ft.		
Collector	> 4000	6 ft. (C)		14 ft.
	2001-4000	3 ft.		
	1001-2000	2 ft.		
	400-1000	2 ft.		
	< 400	0		
	< 400	0		
Local	> 4000	6 ft. (C)		14 ft.
	2001-4000	3 ft.		
	1001-2000	2 ft.		
	400-1000	2 ft. (D)		
	< 400	0 (D)		

This table is applicable to all non-freeway bridges except those classified as new or reconstructed.

For structural criteria not contained in this table, including Minimum Design Loading, see **Structural Engineering's Bridge Design Manual**.

NOTES:

- (A) Divided facilities shall have a minimum of 3 ft. lateral clearance on the median side.
- (B) Distance measured to curb or railing, whichever is less. In no case shall the minimum width be less than the approach roadway (traveled way plus shoulders).
- (C) On mainline bridges having a length of 100 ft. or more, the minimum may be reduced to 3 ft.
- (D) One lane bridges have a total minimum width of 18 ft.
- (E) Distance measured to face of walls, abutments or piers.
- (F) See **Figure 603-2** for minimum barrier clearance.

Note: For the design criteria pertaining to Collectors and Local Roads with ADT's of 400 or less, refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads ADT ≤ 400).

INTERCHANGE ELEMENTS - PAVEMENTS, SHOULDERS AND MEDIANS

303-1E


REFERENCE SECTIONS
303.1

INTERCHANGE ELEMENTS	TOTAL PAVEMENT WIDTH	Graded Shoulder Width				Paved Shoulder Width		Normal Rounding (E)	Guardrail Offset (From Traveled Way) (G)	
		Left		Right						
		With Barrier or Foreslope steeper than 6:1	w/o Barrier slopes 6:1 or flatter	With Barrier or Foreslope steeper than 6:1	w/o Barrier slopes 6:1 or flatter					
		LT	RT	LT	RT					
Ramp	16' (A)	9' (C)	6'	11' (C)	8'	3'	6'	10'	6'	8'
1-Lane Directional Roadway	16' (A)	9' (C)	6'	11' (C)	8'	4'	6'	10'	6'	8'
2-Lane Directional Roadway or Multilane Ramps	Var. (B)	9' (C) (H)	6' (H)	15'(D)	10' (D)	4' (H)	10'	10'	6' (H)	12' (D)
Accel/Decel Lane or Combined	Var. .	NA	NA	13' (D)(F)	8' (D)(F)	NA	8' (F)	10'	NA	10' (D)(F)


NOTES:

- (A) Use 18 ft. when inside pavement edge radius is less than 200 ft.
- (B) For 2-lane directional roadways and 2-lane multilane ramps, the pavement width shall be 24 ft.
- (C) May be reduced 1 ft. if the face of the mainline barrier is 2 ft. from the outside edge of the graded shoulder.
- (D) Or match mainline dimension if lesser.
- (E) Rounding is 4 ft. when barrier is used. No rounding is required when foreslope is 6:1 or flatter.
- (F) Match Multilane Ramp dimensions when used with Multilane Ramps.
- (G) Concrete barrier may be placed at the edge of the paved shoulder when used in lieu of guardrail.
- (H) For 3 or more lanes, use right side widths or dimensions.


TWO-WAY RAMP MEDIAN

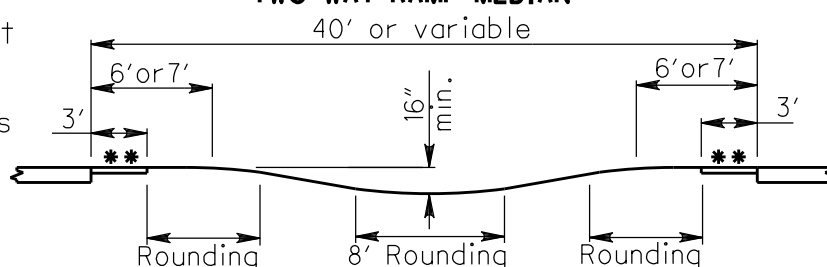

MINIMUM TWO-WAY RAMP - CONCRETE MEDIAN



MINIMUM TWO-WAY RAMP - CONCRETE BARRIER MEDIAN



* Check horizontal stopping sight distance


** See Figure 301-8 for shoulder cross slope

TYPICAL MEDIAN DESIGNS





304-1E

REFERENCE SECTIONS
304.3

BARRIER MEDIAN

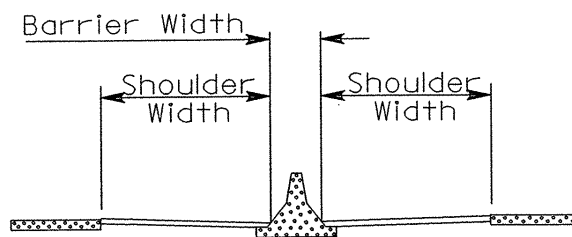

DEPRESSED MEDIANS

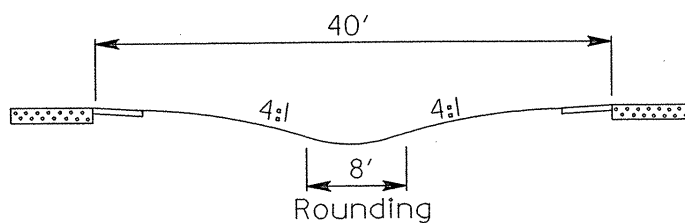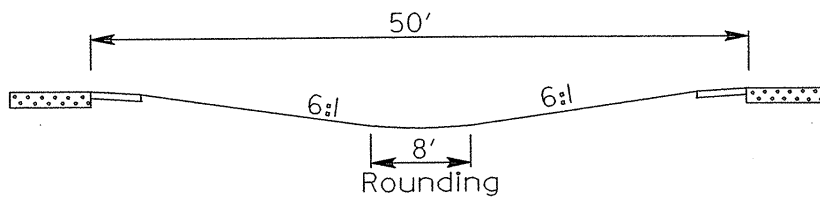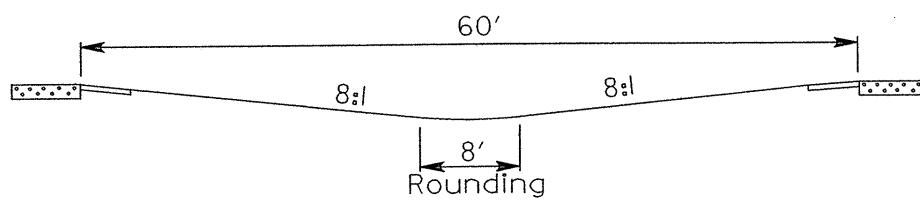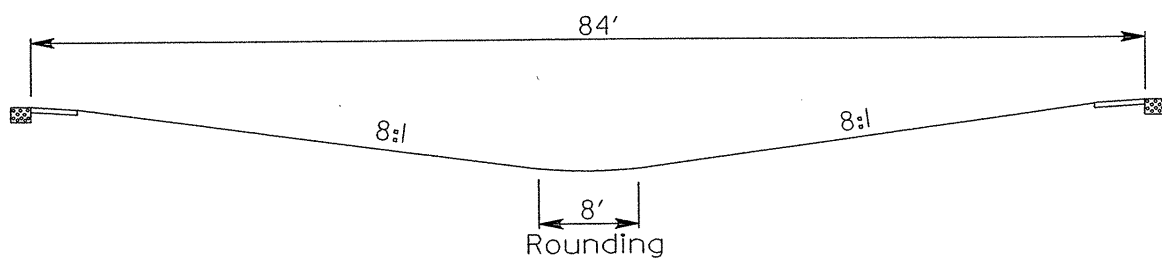


November 2002

STANDARD U-TURN MEDIAN OPENINGS


304-2E

REFERENCE SECTIONS
304.4.3

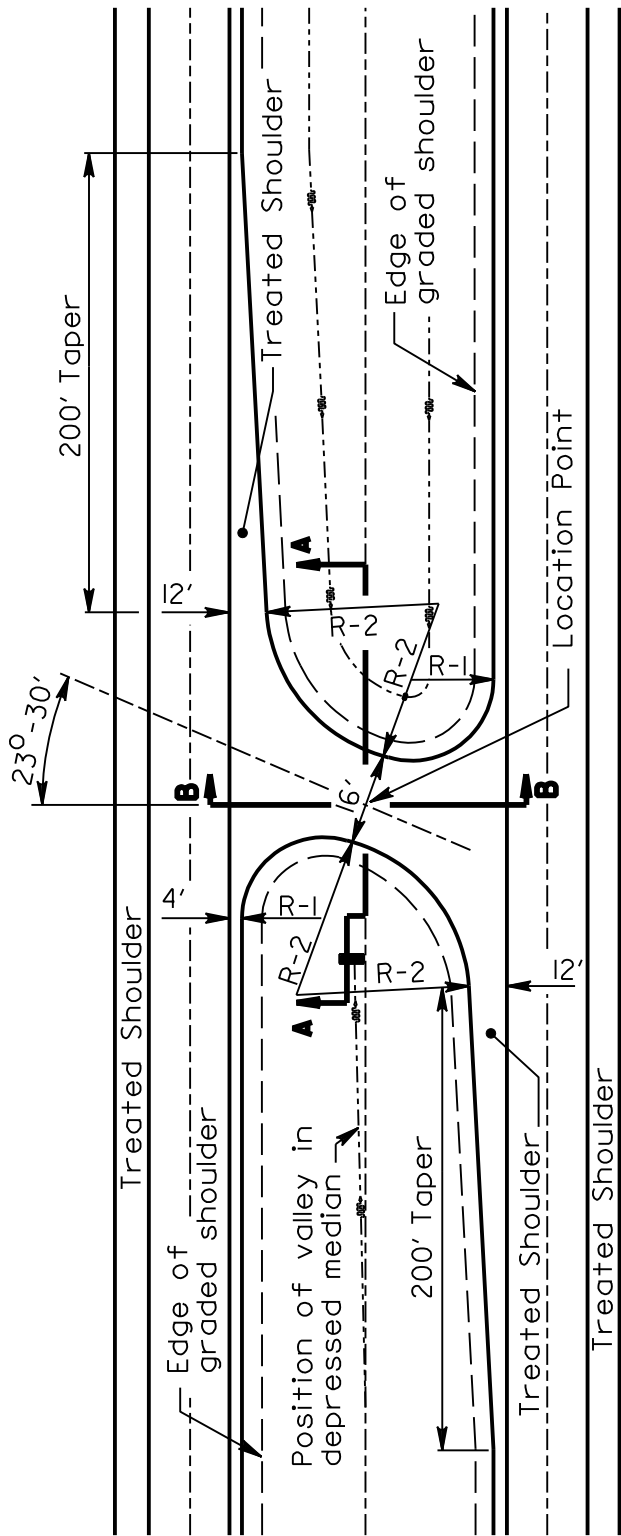

Crossover pavement slope same as mainline profile.


"D" (Below)-Profile Grade Line at Location Point.

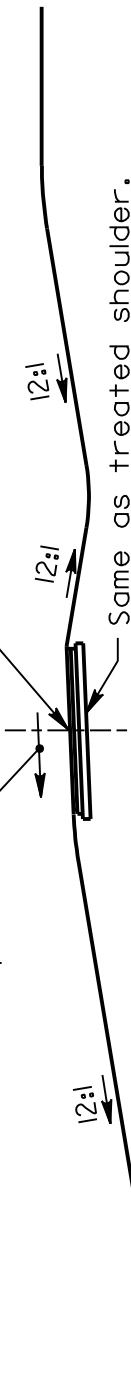

SECTION A-A

DIMENSIONS APPLICABLE TO VARYING MEDIAN WIDTHS			
M	D	R-1	R-2
84'	17.25"	24.87'	55.20'
60'	11.5"	16.31'	35.24'
50'	9.125"	12.73'	26.93'
40'	6.75"	9.16'	18.61'

The values shown do not reflect values needed for CAD accuracy

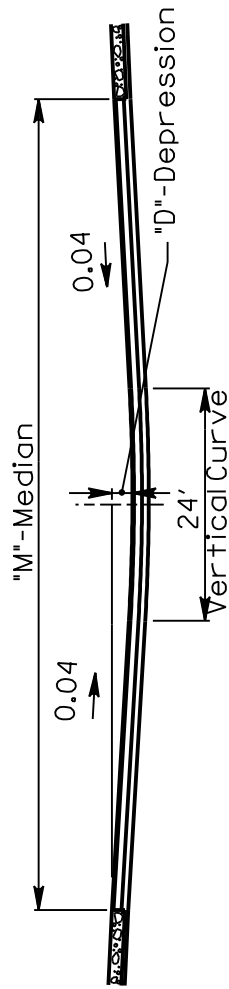

SECTION B-B

GUIDELINES FOR NEW SIDEWALK /WALKWAY INSTALLATIONS

306-1E

REFERENCE SECTIONS
306.2.1


ROADWAY CLASSIFICATION & LAND USE	SIDEWALK/WALKWAY	FUTURE PHASING
Rural Highways (<2,000 ADT)	See AASHTO's <u>A Policy on Geometric Design of Highway and Streets</u> for combined traveled way and shoulder widths for local roads, collectors and arterials	----
Rural/suburban highways (ADT>2,000 and less than 1 dwelling unit per acre)	Minimum 8 ft. shoulders recommended	Secure/preserve ROW for future sidewalks
Suburban Highway (1 to 4 dwelling units per acre)	Sidewalks on both sides recommended	----
Local Urban Street (Residential - 1 to 4 dwelling units per acre)	Sidewalks on both sides preferred, min. of 8 ft. shoulders recommended	Secure/preserve ROW for future sidewalks
Local Urban Street (Residential - 1 to 4 dwelling units per acre)	Sidewalks on both sides recommended	----
Local Urban Street (Residential - more than 4 dwelling units per acre)	Sidewalks on both sides recommended	----
Urban Collector and Minor Arterial (residential)	Sidewalks on both sides recommended	----
Major Urban Arterial (residential)	Sidewalks on both sides recommended	----
All Commercial/Urban Streets	Sidewalks on both sides recommended	----
All Industrial Streets	Sidewalks on both sides preferred, sidewalk on one side and min. of 5 ft. shoulder recommended	----

November 2002


WALK DESIGNS

306-2E


REFERENCE SECTION
306.2.2, 306.2.4

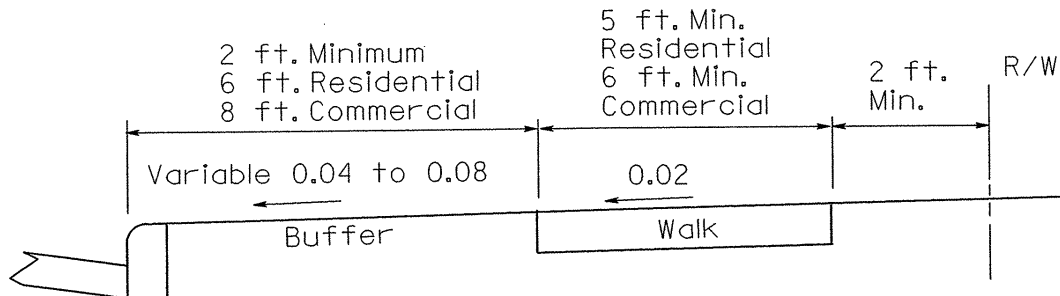


WALK WITH BUFFER

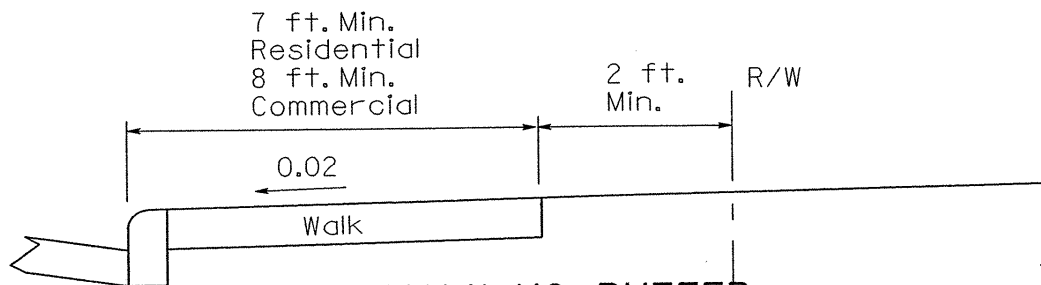

WALK-NO BUFFER

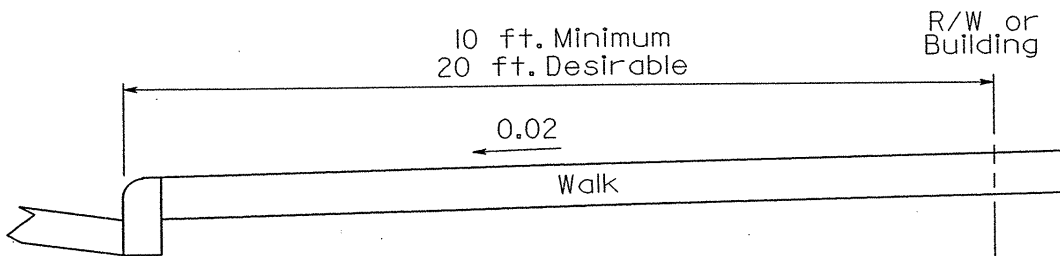

WALK-CENTRAL BUSINESS DISTRICT

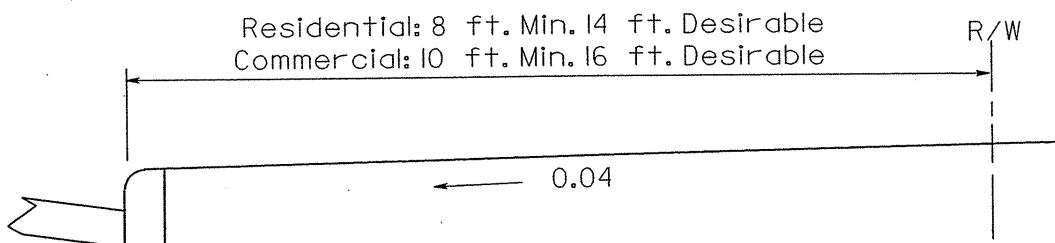


BORDER-NO WALK


CURB RAMP COMPONENTS

306-3E


REFERENCE SECTION
306.3.3

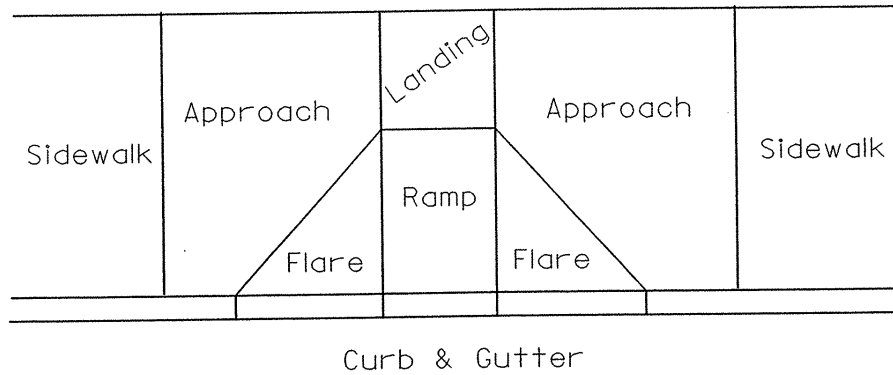

CURB RAMP TERMS

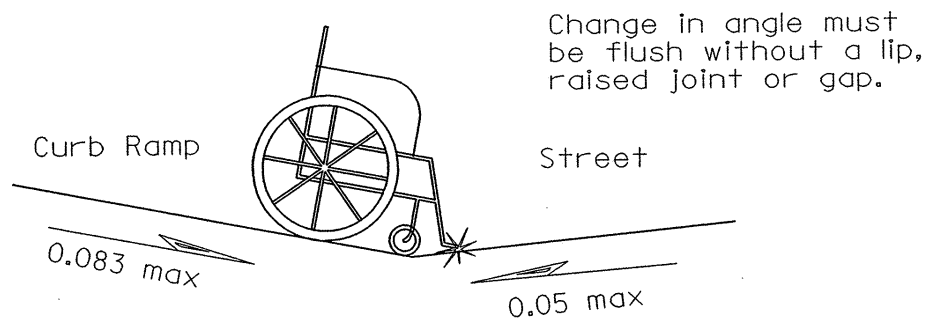

Algebraic difference greater than 11% is not permitted

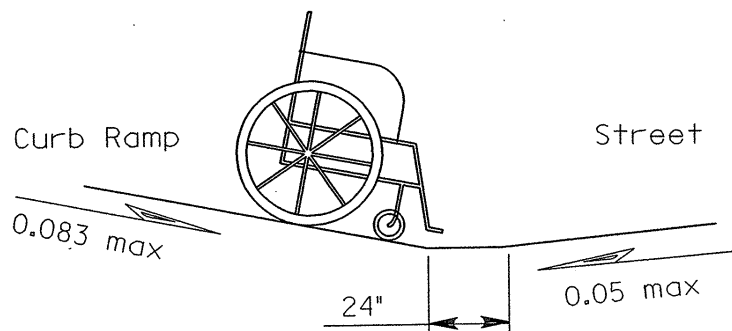

Provide 24 inch level strip if algebraic difference exceeds 11%


COUNTER SLOPE

November 2002


CURB RAMP TYPES AND PEDESTRIAN CURB CUTS

306-4E


REFERENCE SECTION
306.3.4

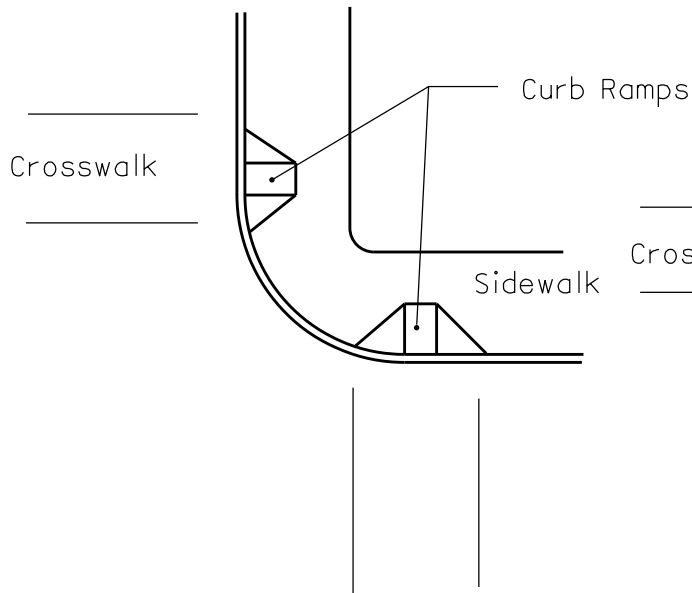


PERPENDICULAR

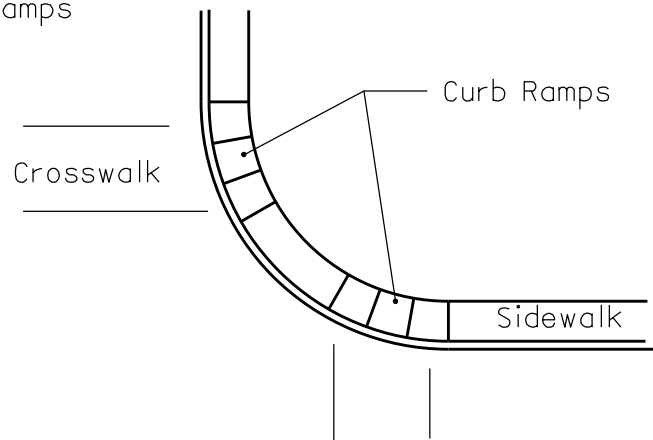

PARALLEL

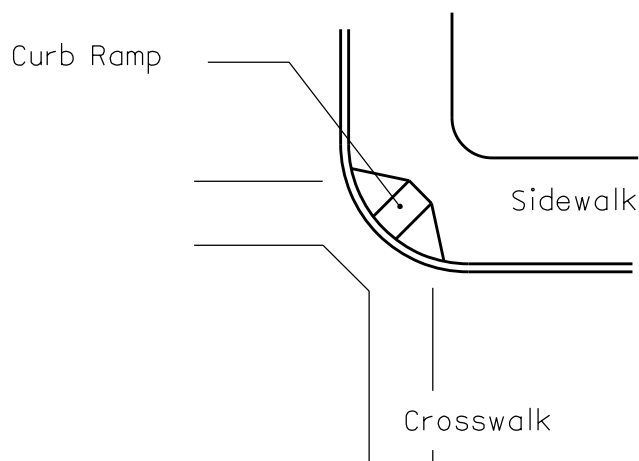

DIAGONAL

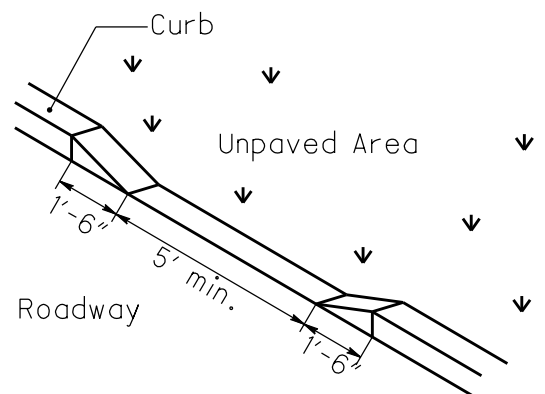


PEDESTRIAN CURB CUT

TRUNCATED DOMES



306-5E

REFERENCE SECTION

306.3.5

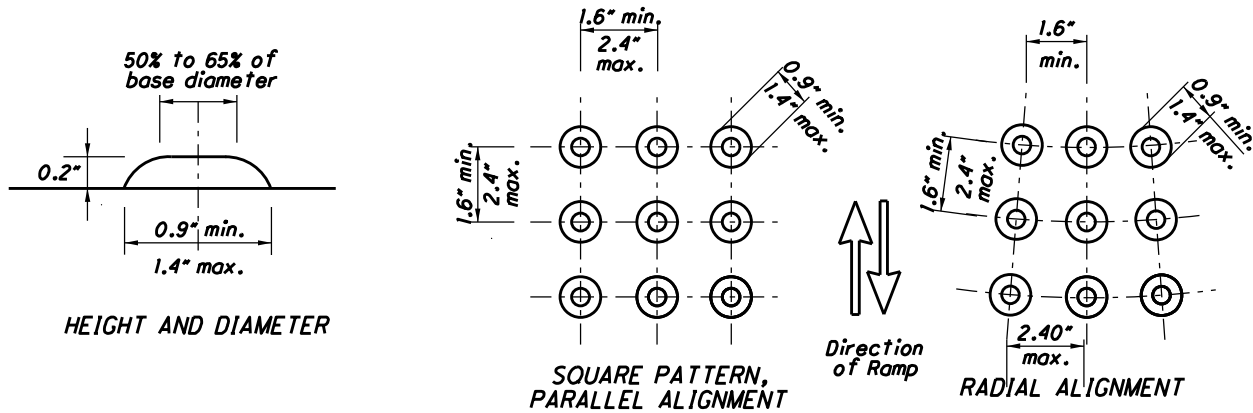

DOME HEIGHT AND SPACING

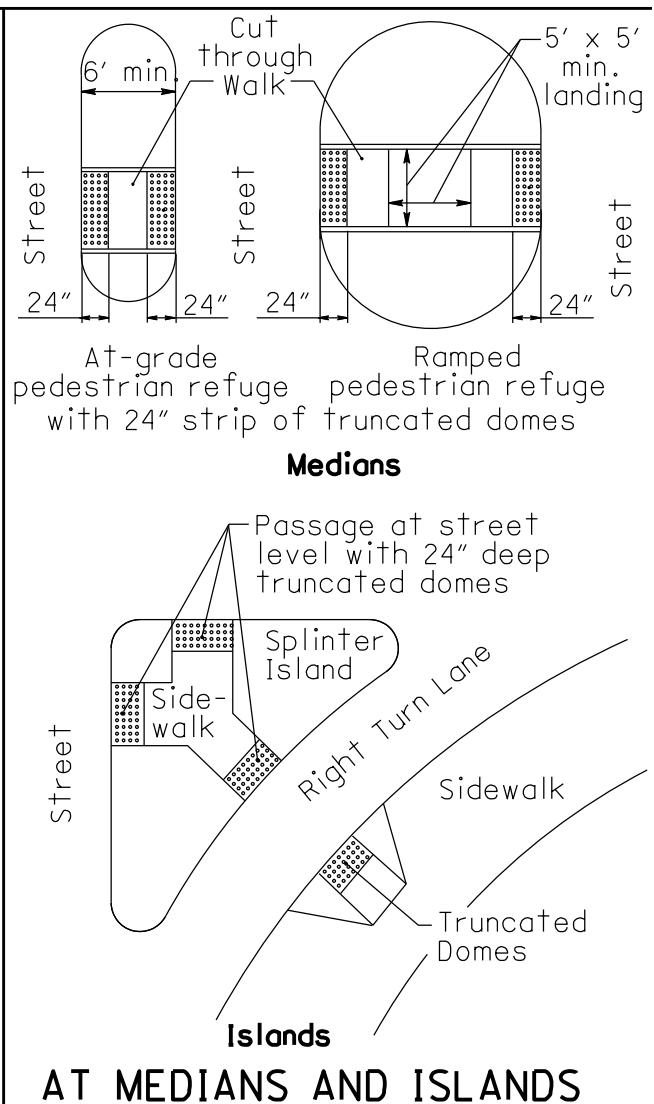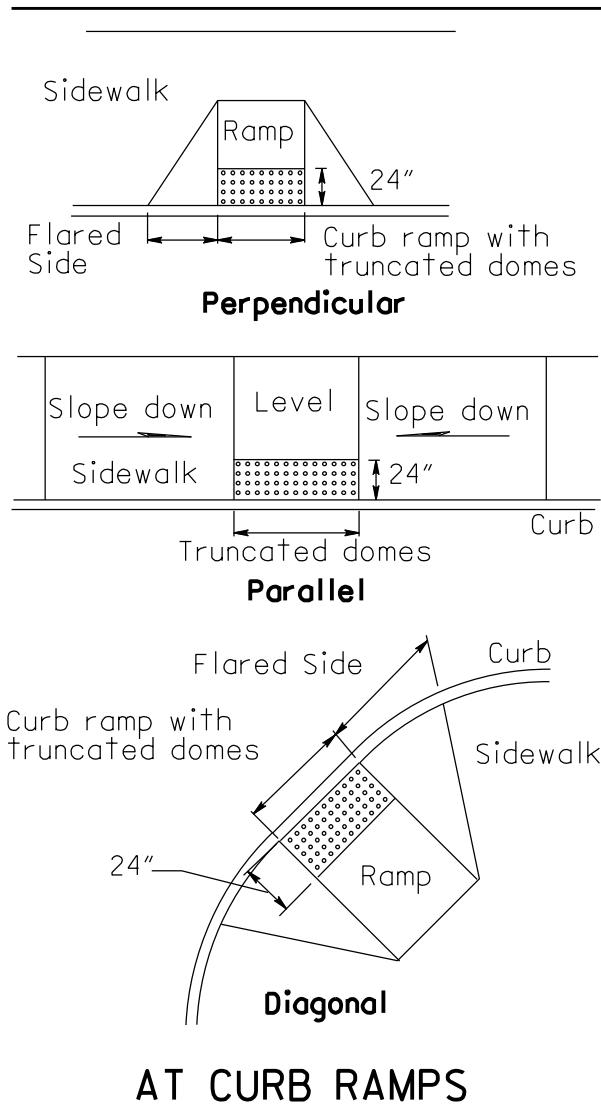


SAFETY GRADING SECTIONS

307-1E

REFERENCE SECTIONS
307.2.1, 307.2.3

CUT SECTION


RURAL INTERSTATE

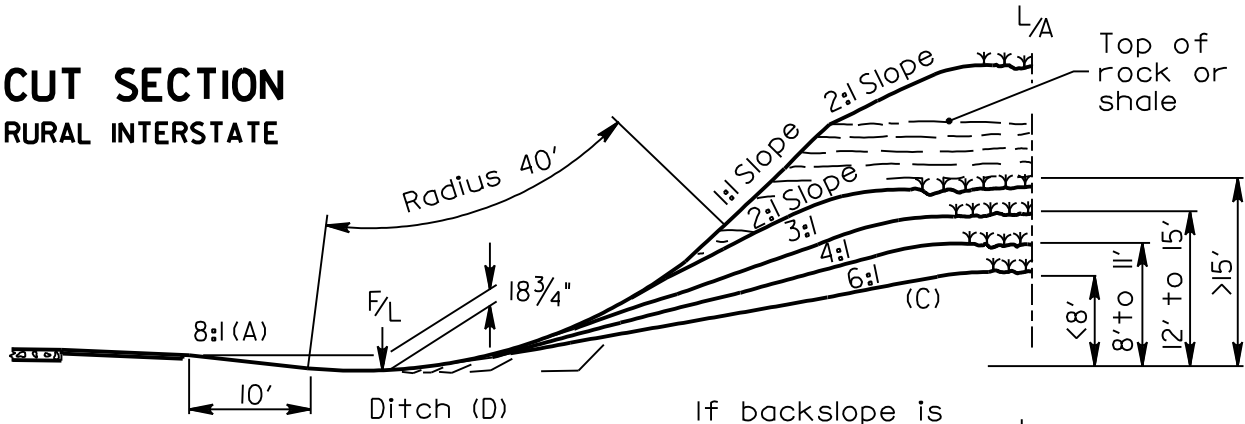

If backslope is greater than 3:1, use 40' radius as shown above.

CUT SECTION


URBAN INTERSTATE,
OTHER FREEWAYS
AND EXPRESSWAYS

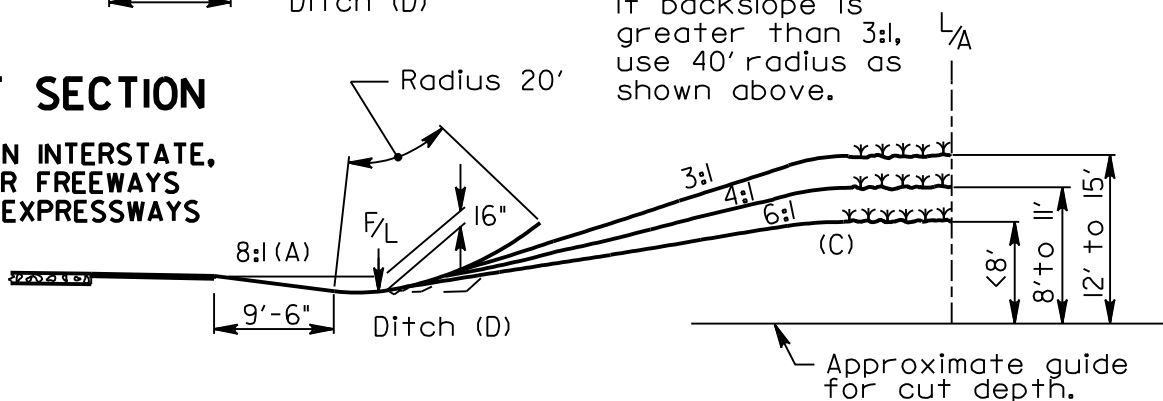

SHALLOW CUT OR LOW FILL



Slope transition between low fill design and medium fill design should be such that the flowline of the roadside ditch does not turn towards the roadway.

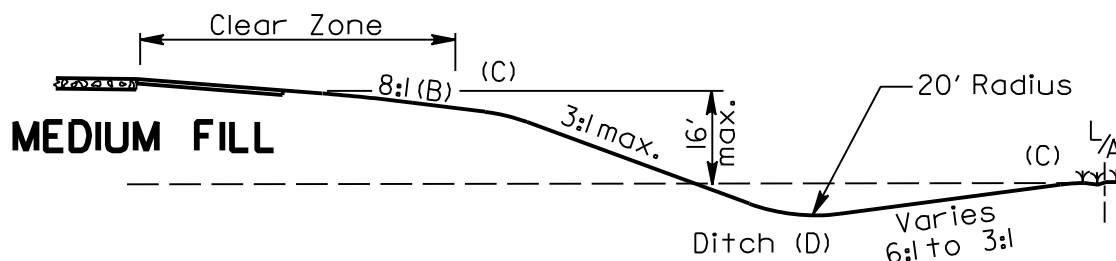

Application of these sections may vary to avoid frequent slope changes and to maintain reasonably straight ditches.

NOTES:

(A) 6:1 slope may be used with horizontal distance remaining the same to increase the ditch depth.

(B) 6:1 slope may be used


(C) 4' Rounding

(D) See **Fig. 307-2** for ditch sections to be used with safety grading

DITCH SECTIONS FOR SAFETY GRADING

307-2E

REFERENCE SECTIONS
307.2.1

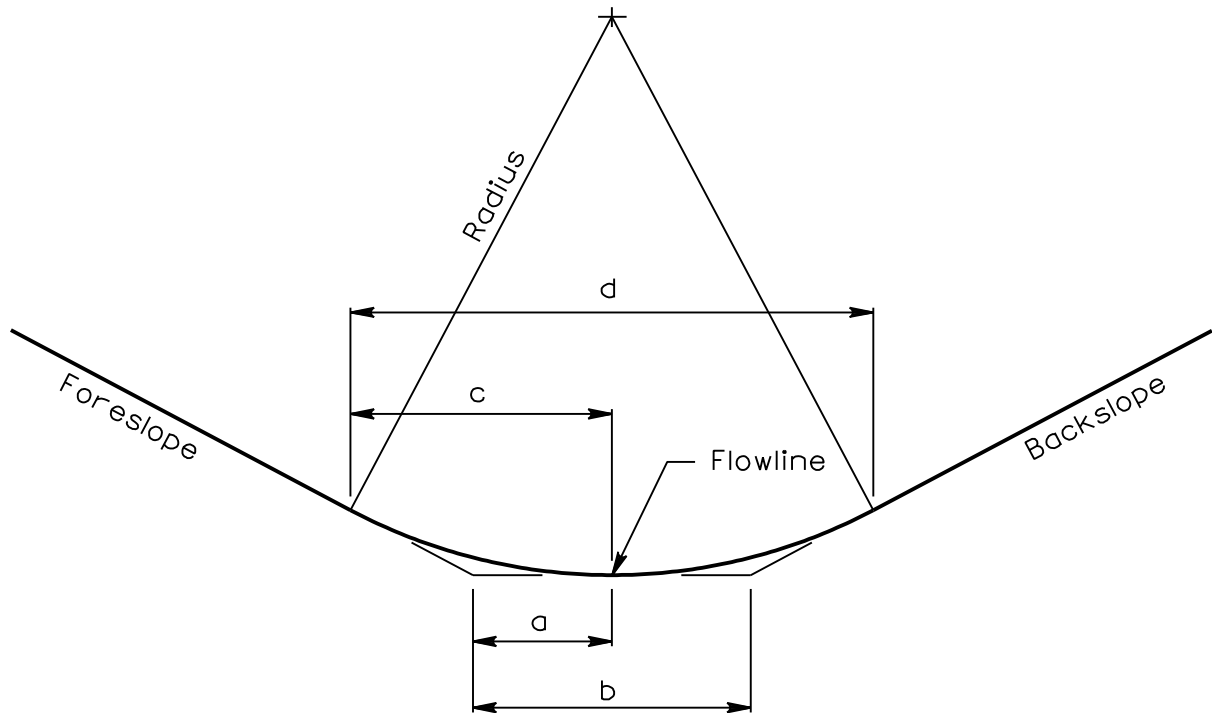

Fore-slope	40' RADIUS		Backslope									
			6:1		4:1		3:1		2:1		1:1	
	a	c	b	d	b	d	b	d	b	d	b	d
8:1	2'-6"	5'-0"	5'-10"	11'-6"	7'-5"	14'-8"	9'-0"	17'-7"	11'-11"	22'-10"	19'-0"	33'-3"
6:1	3'-4"	6'-7"	6'-7"	13'-2"	8'-3"	16'-3"	9'-10"	19'-3"	12'-9"	24'-6"	19'-11"	34'-10"

Fore-slope	20' RADIUS		Backslope					
			6:1		4:1		3:1	
	a	c	b	d	b	d	b	d
8:1	1'-3"	2'-6"	2'-11"	5'-9"	3'-8"	7'-4"	4'-6"	8'-10"
6:1	1'-8"	3'-3"	3'-4"	6'-7"	4'-1"	8'-2"	4'-11"	9'-7"
4:1	2'-6"	4'-10"	4'-1"	8'-2"	4'-11"	9'-8"		
3:1	3'-3"	6'-4"	4'-11"	9'-7"				


January 2005

CLEAR ZONE GRADING SECTIONS



307-3E

REFERENCE SECTIONS
307.2.1, 307.2.3

CUT SECTION

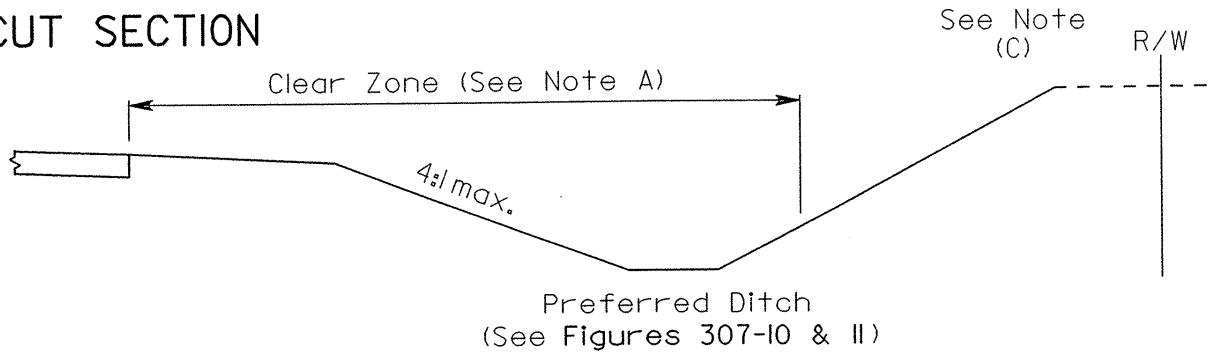

FILL SECTIONS (B)

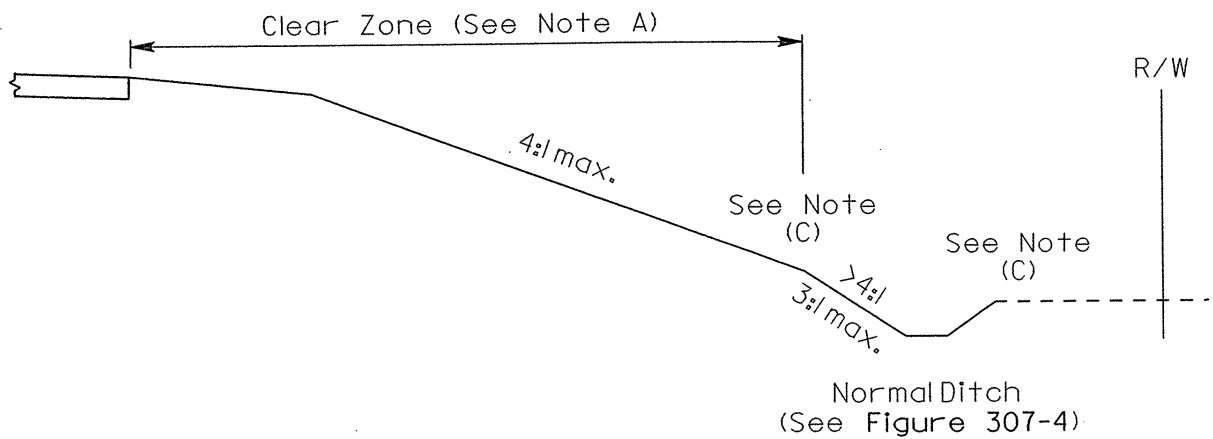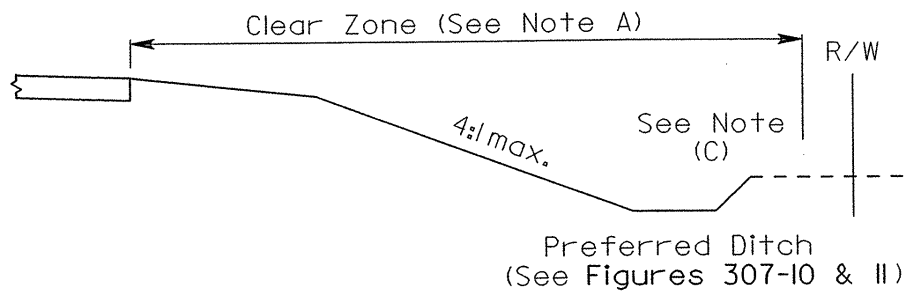

NOTES:

- (A) See Figure 600-1 for Clear Zone widths.
- (B) For fill heights over 16 ft., use barrier grading (See Figure 307-4)
- (C) 4 ft. Rounding


November 2002

COMMON AND BARRIER GRADING SECTIONS


307-4E

REFERENCE SECTIONS
307.2.1, 307.2.3


COMMON GRADING

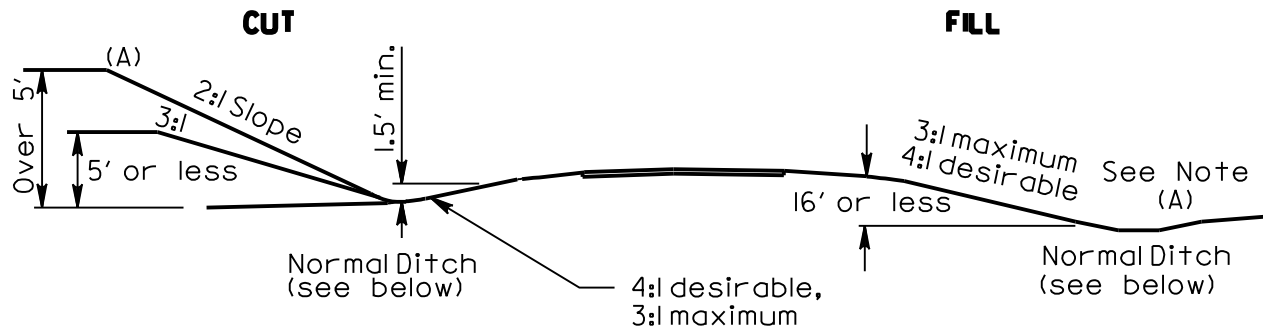

BARRIER GRADING

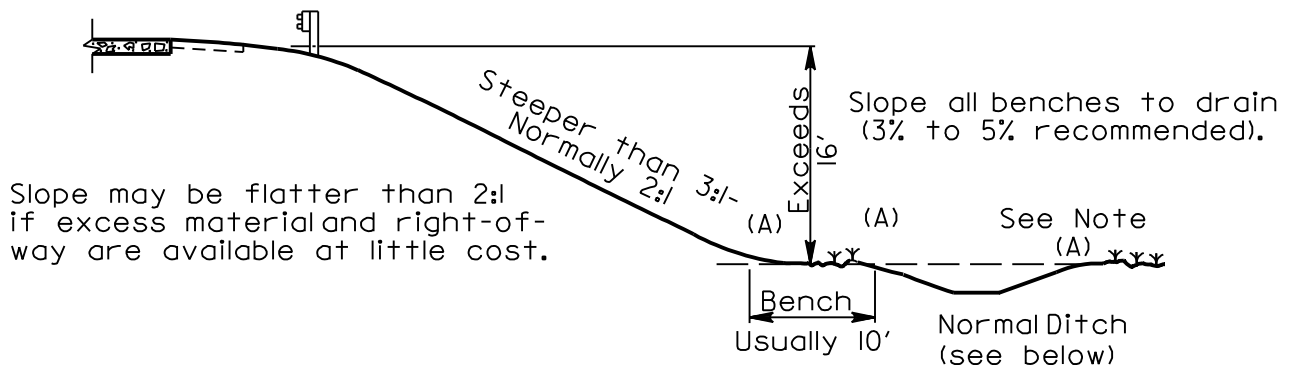

NORMAL DITCH SECTIONS

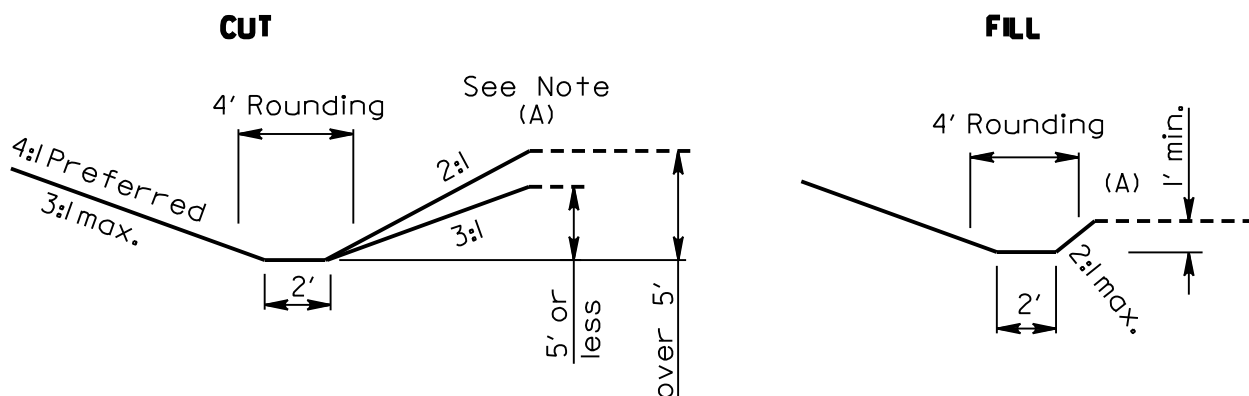

NOTES: (A) 4' Rounding


SPECIAL DESIGNS

307-5E

REFERENCE SECTIONS
307.2.4, 307.2.5,
307.3, 307.4


DESIGNS FOR ROCK CUTS WITH SAFETY GRADING

REFERENCE SECTION 307.2.5

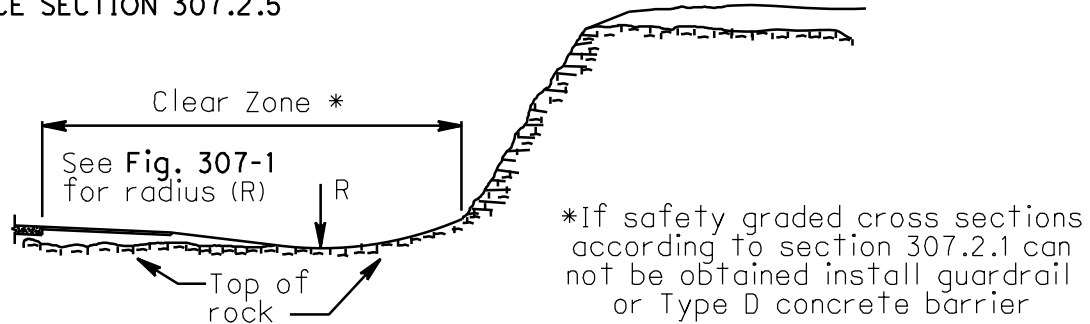


DESIGNS FOR DEEP PARALLEL SIDE DITCHES

REFERENCE SECTIONS 307.3 & 307.4

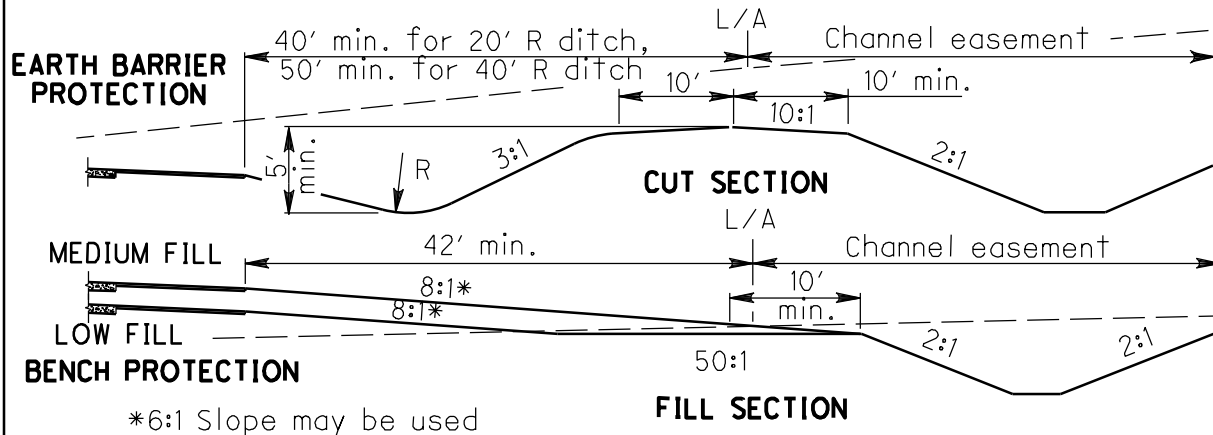

ALTERNATE MEDIAN DESIGNS-SEPARATE PROFILES


REFERENCE SECTION 307.2.4

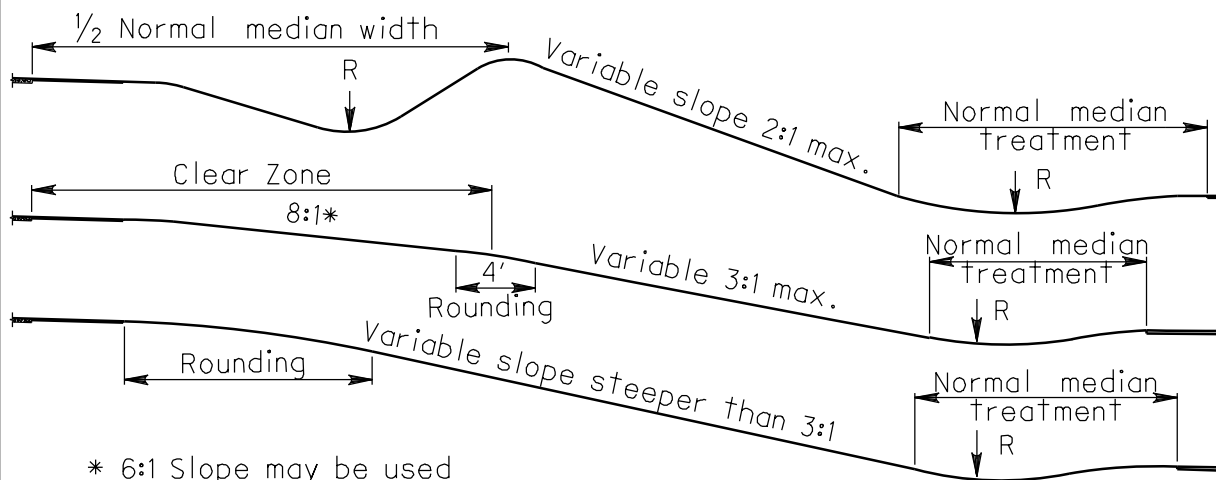

SLOPE TREATMENT ADJACENT TO CURBED STREETS

307-6E

REFERENCE SECTIONS
307.2.6


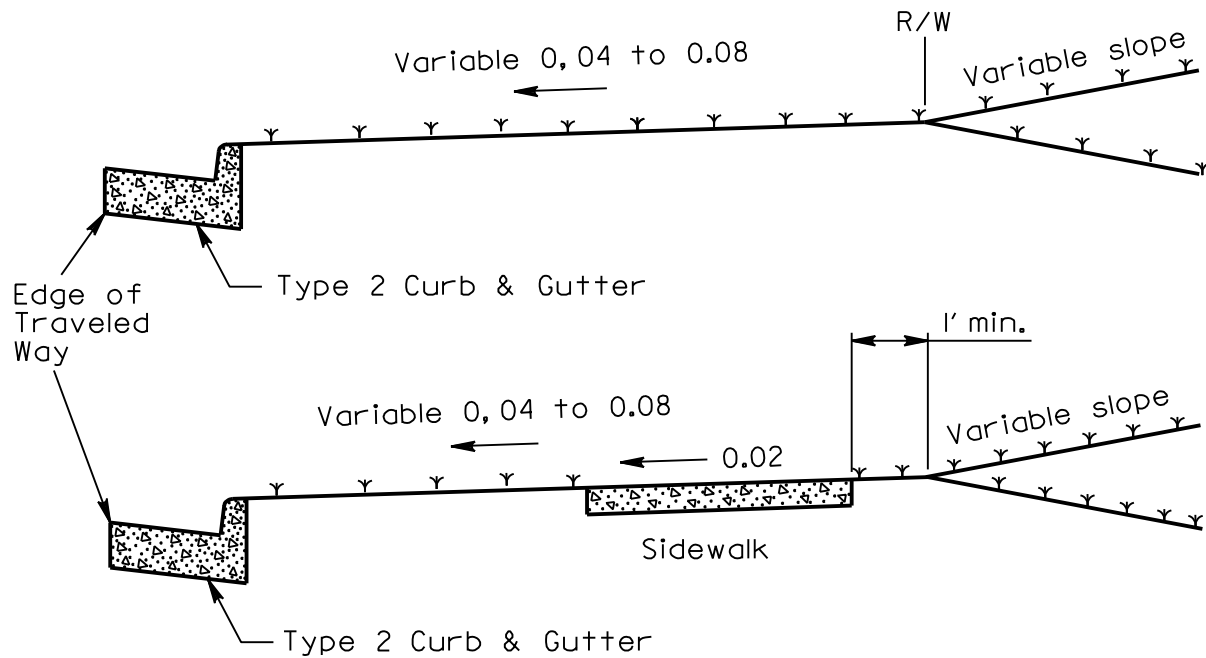


The 4% to 8% slopes in the top detail were extended to the R/W line to prevent runoff from the right-of-way entering private property. This slope may be broken if the highway runoff can be maintained within the highway right-of-way.

SLOPES AND DITCHES AT DRIVEWAYS AND CROSSROADS IN CUT OR LOW FILL

307-7E

REFERENCE SECTIONS
307.2.7

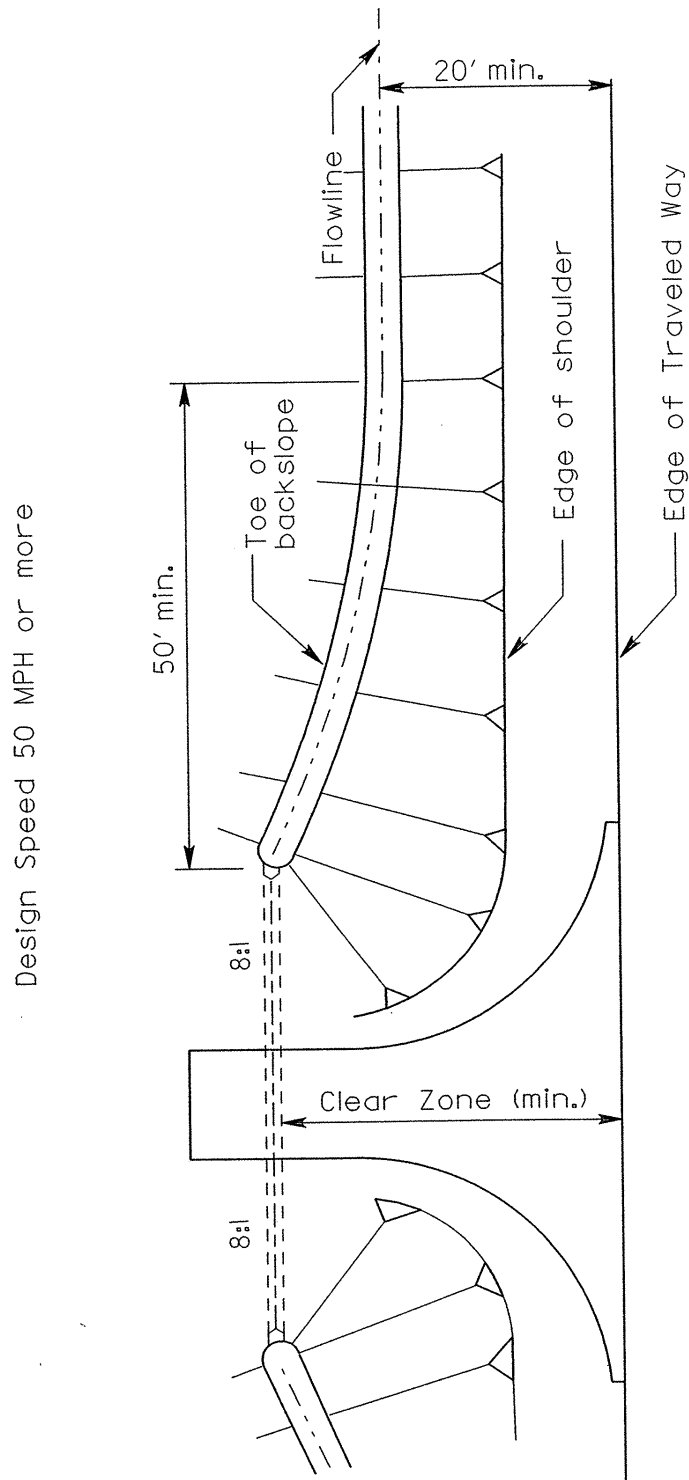


To be used on Clear Zone grading projects
where the roadside ditch flowline is
located within the Clear Zone distance

November 2002

CONTOUR GRADING OF TRUMPET INTERIORS

307-8E

REFERENCE SECTIONS
307.5.3 & 307.5.4

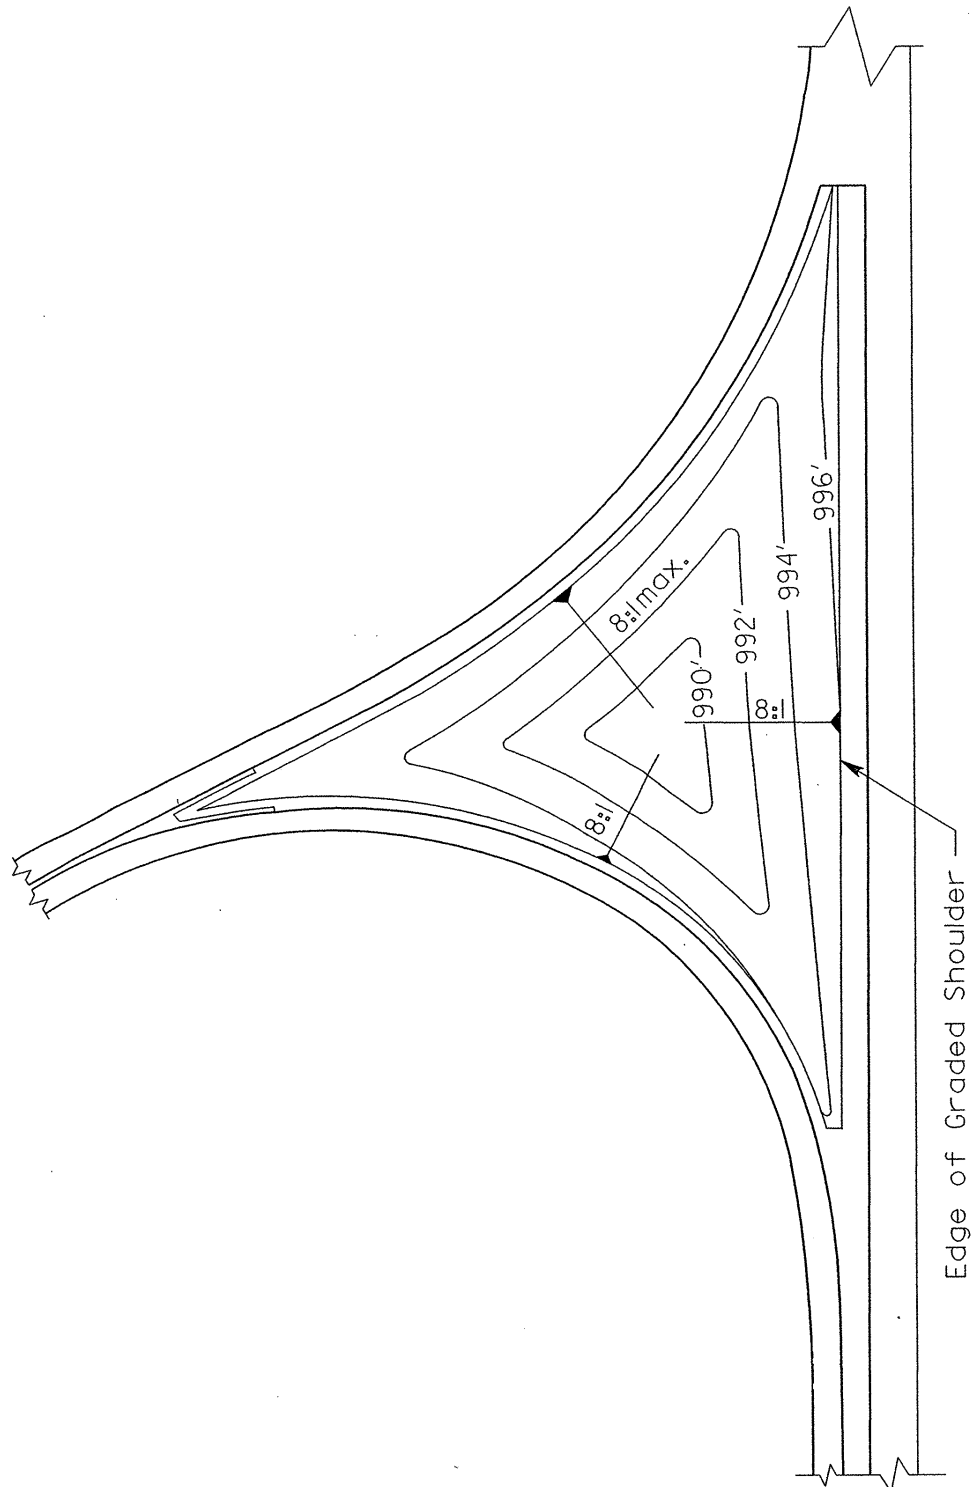


November 2002

CONTOUR GRADING OF LOOP INTERIORS IN CUT

307-9E

REFERENCE SECTIONS
307.5.5


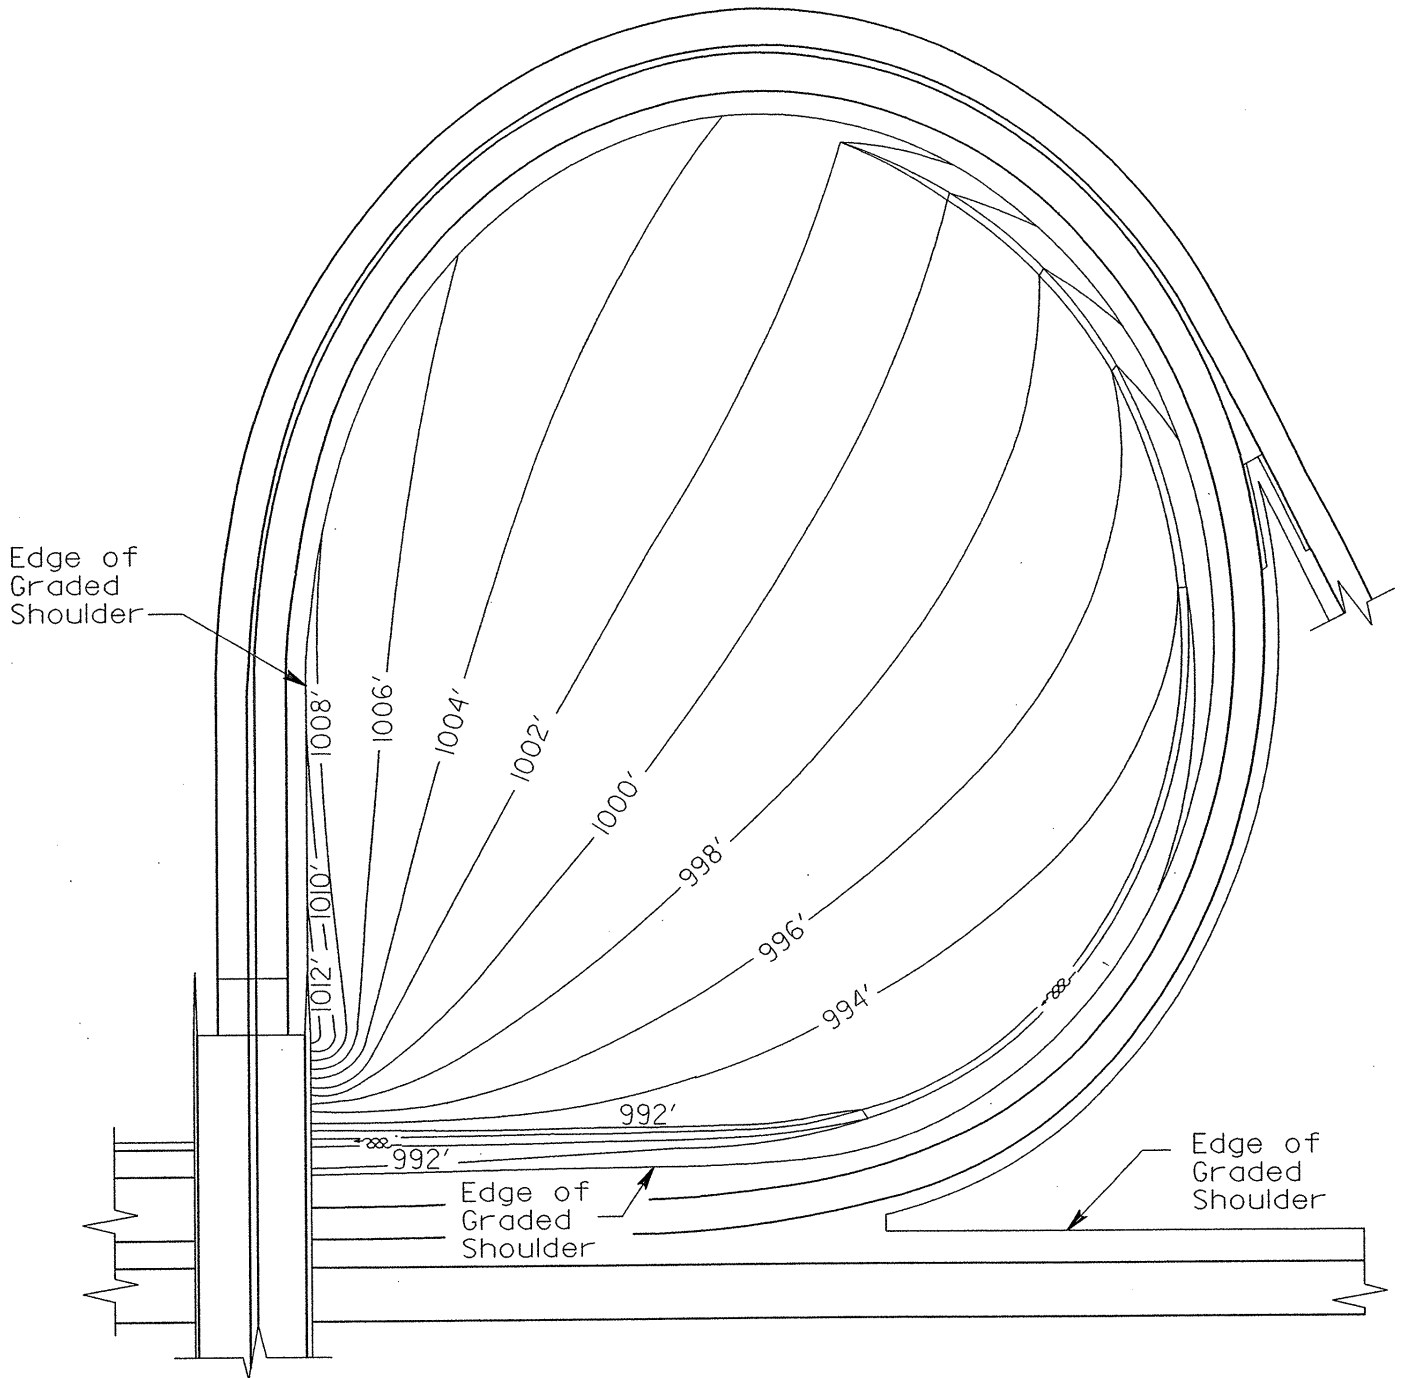


November 2002

PREFERRED CROSS SECTIONS FOR DITCHES WITH ABRUPT SLOPE CHANGES

307-10E

REFERENCE SECTIONS
600.2.1

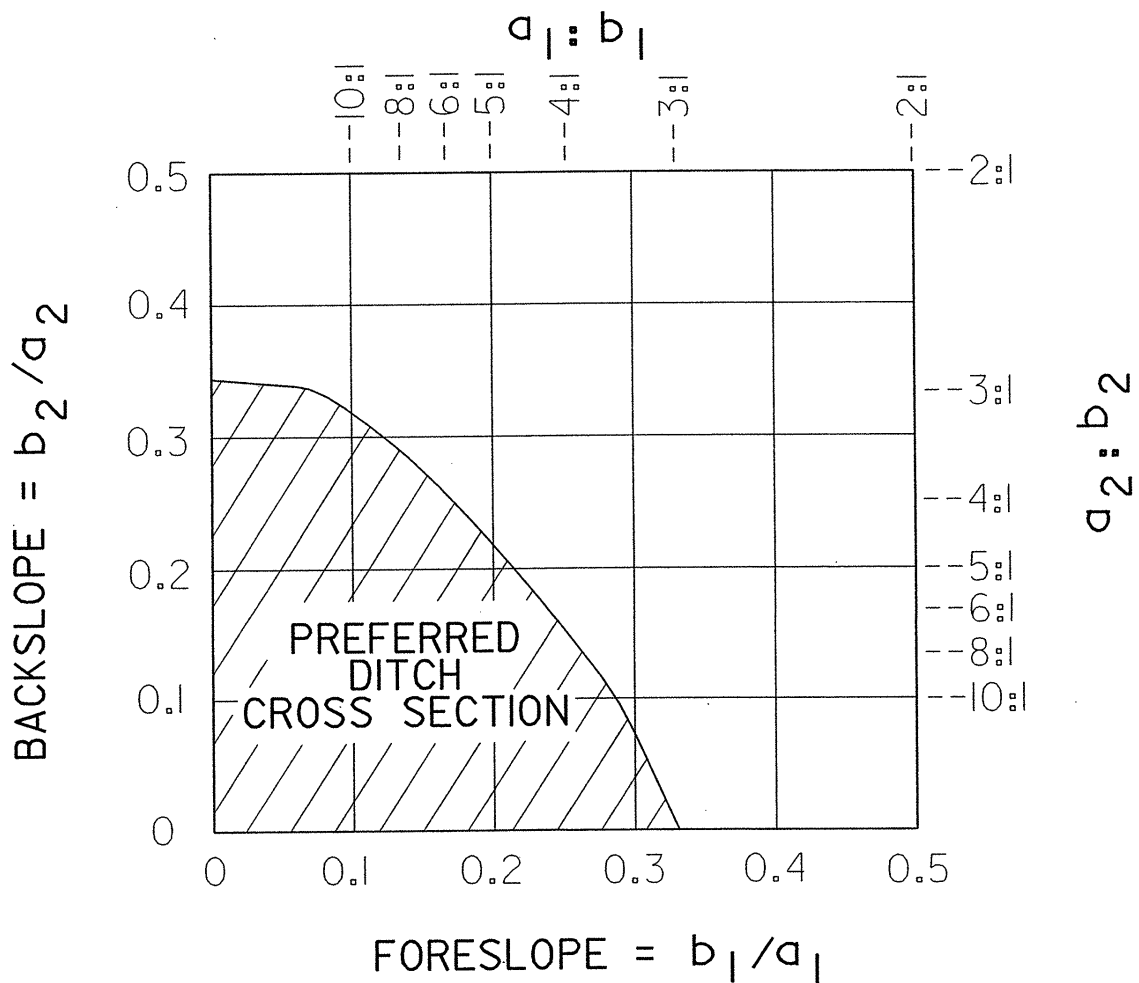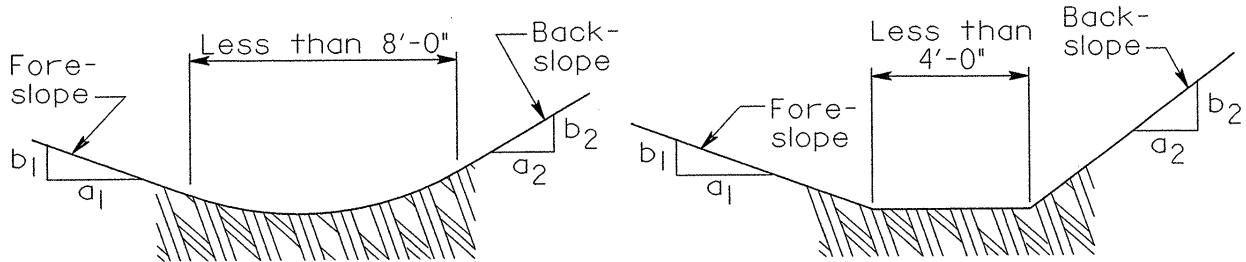



This chart is applicable to vee ditches, rounded ditches with bottom widths less than 8'-0", and trapezoidal ditches with bottom widths less than 4'-0".

Ditch sections that fall within the shaded areas of the figure above are considered traversable and are preferred for use within the Clear Zone. Ditch sections that fall outside the shaded areas are considered non-traversable and should generally be located outside the Clear Zone.

PREFERRED CROSS SECTIONS FOR DITCHES WITH GRADUAL SLOPE CHANGES

307-11E

REFERENCE SECTIONS
600.2.1

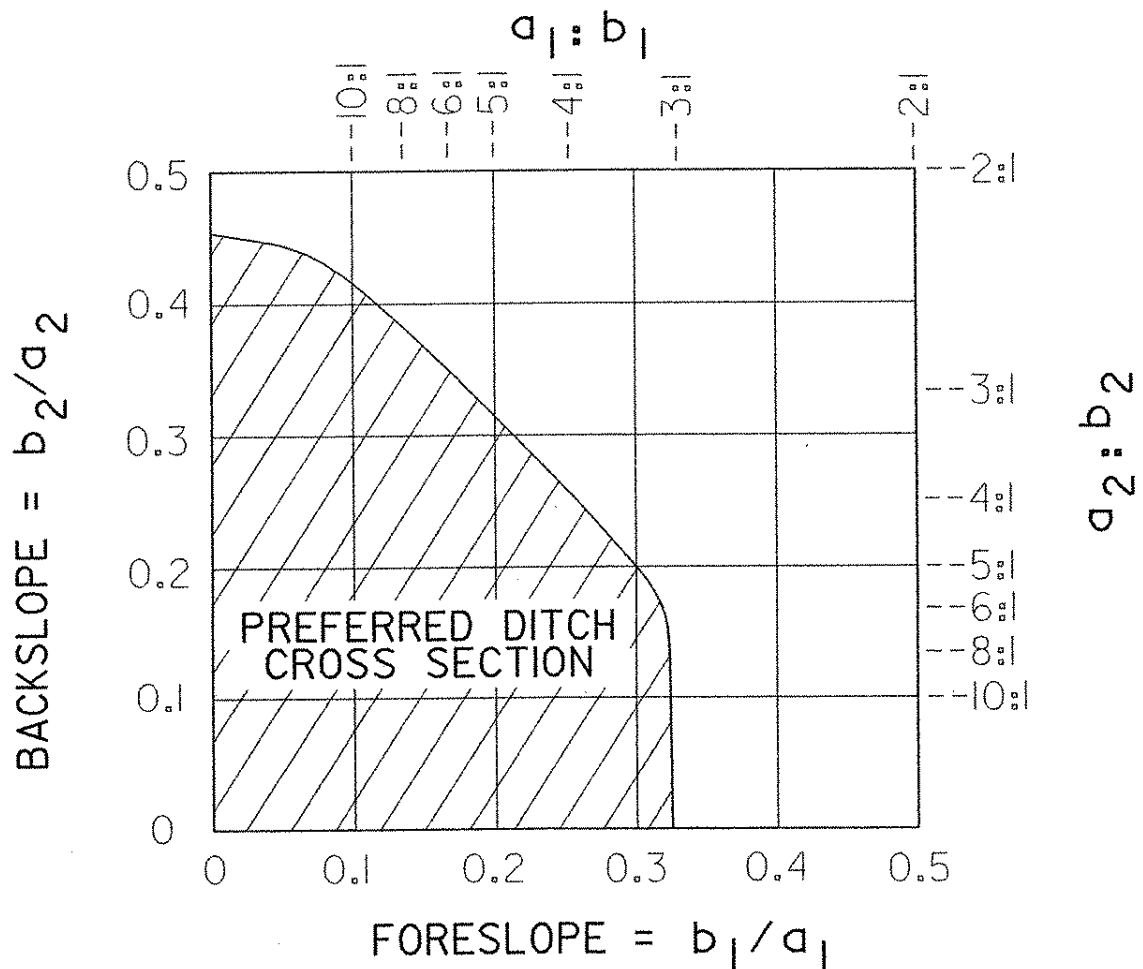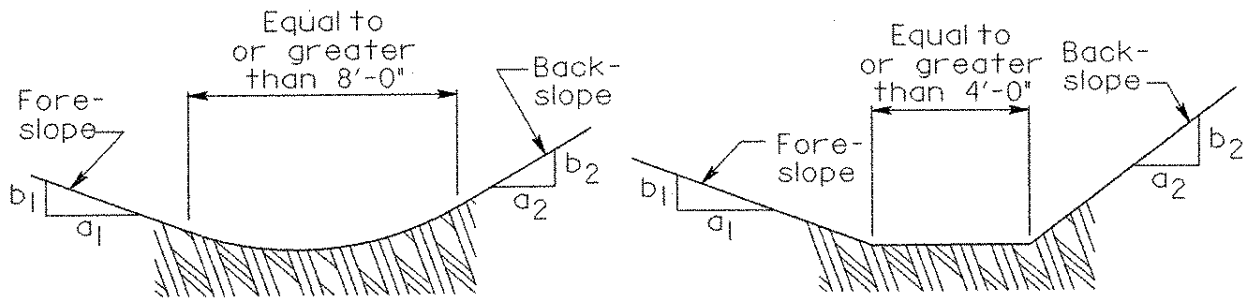

This chart is applicable to rounded ditches with bottom widths of 8'-0" or more, and to trapezoidal ditches with bottom widths equal to or greater than 4'-0".

Ditch sections that fall within the shaded areas of the figure above are considered traversable and are preferred for use within the Clear Zone. Ditch sections that fall outside the shaded areas are considered non-traversable and should generally be located outside the Clear Zone.

November 2002

400 Intersection Design

Table of Contents

401 Intersections At-Grade.....	4-1
401.1 Intersection Locations.....	4-1
401.2 Intersection Traffic Control.....	4-1
401.3 Crossroad Alignment	4-1
401.4 Crossroad Profile	4-1
401.4.1 Intersection Area.....	4-1
401.4.2 Drainage	4-2
401.4.3 Profile at Stop Intersections	4-2
401.4.4 Profile at Signalized Intersections	4-2
401.5 Approach Radii	4-2
401.5.1 Rural	4-2
401.5.2 Urban	4-3
401.5.3 Curbed to Uncurbed Transistors.....	4-3
401.6 Approach Lanes	4-3
401.6.1 Left Turn Lanes.....	4-3
401.6.2 Double Left Turn Lanes	4-4
401.6.3 Right Turn Lanes	4-4
401.6.4 Double Right Turn Lanes.....	4-5
401.6.5 Additional Through Lanes.....	4-5
401.6.6 Recovery Area at Curbed Intersections.....	4-5
401.7 Islands.....	4-5
401.7.1 Characteristics	4-5
401.7.2 Channelizing Islands.....	4-6
401.7.3 Island Treatments	4-6
401.7.3.1 Curbed Islands	4-6
401.7.3.2 Painted Islands	4-6
401.7.3.3 Nonpaved Islands	4-7
401.8 Designing Roadways to Accommodate Pedestrians	4-7
401.8.1 Curb Radii	4-7
401.8.2 Crossing Distance Considerations	4-7
401.8.3 Crossing Islands and Medians.....	4-8
401.8.4 Turning Movements	4-8
402 Two Way Left Turn Lanes (TWLTL).....	4-8
402.1 General.....	4-8
402.2 TWLTL Justification.....	4-8
402.3 TWLTL Design	4-9
402.4 Reversible Lanes.....	4-9
403 Roundabouts.....	4-9
403.1 General.....	4-9

This page is intentionally blank

400 Intersection Design

401 Intersections At-Grade

401.1 Intersection Locations

Care should be taken in locating new at-grade intersections. The alignment and grade on the mainline roadway should, as a minimum, provide stopping sight distance as discussed in **Section 201.2**. The criteria for intersection sight distance (see **Section 201.3**) should also be met wherever possible.

It is best to avoid locating an intersection on a curve. Since this is often impossible, it is recommended that intersection sites be selected where the curve superelevation is 0.04 or less. It is also recommended that intersections be located where the grade on the mainline roadway is 6 percent or less, with 3 percent being the desirable maximum.

401.2 Intersection Traffic Control

The type of traffic control at intersections directly affects the geometric design. An early determination must be made as to whether stop signs will be used or signals are warranted. Whenever there is doubt as to the adequacy of stop control during the design life of the project, the warrants for traffic signals, as outlined in the **Ohio Manual of Uniform Traffic Control Devices (OMUTCD)** should be investigated.

401.3 Crossroad Alignment

Intersection angles of 70 degrees to 90 degrees are to be provided on all new or relocated highways. An angle of 60 degrees may be satisfactory if: (1) the intersection is signalized; or (2) the intersection is skewed such that a driver stopped on the side road has the acute angle (at center of intersection) on his left side (vision not blocked by his own vehicle).

Relocation of the crossroad is often required to meet the desired intersection location, to avoid steep crossroad profile grades and to adjust intersection angles. Horizontal curves on crossroads should be designed to meet the design speed of the crossroad. The crossroad alignment should be as straight as possible. **Figure 401-1** shows an example of a crossroad relocation. Both curve 1 and curve 3 may be reduced per the figure. Design exceptions for horizontal alignment and superelevation will be required for curves which do not meet the design speed of the crossroad.

401.4 Crossroad Profile

401.4.1 Intersection Area

The portion of the intersection located within 60 ft. [20 m] of the edge of the mainline pavement, measured along the crossroad centerline, is considered to be the "intersection area". The pavement surface within this "intersection area" should be visible to drivers within the limits of the minimum stopping sight distance shown on **Figure 201-1**. By being able to see the pavement surface (height of object of 0), drivers (height of eye of 3.5 ft.) [1.07 m] will be able to observe the radius returns, pavement markings, and recognize that they are approaching an intersection. **Figure 401-2** shows the "intersection area".

Combinations of pavement cross slopes and profile grades may produce unacceptable edge of pavement profiles in the "intersection area". For this reason, edge of pavement profiles should be plotted and graphically graded to provide a smooth profile.

400 Intersection Design

401.4.2 Drainage

Within the intersection area, the profile of the crossroad should be sloped wherever possible so the drainage from the crossroad will not flow across the through road pavement. For a stop condition, the 10 ft. [3.0 m] of crossroad profile adjacent to the through pavement is normally sloped away from the through pavement, using at least a 1.6 percent grade, as shown on **Figure 401-2**.

401.4.3 Profile at Stop Intersections

Profile grades within the "intersection area" for stop conditions are shown in **Figures 401-2** and **401-3**. The grade outside the "intersection area" is controlled by the design speed of the crossroad. Normal design practices can be used outside the "intersection area" with the only restriction on the profile being the sight distance required in **Section 401.4.1**.

Grade breaks are permitted at the edge of the mainline pavement for a stop condition as discussed in Note 3 of **Figure 401-2**. If these grade breaks are exceeded, they should be treated according to Note 3 on **Figure 401-3**. Several examples are shown on **Figure 401-3** of the use of grade breaks or short vertical curves adjacent to the edge of through pavement.

401.4.4 Profile at Signalized Intersections

Signalized intersections require a more sophisticated crossroad profile. Whenever possible, profiles through the intersection area of a signalized intersection should be designed to meet the design speed of the crossroad. **Figure 401-4** shows three examples of crossroad profiles at intersections. On Examples A and B (**Figure 401-4**), the mainline cross slopes will need to be adjusted to match the crossroad profile within the intersection area. Grade breaks shown on Examples A and C should be in accordance with **Section 203.3.2**. Since the grade break across a normal crowned pavement is 3.2 percent, it should be noted that the crown must be flattened (See Example C). This will allow vehicles on the crossroad to pass through the intersection on a green signal safely without significantly adjusting their speed. The sight distance requirements of **Section 401.4.1** within the "intersection area" are also applicable for signalized intersections.

401.5 Approach Radii

401.5.1 Rural

Approach radii in rural areas shall normally be 50 ft. [15 m], except that radii less than 50 ft. (minimum 35 ft.) [15 m (minimum 10.5 m)] may be used at minor intersecting roads if judged appropriate for the volume and character of turning vehicles.

Radii larger than 50 ft. [15 m], a radius with a taper, or a three center curve, should be used at any intersection where the design must routinely accommodate semi-trailer truck turning movements. Truck turning templates should be used to determine proper radii and stop bar location. When truck turning templates are used, a 2 foot [0.6 m] clearance should be provided between the edge of pavement and the closest tire path.

Normally the approach width at the ends of the radius returns should be 24 ft. [7.2 m]. The pavement width shall be tapered back to the normal pavement width at a rate of 10:1 if the taper is adjacent to the radius returns.

400 Intersection Design

401.5.2 Urban

Corner radii at street intersections should consider the right of way available, the intersection angle, pedestrian traffic, approach width and number of lanes. The following should be used as a guide:

15 to 25 ft. [4.5 to 7.5 m] radii are adequate for passenger vehicles and may be provided at minor cross streets where there are few trucks or at major intersections where there are parking lanes.

25 ft. [7.5 m] or more radii should be provided at minor intersections on new or reconstruction projects where space permits.

30 ft. [9 m] radii or more should be used where feasible at major cross street intersections.

Radii of 40 ft. [12 m] or more, three-centered compound curves or simple curves with tapers to fit truck paths should be provided at intersections used frequently by buses or large trucks.

401.5.3 Curbed to Uncurbed Transitions

Figures 401-4a and 401-4b show acceptable methods to transition from curbed to uncurbed roadways at intersections. **Figure 401-4a** shows two options to transition from an uncurbed mainline roadway to a curbed approach roadway. **Figure 401-4b** shows the transition from a curbed mainline roadway to an uncurbed approach roadway. See Section 305.4 for additional information.

401.6 Approach Lanes

401.6.1 Left Turn Lanes

Probably the single item having the most influence on intersection operation is the treatment of left turn vehicles. Left turn lanes are generally desirable at most intersections. However, cost and space requirements do not permit their inclusion in all situations. Intersection capacity analysis procedures of the current edition of the Highway Capacity Manual should be used to determine the number and use of left turn lanes. For design software and guidance see **Appendix C**. For unsignalized intersections, left turn lanes may also be needed if they meet warrants as provided in **Figures 401-5a, b, and c**. The warrants apply only to the free-flow approach of the unsignalized intersection.

Left turn lanes should be placed opposite each other on opposing approaches to enhance sight distance. They are developed in several ways depending on the available width. The first example on **Figure 401-7** shows the development required when additional width must be generated. The additional width is normally accomplished by widening on both sides. However, it could be done all on one side or the other. In the second example on **Figure 401-7**, the median width is sufficient to permit the development of the left turn lane. **Figure 401-8** shows the condition where an offset left turn lane is required to obtain adequate sight distance in wide medians.

In developing turn lanes, several types of tapers may be involved as shown in **Figure 401-7**.

1. Approach Taper - An approach taper directs through traffic to the right. Approach taper lengths are calculated using the following:

Design Speed of 50 mph [80 km/h] or more: $L=WS$ [$L=0.6WS$]

400 Intersection Design

Design speed less than 50 mph [80 km/h]: $L = WS^2/60$ [$L = WS^2/156$]

Where: L = Approach taper length in feet [m]
W = Offset width in feet [m]
S = Design Speed [km/h]

- 2.. Departure Taper - The departure taper directs through traffic to the left. Its length should not be less than that calculated using the approach taper equations. Normally, however, the departure taper begins opposite the beginning of the full width turn lane and continues to a point opposite the beginning of the approach taper.
3. Diverging Taper - The diverging taper is the taper used at the beginning of the turn lane. The recommended length of a diverging taper is 50 ft. [15 m].

Figures 401-9 and **401-10** have been included to aid in determining the required lengths of left turn lanes at intersections. An example problem that illustrates the use of these figures is included along with the figures.

After determining the length of a left turn lane, the designer should also check the length of storage available in the adjacent through lane(s) to assure that access to the turn lane is not blocked by a backup in the through lane(s). To do this, **Figure 401-10** may be entered using the average number of through vehicles per cycle, and the required length read directly from the table. If two or more lanes are provided for the through movement, the length obtained should be divided by the number of through lanes to determine the required storage length.

It is recommended that left turn lanes be at least 100 ft. [30 m] long, and the maximum storage length be no more than 600 ft. [180 m].

The width of a left turn lane should desirably be the same as the normal lane widths for the facility. A minimum width of 11 ft. [3.3 m] may be used in moderate and high speed areas, while 10 ft. [3.0 m] may be provided in low speed areas. Additional width should be provided whenever the lane is adjacent to a curbed median as discussed in **Section 305.3**.

401.6.2 Double Left Turn Lanes

Double left turn lanes should be considered at any signalized intersection with left turn demands of 300 vehicles per hour or more. The actual need shall be determined by performing a signalized intersection capacity analysis. For design software and guidance see **Appendix C**. Fully protected signal phasing is required for double left turns.

When the signal phasing permits simultaneous left turns from opposing approaches, it may be necessary to laterally offset the double left turn lanes on one approach from the left turn lane(s) on the opposing approach to avoid conflicts in turning paths. All turning paths of double left turn lanes should be checked with truck turning templates allowing 2 ft. [0.6 m] between the tire path and edge of each lane. Expanded throat widths are necessary for double left turn lanes. For details on double left turn lanes, see **Figures 401-11** and **401-12**.

400 Intersection Design

401.6.3 Right Turn Lanes

Exclusive right turn lanes are less critical in terms of safety than left turn lanes. Right turn lanes can significantly improve the level of service of signalized intersections. They also provide a means of safe deceleration for right turning traffic on high-speed facilities and separate right-turning traffic at stop-controlled intersections.

To determine the need for right turn lanes, intersection capacity analysis procedures of the current edition of the Highway Capacity Manual should be used. For design software and guidance see **Appendix C**. For unsignalized intersections, right turn lanes may also be needed if they meet warrants as provided in **Figures 401-6a, b, c and d**. The warrants apply only to the free-flow approach of the unsignalized intersection.

Figure 401-7 shows the design of right turn lanes. **Figure 401-10** may be used in preliminary design to estimate the storage required at signalized intersections. The recommended maximum length of right turn lanes at signalized intersections is 800 ft. [240 m], with 100 ft [30 m] being the minimum length.

The blockage of the right turn lane by the through vehicles should also be checked using **Figure 401-10**. With right-turn-on-red operation, it is imperative that access to the right turn lane be provided to achieve full utilization of the benefits of this type of operation.

The width of right turn lanes should desirably be equal to the normal through lane width for the facility. In low speed areas, a minimum width of 10 ft. [3.0 m] may be provided. Additional lane width should be provided when the right turn lane is adjacent to a curb.

401.6.4 Double Right Turn Lanes

Double right turn lanes are rarely used. When they are justified, it is generally at an intersection involving either an off-ramp or a one-way street. Double right turn lanes require a larger intersection radius (usually 75 ft. [22.5 m] or more) and a throat width comparable to a double left turn (See **Section 401.6.2** and **Figure 401-11**).

401.6.5 Additional Through Lanes

Normally the number of through lanes at an intersection is consistent with the number of lanes on the basic facility. Occasionally, through lanes are added on the approach to enhance signal design. As a general suggestion, enough main roadway lanes should be provided so that the total through plus turn volumes does not exceed 450 vehicles per hour per lane.

401.6.6 Recovery Area at Curbed Intersections

When a through lane becomes a right turn lane at a curbed intersection, an opposite-side tapered recovery area should be considered. The taper should be long enough to allow a trapped vehicle to escape, but not so long as to appear like a merging lane. Taper lengths may vary from 200 ft to 250 ft [60 m to 75 m] depending on design speed.

400 Intersection Design

401.7 Islands

401.7.1 Characteristics

An island is a defined area between traffic lanes used for control of vehicle movement. Islands also provide an area for pedestrian refuge and traffic control devices. Islands serve three primary functions: (1) to control and direct traffic movement, usually turning; (2) to divide opposing or same direction traffic streams usually through movements; and (3) to provide refuge for pedestrians. Most islands combine functions.

Although certain situations require the use of islands, they should be used sparingly and avoided wherever possible.

401.7.2 Channelizing Islands

Channelizing islands control and direct traffic into the proper paths for the intended use and are an important part of intersection design. They may be of many shapes and sizes, depending on the conditions and dimensions of the intersection. A common form is the corner triangular shape that separates right turning traffic from through traffic. **Figures 401-13a, b, c and d** detail Channelizing Island designs for various vehicle combinations.

Channelizing Islands are used at intersections for the following reasons:

Separation of conflicts.

Control of angle of conflict.

Reduction in excessive pavement areas.

Indication of proper use of intersection

Favor a predominant turning movement.

Pedestrian protection.

Protection and storage of vehicles.

Location of traffic control devices.

These islands should be placed so that the proper course of travel is immediately obvious and easy for the driver to follow. Care should be given to the design when the island is on or beyond a crest of a vertical curve, or where there is a substantial horizontal curvature on the approach to or through the channelized area.

Properly placed islands are advantageous where through and turning movements are heavy.

400 Intersection Design

401.7.3 Island Treatments

401.7.3.1 Curbed Islands

Curbed islands are most often used in urban areas where traffic is moving at relatively low speeds (less than 50 mph [80 km/h]). The smallest curbed island that should normally be considered is 50 sq. ft. [5 square m] in an urban area and 75 sq. ft. [7.5 square m] if used in a rural area. A 100 sq. ft. [10 square m] island is preferred in either case. Curb Islands are sometimes difficult to see at night, so the intersection should have fixed source lighting.

401.7.3.2 Painted Islands

Islands delineated by pavement markings are often preferred in rural or lightly developed areas, when approach speeds are relatively high, where there is little pedestrian traffic, where fixed-source lighting is not provided, or where traffic control devices are not located within the island.

401.7.3.3 Nonpaved Islands

Nonpaved islands are normally used in rural areas. They are generally turf and are depressed for drainage purposes.

401.8 Designing Roadways to Accommodate Pedestrians

Designing a roadway that successfully meets the needs of both vehicular traffic and pedestrians can be a challenging task. Basic roadway design parameters such as roadway widths, corner turning radii and sight distances affect the ability of that roadway to accommodate pedestrians.

For example, the wider the roadway, the more difficult it is for pedestrians to cross, and the greater the barrier effect of this roadway on the communities through which it passes. Undivided six-lane arterials, with or without parking, are not usually pedestrian friendly, while eight and ten-lane arterials create an even more formidable barrier.

The size of a corner radius can also have a significant effect on the overall operation and safety of an intersection. Large corner turning radii promote higher turning speeds, as well as increasing the pedestrian crossing distance and exposure time. Large curb radii also reduce the space for pedestrians waiting to cross, move pedestrians out of the turning motorists' line of sight, and make it harder for the pedestrian to see turning cars. However, in some cases, corners with small turning radii can impact the overall operating efficiency of an arterial intersection, as well as cause the curb to be hit by a turning vehicle.

The designer must keep in mind that, as important as it is for the motorist to see everything adjacent to the roadway, it is of equal importance for the pedestrian, particularly children and wheelchair users, to be able to view and react to potential conflicts. At no area is this issue more critical than at crosswalk locations. Vehicles parked near crosswalks can create a sight distance problem.

400 Intersection Design

401.8.1 Curb Radii

The radius used at urban and suburban locations at both signalized and unsignalized intersections, where there may be pedestrian conflicts, must consider the safety and convenience aspects of both the motorist and pedestrian. The radius should be the smallest possible for the circumstances rather than design for the largest possible design vehicle, which often accounts for less than 2 percent of the total users. A large radius can increase the speed of turning motorists and the crossing distance for pedestrians, creating increased exposure risks.

Two distinct radii need to be considered when designing street corners. The first is the radius of the street corner itself, and the second is the effective turning radius of the selected design vehicle. The effective turning radius is the radius needed for a turning vehicle to clear any adjacent parking lanes and/or to align itself with its new travel lane. Using an effective turning radius allows a smaller curb radius than would be required for the motorist to turn from curb lane to curb lane.

401.8.2 Crossing Distance Considerations

Short crosswalks help pedestrians cross streets. Excessive crossing distances increase the pedestrian exposure time, increase the potential of vehicle-pedestrian conflict, and add to vehicle delay.

Curb extensions reduce the crossing distance and improve the sight distances for both the vehicle and the pedestrian. In general, curb extensions should extend the width of the parking lane, approximately 6 ft. [1.8 m] from the curb.

401.8.3 Crossing Islands and Medians

Where a wide intersection cannot be designed or timed to accommodate all the pedestrian crossing needs across one leg of the intersection at one time, a median or crossing island (often referred to as a refuge island) should be considered. Medians are raised or painted longitudinal spaces. Triangular channelization islands adjacent to right turning lanes can also act as crossing islands.

Desirably, crossing islands should be at least 5 ft. [1.5 m] wide. A width of 8 ft. [2.4 m] is needed to accommodate bicycles, wheelchairs, scooters and groups of pedestrians. Crossing island width should be a minimum of 8 ft. [2.4 m] on roadways with speeds of 50 mph or greater [80 km/hr].

401.8.4 Turning Movements

At both signalized and unsignalized intersections, steps should be taken to ensure that turning speeds are kept low and that sight distance is not compromised for either the motorist or pedestrian.

400 Intersection Design

402 Two Way Left Turn Lanes (TWLTL)

402.1 General

Midblock left turns are often a serious problem in urban and suburban areas. They can be a safety problem due to angle accidents with opposing traffic as well as rear end accidents with traffic in the same direction. Midblock left turns also restrict capacity. Two way left turn lanes (TWLTL) have proven to be a safe and cost-effective solution to this problem.

402.2 TWLTL Justification

TWLTL should be considered whenever actual or potential midblock conflicts occur. This is particularly true when accident data indicates a history of midblock left turn related accidents. Closely spaced driveways, strip commercial development or multiple-unit residential land use along the corridor are other indicators of the possible need for a TWLTL.

Some guidelines which may be used to justify the use of TWLTL are listed below:

1. 10,000 to 20,000 vehicles per day for four lane highways.
2. 5,000 to 12,000 vehicles per day for two lane highways.
3. 70 midblock turns per 1000 ft. [300 m] during peak hour.
4. Left turn peak hour volume 20 percent or more of total volume.
5. Minimum reasonable length of 1000 ft. [300 m] or two blocks.

402.3 TWLTL Design

Widths for TWLTL are preferably the same as through lane widths (See **Section 301.1.2**). A 10 ft. [3.0 m] lane may be used in restricted areas. Care should be taken not to make a TWLTL wider than 14 ft. [4.2 m] since this may encourage shared side-by-side use of the lane. TWLTL markings shall be in accordance with the **OMUTCD**. See **Section 301.1.5** for location of the crown point.

402.4 Reversible Lanes

A reversible lane is a lane on which the direction of traffic flow can be changed to utilize maximum roadway capacity during peak demand periods. Reverse-flow operation on undivided streets generally is justified where 65 percent or more of the traffic moves in one direction during peak periods, where the remaining lanes are adequate for the lighter flow period when there is continuity in the route and width of the street, where there is no median and where left turn and parking can be restricted. Reverse flow operations require special signing and additional control devices. Refer to the federal MUTCD for further guidance. Reverse flow on a divided facility is termed “contra-flow operation.” While the principle of reverse-flow operation is applicable to divided arterials, the arrangement is more difficult than on an undivided roadway.

400 Intersection Design

403 Roundabouts

403.1 General

Roundabouts are circular intersections with specific design and traffic control features. These features include yield control of all entering traffic, channelized approaches, and appropriate geometric curvature. The term “modern roundabout” is used in the United States to differentiate modern roundabouts from the nonconforming traffic circles or rotaries that have been in use for many years. Modern roundabouts are defined by two basic operational and design principles:

Yield-at-Entry: Yield-at-entry requires that vehicles on the circulatory roadway of the roundabout have the right-of-way and all entering vehicles on the approaches have to wait for a gap in the circulating flow. To maintain free flow and high capacity, yield signs are used as the entry control. As opposed to nonconforming traffic circles, modern roundabouts are not designed for weaving maneuvers, thus permitting smaller diameters.

Deflection of Entering traffic: Entrance roadways that intersect the roundabout along a tangent to the circulatory roadway are not permitted. Instead, entering traffic is deflected to the right by the central island of the roundabout and by channelization at the entrance into an appropriate curved path along the circulating roadway. Thus, no traffic is permitted to follow a straight path through the roundabout.

Modern Roundabouts range in size from mini-roundabouts with inscribed circle diameters as small as 45 ft [13 m], to double lane roundabout with inscribed circle diameters around 180 ft. [55 m]. Roundabout design involves trade-offs among safety, operation, and accommodation of large vehicles.

For additional information, see **FHWA's Roundabouts: An Informational Guide**.

400 Intersection Design

List of English Figures

<u>Figure</u>	<u>Date</u>	<u>Title</u>
401-1E	October 04	Typical Crossroad Relocation
	July 06	Explanation of Figure 401-1
401-2E	October 04	Crossroad Profile - Stop Condition - Through Road Normal Crown
401-3E	July 06	Crossroad Profile - Stop Condition - Through Road Superelevated
401-4E	October 04	Crossroad Profile - Signalized Intersection
401-4aE	July 06	Radius Returns for Uncurbed Mainline Curbed Approach
401-4bE	July 06	Radius Returns for Curbed Mainline Uncurbed Approach
401-5aE	October 04	2-Lane Highway Left Turn Lane Warrant (Low Speed)
401-5bE	October 04	2-Lane Highway Left Turn Lane Warrant (High Speed)
401-5cE	October 04	4-Lane Highway Left Turn Lane Warrant
401-6aE	October 04	2-Lane Highway Right Turn Lane Warrant (Low Speed)
401-6bE	October 04	2-Lane Highway Right Turn Lane Warrant (High Speed)
401-6cE	October 04	4-Lane Highway Right Turn Lane Warrant (Low Speed)
401-6dE	October 04	4-Lane Highway Right Turn Lane Warrant (High Speed)
401-7E	October 04	Turning Lane Design
401-8E	October 04	Offset Left Turn Lane
401-9E	October 04	Basis for Computing Length of Turn Lanes
401-10E	October 04	Length of Storage at Intersections, and Turn Lane Design Example
401-11E	October 04	Double Left Turn Lanes, and Notes
401-12E	October 04	Development of Dual Left Turn Lanes
401-13aE	October 04	Channelizing Island - Single Unit Truck and Passenger Car Designs
401-13bE	October 04	Channelizing Island - Single Unit and Minimum WB-50 Designs
401-13cE	October 04	Channelizing Island - WB-50 Truck Designs
401-13dE	October 04	Channelizing Island - Typical Islands with Permitted Left Turns


* Note: For the design criteria pertaining to Collectors and Local Roads with ADT's of 400 or less, refer to the AASHTO Publication - Guidelines for Geometric Design of Very Low-Volume Local Roads ADT_≤400).

This page is intentionally blank

TYPICAL CROSSROAD RELOCATION

401-1E

REFERENCE SECTION
401.3

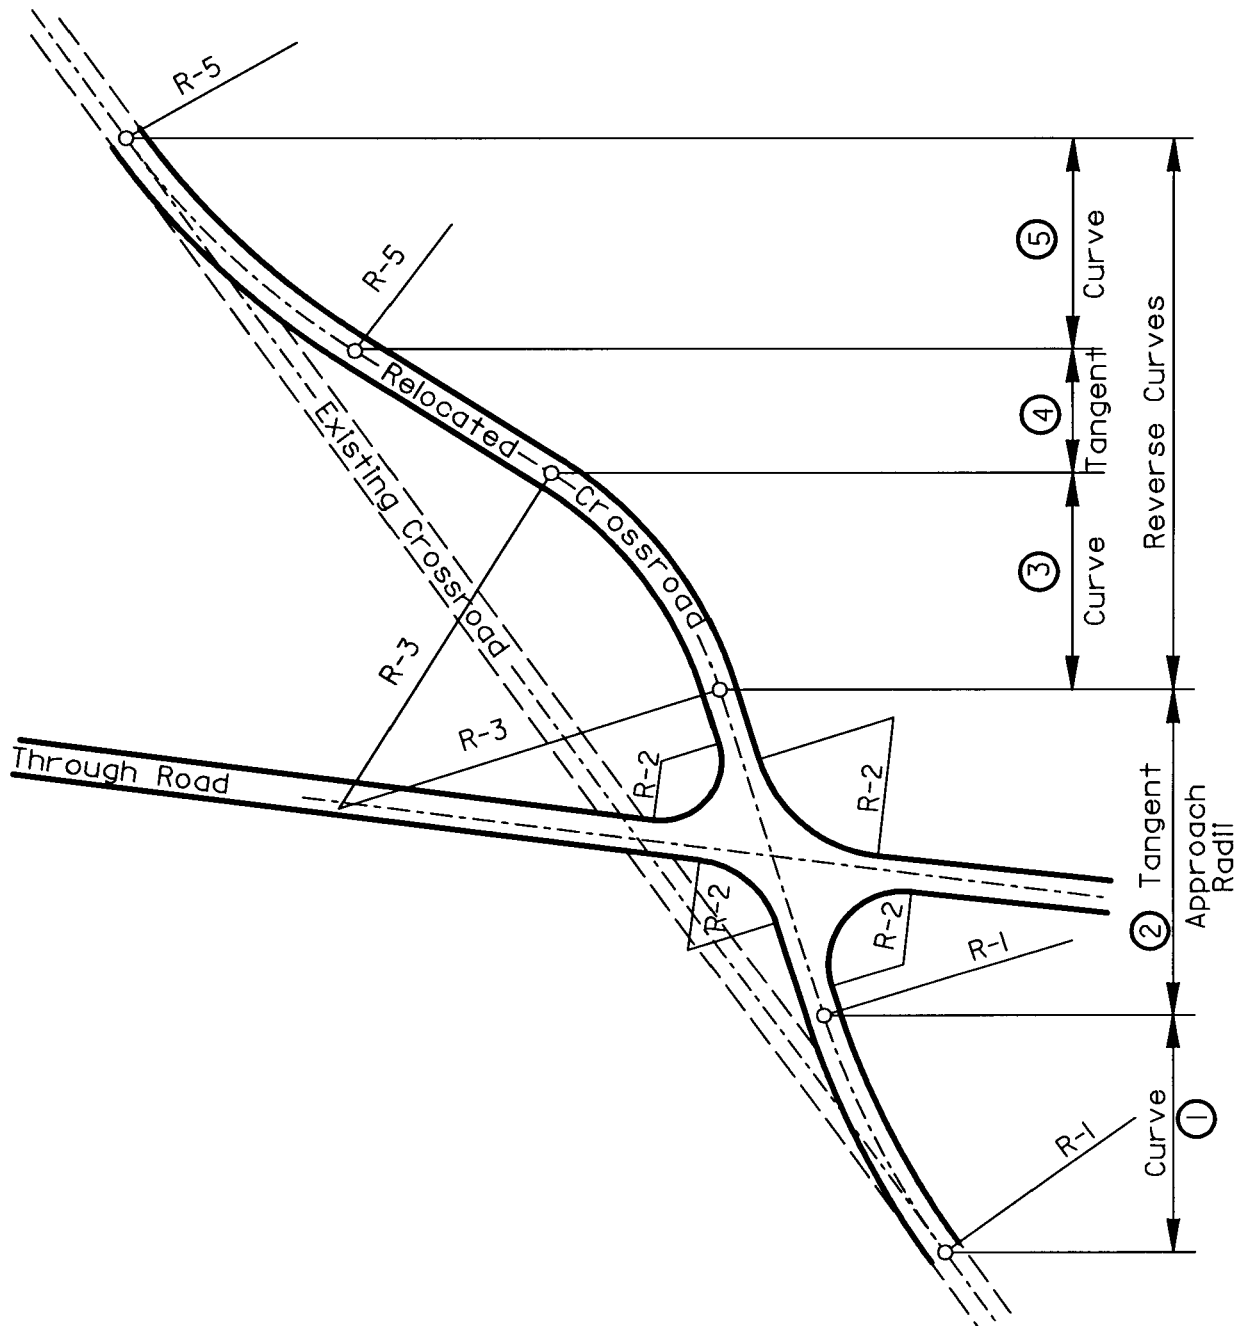

See explanation on adjacent sheet.

October 2004

Explanation of Figure 401-1 Typical Crossroad Relocation

1. Curve - This portion of the crossroad can occur by itself at "T" type or three-legged intersections. If possible, the radius of this curve should be commensurate with the design speed of the crossroad. Often, the length of the required profile controls the work length. The horizontal curvature is then chosen so it can be accomplished within this work length. Regardless of the length of the profile adjustment, it is desirable to provide at least a 230 foot radius for this curve. When a 230 foot radius incurs high costs, it is permissible to reduce this radius to a minimum of 150 ft.
2. Tangent and Approach Radii - The crossroad in this area should have a tangent alignment. For the condition shown, the alignment between the radius returns is tangent from one side of the road to the other. However, at some intersections with a minor through movement (for example, crossroad intersections of standard diamond ramps) it may be desirable to provide different intersection angles on each side of the through road. For approach radii, see discussion in **Section 401.5**.
3. Curve - The statements in (1) above also apply to this curve. With the reverse curve condition shown, the radius will often not exceed 250 ft. because flatter curves make the relocation extraordinarily long.
4. Tangent - This tangent should be approximately 150 ft. in length for 30 or 40 mph design speeds on the existing road, and approximately 250 ft. for 50 or 60 mph design speeds. These lengths are generous enough to allow reasonable superelevation transitions between the reverse curves. In general, it is usually not desirable to make this tangent any longer than required. If a longer tangent can be used, the curvature or intersection angle can be improved and these two design items are more important.
5. Curve - This curve should be much flatter than the other two curves. It should be capable of being driven at the normal design speed of the existing crossroad.


REFERENCE SECTIONS
401.4.1 - 401.4.4



CROSSROAD PROFILE -STOP CONDITION- THROUGH ROAD SUPERELEVATED

401-3E

**REFERENCE SECTION
401.1 & 401.4.3**

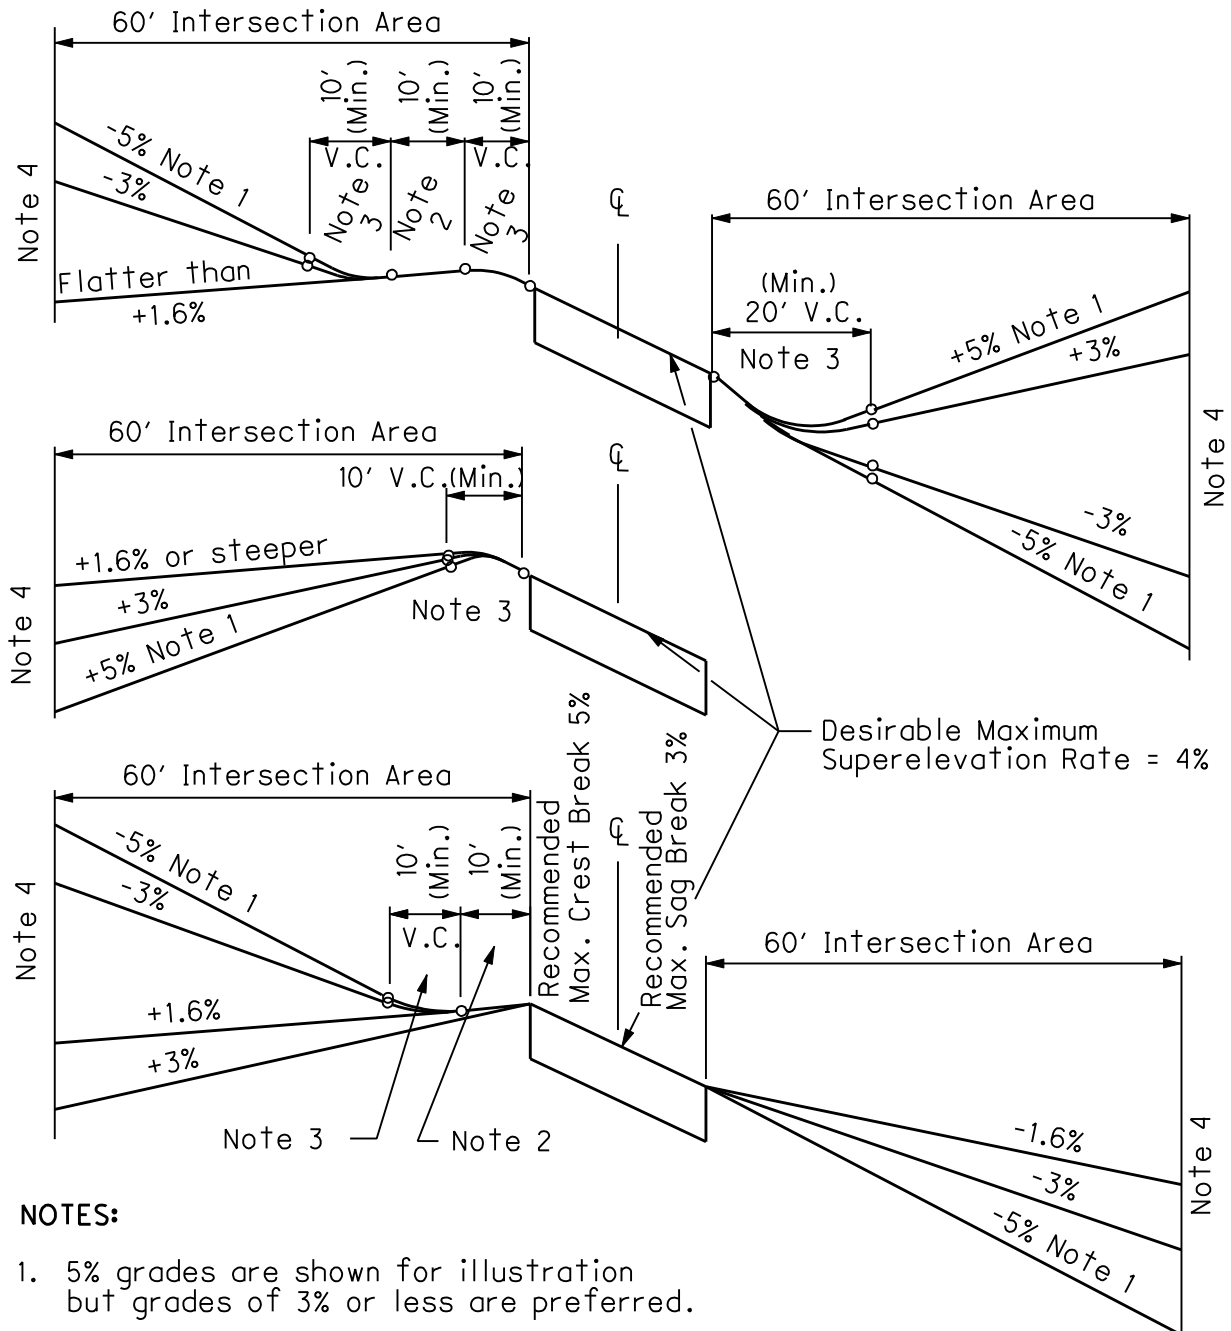


NOTES:

1. 5% grades are shown for illustration but grades of 3% or less are preferred.
2. Grade to be 1.6% or steeper to provide drainage.
3. Crest breaks exceeding 5% shall be rounded using vertical curves having a K of 1 or greater.
Sag breaks exceeding 3% shall be rounded using vertical curves having a K of 1.5 or greater
4. For grade treatment of this area, see Figure 401-2.

CROSSROAD PROFILE SIGNALIZED INTERSECTION


401-4E

REFERENCE SECTION
401.4.4

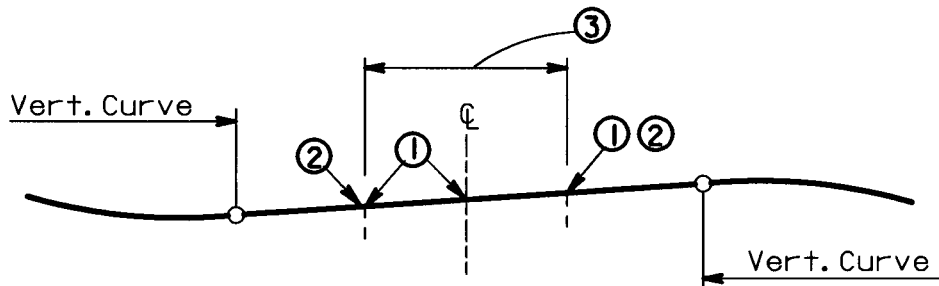


Example A - Crossroad Profile Tangent through Intersection

- ① Location of permissible grade break per **Figure 203-2**
- ② Edge of pavement of intersecting roadway extended through the intersection
- ③ Width of intersecting roadway

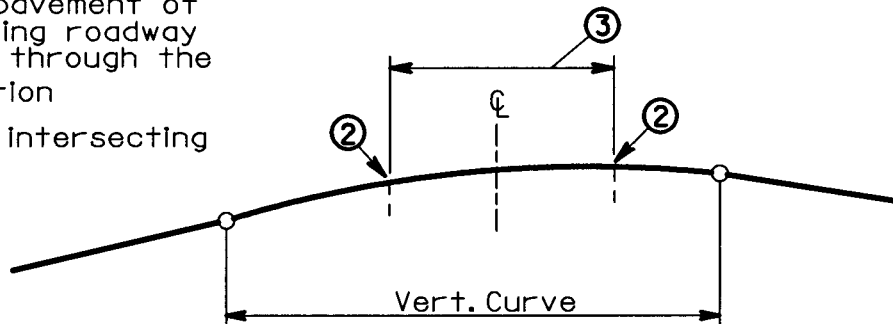

Example B - Crossroad Profile on Vertical Curve through Intersection

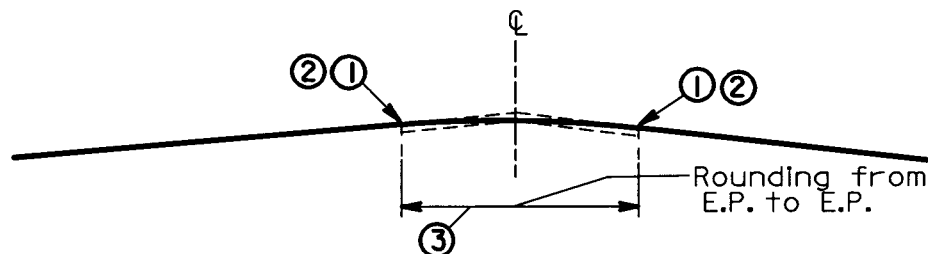


Example C - Crossroad Profile Fitted to a Normal Crown on the Mainline Road

**RADIUS RETURNS FOR
UNCURBED MAINLINE
CURBED APPROACH**

401-4aE

**REFERENCE SECTION
401.5.3 & 305.4**

**UNCURBED MAINLINE
CURBED APPROACH**

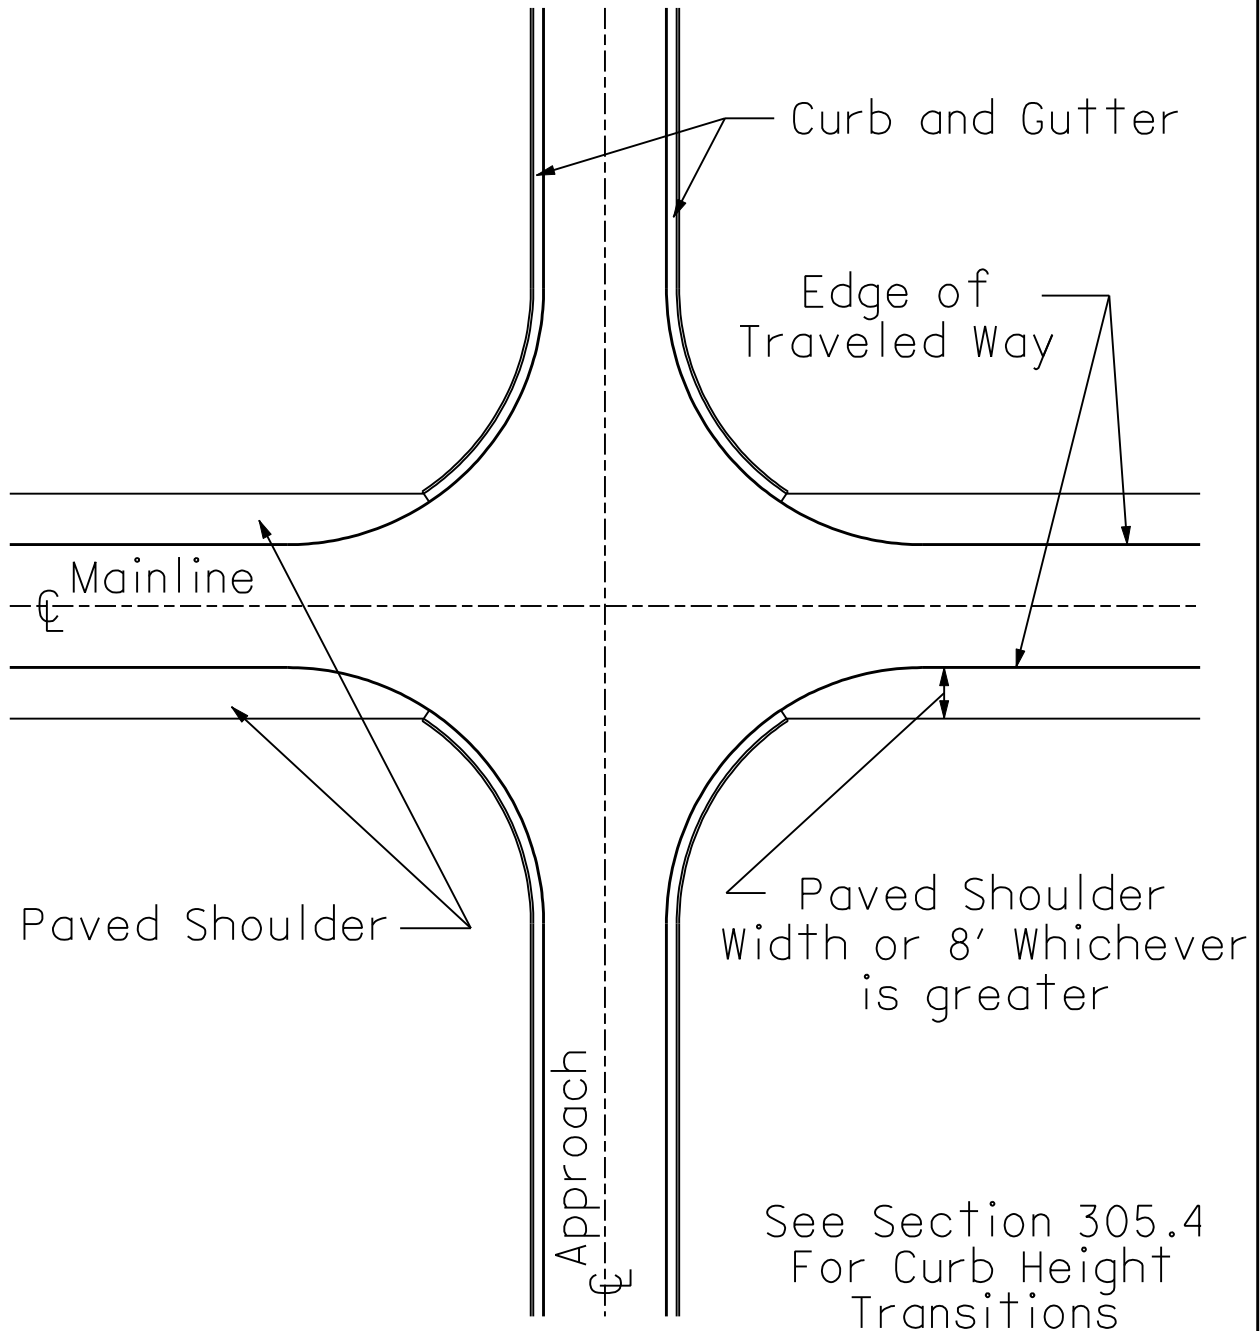


**RADIUS RETURNS FOR
CURBED MAINLINE
UNCURBED APPROACH**

401-4bE

**REFERENCE SECTION
401.5.3 & 305.4**

**CURBED MAINLINE
UNCURBED APPROACH**

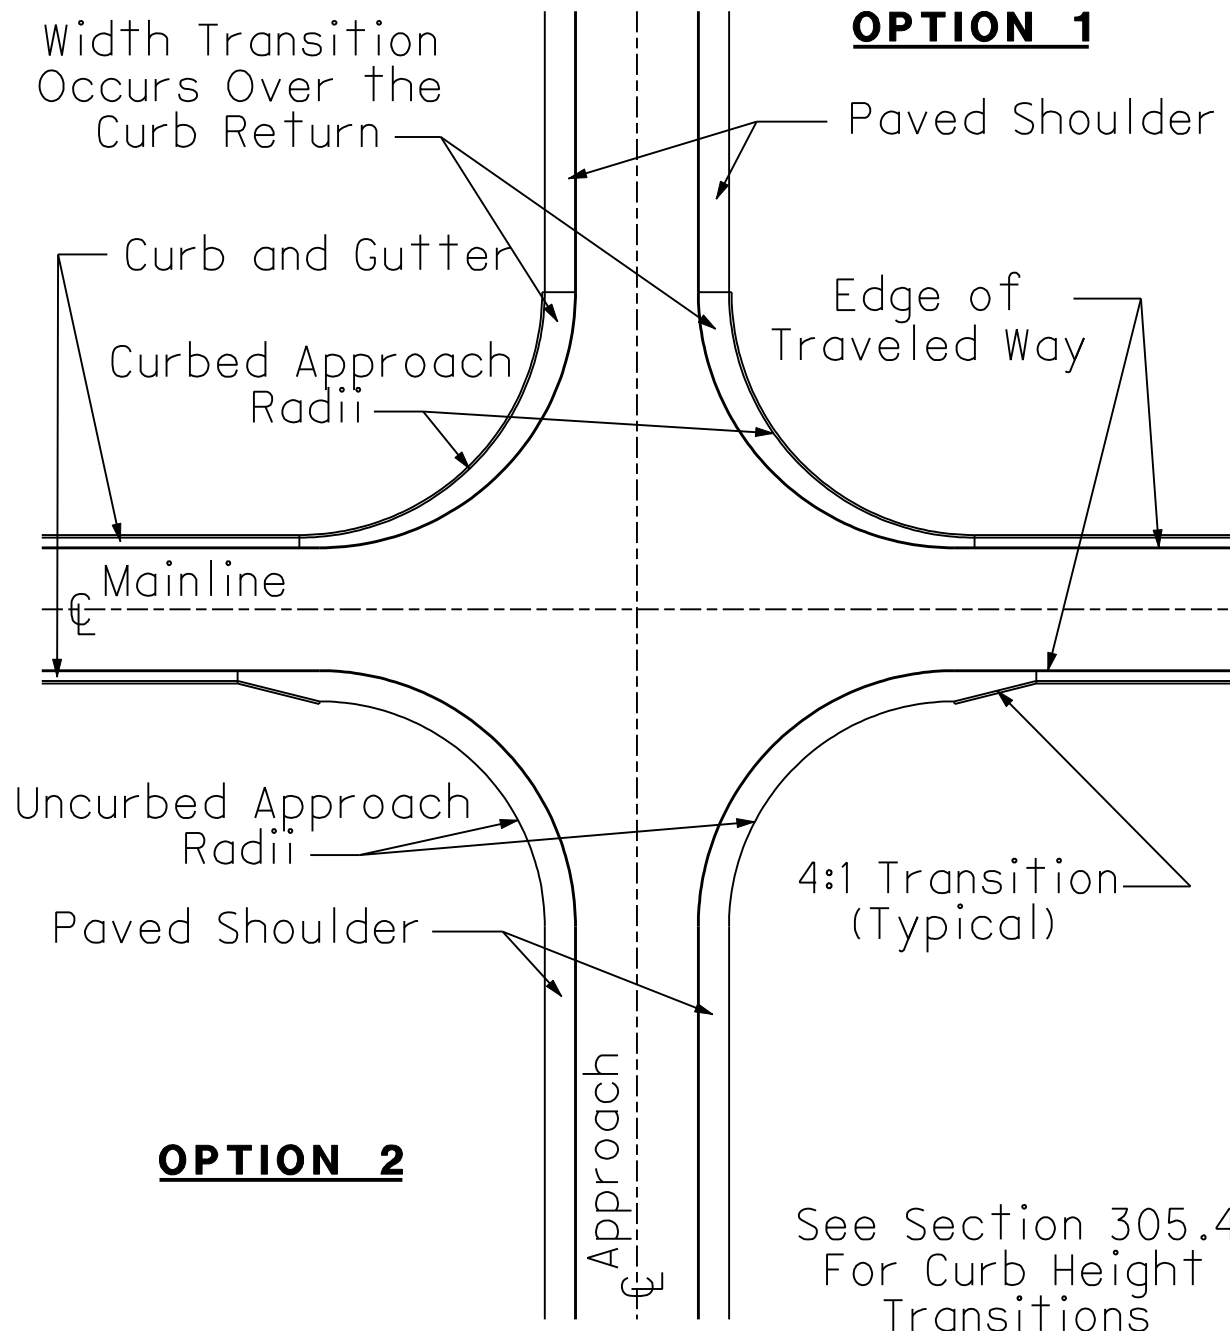


2-LANE LEFT TURN LANE WARRANT (LOW SPEED)

401-5aE

REFERENCE SECTION
401.6.1

2-Lane Highway Left Turn Lane Warrant (= < 40 mph or 70 kph Posted Speed)

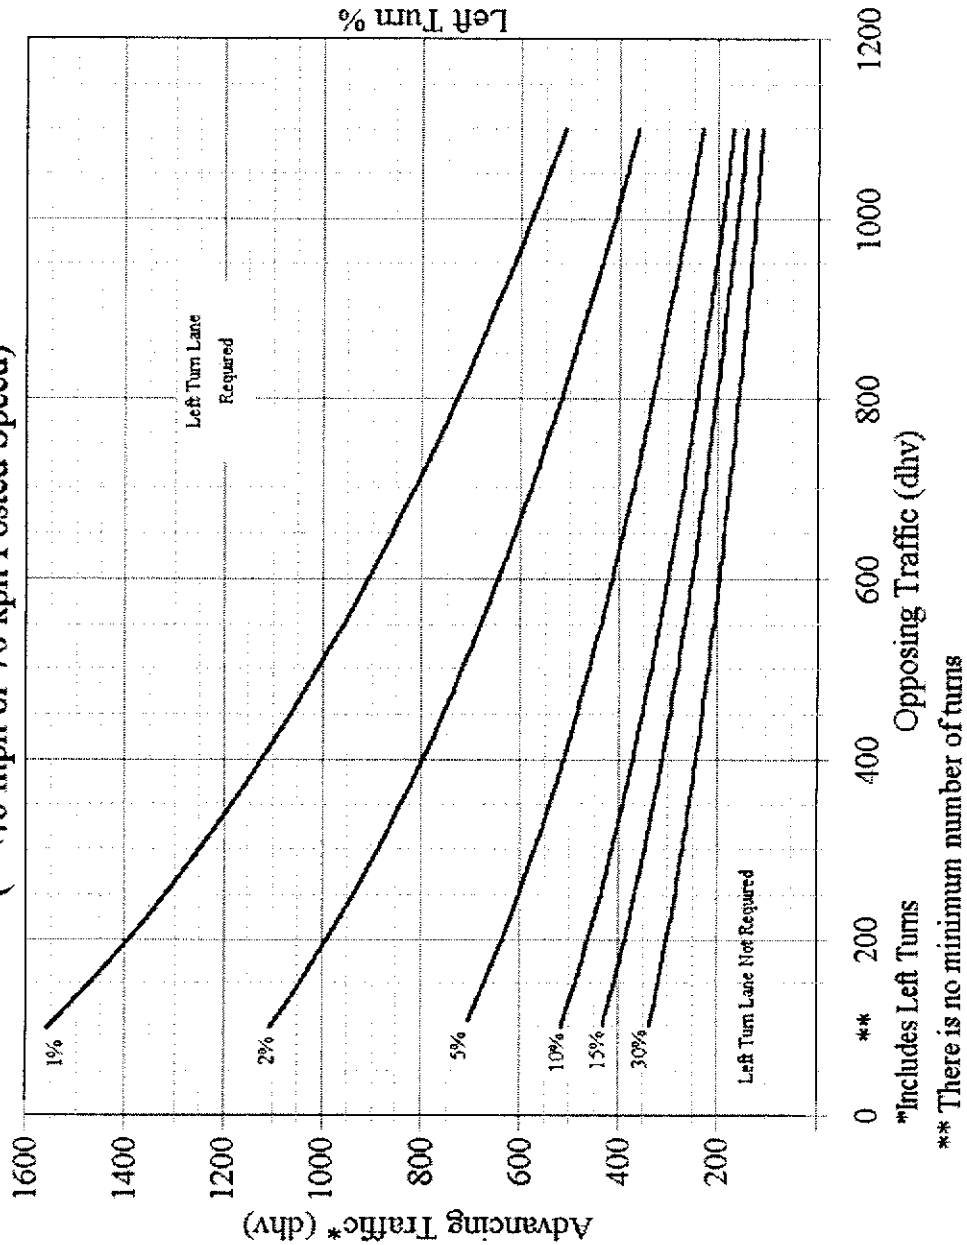


October 2004

2-LANE LEFT TURN LANE WARRANT (HIGH SPEED)

401-5bE

REFERENCE SECTION
401.6.1

2-Lane Highway Left Turn Lane Warrant (>40 mph or 70 kph Posted Speed)

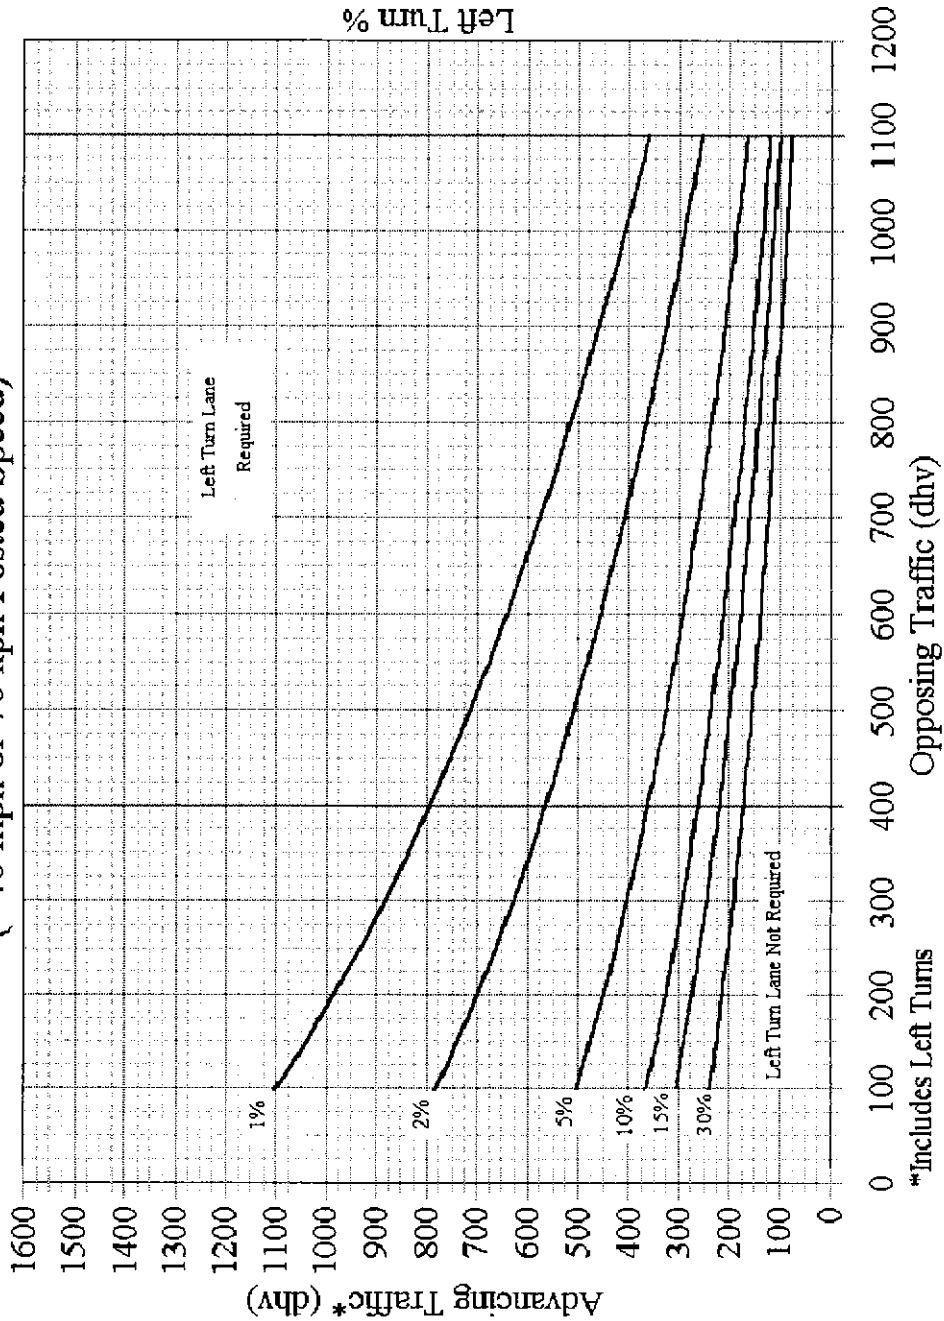


October 2004

4-LANE LEFT TURN LANE WARRANT

401-5cE

REFERENCE SECTION
401.6.1

4-Lane Highway Left Turn Lane Warrant

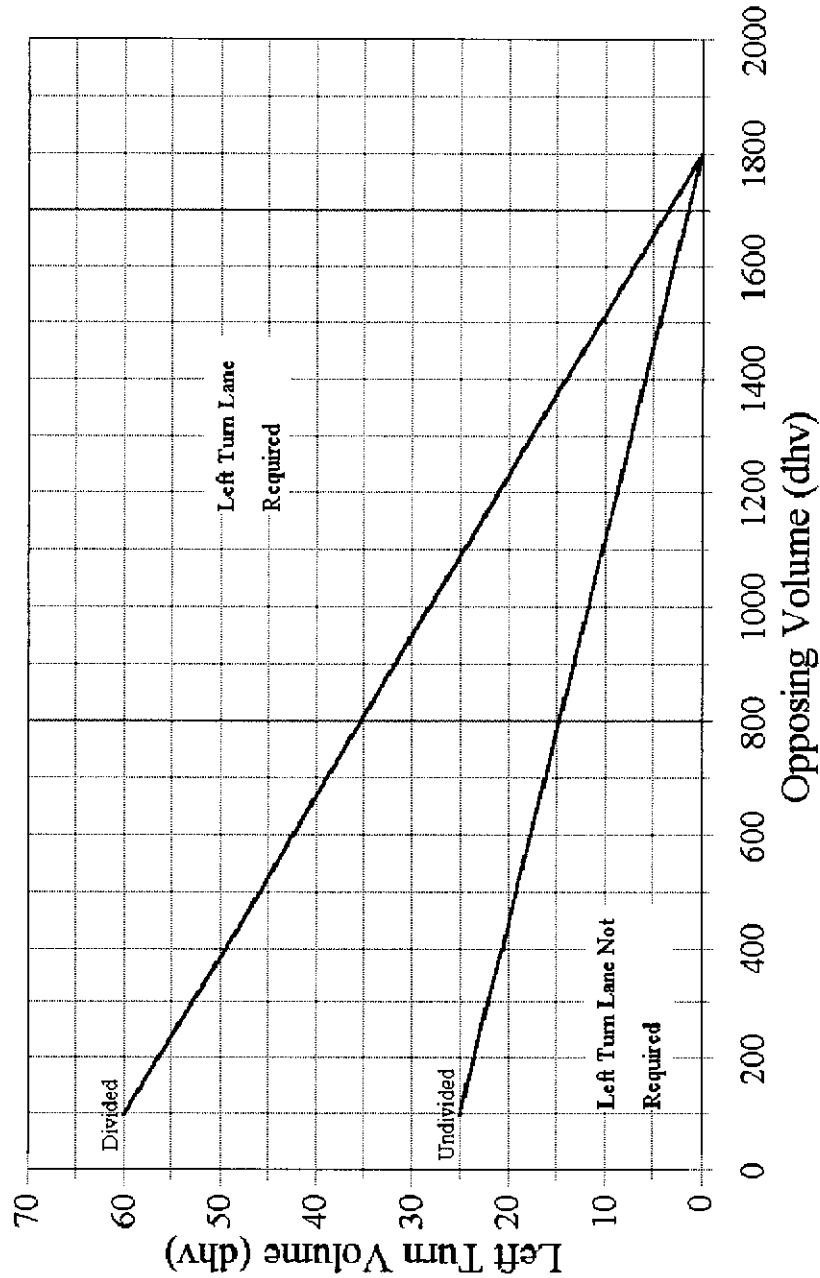


October 2004

2-LANE RIGHT TURN LANE WARRANT (LOW SPEED)

401-6aE

REFERENCE SECTION
401.6.3

2-Lane Highway Right Turn Lane Warrant =< 40 mph or 70 kph Posted Speed

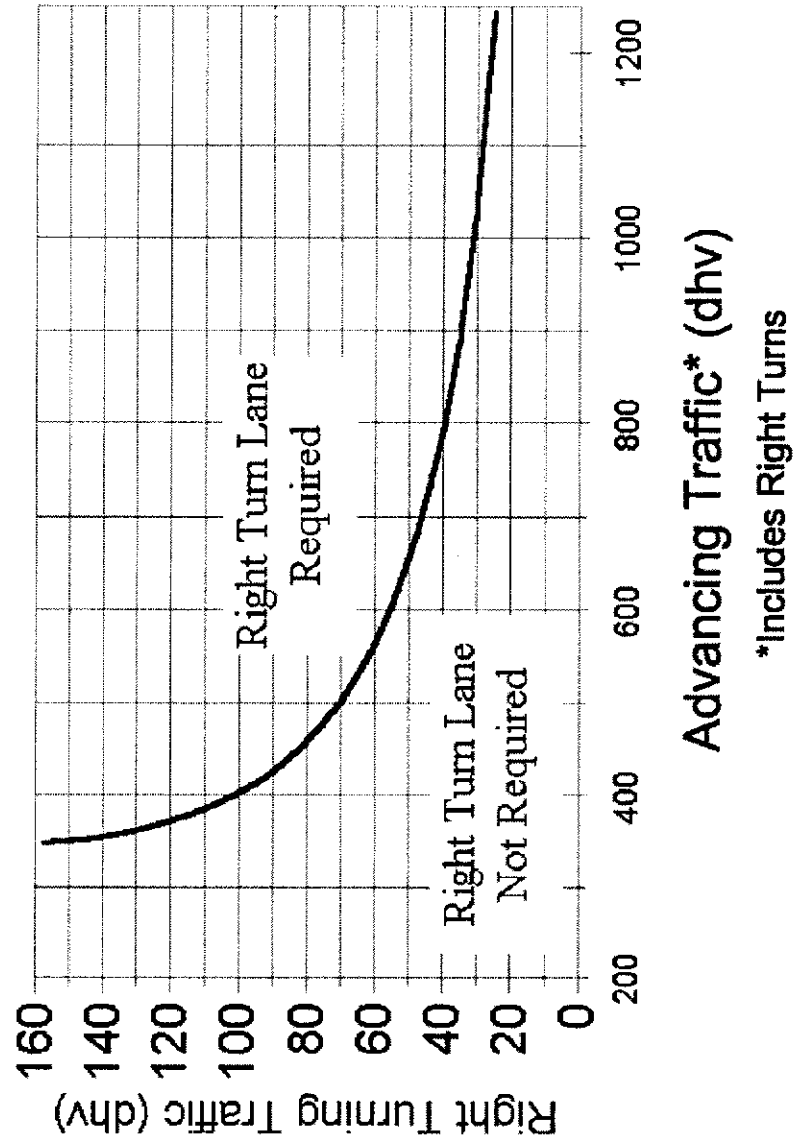


October 2004

2-LANE RIGHT TURN LANE WARRANT (HIGH SPEED)

401-6bE

REFERENCE SECTION
401.6.3

2-Lane Highway Right Turn Lane Warrant > 40 mph or 70 kph Posted Speed

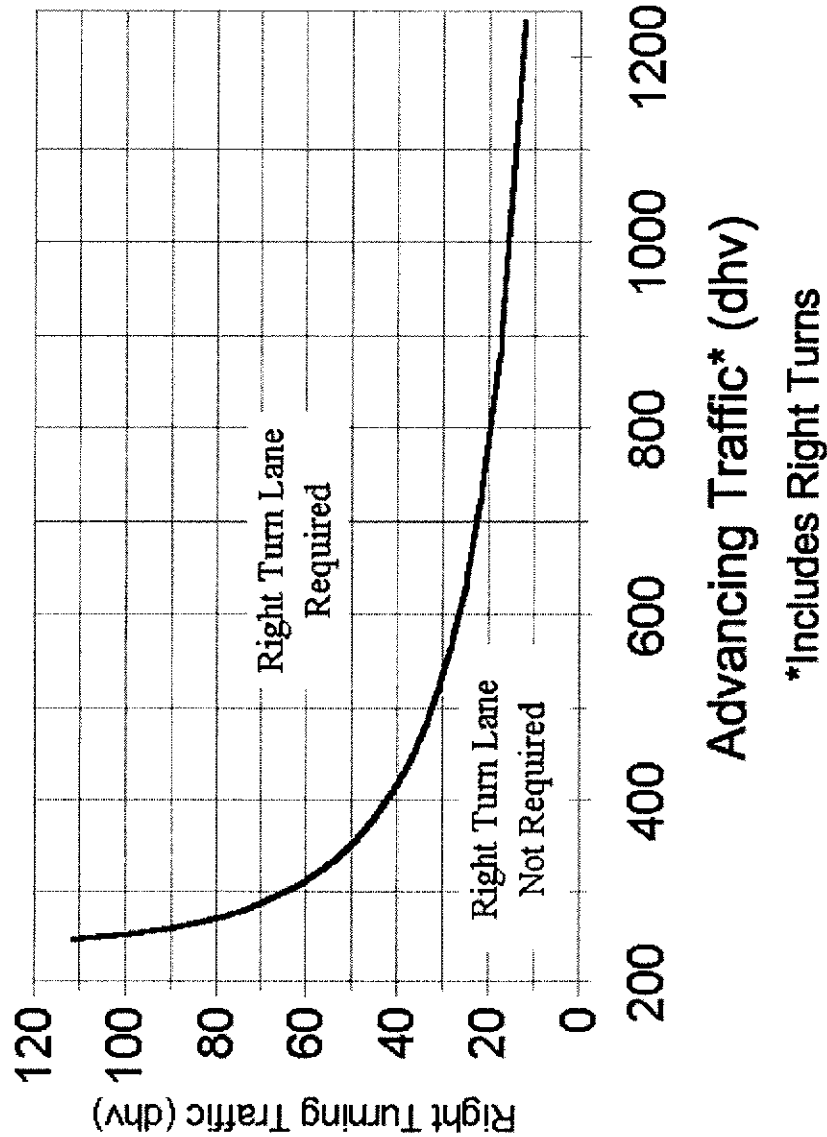


4-LANE RIGHT TURN LANE WARRANT (LOW SPEED)

401-6cE

REFERENCE SECTION
401.6.3

4 Lane Highway Right Turn Lane Warrant (≤ 40 mph or 70 kph Posted Speed)

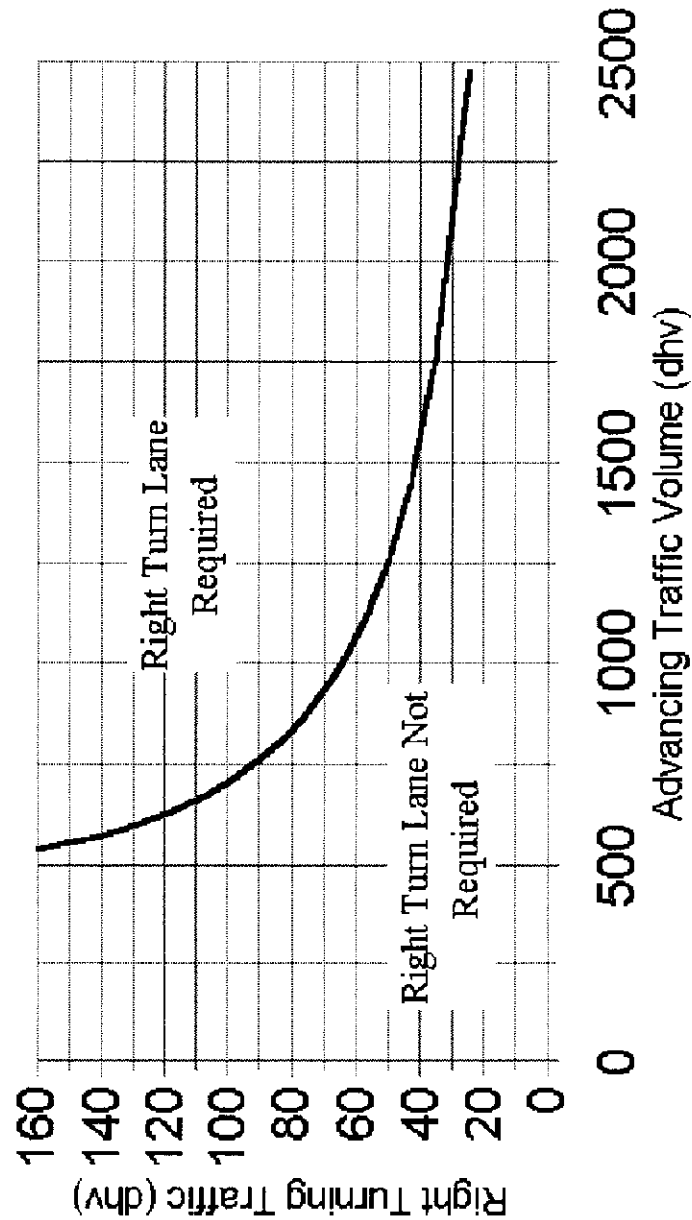


October 2004

4-LANE RIGHT TURN LANE WARRANT (HIGH SPEED)

401-6dE

REFERENCE SECTION
401.6.3

4 Lane Highway Right Turn Lane Warrant (>40 mph or 70 kph Posted Speed)

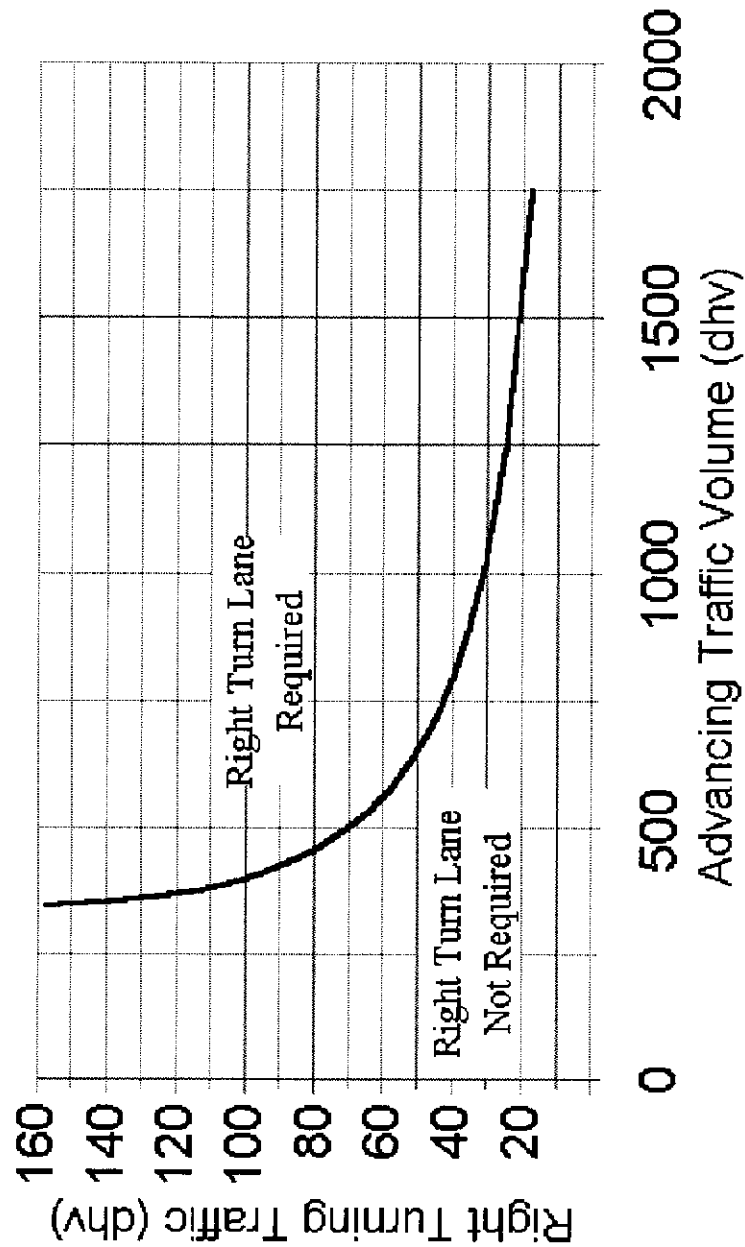


October 2004


TURNING LANE DESIGN

401-7E


REFERENCE SECTIONS
401.6.1, 401.6.3

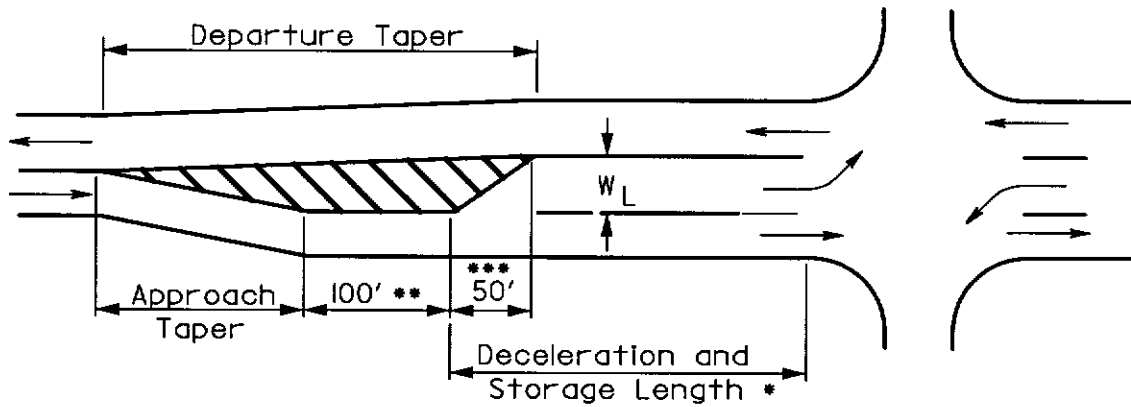

LEFT TURN LANE - NO MEDIAN OR MEDIAN WIDTH $< W_L$

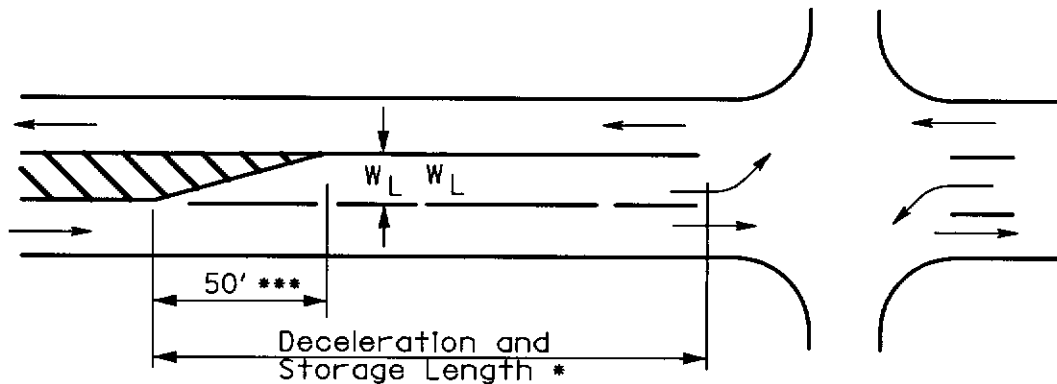

LEFT TURN LANE - MEDIAN WIDTH $\geq W_L$

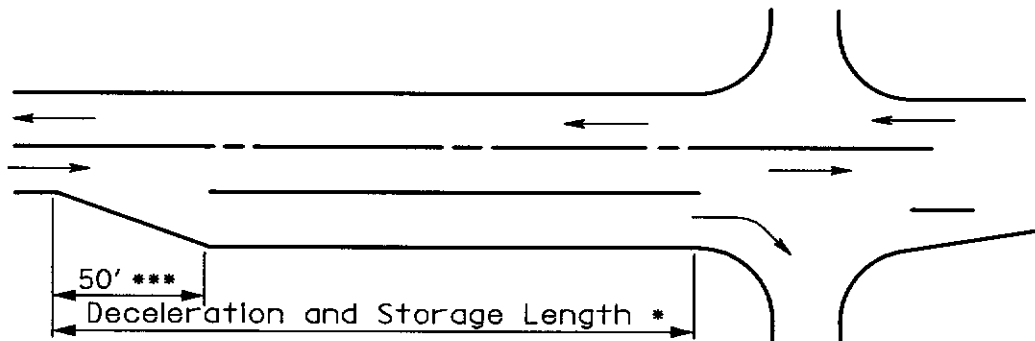

RIGHT TURN LANE

- See **Figures 401-9 and 401-10** to compute length.
- May be reduced or eliminated in urban areas if intersection spacing or storage is constraining
- Diverging taper

W_L = Turn Lane Width


October 2004

OFFSET LEFT TURN LANE

401-8E

REFERENCE SECTIONS

401.6.1, 401.6.3

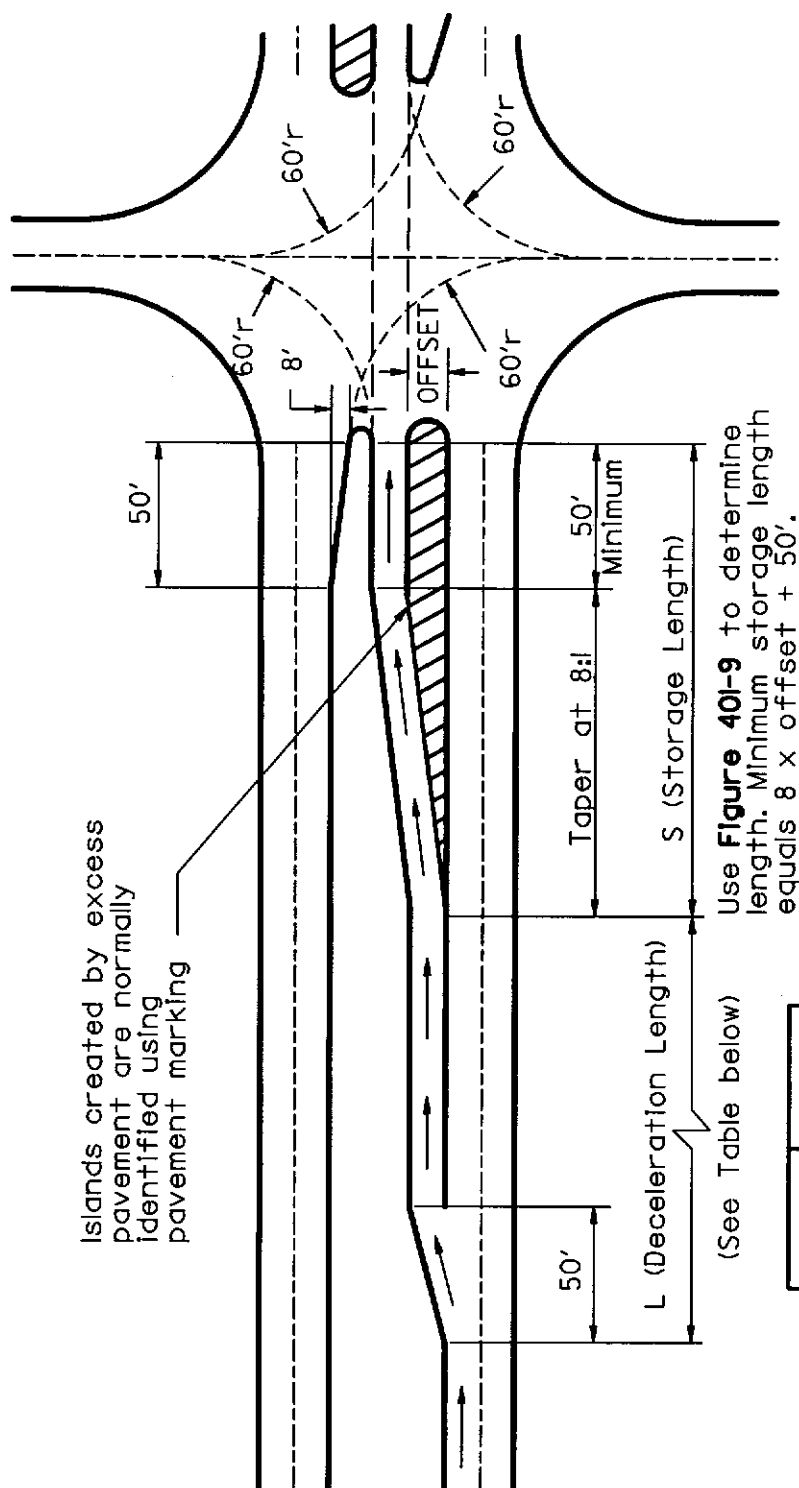

Use **Figure 401-9** to determine length. Minimum storage length equals $8 \times \text{offset} + 50'$.

(See Table below)

Design Speed	L
40 mph	125'
45 mph	175'
50 mph	225'
55 mph	285'
60 mph	345'

BASIS FOR COMPUTING LENGTH OF TURN LANES

401-9E

REFERENCE SECTIONS
401.6.1, 401.6.3

TYPE OF TRAFFIC CONTROL	DESIGN SPEED (mph)					
	30 - 35		40 - 45		50 - 60	
	TURN DEMAND VOLUME					
	HIGH	LOW*	HIGH	LOW*	HIGH	LOW*
SIGNALIZED	(A)	(A)	** (B or C)	** (B or C)	** (B or C)	** (B or C)
UNSIGNALIZED STOPPED CROSSROAD	(A)	(A)	(A)	(A)	(A)	(A)
UNSIGNALIZED THROUGH ROAD	(A)	(A)	(C)	(B)	** (B or C)	(B)

* LOW is considered 10% or less of approach traffic volume.

** Whichever is greater

CONDITION (A) STORAGE ONLY

Length = 50' (diverging taper) + Storage Length (Figure 401-10)

CONDITION (B) HIGH SPEED DECELERATION ONLY

Design Speed

Length (Including 50' Diverging Taper)

40	125
45	175
50	225
55	285
60	345

CONDITION (C) MODERATE SPEED DECELERATION AND STORAGE

Design Speed

Length (Including 50' Diverging Taper)

40	III + Storage Length (Figure 401-10)
45	125
50	143
55	164
60	181

For Explanation, See Turn Lane Design Example

STORAGE LENGTH AT INTERSECTIONS

401-10E

REFERENCE SECTIONS
401.6.1, 401.6.3

* AVERAGE No. OF VEHICLES/CYCLE	REQUIRED LENGTH	* AVERAGE No. OF VEHICLES/CYCLE	REQUIRED LENGTH
1	50 ft	17	600 ft
2	100 ft	18	625 ft
3	150 ft	19	650 ft
4	175 ft	20	675 ft
5	200 ft	21	725 ft
6	250 ft	22	750 ft
7	275 ft	23	775 ft
8	325 ft	24	800 ft
9	350 ft	25	825 ft
10	375 ft	30	975 ft
11	400 ft	35	1125 ft
12	450 ft	40	1250 ft
13	475 ft	45	1400 ft
14	500 ft	50	1550 ft
15	525 ft	55	1700 ft
16	550 ft	60	1850 ft

* Average Vehicles per Cycle = $\frac{\text{DHV (TURNING LANE)}}{\text{CYCLES/HOUR}}$

If Cycles are unknown, assume:

UNSIGNALIZED OR 2 PHASE - 60 CYCLES/HR

3 PHASE - 40 CYCLES/HR

4 PHASE - 30 CYCLES/HR

Example - Turn Lane Design Using Figures 401-9 and 401-10

Problem

Calculate the length of an exclusive left-turn lane on a signalized intersection approach of a rural arterial highway (Design Speed - 55 mph). The intersection approach has three comprised on an exclusive left turn lane and two through lanes with 200 left turning vehicles and 680 through vehicles, respectively. The traffic signal has a 90 second cycle length.

Determine Lane Length

Refer to the matrix in **Figure 401-9**. First, using the given design speed of 55 mph, enter the column with the design speed "50-60". Next, determine if the left turn demand volume is "high" or "low". "Low" is considered 10% or less of the approach traffic flow. The demand is $200/(680 + 200) = 22.7\%$. Therefore, the left turn demand is considered "high". Based on a "signalized" intersection, the matrix indicates that Method B or C (whichever is greater) should be used to calculate the length of the left turn lane.

Method B, for the 55 mph design speed, requires a left turn lane length of 285 ft.

Method C is calculated by adding the 164 ft. (for the 55 mph design speed) to the storage length determined from **Figure 401-10**. To determine the storage length, first, calculate the number of cycles/hour ($3,600 \text{ seconds/hour} \times 1 \text{ cycle/90 seconds} = 40 \text{ cycles/hour}$). Next, divide the hourly left turn approach volume by the number of cycles/hour ($200 \text{ left turning vehicles divided by } 40 \text{ cycles/hour} = 5$). Using **Figure 401-10**, the required storage length is 200 ft. Adding the 200 ft. storage length to the 164 ft. (moderate speed deceleration length) noted above equals 364 ft. A comparison of the values from Method B and Method C yields 285 ft. and 364 ft., respectively. Therefore, use the greater value of 364 ft.

Check Length for Backup


Next, check to determine if backups from the through movements will block left turning vehicles from entering the left turn lane. **Figure 401-10** is also used for this purpose. Using the value of 40 cycles/hour (determined above), calculate the average number of through vehicles per cycle ($680/40 = 17$). Based on **Figure 401-10**, this will result in backups of 600 ft. in a single lane. However, since the through traffic volume is in two through lanes, the backup of through vehicles is only one-half the 600 ft., or 300 ft.

Therefore, the through vehicle backup of 300 ft. per lane will not block left turning vehicles desiring to enter the left turn lane which extends back 364 ft.

DOUBLE LEFT TURN LANES

401-11E

REFERENCE SECTIONS
401.6.2, 401.6.4

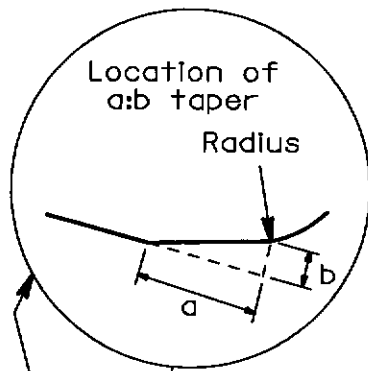

Note 4

Note 1

INSIDE RADIUS -R-	EXPANDED THROAT WIDTH -W-		
	DESIGN TRAFFIC CONDITION ▼		
	A	B	C
50 ft.	31 ft.	36 ft.	45 ft.
75 ft.	29 ft.	33 ft.	38 ft.
100 ft.	28 ft.	31 ft.	35 ft.
150 ft.	26 ft.	29 ft.	32 ft.
200 ft.	26 ft.	28 ft.	30 ft.

▼ A= mostly "P" vehicles, some "SU" trucks

B= sufficient "SU" trucks to govern design, some semitrailers


C= sufficient bus and combination types to govern design

Generally, A is when $T < 5\%$

B is when $T = 5-10\%$

C is when $T > 10\%$

T= percentage of type B and C trucks in Design ADT

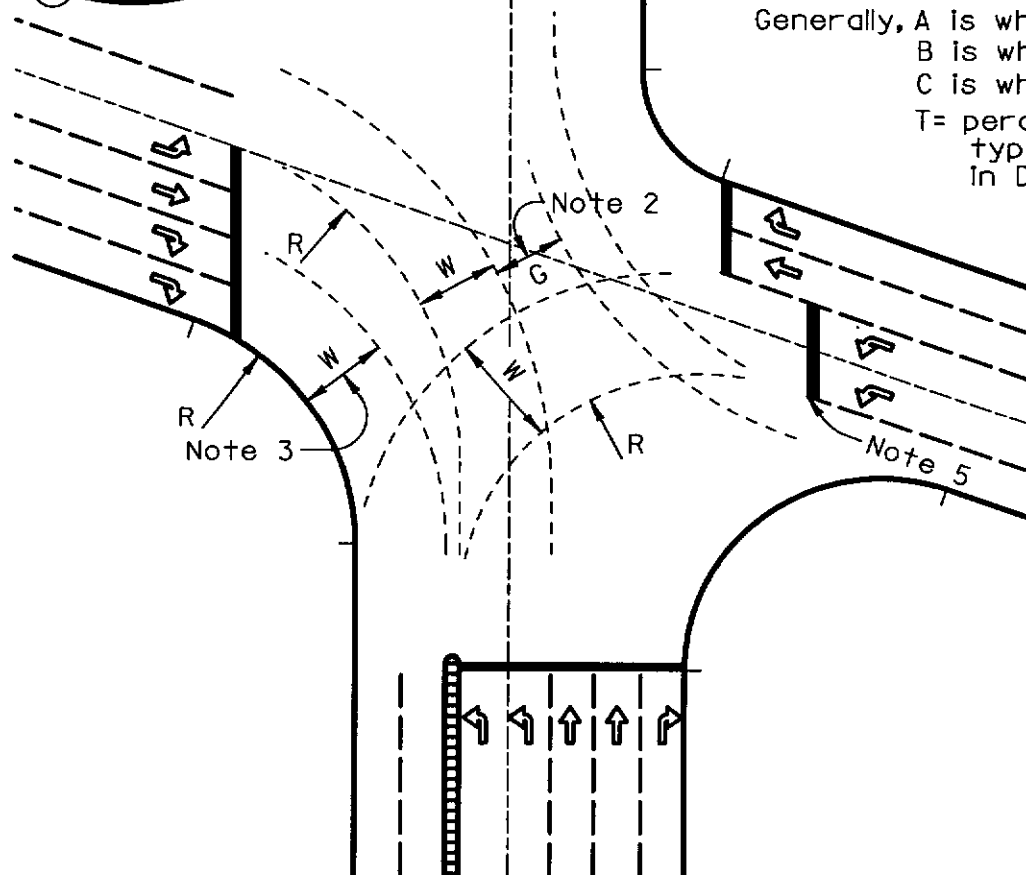

Notes for Figure 401-11 Double Left Turn Lanes

1. Notice that the single left turn lane at the top of the page has been laterally offset from the through lanes in order to prevent conflicts between opposing turning paths.
2. Opposing turning paths should always be checked to verify that there is no conflict (see dimension "G").
3. The double right turn lane design follows the same criteria as the double left turn lane for expanded throat width.
4. The pavement width of the receiving lanes for a double left turn at an intersection needs to be checked to see if design vehicles can complete their turns within the pavement area. This is especially important where the radius returns are curbed. The use of radius templates is one method that can be used to check wheel tracking to see if additional pavement area adjacent to the far return area is needed. If the turning lanes are 12 ft. in width, the following formula is recommended to estimate a need for widening the pavement at the receiving throat:

$$F = (W-24)/2$$

where W is the maximum expanded throat width from the table on **Figure 401-11**. If the turn lanes are not 12 ft., use truck turning templates.

The use the following guidelines:

- If $F < 2.0$, no widening is required.
- If $F = 2.0$ through 3.9, use a 40:4 taper.
- If $F = 4.0$ through 5.9, use a 45:6 taper.
- If $F = 6.0$ through 9.0, use a 50:8 taper.


See **Figure 503-5** for examples of how these tapers are used at radius returns.

5. Stop bar locations may need to be adjusted to the inside radius return of the left turn movements.

DEVELOPMENT OF DUAL LEFT TURN LANES

401-12E

REFERENCE SECTION
401.6.2

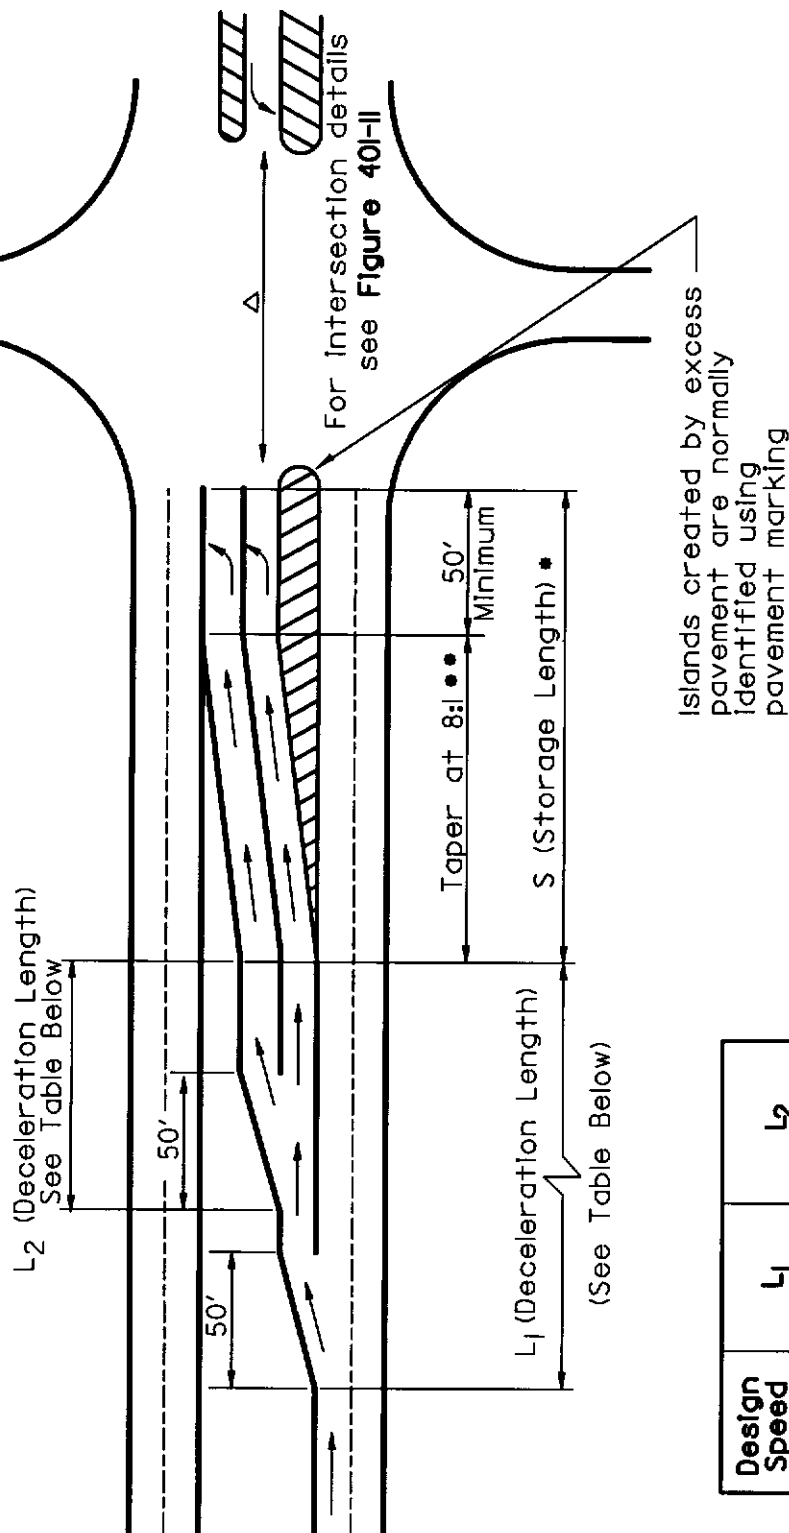

• Use Figure 401-10 to determine storage length. For offset left turn lanes, minimum storage length equals $8 \times \text{offset} + 50'$.

•• Taper is used when dual left turn lanes are offset.

Δ If opposite approach has one left turn lane, these lanes should line up.


Design Speed	L_1	L_2
40 mph	125'	75'
45 mph	175'	125'
50 mph	225'	143'
55 mph	285'	164'
60 mph	345'	181'

CHANNELIZING ISLANDS SINGLE UNIT TRUCK AND PASSENGER CAR DESIGNS

401-13aE

REFERENCE SECTION

401.7.2

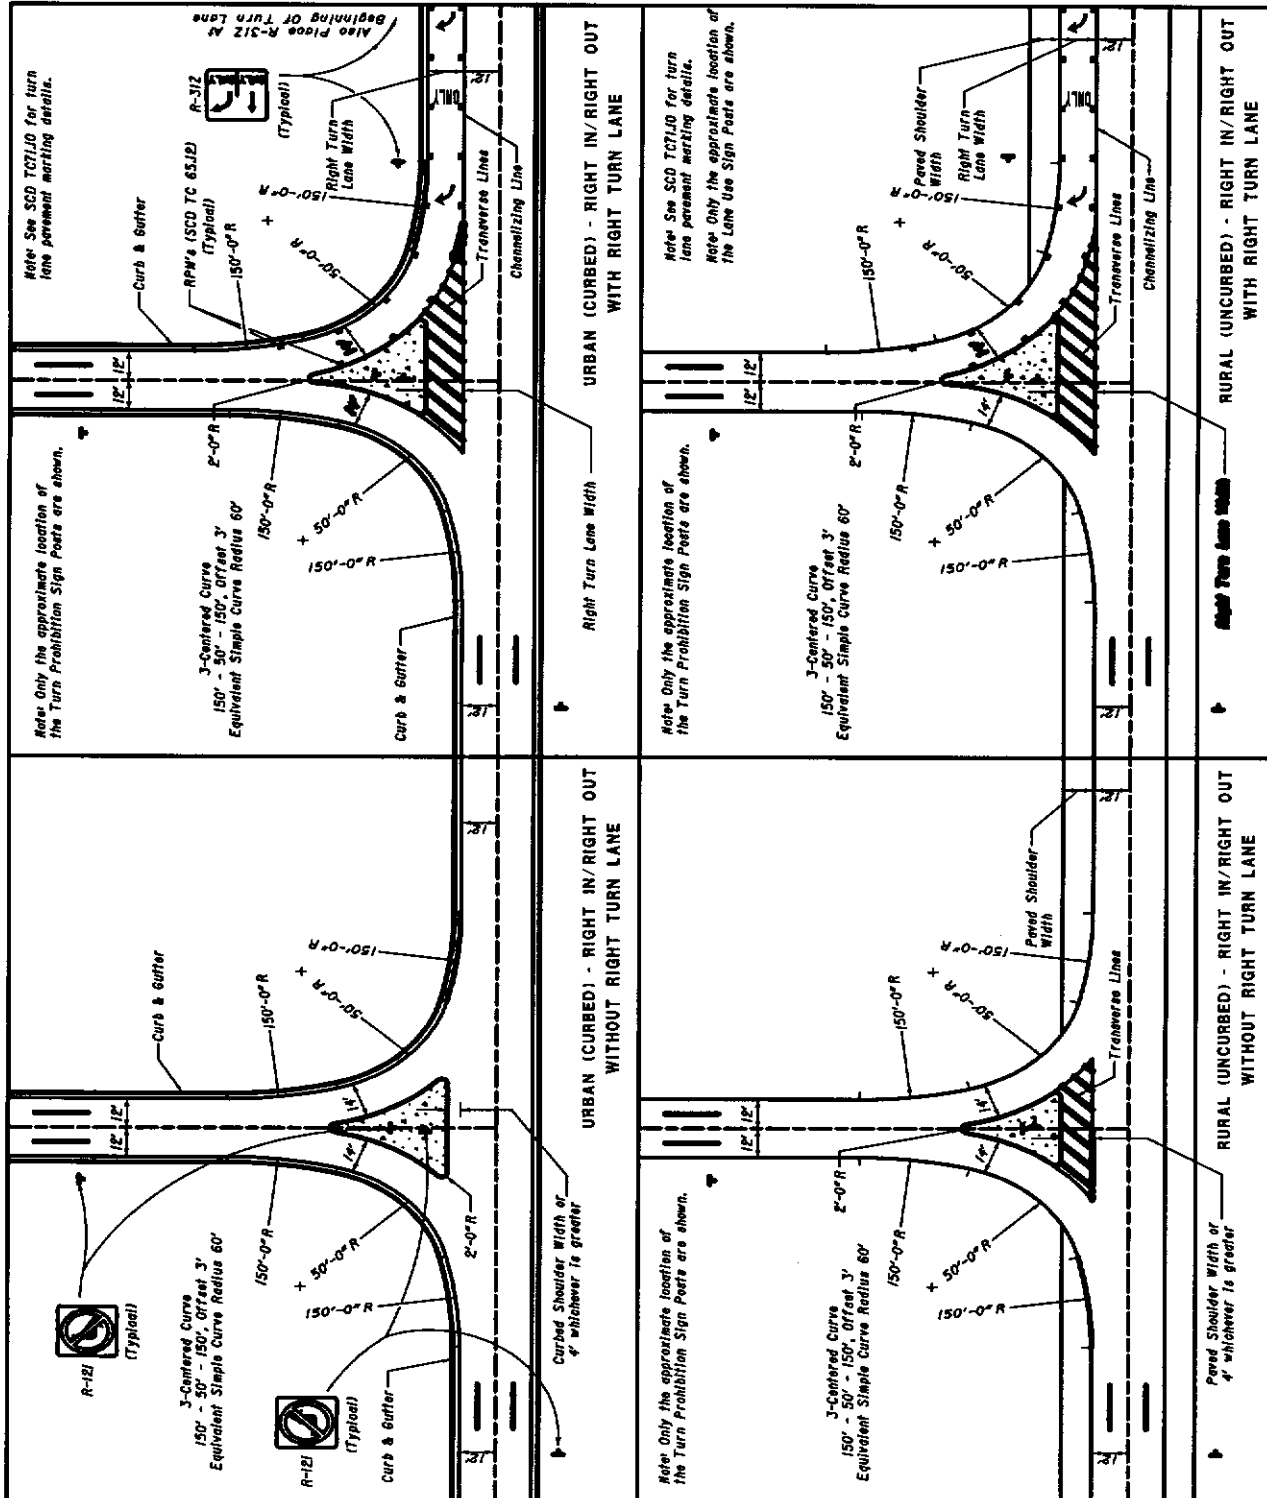

Source: ODOT State Highway Access Management Manual


October 2004

CHANNELIZING ISLANDS SINGLE UNIT AND MINIMUM WB-50 TRUCK DESIGNS

401-13bE

REFERENCE SECTION

401-7.2

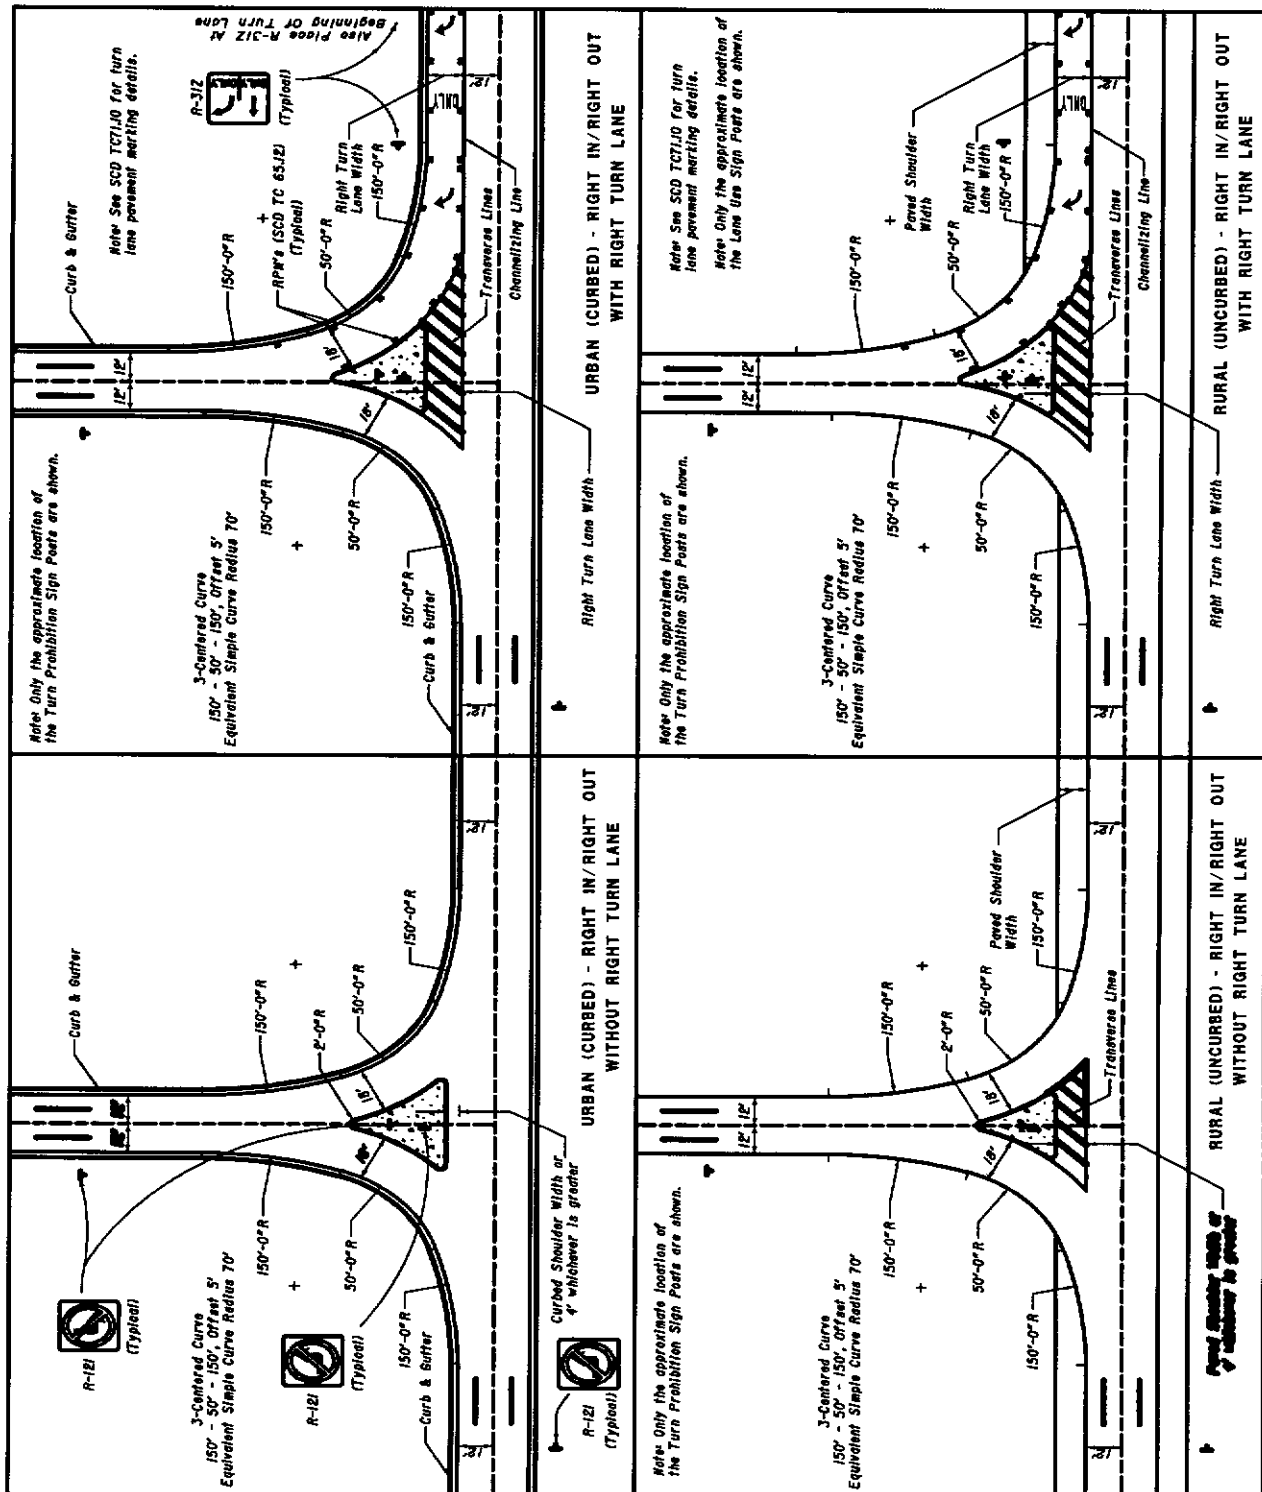

Source: ODOT State Highway Access Management Manual


October 2004

CHANNELIZING ISLANDS WB-50 TRUCK DESIGNS

401-13cE

REFERENCE SECTION

401.7.2

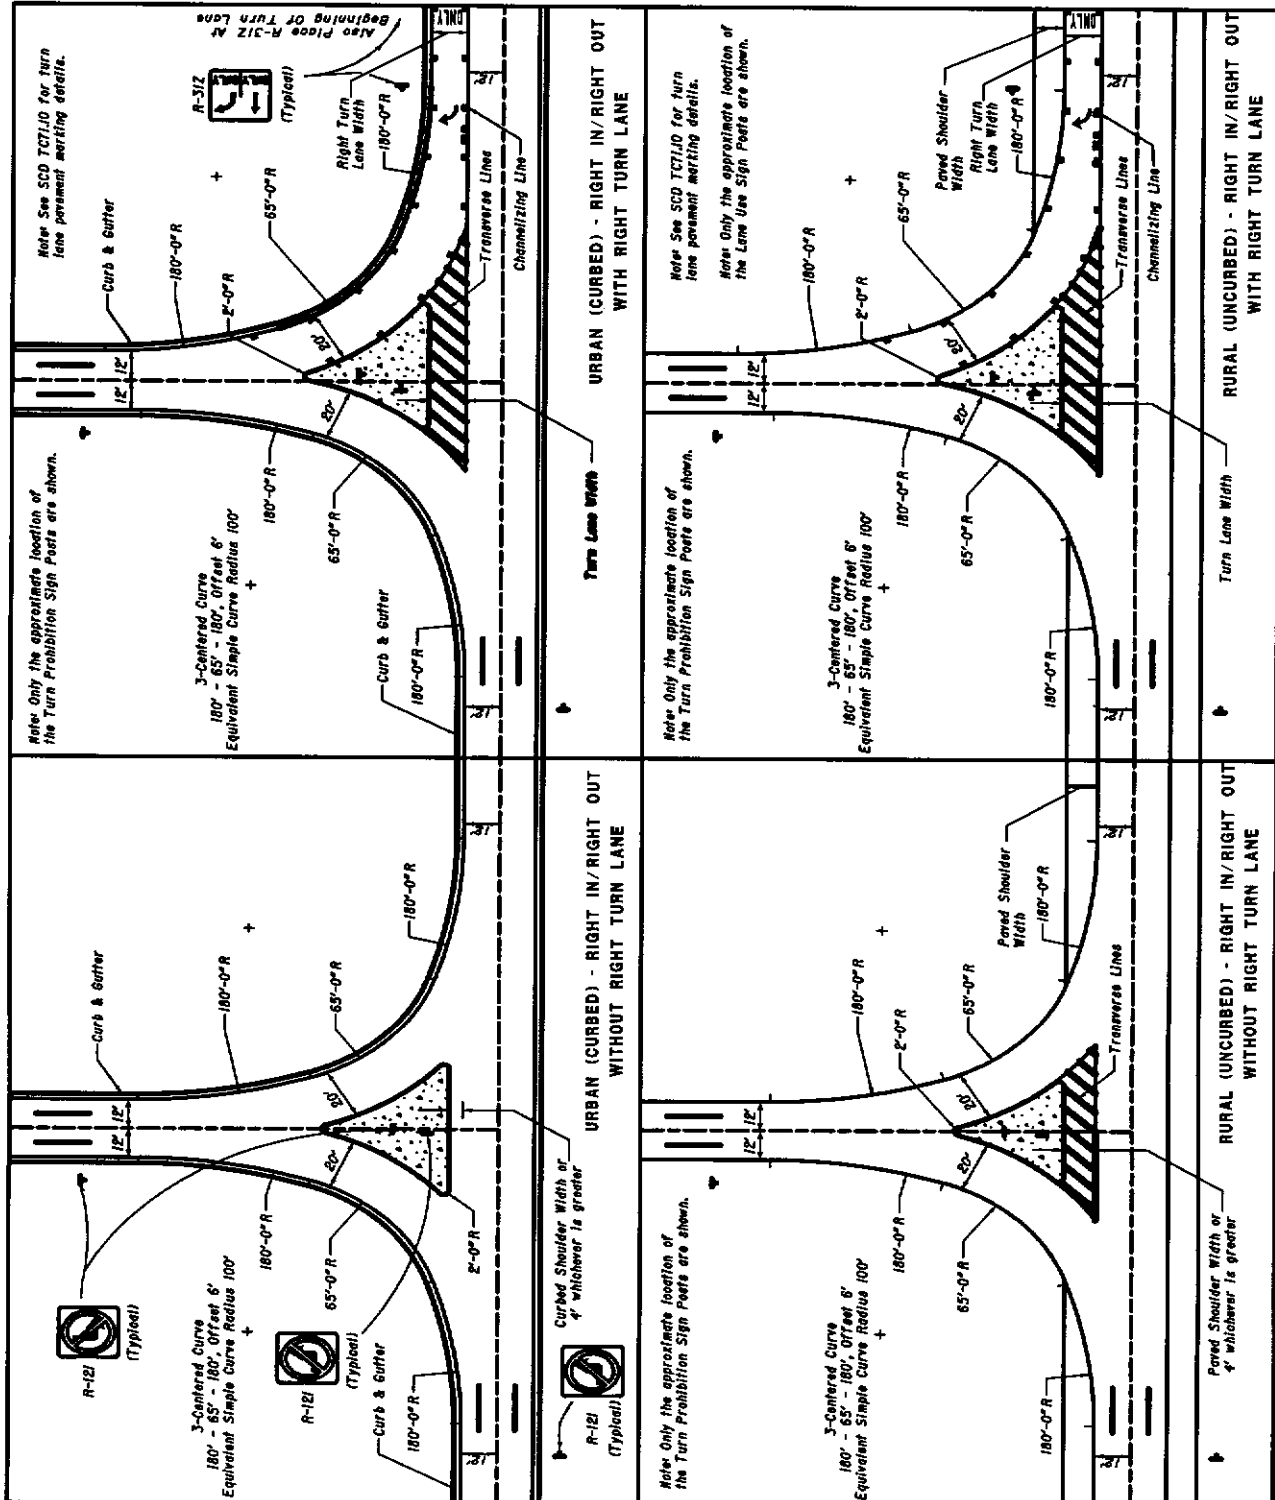

Source: ODOT State Highway Access Management Manual


October 2004

CHANNELIZING ISLANDS TYPICAL ISLANDS WITH PERMITTED LEFT TURNS

401-13dE

REFERENCE SECTION

401.7.2

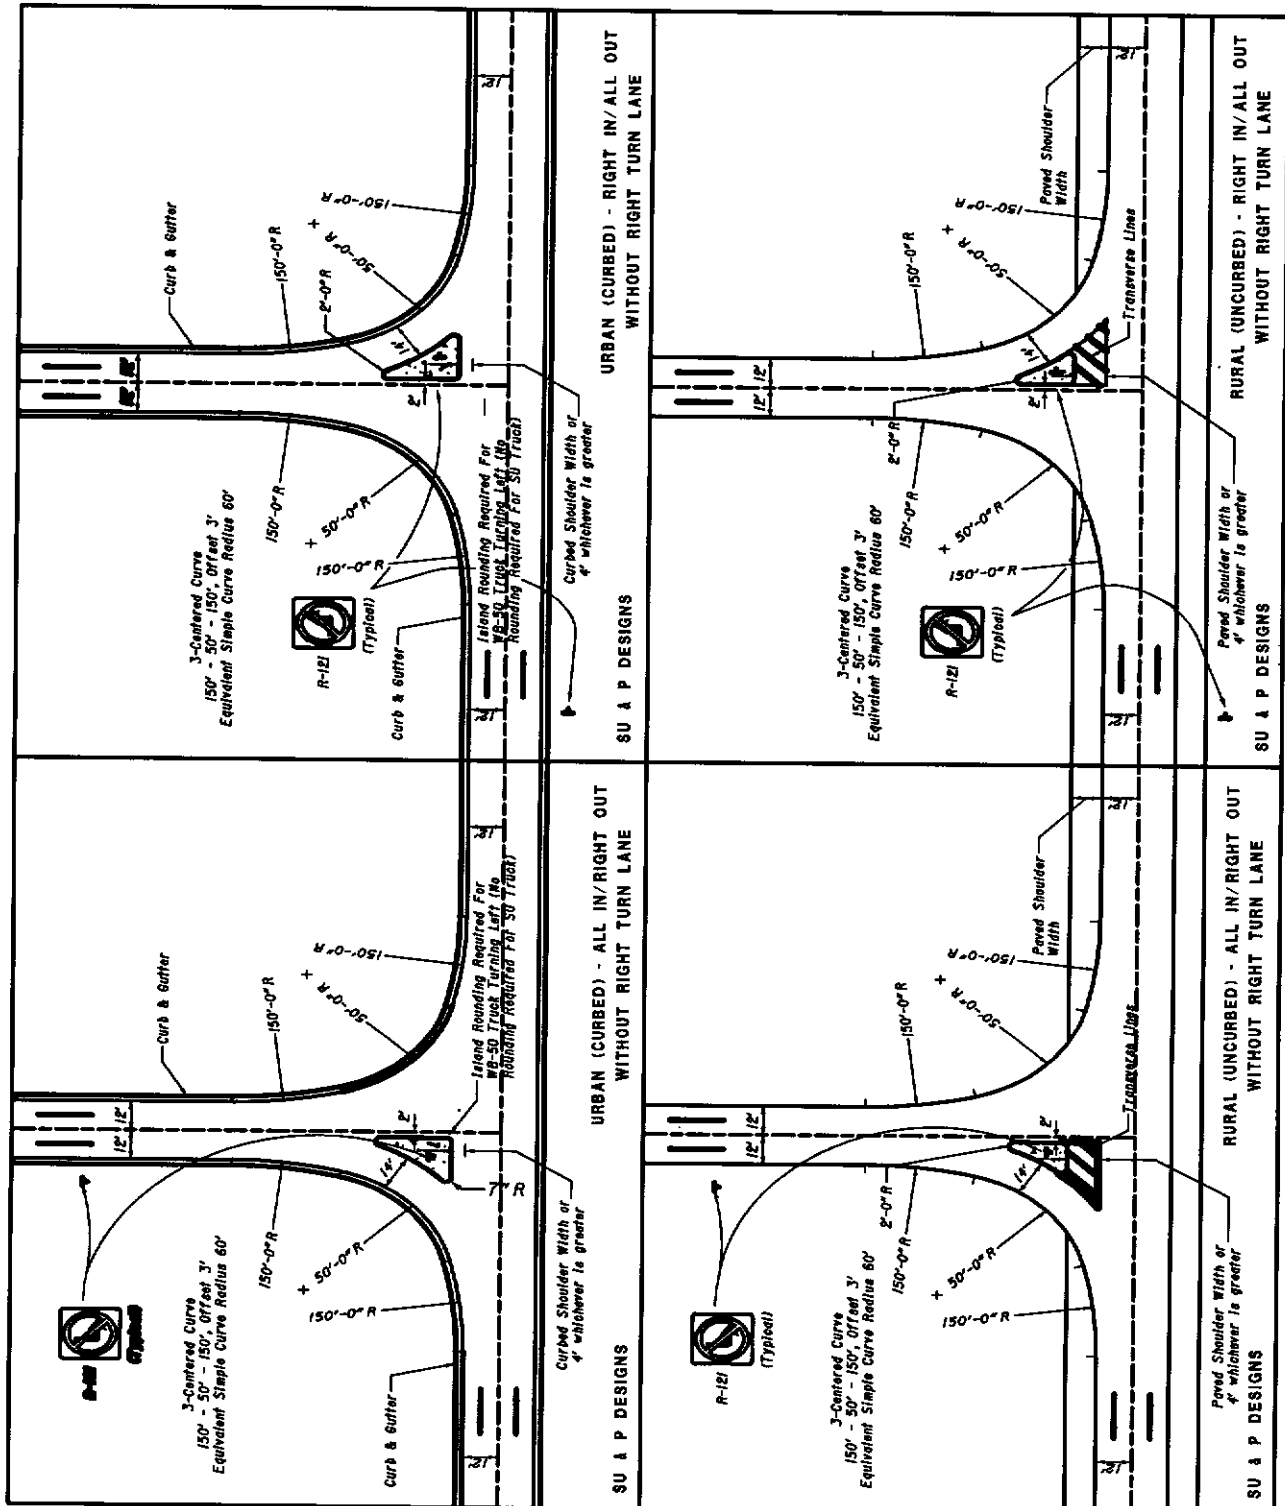

Source: ODOT State Highway Access Management Manual

October 2004

500 Interchange Design

Table of Contents

501 Interchange Design	5-1
501.1 General.....	5-1
501.2 Interchange Type.....	5-1
501.2.1 General.....	5-1
502 Interchange Design Considerations	5-2
502.1 Determination of Interchange Configuration	5-2
502.2 Approaches to the Structure.....	5-2
502.2.1 Alignment, Profile and Cross Section	5-2
502.2.2 Sight Distance.....	5-2
502.3 Interchange Spacing	5-3
502.4 Uniformity of Interchange Patterns	5-3
502.5 Route Continuity	5-3
502.6 Signing and Marking	5-3
502.7 Basic Number of Lanes.....	5-3
502.8 Coordination of Lane Balance and Basic Number of Lanes.....	5-4
502.9 Auxiliary Lanes	5-4
502.10 Lane Reductions.....	5-4
502.11 Weaving Sections.....	5-4
503 Interchange Ramp Design	5-5
503.1 General.....	5-5
503.2 Ramp Design Speed	5-5
503.2.1 Diamond Ramp Design Speeds	5-5
503.2.2 Loop Ramp Design Speeds	5-5
503.2.3 Directional Ramp Design Speeds	5-6
503.3 Vertical Alignment.....	5-6
503.4 Horizontal Alignment	5-6
503.5 Ramp Terminals	5-7
503.5.1 General Considerations	5-7
503.5.2 Left-hand Entrances and Exits	5-7
503.5.3 Distance Between Successive Ramp Terminals	5-7
503.6 Single-Lane Ramp Terminals.....	5-7
503.6.1 Terminal Classification	5-8
503.6.2 Single-Lane Entrance Terminals	5-8
503.6.2.1 High-Speed.....	5-8
503.6.2.2 Low-Speed.....	5-8
503.6.3 Single-Lane Exit Terminals	5-8
503.6.3.1 High-Speed.....	5-8
503.6.3.2 Low-Speed.....	5-9
503.6.4 Superelevation at Terminals.....	5-9
503.6.5 Terminals on Crest Vertical Curves.....	5-9
503.7 Ramp At-Grade Intersections.....	5-9
504 Collector - Distributor (C-D) Roads.....	5-10
504.1 Use of C-D Roads	5-10

500 Interchange Design

504.2 Design of C-D Roads	5-10
504.3 C-D Road Entrance and Exit Terminals	5-10
505 Multi-lane Ramp & Roadway Terminals and Transitions	5-10
505.1 Multi-lane Entrance Ramps and Converging Roadways	5-11
505.1.1 General	5-11
505.1.2 Lane Balance and Continuity	5-11
505.1.3 Inside Merges	5-11
505.1.4 Preferential Flow	5-11
505.1.5 Horizontal Curvature	5-11
505.1.6 Crest Vertical Curves	5-12
505.1.7 Superelevation and Joint Location	5-12
505.2 Multi-lane Exit Ramps and Diverging Roadways	5-12
505.2.1 General	5-12
505.2.2 Lane Balance and Continuity	5-12
505.2.3 Terminal Design	5-13
505.2.4 Horizontal Curvature	5-13
505.2.5 Crest Vertical Curves	5-13
505.2.6 Superelevation and Joint Location	5-13
505.3 Four Lane Divided to Two Lane Transition	5-13
506 Service Roads	5-14
506.1 Use of Service Roads	5-14
506.2 Design of Service Roads	5-14
550 Requests for New or Revised Access - Interstate Highways or Other Freeways	5-14
550.1 General	5-14
550.2 Access Point Request Document	5-15
550.2.1 Safety Improvements on Interstate Highways or other Freeways	5-18
550.3 Study Methodology	5-18
550.3.1 General	5-18
550.3.2 Constrained Traffic	5-18
550.3.3 Delay Balancing	5-18
550.3.4 Diagrams and Plans	5-18
550.4 Environmental Studies	5-18
550.4.1 Environmental Overview	5-18
550.4.2 Environmental Document	5-19
550.5 Review Process	5-19

500 Interchange Design

501 Interchange Design

501.1 General

An interchange is defined as a system of interconnecting roadways in conjunction with one or more grade separations that provides for the movement of traffic between two or more roadways or highways on different levels. Interchanges are utilized on freeways and expressways where access control is important. They are used on other types of facilities only where crossing and turning traffic cannot be accommodated by a normal at-grade intersection. An Interchange Justification Study may be necessary.

501.2 Interchange Type

501.2.1 General

The most commonly used types of interchanges are the diamond, cloverleaf and directional.

The diamond interchange is the most common type where a major facility intersects a minor highway. The design allows free-flow operation on the major highway but creates at-grade intersections on the minor highway with the ramps. The capacity is limited by the at-grade intersections on the minor highway. Variations of the diamond interchange include the Tight Urban Diamond Interchange (TUDI) and the Single Point Urban Interchange (SPUI). The characteristics of the TUDI include closely spaced ramp intersections, typically within 250 ft [76 m] to 400 ft. [122 m] of each other, with side-by-side left turn lanes on the minor highway that extend beyond the first ramp intersection. Special signal phasing allows queuing of vehicles outside the ramp intersections and minimizes queuing of vehicles between the ramp intersections. The SPUI aligns the left turn movements of the exit ramps opposite one another to form a single intersection at the center of the grade separation structure. Both SPUIs and TUDIs are more compact than a standard diamond, but are significantly more costly to construct.

Cloverleaf or partial cloverleaf designs may be used in lieu of a diamond when development or other physical conditions prohibit construction in a quadrant, or where heavy left turns are involved. A continuous flow design is required where two major facilities intersect. In this case, a full cloverleaf interchange is the minimum design that can be used. The designer should consider collector-distributor roads in conjunction with cloverleaf interchanges to minimize weaving.

However, full cloverleafs have deficiencies which need to be addressed before being chosen as the interchange type. Principle disadvantages are:

- The inherent weaving maneuver generated and the short weaving length available.
- Large trucks may not be able to operate efficiently on the smaller curve radii on the associated loop ramps.
- Loop ramps are limited in capacity.

When Collector-Distributor roads are not used, a further disadvantage includes weaving on the main line, the double exit on the main line and problems associated with signing for the second exit.

The full cloverleaf weaving maneuver is not objectionable when the left-turning movements are relatively light, but when the sum of traffic volumes on two adjoining loops approaches about 1,000 vehicles per hour, interference occurs, which results in a reduction in the speed of the mainline traffic. On low-volume full cloverleaf interchanges, the weaving length shown in **Figure 503-1a** should be provided. When the weaving volume in a particular weaving section exceeds 1,000 vehicles per hour, the quality of service on

500 Interchange Design

the main facility deteriorates, generating a need to transfer the weaving section from the through lanes to a C-D road. For these reasons, full cloverleafs are discouraged.

Directional interchanges are the highest type and most expensive. They permit vehicles to move from one major freeway to another major freeway at relatively fast and safe speeds.

502 Interchange Design Considerations

502.1 Determination of Interchange Configuration

Interchange configurations are covered in two categories, “system interchanges” and “service interchanges.” The term “system interchange” is used to identify interchanges that connect two or more freeways, whereas the term “service interchange” applies to interchanges that connect a freeway to lesser facilities. Generally, interchanges in rural areas are widely spaced and can be designed on an individual basis without any appreciable effect from other interchanges within the system. However, the final configuration of an interchange may be determined by the need for route continuity, uniformity of exit patterns, single exits in advance of the separation structure, and elimination of weaving on the main facility, signing potential, and availability of right-of-way. Selecting an appropriate interchange configuration in an urban environment involves considerable analysis of prevailing conditions so that the most practical interchange configuration alternatives can be developed. Generally, in urban areas, interchanges are so closely spaced that each interchange may be influenced directly by the preceding or following interchange to the extent that additional traffic lanes may be needed to satisfy capacity, weaving and lane balance. Interchanges should provide for all movements, even when an anticipated turning movement volume is low.

Once several alternates have been prepared for the system design, they can be compared on the following principles: (1) capacity, (2) route continuity, (3) uniformity of exit patterns, (4) single exits in advance of the separation structure, (5) with or without weaving, (6) potential for signing, (7) cost, (8) availability of right-of-way, (9) constructability, and (10) compatibility with the environment.

502.2 Approaches to the Structure

502.2.1 Alignment, Profile and Cross Section

Traffic passing through an interchange should be afforded the same degree of utility and safety as that given on the approaching roadways. The design speed, alignment, profile and cross section in the interchange area should be consistent with those on the approaching highways. Four-lane roadways should be divided at interchanges with a non-traversable median to ensure that drivers use the proper ramps for left-turning maneuvers. At-grade left turns preferably should be accommodated within a suitably wide median.

502.2.2 Sight Distance

Sight distance on the roadways through an interchange should be at a minimum the required stopping sight distance and preferably should be Decision Sight Distance (**Figure 201-6**), particularly along entrances and exits.

The horizontal sight distance limitations of piers and abutments at curves usually present a more difficult problem than that of vertical limitations. With the minimum radius for a given design speed, the normal lateral clearances at piers and abutments of underpasses does not provide the minimum stopping sight

500 Interchange Design

distance. Similarly, on overpasses with the sharpest curvature for the design speed, sight distance deficiencies result from the usual offset to the bridge railing. Above minimum radii should be used for curvature on roadways through interchanges. If sufficiently flat curvature cannot be used, the clearances to abutments, piers or bridge railing should be increased to obtain the proper sight distance, even though this involves increasing structure spans or widths.

502.3 Interchange Spacing

Interchanges should be located close enough together to properly discharge and receive traffic from other highways or streets, and far enough apart to permit the free flow and safety of traffic on the main facility. In general, more frequent interchange spacing is permitted in urbanized areas. Minimum spacing is determined by weaving requirements, ability to sign, lengths of speed change lanes, and capacity of the main facility.

Interchanges within urban areas should not be spaced closer than an average of 2 miles [3.2 km], in suburban sections an average of not closer than 4 miles [6.5 km], and in rural sections an average of not closer than 8 miles [13 km]. In consideration of the varying nature of the highway, street or road systems with which the freeway or expressway must connect, the spacing between individual adjacent interchanges must vary considerably. In urban areas, the minimum distance between adjacent interchanges should not be less than 1 mile [1.6 km], and in rural areas not less than 3 miles [4.8 km]. Spacing less than this have a detrimental effect on freeway operations.

502.4 Uniformity of Interchange Patterns

Since interchange uniformity and route continuity are interrelated concepts, interchanges along a freeway should be reasonably uniform in geometric layout and general appearance to provide the appropriate level of service and maximum safety in conjunction with freeway operations. Except in highly special cases, all entrance and exit ramps should be on the right.

502.5 Route Continuity

Route continuity is an extension of the principle of operational uniformity coupled with the application of proper lane balance and the principle of maintaining a basic number of lanes. The principle of route continuity simplifies the driving task in that it reduces lane changes, simplifies signing, delineates the through route and reduces the driver's search for directional signing. Desirably, the through driver should be provided a continuous through route on which changing lanes is not necessary to continue on the through route. In maintaining route continuity, interchange configuration may not always favor the heavy traffic movement, but rather the through route. In this situation, heavy movements can be designed on flat curves with reasonably direct connections and auxiliary lanes.

502.6 Signing and Marking

The safety, efficiency and clarity of paths to be followed at interchanges depend largely on their relative spacing, geometric layout and effective signing and marking. The location of and minimum spacing between ramp terminals depends to a large degree on whether or not effective signing can be provided. Signing and marking should conform to the OMUTCD.

502.7 Basic Number of Lanes

The basic number of lanes is defined as a minimum number of lanes designated and maintained over a significant length of a route, irrespective of changes in traffic volume and lane balance needs. (The basic

500 Interchange Design

number of lanes is a constant number of lanes assigned to a route, exclusive of auxiliary lanes, based on capacity needs of the section.)

502.8 Coordination of Lane Balance and Basic Number of Lanes

Design traffic volumes and a capacity analysis determine the basic number of lanes to be used on the freeway and the minimum number of lanes on the ramps. The basic number of lanes should be established for a substantial length of freeway and should not be changed through pairs of interchanges, simply because there are substantial volumes of traffic entering or leaving the freeway. There should be continuity in the basic number of lanes. Auxiliary lanes should be provided for variations in traffic demand.

After the basic number of lanes is determined for each roadway, the balance in the number of lanes should be checked on the basis of the following principles:

1. At entrances, the number of lanes beyond the merging of two traffic streams should not be less than the sum of all traffic lanes on the merging roadways minus one, but may be equal to the sum of all traffic lanes on the merging roadways.
2. At exits, the number of approach lanes on the roadway should be equal to the number of lanes on the roadway beyond the exit, plus the number of lanes on the exit, minus one. Exceptions to this principle occur at cloverleaf loop ramp exits that follow a loop ramp entrance and at exits between closely spaced interchanges. In these cases, the auxiliary lane may be dropped in a single-lane exit with the number of lanes on the approach roadway being equal to the number of through lanes beyond the exit plus the lane on the exit.
3. The traveled way of the highway should be reduced by not more than one traffic lane at a time.

502.9 Auxiliary Lanes

An auxiliary lane is the portion of the roadway adjoining the traveled way for speed change, turning, storage for turning, weaving and other purposes supplementary to through-traffic movement. An auxiliary lane may be provided to comply with the concept of lane balance, to comply with capacity needs or to accommodate speed changes, weaving and maneuvering of entering or exiting traffic.

502.10 Lane Reductions

The basic number of mainline lanes should not be reduced through a “service interchange”. If a reduction in the basic number of lanes is warranted by a substantial decrease in traffic volume over a significant length of freeway, then it should be reduced between interchanges. The reduction should occur 2,000 to 3,000 ft. [600 to 900 m] from the end of the acceleration taper of the previous interchange to allow for adequate signing. The end of the lane reduction should be tapered at a rate of 70:1. The lane reduction should occur on a tangent section of freeway, preferably within a sag vertical curve, and provide Decision Sight Distance, **Figure 201-6**, where possible. The lane reduction should also be on the right side of the freeway.

502.11 Weaving Sections

Weaving sections are highway segments where the pattern of traffic entering and exiting at contiguous points of access results in vehicle paths crossing each other. Weaving sections may occur within an interchange, between closely spaced interchanges or on segments of overlapping routes.

500 Interchange Design

Because weaving sections cause considerable turbulence which results in a reduction in capacity, interchange designs that eliminate weaving or remove it from the mainline by the use of C-D roads are desirable.

The capacity of weaving sections may be seriously restricted unless the weaving section has adequate length, adequate width and lane balance. Refer to the Highway Capacity Manual for capacity analysis of weaving sections.

503 Interchange Ramp Design

503.1 General

An interchange ramp is a roadway which connects two legs of an interchange. Ramp cross section elements are discussed in **Section 303.1**. Elements contributing to horizontal and vertical alignments are designed similar to any roadway (**Section 200**) once the ramp design speed has been determined.

503.2 Ramp Design Speed

In order to design horizontal and vertical alignment features, a design speed must be determined for each ramp. Since the driver expects a speed adjustment on a ramp, the design speed may vary within the ramp limits. **Figure 503-1** includes three ranges of ramp design speeds which vary with the design speed of the mainline roadway. The ramp design speed range is determined by engineering judgment based on several conditions:

1. The type of roadways at each end of the ramp and their design speeds,
2. The length of the ramp,
3. The terminal conditions at each end, and
4. The type of ramp (diamond, loop or directional).

Design exceptions will be required for speed related design criteria that do not meet the following:

- For directional ramps (roadways) that do not provide the minimum design speed given in **Section 503.2.3**.
- For loop ramps on high-speed roadways that do not provide a minimum design speed of 25 mph (150-ft radius) [40 km/h (50 m radius)].
- For all other ramps that, at a minimum, do not provide the lower range design speed of **Figure 503-1**.

503.2.1 Diamond Ramp Design Speeds

Diamond ramps normally have a high speed condition at one end and an at-grade intersection with either a stop or slow turn (15 mph, [25 km/h]) condition at the other. Upper to middle range design speeds in **Figure 503-1** are normal near the high speed facility with middle to lower range design speeds usually used closer to the at-grade intersection.

503.2.2 Loop Ramp Design Speeds

Loop ramps may have a high speed condition at one end and, either a slow or high speed condition at the other. Loop ramps, because of their short radius, usually have design speeds in the lower range in the

500 Interchange Design

middle and slow speed end of the ramp with middle range design speeds occasionally used nearer the high speed terminal. For design speeds, see **Figure 503-1**. The minimum loop ramp radius is 150 feet (50 m).

503.2.3 Directional Ramp Design Speeds

Directional ramps (roadways) generally have high speed conditions at both ends. They are normally designed using a design speed falling into the upper range of **Figure 503-1**. The absolute minimum should be the middle range design speeds.

503.3 Vertical Alignment

Maximum grades for vertical alignment cannot be as definitely expressed as for the highway, but should preferably not exceed 5 percent. General values of limiting upgrades are shown in **Table 503-1**, but for any one ramp the grades to be used are dependent upon a number of factors. These factors include the following:

1. The flatter the gradient on the ramp relative to the freeway grade, the longer the ramp will be.
2. The steepest grades should occur over the center part of the ramp. Grades at the terminal ends of the ramp should be as flat as possible.
3. Short upgrades of 7 to 8 percent permit good operation without unduly slowing down passenger cars. Short upgrades of as much as 5 percent do not unduly affect trucks and buses.
4. Ramp grades and lengths can be significantly impacted by the angle of intersection between the two highways when the angle is 70 degrees or less. The direction and grade on the two highways may also have a significant impact.
5. Adequate sight distance is more important than a specific gradient control and should be favored in design.

Table 503-1 Maximum Ramp Upgrades			
Ramp Design Speed	25-30 mph [40-50 km/h]	35-40 mph [55-65 km/h]	45 mph and above [70 km/h and above]
Desirable Grade (%)	5	4	3
Maximum Grade (%)	7	6	5

Note: Downgrades may exceed the table values by 2%, but should not exceed 8%.

503.4 Horizontal Alignment

Horizontal alignment will be largely determined by the selected design speed and type of ramp. The horizontal alignment criteria found in **Section 202** shall also apply to ramps. Check that the required horizontal stopping sight distance is provided. Use the allowed skew at the ramp terminal at-grade intersection to minimize curvature.

Depending on the design speed and curvature, curve widening may be required on a two-lane ramp. See **Section 301.1.3** and **Figure 301-5c**. The WB-62 [WB-19] design vehicle should be used for Interstate ramps.

500 Interchange Design

503.5 Ramp Terminals

The terminal of a ramp is that portion adjacent to the through traveled way, including speed change lanes, tapers and islands. Ramp terminals, as opposed to diverging roadways, require speed change lanes. Ramp terminals may be the at-grade type, as at the crossroad terminal of diamond or partial cloverleaf interchanges, or the free-flow type where ramp traffic merges with or diverges from high-speed through traffic at flat angles. Terminals are further classified as either single-lane or multi-lane and as either a taper or parallel type.

503.5.1 General Considerations

While interchanges are custom designed to fit specific site conditions, it is desirable that the overall pattern of exits along the freeway have some degree of uniformity. It is desirable that all interchanges have one point of exit located in advance of the crossroad wherever practical.

Because considerable turbulence occurs throughout weaving sections, interchange designs that eliminate weaving entirely or at least remove it from the mainline are desirable. Weaving sections may be eliminated from the mainline by the incorporation of C-D roadways or grade separating the ramps (braiding).

Interchanges that provide all exit movements before any entrance movements will also eliminate weaving and are highly recommended.

503.5.2 Left-hand Entrances and Exits

Left-hand entrances and exits are contrary to the concept of driver expectancy when intermixed with right-hand entrances and exits. Therefore, extreme care should be exercised to avoid left-hand entrances and exits in the design of interchanges. Because they are contrary to driver expectancy, special attention should be given to signing and the provision for decision sight distances to alert the driver an unusual condition exists.

503.5.3 Distance Between Successive Ramp Terminals

In urban areas ramp terminals are often located in close succession. To provide sufficient weaving length and adequate space for signing, a reasonable distance should be provided between successive ramp terminals. Spacing between successive outer ramp terminals is dependent on the classification of the interchanges involved, the function of the ramp pairs (entrance or exit), and weaving potential. Minimum spacing for various ramp combinations are shown in **Figure 503-1a**.

Where an entrance ramp is followed by an exit ramp, that absolute minimum distance between the successive noses is governed by weaving considerations. This spacing is not applicable to cloverleaf interchanges as the distances between entrance-exit ramps noses is dependent on loop ramp radii and other factors. When the distance between successive noses is less than 1,500 ft. [450 m] the speed change lanes should be connected to provide an auxiliary lane to improve traffic flow over a relatively short section of the freeway.

503.6 Single-Lane Ramp Terminals

This discussion is limited to terminals used for single-lane entrance and exit ramps only. See **Section 505** for multi-lane transitions. Ohio's standards currently permit a parallel exit terminal and tapered entrance terminal.

500 Interchange Design

503.6.1 Terminal Classification

Ohio uses two basic ramp terminal classifications.

High-Speed Terminals (See **Figures 503-2a, 503-2b and 503-2c**, along with **Figures 503-3a, 503-3b and 503-3c**) - High-Speed terminals are intended for use on all Interstate highways and on other limited access freeways or expressways having similar design standards and a minimum design speed of 50 mph [80 km/h].

Low-Speed Terminals (See **Figures 503-4a and 503-4b**) - Low-Speed terminals (design speeds of 45 mph [70 km/h] or less) are intended for use on all other limited access expressways or other highways which have little or no access control except through an interchange area. Many of the features of Low-Speed terminals are applicable to a terminal of one ramp with another ramp. Low Speed terminals are also used with Low-Speed C-D Roads.

503.6.2 Single-Lane Entrance Terminals

503.6.2.1 High-Speed

The typical single-lane entrance terminal consists of two parts, an acceleration lane and a taper. The acceleration lane allows the entering vehicle to accelerate to the freeway speed and evaluate gaps in the freeway traffic. The taper is provided for the entering vehicle to merge into the chosen gap in freeway traffic. The minimum taper rate is 50:1.

The length of the acceleration lane varies depending on the design speed of the last ramp curve on the entrance ramp and the design speed of the mainline. **Figure 503-2a** provides the minimum lengths of acceleration lanes for entrance ramp terminals. When the average grade of the acceleration lane exceeds 3%, the acceleration length obtained from **Figure 503-2a** should be adjusted by the factor obtained from **Figure 503-2b**. The acceleration lane length is measured from the last entrance ramp curve point (PT or CS) to the point where the right edge of the ramp is 12 feet [3.6 m] from the right edge of the through lane of the freeway. **Figure 503-2c** illustrates the typical design of a single-lane entrance ramp terminal.

Referring to **Figure 503-2c**, when the required acceleration length (L from **Figure 503-2a**, adjusted to grade, **Figure 503-2b**) is less than the acceleration length provided by the 200 ft. [60 m] spiral plus 650 ft [200 m] of the 50:1 taper, then a parallel acceleration length is not required and the terminal becomes the minimum acceptable design consisting of the 200 ft. [60 m] spiral and the 1,250 ft. [380 m] 50:1 taper.

503.6.2.2 Low-Speed

Figure 503-4a provides the Low-Speed Entrance Terminal designs for design speeds equal to or less than 45 mph [70 km/h].

503.6.3 Single-Lane Exit Terminals

503.6.3.1 High-Speed

The typical single-lane exit terminal consists of two parts, a taper for maneuvering out of the through traffic lane and a deceleration lane to slow to the speed of the first curve on the ramp. All deceleration should occur on the full width deceleration lane and not on the mainline or the taper.

The length of the deceleration lane varies depending on the design speed of the mainline and the design speed of first geometric control on the exit ramp, usually a horizontal curve but could be the stopping

500 Interchange Design

sight distance on a vertical curve or the back of an anticipated traffic queue. **Figure 503-3a** provides the minimum lengths of deceleration lanes for exit ramp terminals. When the average grade of the deceleration lane exceeds 3 percent, the deceleration length obtained from **Figure 503-3a** should be adjusted by the factor obtained from **Figure 503-3b**. The deceleration lane length is measured from the point where the taper reaches a width of 12 feet [3.6 m] to the first point that governs the design speed of the exit ramp, usually the PC of the first curve. **Figure 503-3c** illustrates the typical design of a single-lane exit ramp terminal.

The minimum deceleration length (**Figure 503-3a**) adjusted to grade (**Figure 503-3b**) shall be 800 ft. [245 m].

503.6.3.2 Low-Speed

Figure 503-4b provides the Low-Speed Exit Terminal design for design speeds equal to or less than 45 mph [70 km/h].

503.6.4 Superelevation at Terminals

Superelevation at ramp terminals should be developed using the following guidelines:

1. The rate of superelevation at the entrance and exit nose shall be selected on the basis of the design speed of the ramp at the nose.
2. All transverse changes or breaks in superelevation shall be made at joint lines (See **Standard Construction Drawing BP-6.1**). In the case of bituminous pavement, the superelevation breaks should occur in the same locations as they would in concrete pavement.
3. For High-Speed terminals, the transverse breaks in superelevation cross-slope shall not exceed a differential of 0.032 at the mainline pavement edge or 0.050 at other locations. If a double break occurs on longitudinal joints less than 6 ft. [1.8 m] apart, it shall not exceed a total differential of 0.032, if adjacent to the mainline, or 0.050 elsewhere. On Low-Speed terminals the transverse breaks in superelevation cross-slope shall not exceed a differential of 0.05 to 0.06.
4. For High-Speed terminals, the rate of rotation of a superelevated ramp pavement or speed change lane pavement shall be in accordance with **Section 202.4**.
5. Where possible, the terminal area pavement and shoulder should slope away from the mainline pavement so that a minimum amount of water drains across the mainline pavement.

503.6.5 Terminals on Crest Vertical Curves

Mainline crest vertical curves in the vicinity of ramp terminals should be designed using decision stopping sight distances. Where a crest vertical curve occurs on an exit ramp at or near the nose, the crest vertical curve should be designed using the "upper range" design speeds of **Figure 503-1**.

503.7 Ramp At-Grade Intersections

Ramp at-grade intersections are designed using much of the same criteria as outlined in **Section 401** (the normal design vehicle for Interstate ramps is the WB-62 [WB-19]). However, one of the basic differences is the one-way nature of ramps and the fact that most traffic at ramp intersections is turning. **Figure 503-5** shows the design of a typical uncurbed ramp intersection. Curbed returns are normally

500 Interchange Design

used in urban areas where space is more restricted. Intersection Sight Distance, **Section 201.3**, should be provided at all ramp at-grade intersections.

Exit ramps may require multiple lanes at the crossroad intersection to provide additional storage and capacity. **Figure 503-5a** illustrates alternate ways to transition from a single lane exit ramp to two lanes. The additional lane is usually provided for the minor movement.

504 Collector - Distributor (C-D) Roads

504.1 Use of C-D Roads

The reason for using C-D Roads is to minimize weaving problems and reduce the number of conflict points (merging and diverging) on the mainline. C-D Roads may be used within a single interchange, through two adjacent interchanges, or continuously through several interchanges.

504.2 Design of C-D Roads

When a C-D Road is provided between interchanges, a minimum of two lanes should be used. Either one or two lanes may be used on C-D Roads within a single interchange. The cross section elements for one and two lane C-D Roads should be in accordance with the one lane and two lane directional roadways shown in **Figure 303-1**. The design speed of a C-D Road should normally be the same as the mainline design speed but may be reduced by not more than 10 mph [15 km/h].

The separation between the mainline and C-D Road pavements should be designed to prevent, or at least discourage, indiscriminate crossovers. As a minimum, the separation should be wide enough to provide normal shoulder widths for both the mainline and C-D Road roadways plus a suitable median. Normally, a standard concrete barrier median is used since C-D Road separation often involves obstructions such as bridge parapets, piers or overhead sign supports. There may be isolated cases where a lesser type median may be used.

504.3 C-D Road Entrance and Exit Terminals

Figure 504-1 shows both Low-Speed and High-Speed C-D Road entrance terminals. Three exit terminal lane conditions are shown on **Figure 504-2**. These terminal designs are to be applied to highways using High-Speed exit terminals.

Superelevation at C-D Terminals shall be developed similar to that described in **Section 503.6.4**.

505 Multi-lane Ramp & Roadway Terminals and Transitions

When two roadways converge or diverge, the less significant roadway should exit or enter on the right. Left-hand exits or entrances are contrary to driver expectancy and should be avoided wherever possible.

500 Interchange Design

505.1 Multi-lane Entrance Ramps and Converging Roadways

505.1.1 General

Figure 505-1a shows the design to be used for multi-lane entrance ramps and converging roadways. Converging roadways are defined as separate and nearly parallel roadways or ramps which combine into a single continuous roadway or ramp having a greater number of lanes beyond the nose than the number of lanes on either approach roadway. (Single-Lane Entrance Terminals should be used in lieu of Converging Roadway drawings when a speed change lane is required.)

Figure 505-1b shows the specific design to be used for two-lane High-Speed entrance ramps.

High-Speed Converging Roadways should be used when either or both of the Converging Roadways are mainline roadways of an expressway or freeway or if the design speed of converging directional ramps is 50 mph [80 km/h] or higher. Low-Speed Converging Roadways should be used at the convergence of directional ramps within an interchange or at the convergence of interchange ramps with non-limited access roads or streets where design speeds are 45 mph [70 km/h] or lower.

505.1.2 Lane Balance and Continuity

In order to avoid inside merges, the number of mainline lanes plus converging lanes approaching the nose must be equal to the resultant number of lanes leaving the nose. To make this possible, it is often necessary to carry additional mainline lanes past the nose for an adequate distance prior to tapering back to the desired number of lanes. These details are shown in **Figure 505-1a**.

505.1.3 Inside Merges

When using a taper type of multilane entrance ramp an “inside merge” is created with traffic traveling on both sides of the merging lanes. If either vehicle involved with the merging movement abandons the merge, traffic in the adjacent lanes could prevent the merging vehicles from escaping to the adjacent lanes. By contrast, the parallel type multilane entrance ramp, as shown in **Figure 505-1a**, allows the merging vehicle to escape to the right shoulder without any interference. For the above reasons, inside merges are not desirable.

505.1.4 Preferential Flow

On **Figure 505-1a**, one roadway in each design is labeled PREFERENTIAL FLOW. This indicates the more important of the two approaching traffic flows. In selecting the preferential flow a designer must consider the effect of traffic volumes, number of lanes, sign route continuity and importance, vehicle speeds and roadway alignment. Lanes carrying the preferential flow are given the higher design treatment. When it is necessary to reduce a number of converging lanes or where an angular change in direction must occur, the design should favor the preferential flow.

505.1.5 Horizontal Curvature

Horizontal curves of roadways approaching the terminal nose should conform to mainline roadway criteria in the case of mainline roadways and to ramp entrance terminal criteria in the case of ramps.

500 Interchange Design

505.1.6 Crest Vertical Curves

Crest vertical curves on constant-width roadways approaching the merging nose should be designed to provide sight distance consistent with the design speed of the roadway.

Crest vertical curves from the merging nose forward to a point where pavement convergence ceases and to the converging portion of an approaching roadway where the number of lanes is being reduced in advance of the nose should be designed using the decision stopping sight distance shown in **Figure 201-6**. (See **Figure 505-1a**.)

When design speeds differ on approaching roadways, the higher of the two design speeds shall be used in designing the crest vertical curve beyond the merging nose.

505.1.7 Superelevation and Joint Location

Reference shall be made to **Section 503.6.4** for superelevation requirements.

Longitudinal joints should be located so they will coincide with and define the lane lines. Reference should be made to **Standard Construction Drawing BP-6.1** for type and location.

505.2 Multi-lane Exit Ramps and Diverging Roadways

505.2.1 General

Figure 505-2a shows the general design for multi-lane exit ramps and diverging roadways. A diverging roadway is defined as a single roadway which branches or forks into two separate roadways without the need of a speed change lane.

Figure 505-2b shows the specific design to be used for two-lane High-Speed exit ramps.

Figure 505-2c shows examples of designs for diverging roadways.

High-Speed Diverging Roadways should be used when either or both the diverging roadways are mainline roadways of an expressway or freeway or at the divergence of high-speed directional ramps within an interchange. Low-Speed Diverging Roadways should be used at the divergence of low-speed directional ramps within an interchange or at the divergence of ramps with non-limited access roads or streets.

505.2.2 Lane Balance and Continuity

In order to have lane continuity, the number of mainline lanes leaving the diverging nose must be equal to the number of mainline lanes approaching the nose. The total number of lanes leaving the diverging nose (mainline lanes plus diverging lanes) must be one greater than the total number of lanes approaching the nose to obtain lane balance. The purpose for obtaining lane continuity and lane balance is to avoid a drop lane situation. See **Figures 505-2a and 505-2b**.

It may be necessary to obtain this lane balance by adding additional lanes upstream from the diverging nose. The length of each additional lane should be 2,500 ft. [750 m] and should be introduced using a 0 to 12 ft. [3.6 m] taper with a length of 100 ft. [30 m] as shown on **Figure 505-2b** for the approach roadway class and design speed.

500 Interchange Design

There may be conditions off the mainline, such as on Collector-Distributor Roads or within interchanges, where lane balance and continuity is less important. In such cases, the non-mainline roadway design on **Figures 505-2a and 505-2b** may be used.

505.2.3 Terminal Design

The design of diverging roadway terminals is determined by the class and the design speed of the approach roadway, and is based on the neutral gore length "L" and the nose width "N" (See **Figure 505-2a**).

Table A on **Figure 505-2a** lists length "L" and nose width "N" for various design speeds in diverging roadway classes. The "N" dimension should be exact, but the "L" dimensions may vary slightly from the Table A value.

505.2.4 Horizontal Curvature

Table B on **Figure 505-2a** lists recommended values for the curve differential between the outer pavement edges of diverging roadways. These values apply only when the alignment between the diverging nose and the PC of the diverging curvature is on tangent or simple curvature.

When compounded or spiral curvature is used in the diverging area, it will be necessary to design diverging roadway alignments individually to provide the proper "L" and "N" for the approach roadway Class and design speed.

505.2.5 Crest Vertical Curves

When a diverging nose is located on a crest vertical curve, this vertical curve shall be designed using the design speed of the approach highway and decision stopping sight distance from **Figure 201-6**.

505.2.6 Superelevation and Joint Location

The superelevation rate will be based on the design speed of the approach roadway. Reference should be made to **Section 503.6.4** for other superelevation requirements.

Longitudinal joints should be located so they will define the lane lines. Reference should be made to **Standard Construction Drawing BP-6.1** for type and location. The joints in the gore area should be located to facilitate superelevation and pavement grading.

505.3 Four Lane Divided to Two Lane Transition

Figure 505-3 shows a reversed curve design (Types A and B) a tapered design (Type C) and a design for a transition on a curve (Type D). The pavement transition should be located in an area where it can easily be seen. Intersections or drives should be avoided in the transition area. Vertical or horizontal curves should provide decision stopping sight distance.

Reverse curve transitions should normally be used for median widths of 20 ft. [6 m] or wider.

Taper lengths are calculated as shown in **Section 401.6.1**.

500 Interchange Design

506 Service Roads

506.1 Use of Service Roads

Service roads (frontage roads) are used to enhance capacity on the mainline, control access, serve adjacent properties, or maintain traffic circulation. They permit development of adjacent properties while preserving the through character of the mainline roadway. Service roads may be either one-way or two-way, depending on where they are located and the purpose they are intended to serve.

506.2 Design of Service Roads

Although the alignment and profile of the mainline may have an influence, service roads are generally designed to meet the specific criteria based on functional classification (usually "local"), traffic volumes, terrain/locale and design speed. Two features, however, are unique to service roads and are further discussed below. They are (1) the separation between the service road and mainline and (2) the design of the crossroad connection.

The further the service road is located from the mainline, the less influence the two facilities will have on each other. A separation width that exceeds the clear zone measurement for each roadway is desirable. However, the separation should be at least wide enough to provide normal shoulder widths on each facility plus accommodate surface drainage and a suitable physical traffic barrier. Glare screen is desirable to screen headlights when the service road is two-way.

At crossroads, the distance between the mainline and service road becomes extremely critical. This distance should be great enough to provide adequate storage on the approaches to both the mainline and service road. The recommended minimum distance between the mainline and service road edges of pavement is 150 ft. [45 m] in urban areas and 300 ft. [90 m] in rural areas. In addition, the designer should check the adequacy of stopping sight distance on the crossroad as well as intersection sight distance at the frontage road.

Since service roads are normally maintained by local governmental agencies, the pavement design should either meet, or exceed, that required by the maintaining agency.

550 Requests for New or Revised Access - Interstate Highways or Other Freeways

550.1 General

Control of access on the Interstate and other freeway systems is considered critical to providing the highest quality of service in terms of safety and mobility. This section provides guidance for the preparation and processing of access point requests in relation to new and existing interchanges on the Interstate and other freeway systems in accordance to [Federal Code 23 U.S.C. 111 and FHWA Policy – Access to the Interstate System \(Federal Register: August 27, 2009, Volume 74, Number 165\)](#). See [Appendix A](#) for a copy of the policy.

The documentation required depends on the type of change requested - new or revised.

500 Interchange Design

New Access is the addition of a point of access where none previously existed. This includes the construction of an entirely new interchange such that it will result in additional points of access or additional ramps to existing interchanges. As an example, the reconstruction of an existing diamond interchange to a full cloverleaf interchange would add four new points of access.

Revised Access is the revision of existing ramps or crossroads within the limited access area such that the number of access points will remain the same but the operation and/or safety of the Interstate/freeway system may be affected. The changing of a cloverleaf interchange to a fully directional interchange, the adding of turn lanes at crossroad-ramp intersections, the adding of through lanes on the crossroad through an interchange, or the widening of a single lane entrance ramp to two lanes are considered examples of revised points of access.

New or revised access point requests require the preparation and processing of an Access Point Request Document. Generally, a new access requires an Interchange Justification Study (IJS), and a revised access requires an Interchange Modification Study (IMS).

550.2 Access Point Request Document

The degree of complexity of the Access Point Request Document will vary depending on the character of the location (urban or rural) and/or whether the change involves a revised access point, a new access point at an existing interchange, or an entirely new interchange location. The following is a list of items which must be addressed in the justification study for a new or revised access on the Interstate/freeway system:

1. Adequate documentation that the existing access points and/or local roads are unable to handle the design year traffic demands while providing the access intended by the proposal, or be improved to do so, if the new or revised access is not provided. If the request involves a new access point, and particularly an interchange at a new location, a comprehensive description of the public need for the access must be included. A justification based on enhanced property values or access to private facilities will not be accepted.
2. Assurance that all reasonable alternatives for design options, location, and transportation system management type improvements (such as ramp metering, mass transit, and HOV facilities) have been assessed and provided for if currently justified, or provisions are included for accommodating such facilities if a future need is identified.
3. Evidence that the proposed new or revised access does not have significant adverse impact on the safety and operation of the Interstate/freeway system. The analysis must address design year traffic with and without the new or revised access point (build vs. no-build). Design year traffic must reflect future land use changes and associated trip generations. Traffic projections must be prepared by, or certified by, the Office of Technical Services. If stage construction is contemplated, certified opening day traffic must also be used in the analysis to determine what improvements are required on opening day, and when others are needed over the life of the project.

Requests involving new access points or revised access points must use 20 year design traffic projected from the opening day of the interchange.

The level-of-service (LOS) of the Interstate/freeway system and the interchange components that are built new or modified should generally provide a LOS C, except certain cases in the MPO's Boundary where LOS D may be acceptable (Refer to ODOT Policy No. 322-002(P), Policy for Applying Level-of-Service and Volume-to-Capacity Ratio in the Transportation Development Process).

500 Interchange Design

The proposed Interstate/freeway interchange or improvements cannot have a significant adverse impact on the safety and operation of the Interstate/freeway facility based on an analysis of design year traffic. Significant impact is defined as lowering the LOS one or more levels from the no-build condition, unless the resulting build LOS meets new design criteria specified in the previous paragraph. If the no-build LOS is F, or if the LOS is reduced, degradation is not assumed to occur unless the build traffic volume is greater than 2% more than the no build traffic volume in the peak hour of the design year using constrained traffic. If the traffic volume increase is greater than 2 percent, the project will not be permitted unless mitigative measures are included to either restrain vehicles from entering the freeway (i.e., ramp metering), or additional capacity is provided on the freeway to restore the LOS. ODOT and FHWA will decide what mitigative measures, if any, will be allowed.

The operational analysis shall, particularly in urban areas, include an analysis of sections of Interstate/freeway to and including at least the first adjacent existing or proposed upstream and downstream interchange. The analysis shall extend to at least where the no-build and build LOS are equal. Crossroads and other roads and streets shall be included in the analysis to the extent necessary to assure their ability to collect and distribute traffic to and from the interchange with new or revised access points. New interchanges must include analysis of the local street system to the extent that local road system improvements can be compared as an alternative to constructing a new interchange. Maps and/or diagrams should be provided as needed to clearly describe the location and study limits of the proposal.

For requests involving entirely new interchanges, the study should include a discussion of the distance to, and size of, communities to be served by the new interchange. An examination of proper interchange spacing must also be included.

4. Assurance that the new or revised access connects to a public road and is part of a configuration that provides for all traffic movements. Less than “full interchanges” for special purpose access for transit vehicles, for HOV’s, or into park and ride lots may be considered on a case-by-case basis. Proposed design must meet or exceed current design standards.
5. The proposal considers and is consistent with local and regional land use and transportation plans. Prior to final approval, all requests for new or revised access must be consistent with the metropolitan and/or statewide transportation plan, as appropriate, the applicable provisions of 23 CFR part 450 and the transportation conformity requirements of 40 CFR parts 51 and 93.

The request should include a statement and analysis of compatibility with, and the effect on, the local road network. Letters of support and commitment are required from the state and other sponsoring agencies for any required street or road improvements as well as for the access point.

6. In areas where the potential exists for future multiple interchange additions, all requests for new or revised access are supported by a comprehensive Interstate/freeway network study with recommendations that address all proposed and desired access within the context of a long-term plan.
7. Evidence that the request for the new or revised access generated by new or expanded development demonstrates appropriate coordination between the development and the necessary transportation improvements. A discussion of potential funding sources, if known, should be included.
8. The request for new or revised access contains information relative to the planning requirements and the status of the environmental processing of the proposal.

500 Interchange Design

The Access Point Request Document should only be performed for the preferred alternative, however a discussion of feasible alternatives should also be included in the study. The preferred alternative will comply to all State and FHWA design requirements, including but not limited to: interchange spacing, interchanges to provide for all traffic movements to and from the freeway, not allowing lanes to drop into private facilities, not allowing intersections (driveways or streets) to intersect ramps (except in special cases such as facilities for utilities).

In some cases, a Preliminary Access Point Request Document may be beneficial if it is suspected that a project would result in degradation to the freeway. The purpose of a Preliminary Access Point Request Document is to limit the risk of funding a IMS or IJS only to find that degradation would result to the Interstate/freeway and the project would not be approved. The preliminary document is simply an operational analysis using either preliminary or certified traffic to determine the effects on the Interstate/freeway mainline. There is no prescribed format for a preliminary study, nor is a preliminary study “approved” by any agency. It is simply a report to provide a comfort level of what impacts would be associated with an IJS or IMS. Preliminary Access Point Request Documents are particularly useful to determine mainline Interstate/freeway impacts of new interchanges.

The development of an Access Point Request Document should be performed in accordance with the ODOT Project Development Process (PDP). However, care should be taken not to apply the PDP rigidly where Access Point Request Documents are concerned. Many projects are unique and demand flexibility in the application of the PDP. The phases in which work is done should be established during the project’s scope.

An IJS/IMS Report Outline and Requirement Checklist are contained in Appendix A.

550.2.1 Safety Improvements on Interstate or Other Freeways

Safety improvements eligible for this process are defined as low to medium cost solutions that address an identified “spot” safety problem. The LOS provisions of 550.2 do not apply except that the LOS should not be degraded over the no-build condition in the design year. All other provisions of 550.2 still apply, including the IMS report to support the analyses. To determine degradation, the individual operational components shall be analyzed, but evaluated for acceptance within the context of the overall affected system. Though a single operational component could experience incremental degradation, the overall system should improve or essentially remain the same. For a safety improvement to qualify under this section, the following criteria must be met:

1. The project purpose and need is primarily to address “spot” safety problems. The purpose and need may not include operational performance or economic development objectives.
2. The location has separate independent utility from all other improvements
3. Any potential longer term solution which would provide LOS C would take 5 or more years to implement.
4. No major rehabilitation or reconstruction is planned for 5 or more years. Other work (e.g., routine maintenance or minor rehabilitation) may be done within the 5 year window as long as it does not substantially replace the base pavement and/or reconfigure the facility.
5. The location is a spot location (defined as a ramp, intersection, merge/diverge point, weave, or mainline section not to exceed one mile).
6. The location planning level cost estimate is less than \$5 million total (low to medium cost measures) for all phases of project development (i.e. preliminary engineering, detail design, right of way and construction).

500 Interchange Design

550.3 Study Methodology

550.3.1 General

One of the primary objectives of an Access Point Request Document is to determine if additional traffic enters the Interstate/freeway in the build versus the no-build case, and if traffic does increase, does it degrade the operation of the Interstate/freeway. In cases of new interchanges or new access points, the new roadway and connections will generally result in changed traffic patterns from the no-build case. In the case of revised access projects, the build and no-build traffic volumes may be identical. In these cases, it is important to understand the concept of constrained traffic.

550.3.2 Constrained Traffic

In many cases, the purpose of a project is to alleviate traffic congestion at an interchange, possibly due to over saturated ramp terminal intersections or inadequate ramp capacity. In these cases, the proposed solution generally includes capacity improvements such as turn lanes or additional through lanes intended to remove the geometric constraint, or “bottleneck”. In order to determine the real-world effect of the proposed improvement on the Interstate/freeway, traffic analysis tools such as the Highway Capacity Manual (HCM) or the Highway Capacity Software (HCS) must be used to find which movements entering the Interstate/freeway are over saturated in the no-build configuration. For over saturated movements, the demand volume should be divided by the volume-to-capacity (V/C) ratio of that movement to determine the actual, or constrained, flow volumes to be used in the downstream merge and mainline LOS calculations. The difference between the no-build constrained traffic flow and the build (typically unconstrained) traffic flow is the increase of traffic volume entering the Interstate/freeway. Refer to Example 550-1 at the end of the section for a sample problem using the constrained traffic methodology.

550.3.3 Delay Balancing

When performing capacity analysis for intersections, approach delay should be balanced between the worst of the north-south approaches and the east-west approaches. This provides a common basis for comparison between the no-build and build alternatives. For design software and guidance see *Appendix C*.

550.3.4 Diagrams and Plans

The Access Point Request Document should contain diagrams and plans as needed (as applicable) to indicate: project limits, adjacent interchanges, proposed interchange configuration, travel lanes and shoulder widths, ramps to be added, ramps to be removed, ramp radii, ramp grades, acceleration lane lengths, deceleration lane lengths, taper lengths, auxiliary lane lengths, and collector/distributor roads.

550.4 Environmental Studies

550.4.1 Environmental Overview

Documentation of an initial overview or impact to the environment as a result of the access point is required as part of the request package. The agency sponsoring the access request is required to perform the overview and provide documentation in accordance with ODOT and FHWA procedures. The overview must cover: literature searches of historic, prehistoric and architectural resources; literature searches of aquatic/terrestrial, wetlands and endangered species; a literature/record search of

500 Interchange Design

solid/hazardous waste sites; potential involvement of 4(f) lands; air quality implications; and any other related special social, economic or environmental impacts. Depending on the magnitude of environmental impacts, additional studies may be required.

For new interchanges, major modifications to existing interchanges, or any interchange modification involving significant new right-of-way, a Red Flag Summary Report should be included in the IJS or IMS. Refer to ODOT's Project Development Process, Appendix H, for the Red Flag Summary form.

550.4.2 Environmental Document

A project-specific environmental document is required as part of the normal project development process after approval of the access point. There may be cases, however, where it would be desirable to initiate the environmental studies prior to, or during preparation of, the access point request study. The collection of field data for historic/prehistoric and biological studies is seasonally controlled. Depending on the timing, there could be much to gain by working on the environmental document concurrently with the access point study.

An environmental document is required for a new access request. This could be an Environmental Impact Statement (EIS), Environmental Assessment (EA), or a Categorical Exclusion (CE). For revised or modified access requests, a CE will usually be the appropriate level of NEPA conformity.

Since the final environmental document will normally be completed after access point approval, it is possible that the document could identify an environmental concern which could cause the approval of the access point to be reassessed.

For new interchanges or major modifications to existing interchanges, an Assessment of Feasible Alternatives should be submitted to ODOT prior to initiation of the Access Point Request Document. The report should include all known environmental impacts, right-of-way impacts, operational comparison, and costs for each feasible alternative. The report should provide a summary table listing all the comparison data. The report will be used in determining the preferred alternative that will be carried forward into the Access Point Request Document (IJS or IMS).

550.5 Review Process

All requests are to be sent to the Office of Roadway Engineering (two copies for non-Interstate freeways, three copies for Interstate freeways) with two copies to the ODOT District Office. The Office of Roadway Engineering will be responsible for coordination with the Federal Highway Administration for studies involving Interstates.

The Office of Roadway Engineering will review and has approval authority for Access Point Request Documents involving non-Interstate freeways. For Interstates, the Office of Roadway Engineering will also review and approve the Access Point Request Document, and if acceptable, will be forwarded to FHWA with a request for their approval. If the environmental document has not been completed, approval will be conditional on acceptance of the environmental document.

This page is intentionally blank

500 Interchange Design

List of Figures

Figure	Date	Title
503-1E	October 04	Ramp Design Speed Guide
503-1aE	October 10	Minimum Ramp terminal Spacing
503-2aE	October 04	Minimum Acceleration Lengths for High-Speed Entrance Terminals with Flat Grades of 2% or Less
503-2bE	October 04	High-Speed Entrance terminal Adjustment Factors as a Function of Grade
503-2cE	October 10	High-Speed Single-Lane Entrance Terminal
503-3aE	October 04	Minimum Deceleration Lengths for High-Speed Exit Terminals with Flat Grades of 2% or Less
503-3bE	October 04	High-Speed Exit Terminal Adjustment Factors as a Function of Grade
503-3cE	July 06	High-Speed Single-Lane Exit Terminal
503-4aE	October 04	Low-Speed Entrance Terminals
503-4bE	January 05	Low-Speed Exit Terminals
	October 04	Notes for Low-Speed Entrance and Exit Terminals
503-5E	July 06	Uncurbed Ramp Intersection
503-5aE	October 04	Transition From Single Lane to Two-Lane Exit Ramp
504-1E	January 05	Collector-Distributor Entrance Terminals
504-2E	October 04	Collector-Distributor Exit Terminals
505-1aE	October 10	Multi-Lane Entrance Ramps and Converging Roadways
505-1bE	October 10	High-Speed Two-Lane Entrance Terminals
505-2aE	October 04	Multi-Lane Exit Ramps and Diverging Roadways
505-2bE	October 04	High-Speed Two-Lane Exit Terminals
505-2cE	October 04	Examples of Diverging Roadways
505-3E	April 06	Transitions - Four Lane Divided Roadway to Two Lane Roadways

Example Problem

Ex. 550-1	January 06	Constrained Traffic Volume
-----------	------------	----------------------------

This page is intentionally blank

RAMP DESIGN SPEED GUIDE

503-1E**REFERENCE SECTIONS
503.2**

RAMP DESIGN SPEED (mph)	MAINLINE DESIGN SPEED (mph)								
	30	35	40	45	50	55	60	65	70
UPPER RANGE	25	30	35	40	45	48	50	55	60
MIDDLE RANGE	20	25	30	33	35	40	45	45	50
LOWER RANGE	15	18	20	23	25	28	30	30	35





Note: Ramp design speeds do not pertain to the ramp terminals.

October 2004

MINIMUM RAMP TERMINAL SPACING


503-1aE

REFERENCE SECTIONS
503.5.3

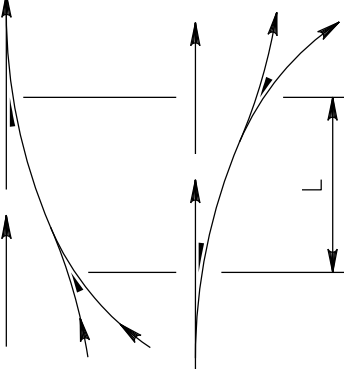ENTRANCE-ENTRANCE OR EXIT-EXIT	EXIT-ENTRANCE	TURNING ROADWAYS	ENTRANCE-EXIT (WEAVING)
			 * NOT APPLICABLE TO CLOVERLEAF LOOP RAMPs
FULL FREEWAY	FULL FREEWAY	SYSTEM INTER- CHANGE	SYSTEM TO SERVICE INTERCHANGE
CDR OR FDR	CDR OR FDR	SERVICE INTER- CHANGE	FULL FWY. CDR OR FDR FULL FWY. CDR OR FDR
MINIMUM LENGTHS MEASURED BETWEEN SUCCESSIVE RAMP TERMINALS			
1000 ft	800 ft	500 ft	400 ft
800 ft	500 ft	400 ft	2000 ft
1600 ft	1600 ft	1600 ft	1600 ft
1000 ft	1000 ft	1000 ft	1000 ft


NOTES: CDR - COLLECTOR DISTRIBUTOR ROAD
FDR - FREEWAY DISTRIBUTOR ROAD

The recommendations are based on operational experience and need for flexibility and adequate signing. They should be checked in accordance with the procedure outlined in the **Highway Capacity Manual (HCM)** and the larger of the values is suggested for use. Also refer to the HCM for the procedure for measuring the length of the weaving section. The "L" distances noted in the figures above are between like points, not necessarily "physical" gores. Additionally for EN-EN, a minimum distance of 270 ft. is recommended between the end of the taper for the first entrance ramp and the entrance nose for the succeeding entrance ramp (similar for EX-EX except use the physical nose).

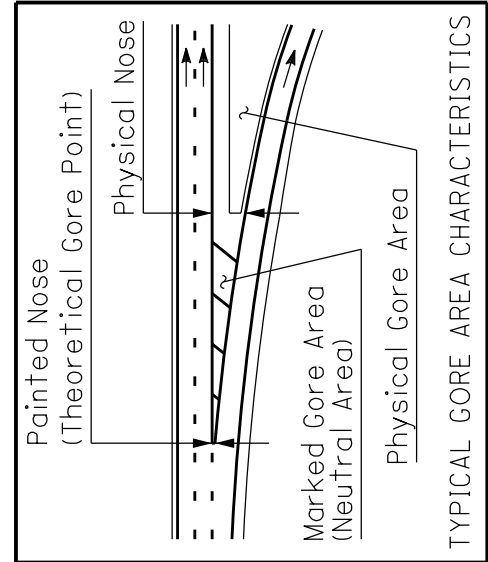

MINIMUM ACCELERATION LENGTHS FOR HIGH-SPEED ENTRANCE TERMINALS WITH FLAT GRADES OF 2% OR LESS	503-2aE	
	REFERENCE SECTION 503.6.2	

Mainline Design Speed, V (mph)	Acceleration length, L (ft) for design speed of last ramp curve, Vr (mph)								
	Stop	15	20	25	30	35	40	45	50
50	720	660	610	550	450	350	130	-	-
55	960	900	810	780	670	550	320	150	-
60	1200	1140	1100	1020	910	800	550	420	180
65	1410	1350	1310	1220	1120	1000	770	600	370
70	1620	1560	1520	1420	1350	1230	1000	820	580

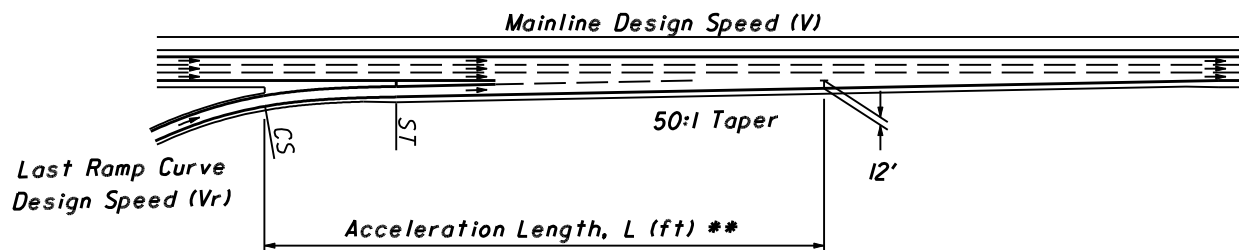

**** The Acceleration Length, L, Shall Be Adjusted
For Grade With Figure 503-2b.**

HIGH-SPEED ENTRANCE TERMINAL ADJUSTMENT FACTORS AS A FUNCTION OF GRADE

503-2bE

REFERENCE SECTION
503.6.2

<i>Mainline Design Speed (mph)</i>	<i>Ratio of length on grade to length on level for design speed of last ramp curve (mph)*</i>							
	20	25	30	35	40	45	50	<i>All Speeds</i>
	<i>3 to 4% upgrade</i>							<i>3 to 4% downgrade</i>
50	1.30	1.35	1.40	1.40	1.40	-	-	0.65
55	1.35	1.40	1.45	1.45	1.45	-	-	0.625
60	1.40	1.45	1.50	1.50	1.50	1.55	1.60	0.60
65	1.45	1.50	1.55	1.55	1.60	1.65	1.70	0.60
70	1.50	1.55	1.60	1.65	1.70	1.75	1.80	0.60
	<i>5 to 6% upgrade</i>							<i>5 to 6% downgrade</i>
50	1.50	1.60	1.70	1.80	1.90	-	-	0.55
55	1.60	1.70	1.80	1.90	2.05	-	-	0.525
60	1.70	1.80	1.90	2.05	2.20	2.35	2.50	0.50
65	1.85	1.95	2.05	2.20	2.40	2.60	2.75	0.50
70	2.00	2.10	2.20	2.40	2.60	2.80	3.00	0.50

No adjustment required for grades less than 3%.

** Ratio from this table multiplied by acceleration length in Figure 503-2a gives acceleration length on grade.*


The "grade" in the table is the average grade measured over the distance for which the acceleration length applies.

HIGH-SPEED SINGLE-LANE ENTRANCE TERMINAL

503-2cE

REFERENCE SECTIONS

503.6.2

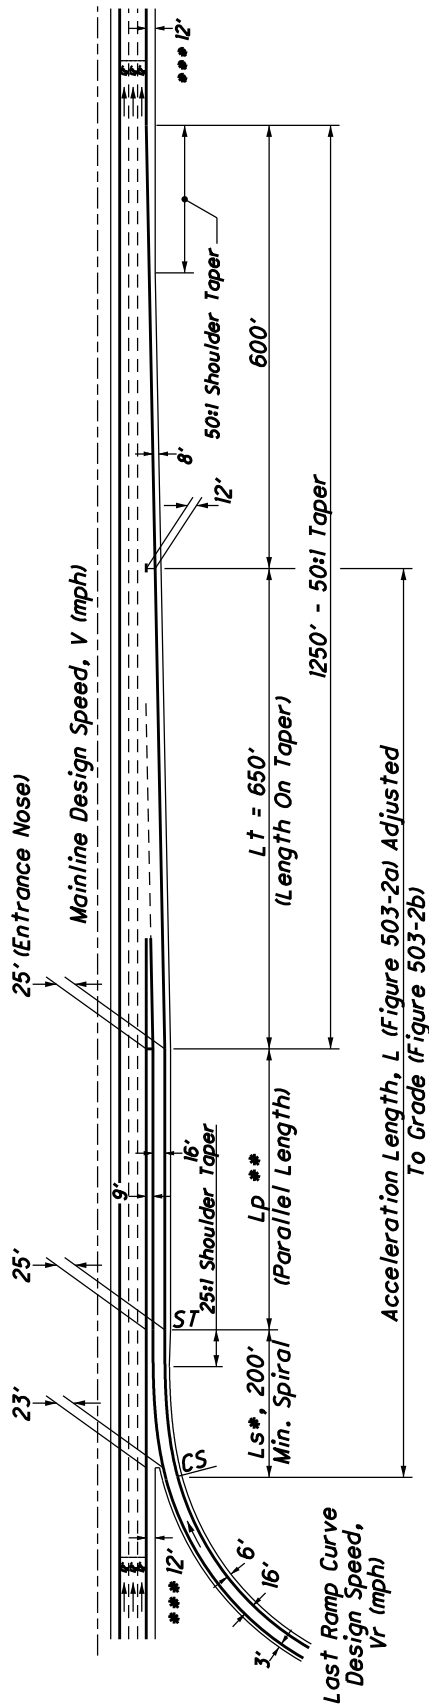

* Length May Be Increased For Superelevation Transition

** To Determine L_p , Subtract L_s And L_t From L .


*** Mainline paved shoulder width as required by Figure 301-3 or 301-4.

Notes For Single Lane Entrance Terminals

1. The minimum acceleration length, L , shall be $L_s + L_t$.
2. The 9' to 23' variable width of treated shoulder of the entrance terminal shall be sloped for 12' as required for mainline design usually $\frac{1}{2}$ in./ft., except for the last 100' to 200' at the 9' end, which is to be sloped as required for proper terminal grading.
3. Normally single lane ramps will have a width of 16'. The width shall be increased to 18' when the ramp radius is less than 200'. When an 18' wide ramp is used, the 25' entrance terminal width shall be retained and the 9' width reduced by 2'.
4. If L_p (parallel length) is not required ($L \leq 850'$), then the 200' minimum spiral should be tangent to the 50:1 taper.

MINIMUM DECELERATION LENGTHS FOR HIGH-SPEED EXIT TERMINALS WITH FLAT GRADES OF 2% OR LESS	503-3aE
	REFERENCE SECTION 503.6.3

Mainline Design Speed, V (mph)	Deceleration length, L (ft) for design speed of first ramp curve, Vr (mph) ***								
	Stop	15	20	25	30	35	40	45	50
50	435	405	385	355	315	285	225	175	-
55	480	455	440	410	380	350	285	235	-
60	530	500	480	460	430	405	350	300	240
65	570	540	520	500	470	440	390	340	280
70	615	590	570	550	520	490	440	390	340

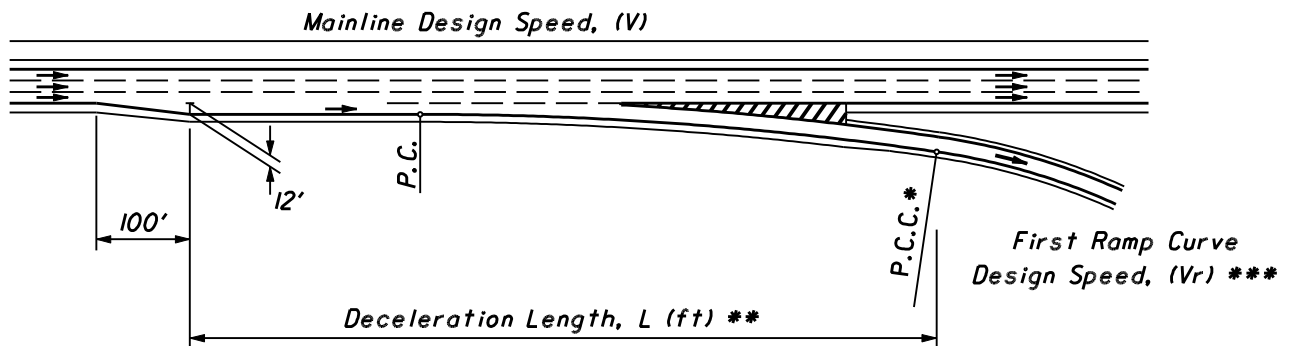

* P.C.C. Or Mid-Point of 200' Spiral

** The Minimum Deceleration Length, L, After Adjustment For Grade
(Figure 503-3b), Shall Be 800'

*** Or Other Design Speed Limiting Geometric Control Such As The Stopping
Sight Distance For A Vertical Curve Or The Back Of A Traffic Queue.

HIGH-SPEED EXIT TERMINAL ADJUSTMENT FACTORS AS A FUNCTION OF GRADE	503-3bE
	REFERENCE SECTION 503.6.3

<i>Mainline Design Speed (mph)</i>	<i>Ratio of length on grade to length on level for design speed of first ramp curve (mph)*</i>	
	<i>All Speeds</i>	<i>All Speeds</i>
	<i>3 to 4% upgrade</i>	<i>3 to 4% downgrade</i>
<i>All Speeds</i>	<i>0.90</i>	<i>1.20</i>
	<i>5 to 6% upgrade</i>	<i>5 to 6% downgrade</i>
<i>All Speeds</i>	<i>0.80</i>	<i>1.35</i>

No adjustment required for grades less than 3%.

** Ratio from this table multiplied by deceleration length in Figure 503-3a gives deceleration length on grade.*


The "grade" in the table is the average grade measured over the distance for which the deceleration length applies.

HIGH-SPEED SINGLE-LANE EXIT TERMINAL

503-3cE

REFERENCE SECTIONS

503.6.3

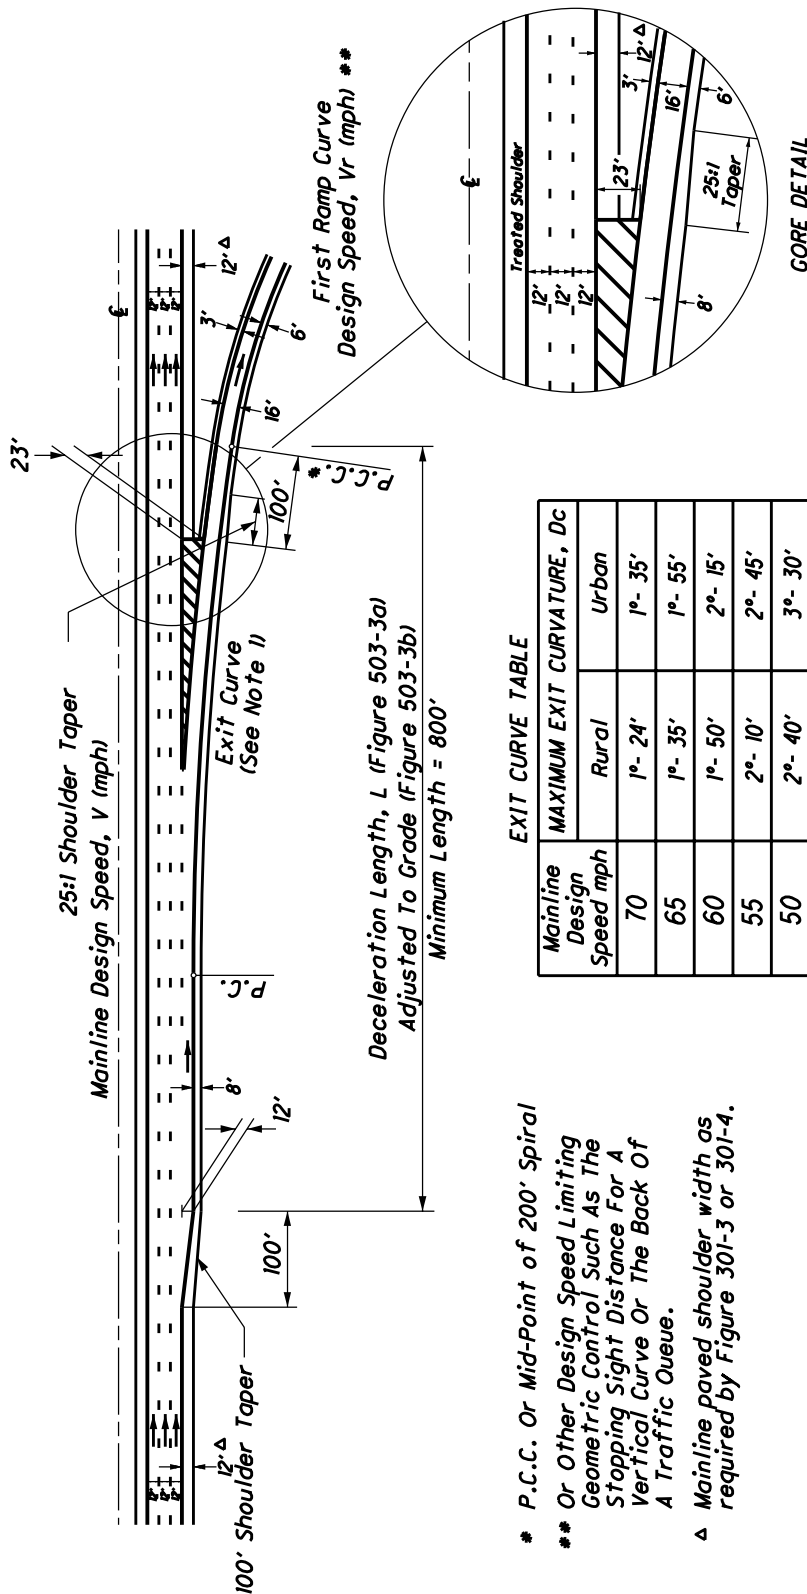

- * P.C.C. Or Mid-Point of 200' Spiral
- ** Or Other Design Speed Limiting Geometric Control Such As The Stopping Sight Distance For A Vertical Curve Or The Back Of A Traffic Queue.
- Δ Mainline paved shoulder width as required by Figure 301-3 or 301-4.




Notes For High-Speed Single-Lane Exit Terminals

1. The Exit Curve should normally be according to the Exit Curve Table where the mainline is on tangent. Where the mainline is on curving alignment, the maximum differential between the Exit Curve and the mainline curve should normally be the Exit Curve Table value. This differential, however, may vary by as much as one degree in order to avoid a tangent exit alignment. (See Section 503.6.4 for the allowable transverse breaks in superelevation cross-slope.)
2. When the First Ramp Curve does not exceed 8°, the Exit Curve may be compounded directly with the First Ramp Curve at a PCC 100' beyond the nose. When the First Ramp Curve does exceed 8°, a spiral should be placed between the Exit Curve and the First Ramp Curve and the beginning of the spiral (CS) should be at the nose.
3. Normally single lane ramps will have a width of 16'. The width shall be increased to 18' when the ramp radius is less than 200'. When an 18' wide ramp is used, the 39' exit terminal width shall be retained and the 23' width reduced by 2'.

LOW-SPEED ENTRANCE TERMINALS

503-4aE

REFERENCE SECTIONS
503.6.2

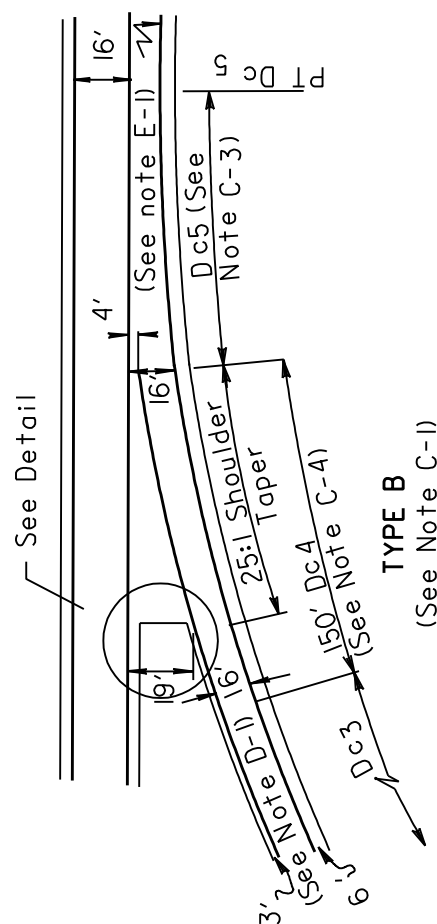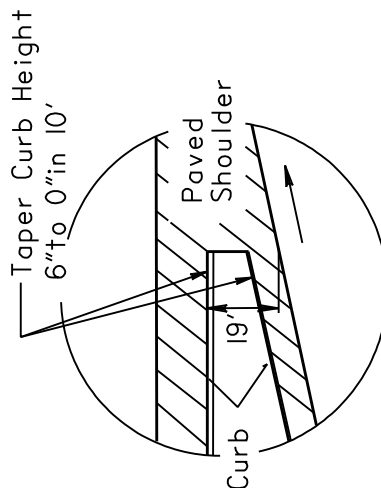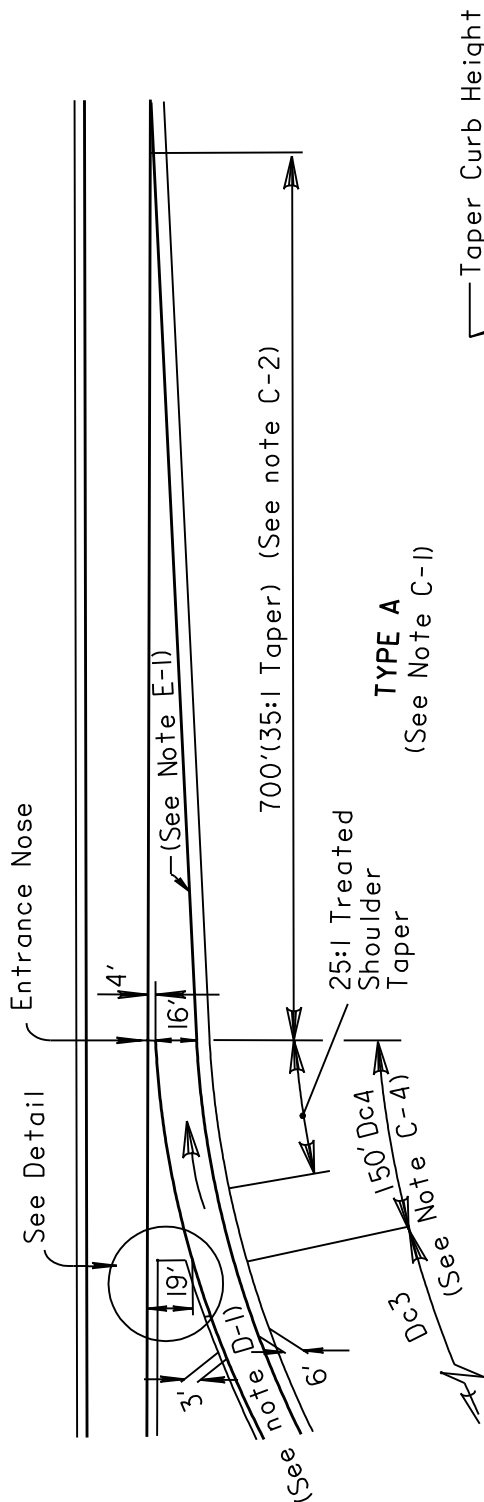



LOW-SPEED ENTRANCE TERMINALS

For Notes, see adjacent sheet.

LOW-SPEED EXIT TERMINALS

503-4bE

REFERENCE SECTIONS
503.6.3

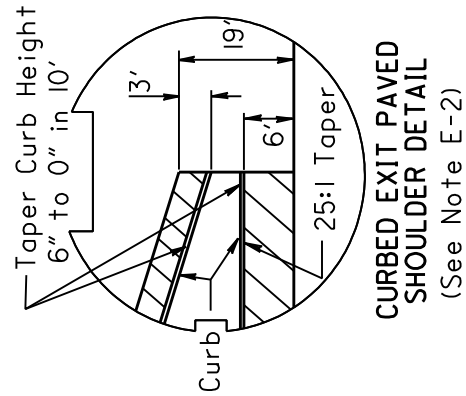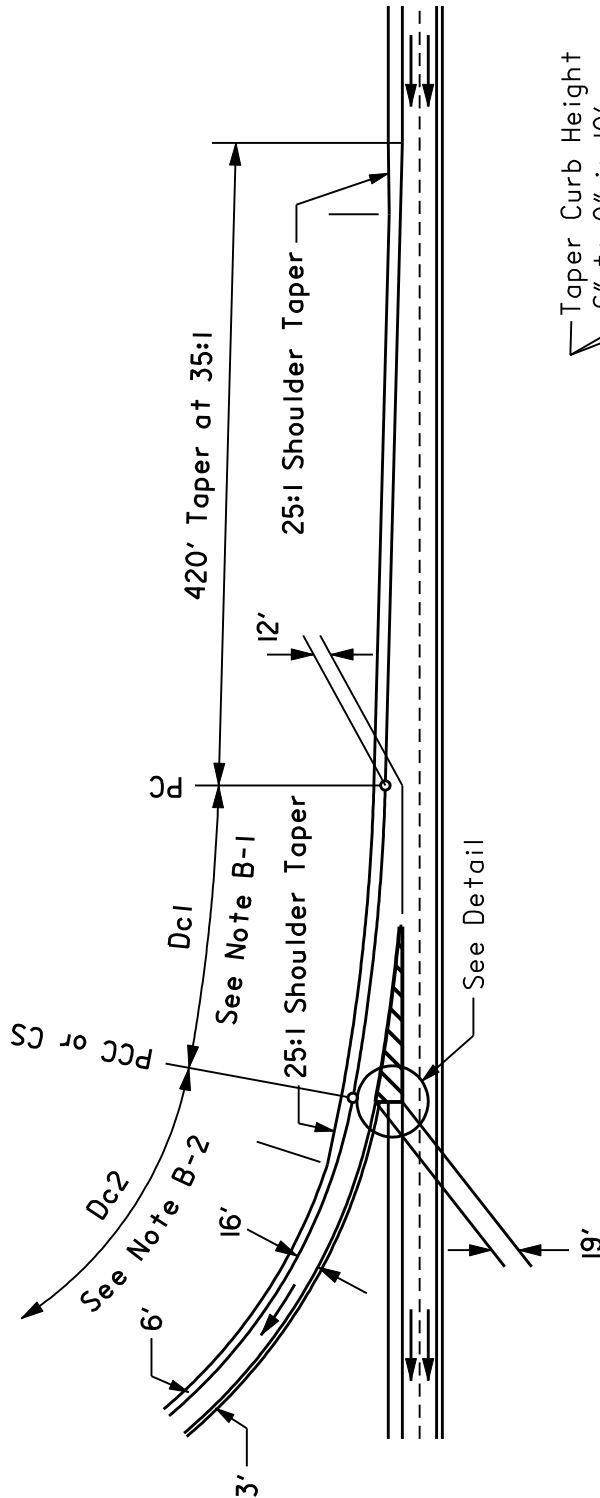

LOW-SPEED EXIT TERMINAL

For Notes, see adjacent sheet.

Notes for Low-Speed Entrance and Exit Terminals

Figures 503-4a and 503-4b

A. GENERAL

1. Low-Speed Terminals are intended for used on highways which have little or no access control except through an interchange area. Many of the features of Low-Speed Terminals are applicable to a terminal of one ramp with another ramp in a freeway interchange.

B. EXIT TERMINAL

1. The curve differential between the through roadway and exit curve D_{C1} may vary from a minimum of 4° to the maximum of 8° .
2. Exit Curve D_{C1} may be compounded or spiraled into Ramp Curve D_{C2} . If D_{C2} is greater than 25° then provide a 150 ft. spiral between D_{C1} and D_{C2} .

C. ENTRANCE TERMINAL: TYPE A & TYPE B

1. Type A is preferred and shall normally be used. However, when a ramp enters as an added lane or as a combined acceleration-deceleration lane, Type B may be used if its use would result in a substantial savings in cost (i.e. reduced bridge width).
2. The acceleration lane of Type A shall be a uniform 35:1 taper relative to the through pavement edge for either tangent or curving alignment.
3. The curve differential between the through roadway and entrance curve D_{C5} of Type B shall be 4° .
4. The design of the entrance terminal curvature shall be based on the following:
 - (a) Ramp Curve D_{C3} of 8° or less
When the through roadway tangent or a curve to the right, D_{C4} shall be a 150 ft. long simple curve of a degree such that the differential between it and the through roadway will not exceed 4° . When the through roadway is on a curve to the left, a 150 ft. tangent shall be substituted for D_{C4} .
 - (b) Ramp Curve D_{C3} greater than 8°
A 150 ft. spiral may be substituted for D_{C4} .

D. RAMP WIDTH

1. Normally single lane ramps will have a width of 16 ft. The width shall be increased to 18 ft. when the ramp radius is less than 200 ft. When an 18 ft. wide ramp is used, the 35 ft. exit and 20 ft. entrance terminal widths shall be retained and the 19 ft. and 4 ft. widths reduced by 2 ft.


E. TREATED SHOULDER

1. The treated shoulder along the speed change lanes shall be as shown on **Figure 303-1**.
2. If the ramp or through roadway has a curb offset greater than 6 ft. (or 3 ft.), the greater width shall be used at the terminal. Retain the 19 ft. width.
3. The Special Detail drawings shall apply when the through roadway is curbed..

UNCURBED RAMP INTERSECTION

503-5E

**REFERENCE SECTIONS
503.7**

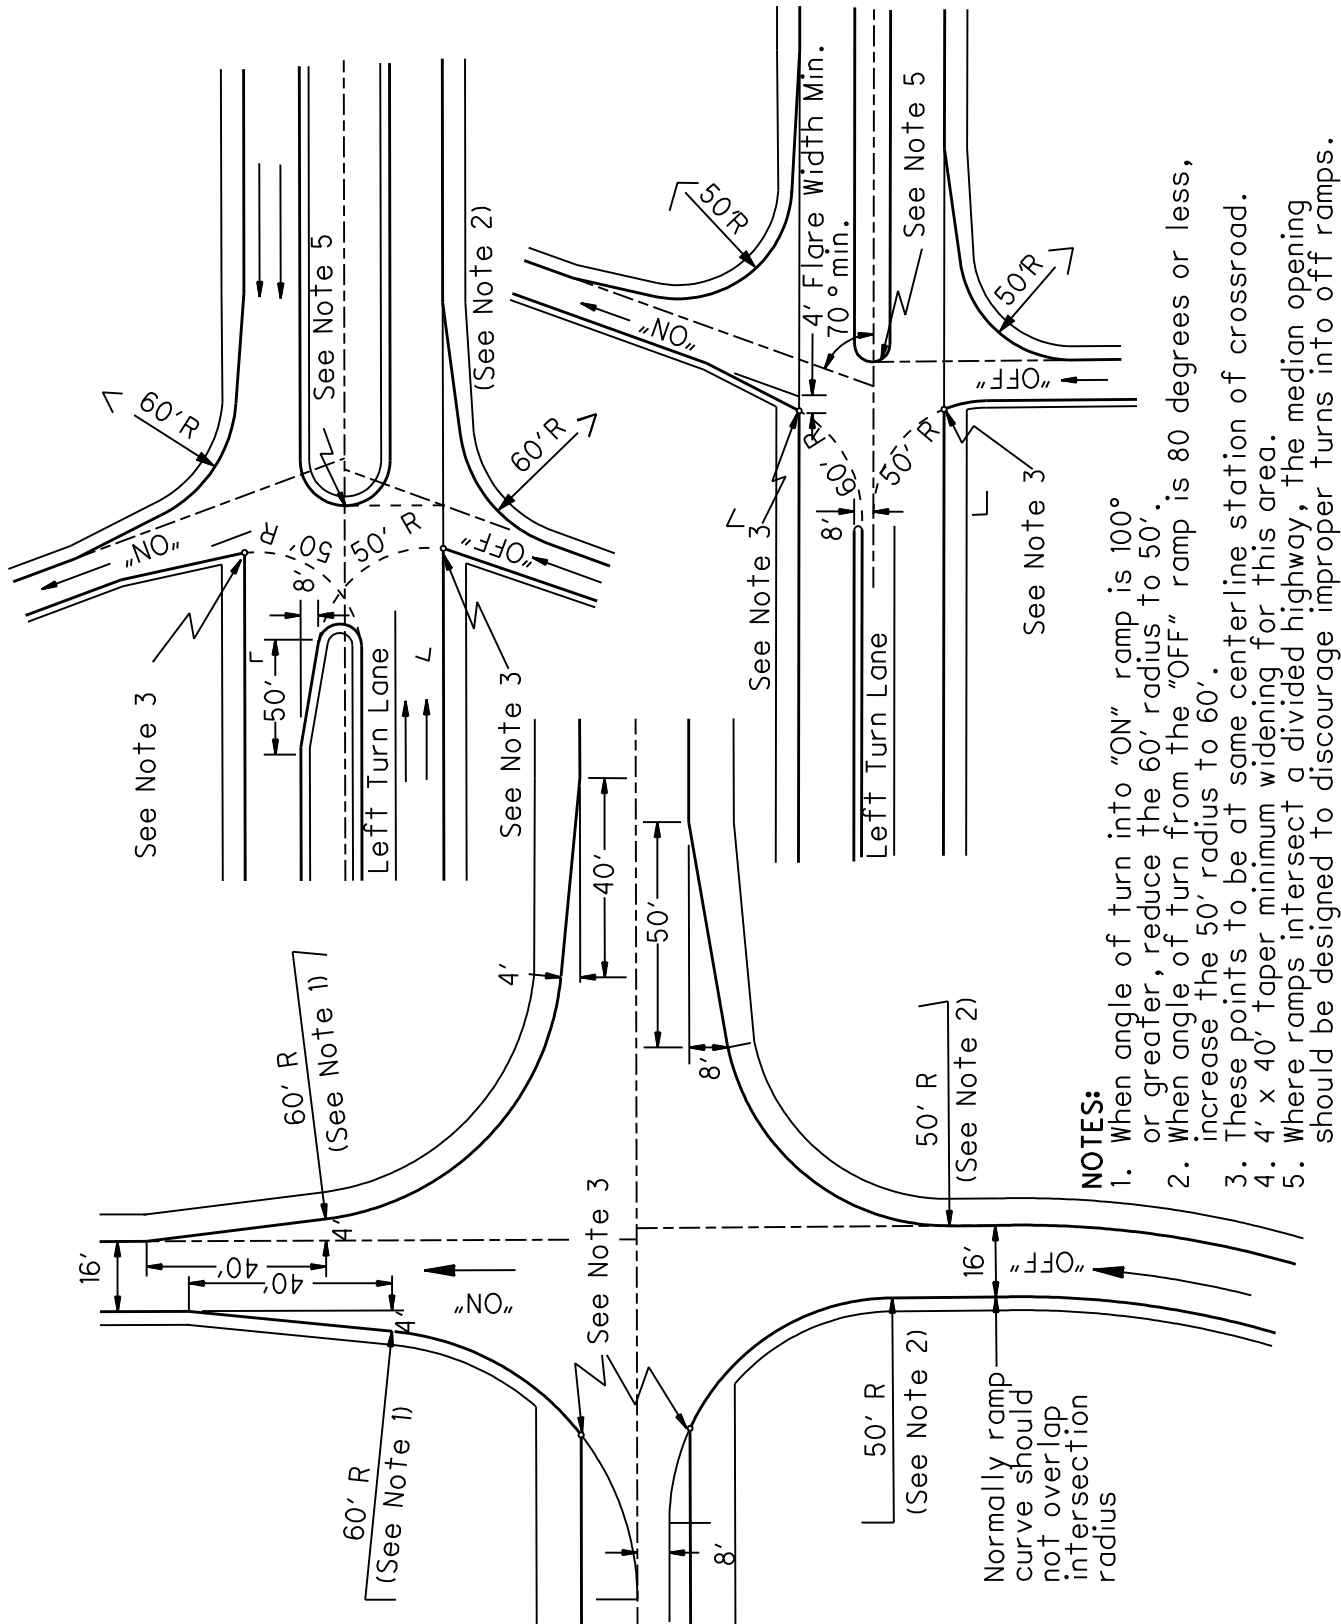


July 2006


TRANSITION FROM SINGLE-LANE TO TWO-LANE EXIT RAMP

503-5aE

REFERENCE SECTIONS
503.7

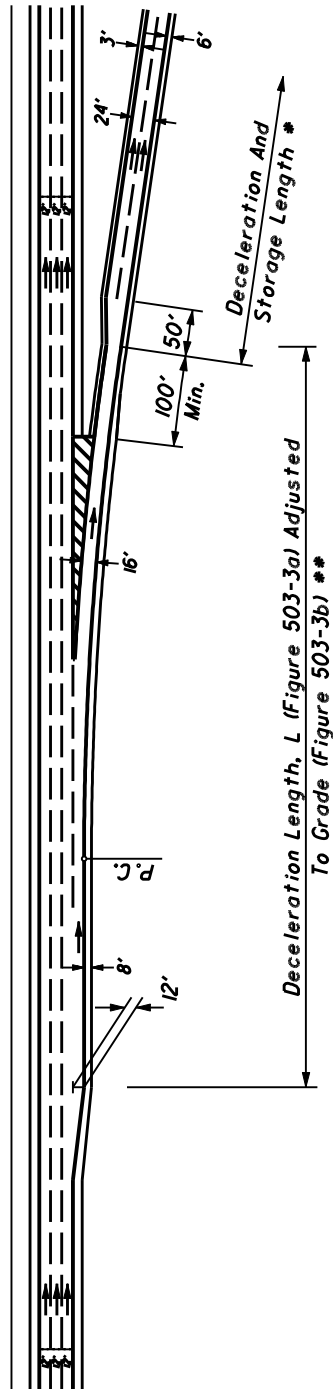

ALTERNATE A

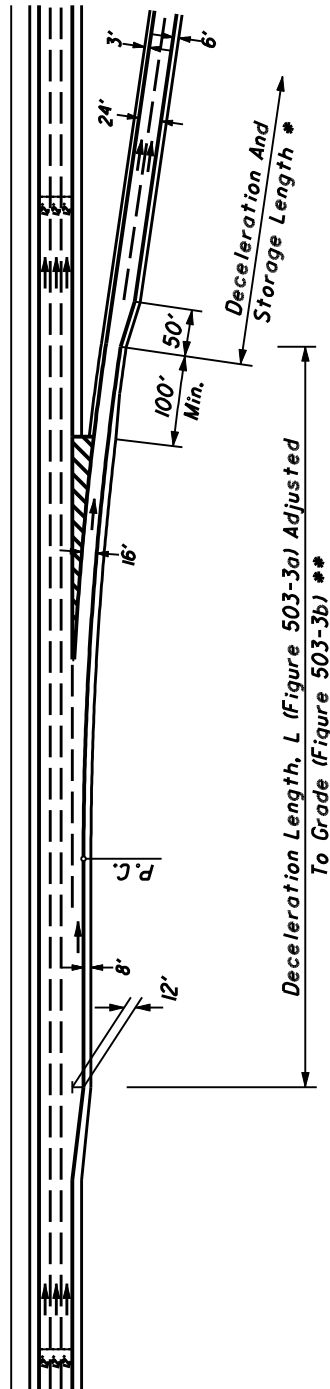


ALTERNATE B

- * See Figure 401-9 and 401-10 to compute the length.
- ** The Minimum Deceleration Length, L, After Adjustment For Grade (Figure 503-3b), Shall Be 800'


Note: The additional lane is usually provided for the minor movement.

504-1E

REFERENCE SECTIONS
504.3



HIGH-SPEED COLLECTOR-DISTRIBUTOR ENTRANCE TERMINAL
DESIGN SPEED $\geq$ 50 MPH



LOW-SPEED COLLECTOR-DISTRIBUTOR ENTRANCE TERMINAL
DESIGN SPEED < 50 MPH

REFERENCE SECTIONS
504.3


MULTI-LANE ENTRANCE RAMPS AND CONVERGING ROADWAYS

505-1aE


REFERENCE SECTIONS
505.1

TABLE A


Design Speed (mph)	Taper Rate	
	High-Speed	Low-Speed
70	50:l	---
60	50:l	---
50	50:l	---
45	---	35:l
40	---	35:l
30	---	35:l

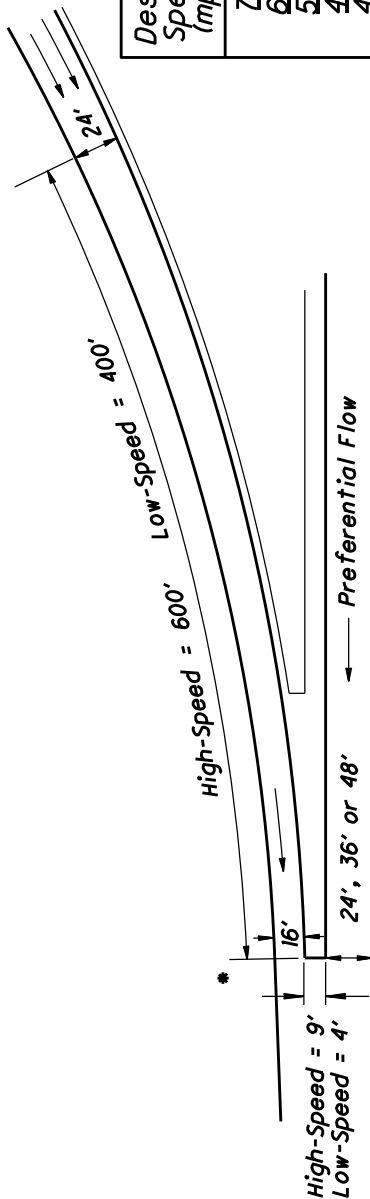

TWO-LANE ROADWAY REDUCED TO SINGLE LANE PRIOR TO ENTRANCE NOSE

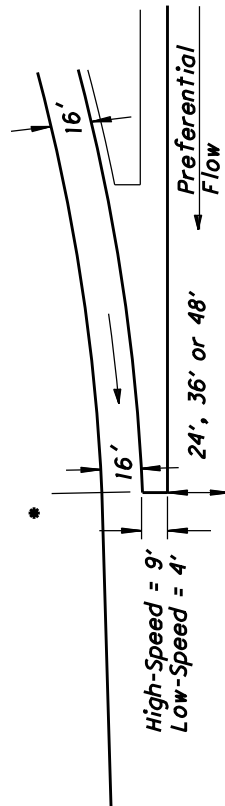


SINGLE LANE CONVERGING WITH MULTI-LANE

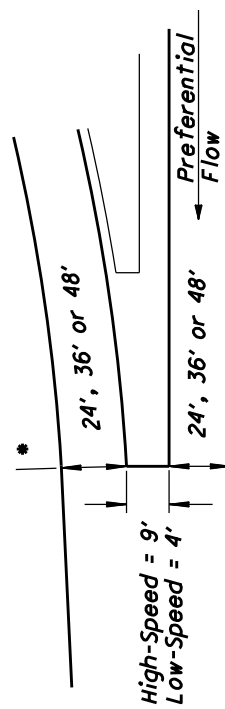

MULTI-LANE CONVERGING WITH MULTI-LANE

* Note: the number of lanes leaving the entrance nose must be equal to the total number of lanes (converging plus mainline) approaching the entrance nose.

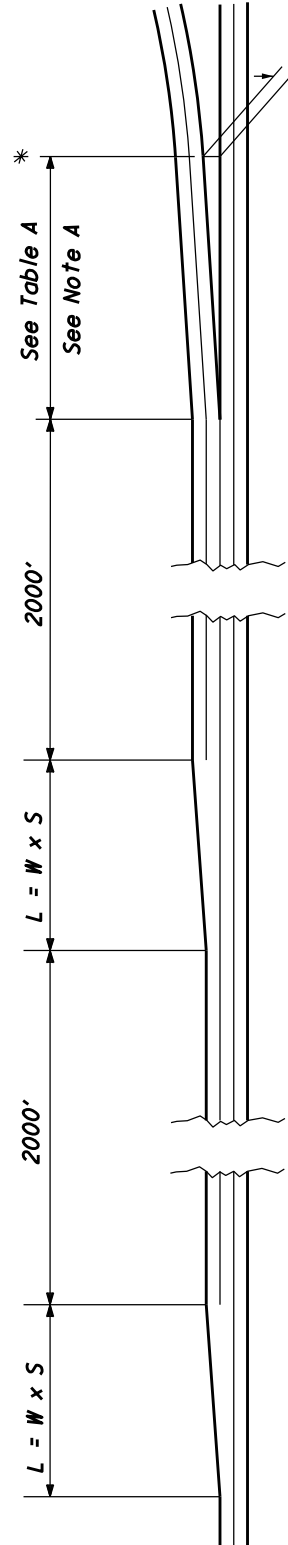

DETAIL FOR DROPPING EACH CONVERGING LANE

W = Lane Width
S = Design Speed

NOTE A:
Vertical alignment of both the mainline and the ramp should provide Decision Sight Distance, Avoidance Maneuver C or E, as per Figure 201-6.

HIGH-SPEED TWO-LANE ENTRANCE TERMINALS


505-1bE

REFERENCE SECTIONS

505.1


*Note A - Additional lane provided to satisfy lane-balance.
The Add-Lane may be a basic lane if needed for
capacity or an auxiliary lane and dropped either
as shown below or at the next interchange.*

*Vertical alignment of both the mainline and the ramp
should provide Decision Sight Distance, Avoidance
Maneuver C or E, as per Figure 201-6.*

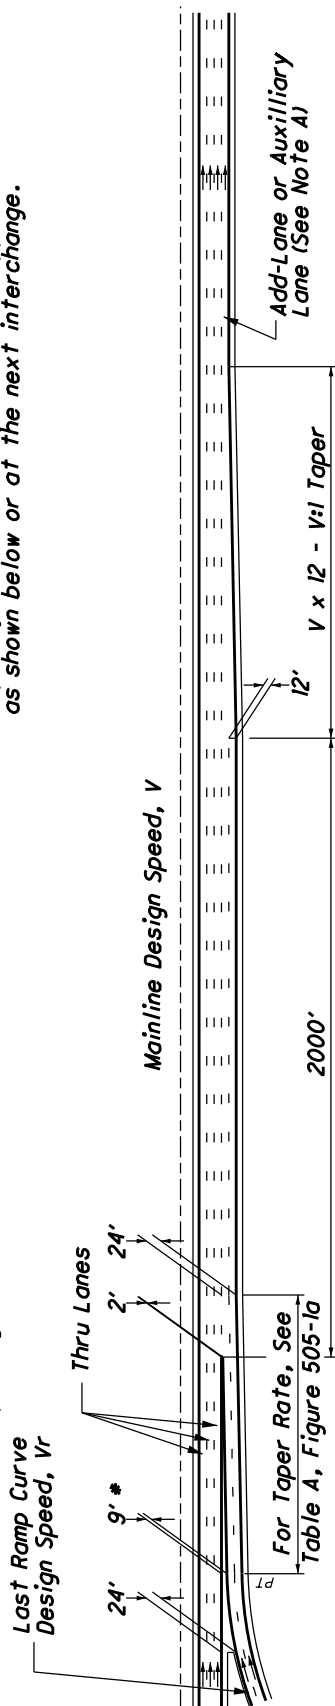

* Entrance Nose

TWO-LANE ENTRANCE TERMINAL WITH ADD-LANE

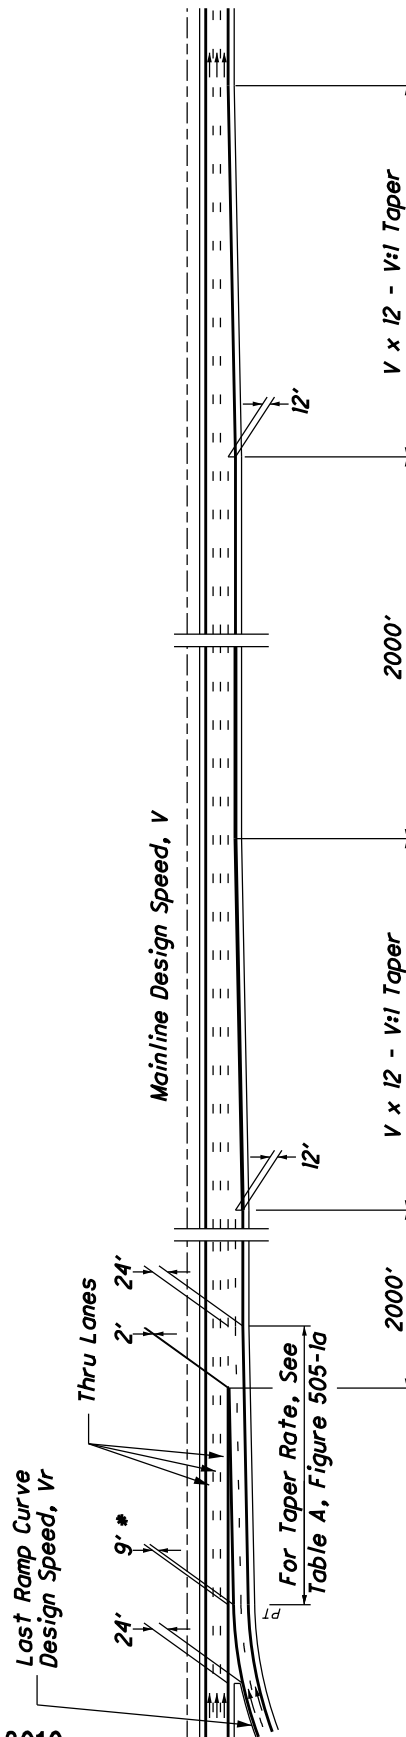


TWO-LANE ENTRANCE TERMINAL WITH DROPPED AUXILIARY LANE


MULTI-LANE EXIT RAMP AND DIVERGING ROADWAYS

505-2aE

REFERENCE SECTIONS
505.2

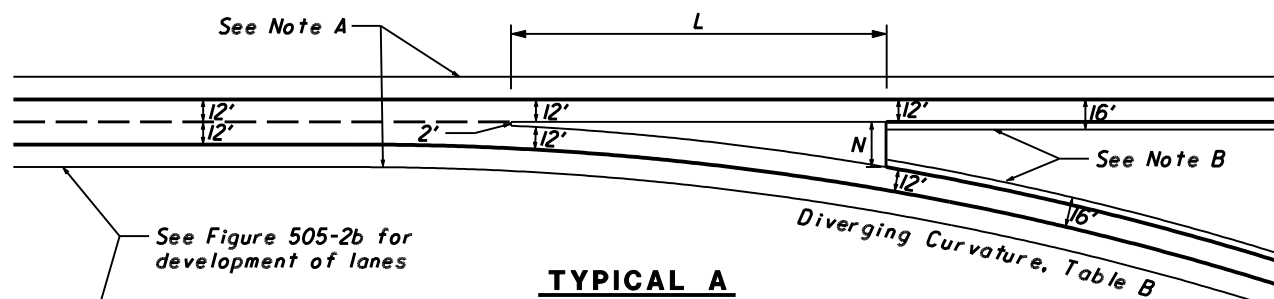

TYPICAL A
TOTAL NUMBER OF LANES BEYOND
THE NOSE EQUALS APPROACH LANES
(FOR USE ON NON-MAINLINE FACILITIES ONLY)

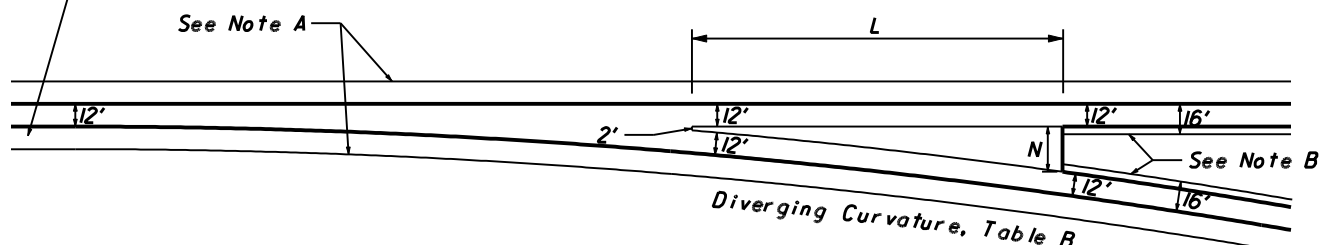

TYPICAL B
TOTAL NUMBER OF LANES BEYOND
THE NOSE EQUALS APPROACH LANES PLUS ONE
(FOR USE ON ALL FACILITIES)

TABLE A

Design Speed "V" mph	L* Gore Length (ft.)			N* Nose Width (ft.)		
	High-Speed		Low-Speed	High-Speed		Low-Speed
	Rural	Urban		Rural	Urban	
70	450	370		32	24	
65	400	340		32	24	
60	370	300		32	24	
55	350	280		32	24	
50	320	260		32	24	
45			180			24
40			160			24
35			140			24
30			120			24

* N dimension includes 4' of a 16' lane

TABLE B
RECOMMENDED DIVERGING CURVATURE
(See Sec. 505.2.4)

Design Speed of Approaching Roadway "V" mph	DIVERGING CURVATURE Total Lanes Beyond Diverging Nose Equals					
	Approach Lanes			Approach Lanes +1		
	High-Speed		Low-Speed ^Δ	High-Speed		Low-Speed ^Δ
	Rural	Urban		Rural	Urban	
70	1°- 00'	1°- 00'		0°- 30'	0°- 30'	
65	1°- 15'	1°- 15'		0°- 35'	0°- 35'	
60	1°- 30'	1°- 30'		0°- 40'	0°- 40'	
55	1°- 45'	1°- 45'		0°- 45'	0°- 45'	
50	2°- 00'	2°- 00'		1°- 00'	1°- 00'	
45			4°- 15'			1°- 45'
40			5°- 30'			2°- 15'
35			7°- 00'			2°- 45'
30			10°- 00'			3°- 30'

^Δ Based on a Design Speed equal to ("V" - 10 mph)

Note A - Any lane combination can be designed from Table A and Typical A and B by adding one or more lanes to one or both sides of Typical A or adding one or more lanes to both sides of Typical B.


Note B - When a 16 foot lane width is used after the diverging nose, the nose width "N" includes 4 feet of the 16 foot lane width. For two 16 foot lanes, "N" includes 4 feet of each lane.

October 2004


HIGH-SPEED TWO-LANE EXIT TERMINALS

505-2bE

REFERENCE SECTIONS
505.2

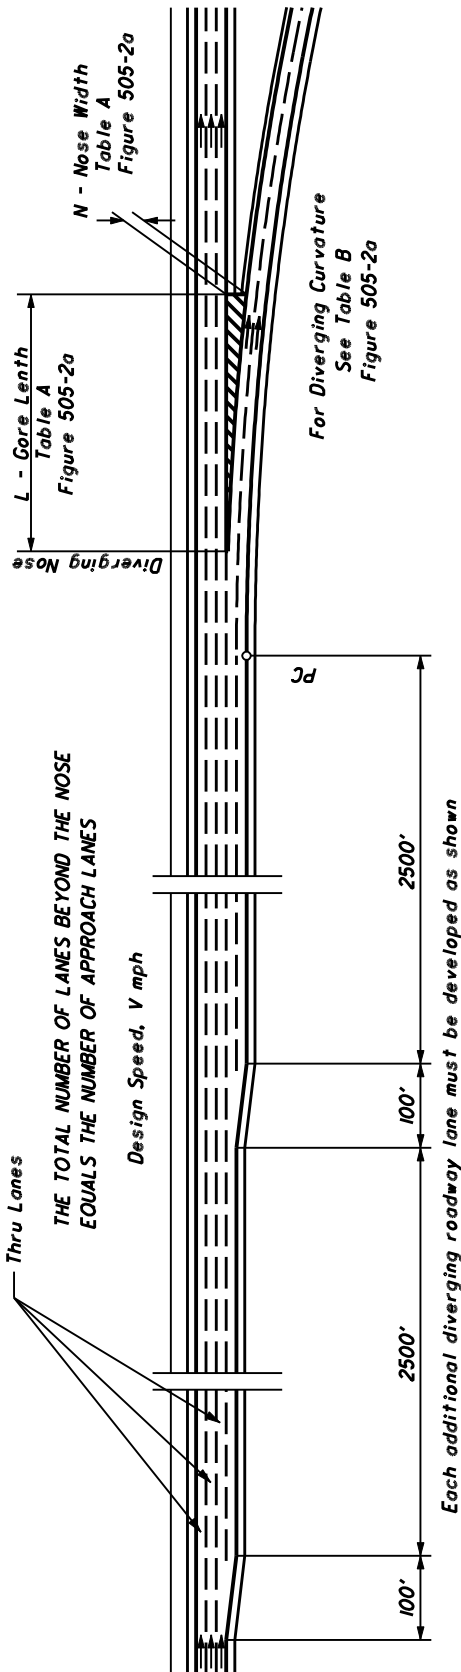

TWO-LANE EXIT TERMINAL (FOR USE ON NON-MAINLINE FACILITIES ONLY)

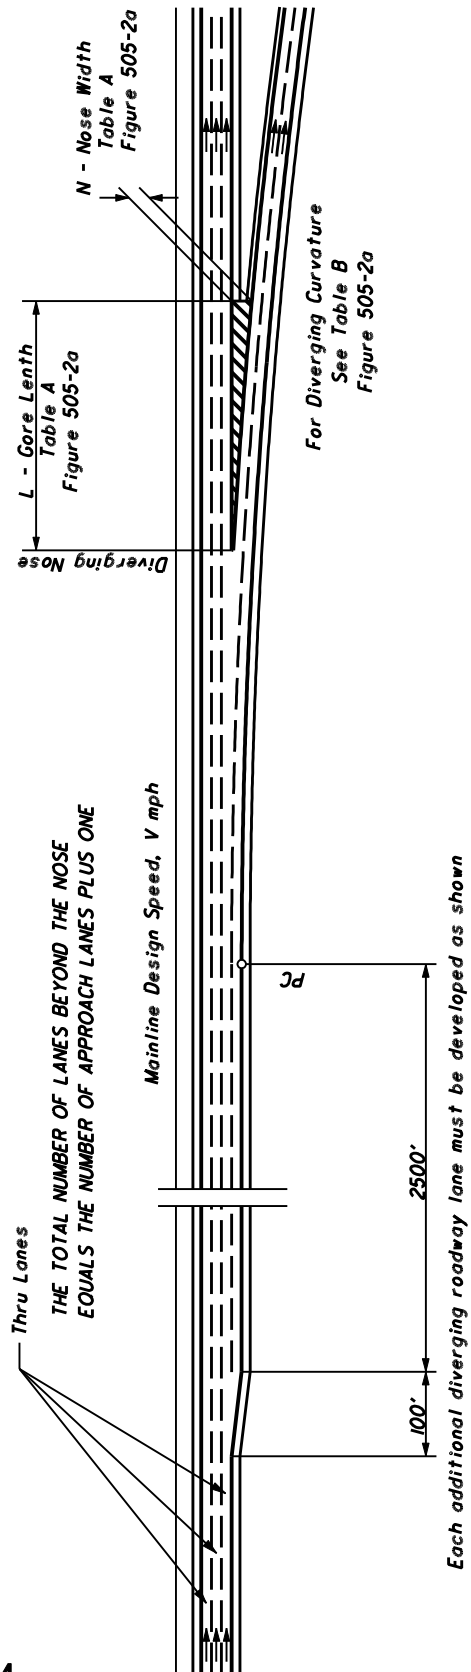

TWO-LANE EXIT TERMINAL (FOR USE ON ALL FACILITIES)


October 2004

EXAMPLES OF DIVERGING ROADWAYS




505-2cE

REFERENCE SECTIONS

505.2

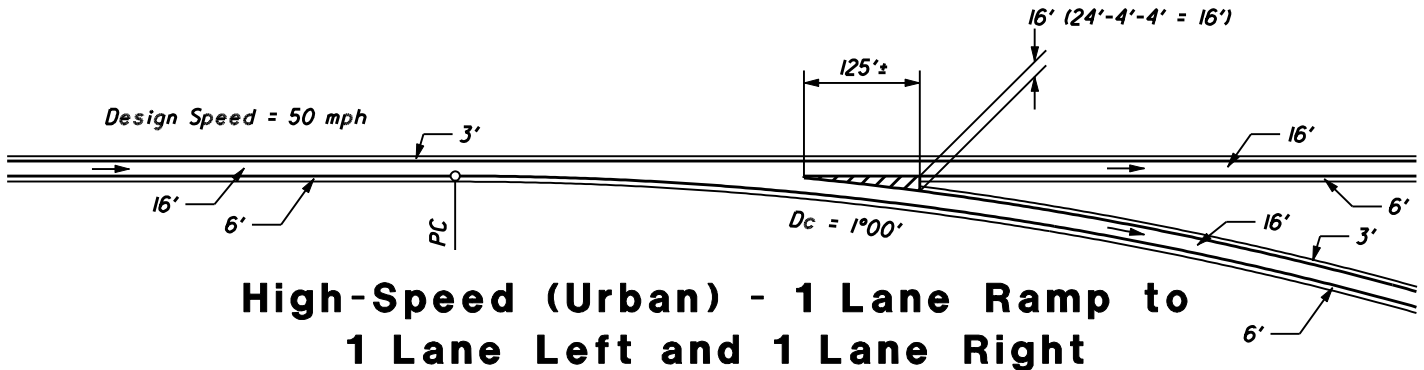


* The maximum differential between diverging curvatures should not exceed the values in Table B of Figure 505-2a.

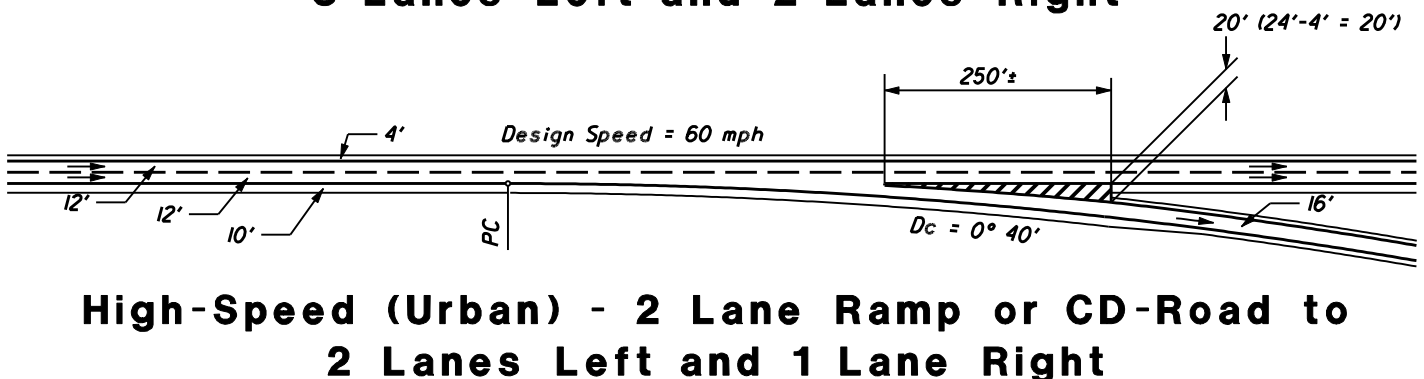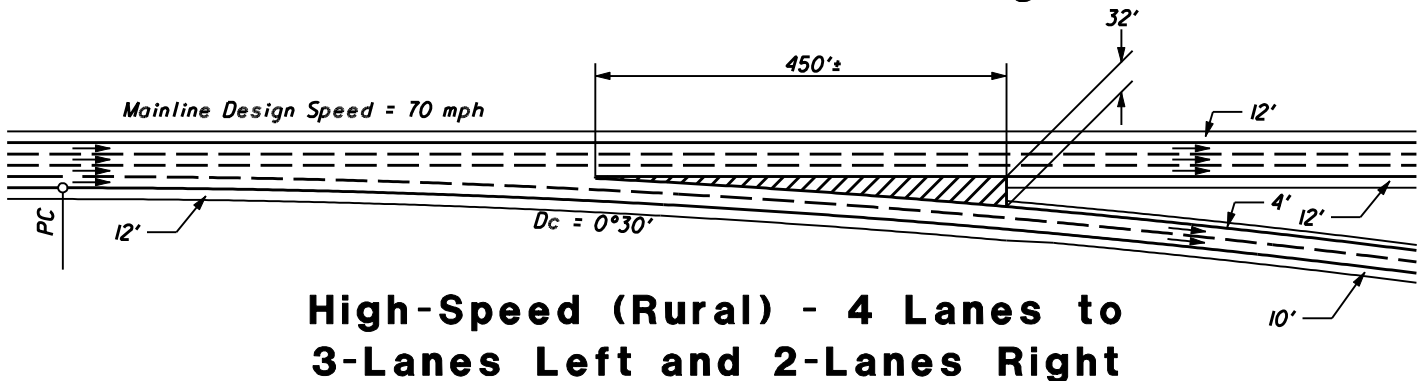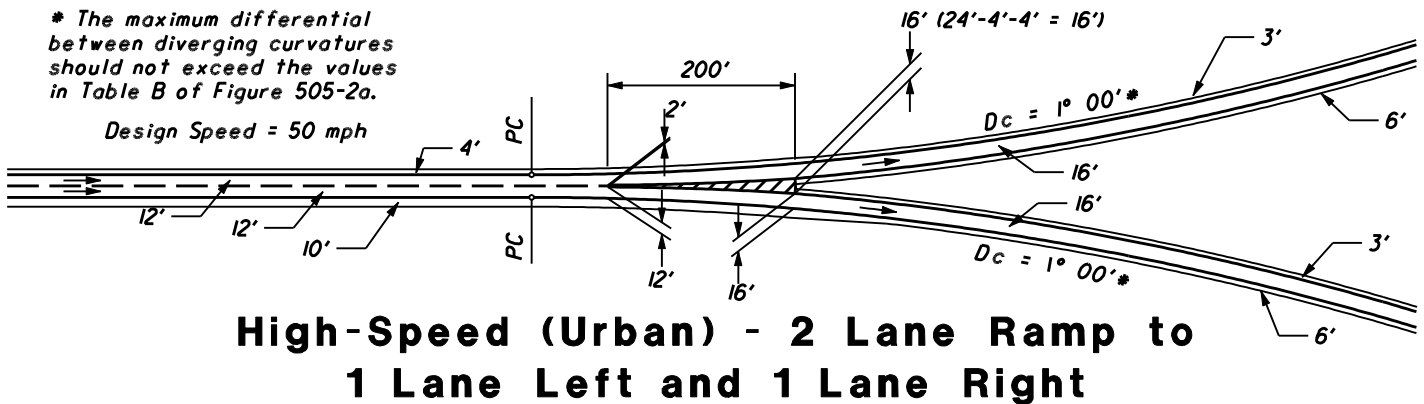

TRANSITIONS FOUR LANE DIVIDED ROADWAY TO TWO LANE ROADWAY


505-3E

REFERENCE SECTIONS
505.3

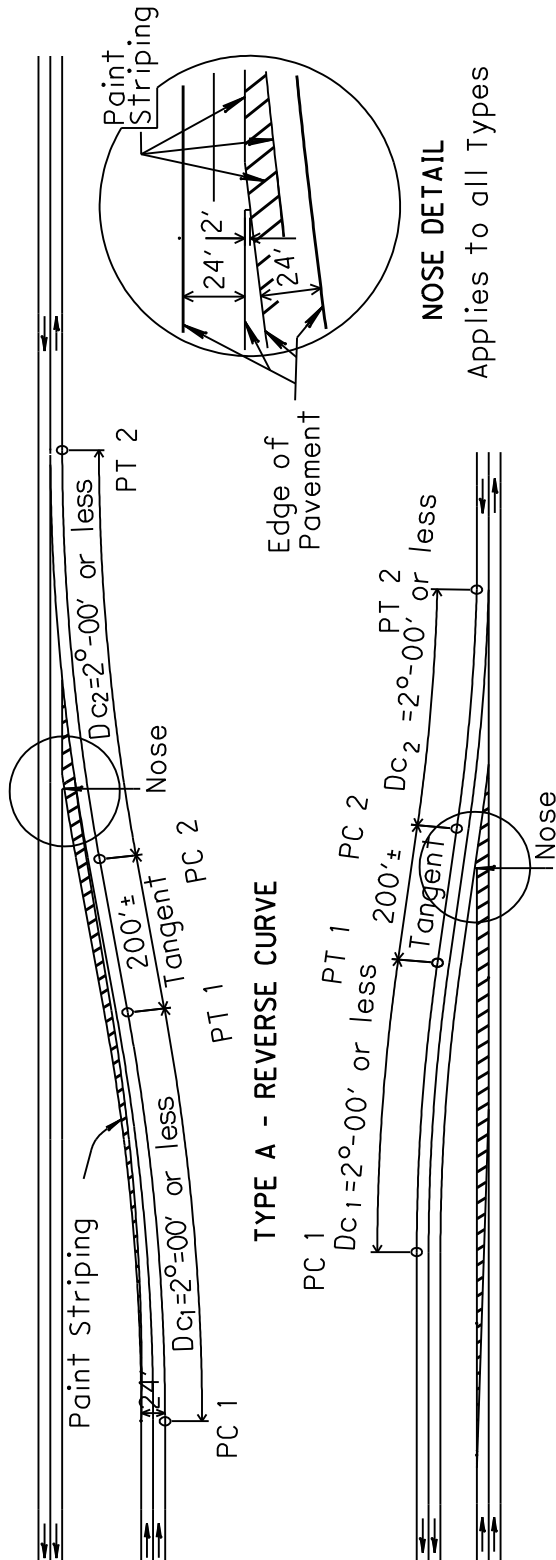


NOTE:
Refer to OMUTCD for
paint striping details

TYPE B - REVERSE CURVE

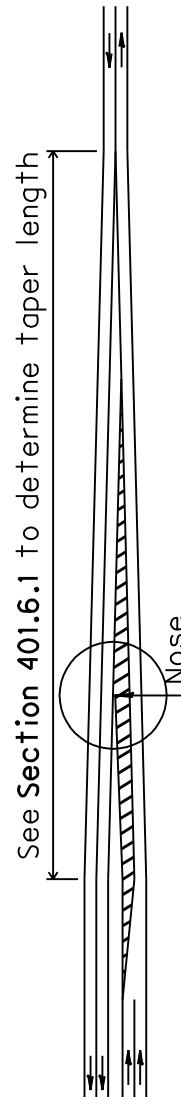

TYPE C - TAPERED

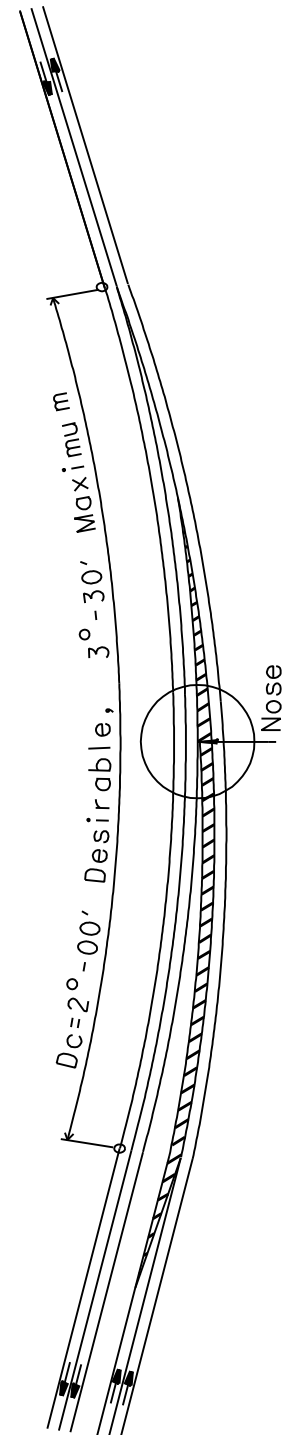

TYPE D - ON CURVE

Notes for Low-Speed Entrance and Exit Terminals

Figures 503-4a and 503-4b

A. GENERAL

1. Low-Speed Terminals are intended for use on highways which have little or no access control except through an interchange area. Many of the features of Low-Speed Terminals are applicable to a terminal of one ramp with another ramp in a freeway interchange.

B. EXIT TERMINAL

1. The curve differential between the through roadway and exit curve D_{C1} may vary from a minimum of 4° to the maximum of 8° .
2. Exit Curve D_{C1} may be compounded or spiraled into Ramp Curve D_{C2} . If D_{C2} is greater than 25° then provide a 150 ft. spiral between D_{C1} and D_{C2} .

C. ENTRANCE TERMINAL: TYPE A & TYPE B

1. Type A is preferred and shall normally be used. However, when a ramp enters as an added lane or as a combined acceleration-deceleration lane, Type B may be used if its use would result in a substantial savings in cost (i.e. reduced bridge width).
2. The acceleration lane of Type A shall be a uniform 35:1 taper relative to the through pavement edge for either tangent or curving alignment.
3. The curve differential between the through roadway and entrance curve D_{C5} of Type B shall be 4° .
4. The design of the entrance terminal curvature shall be based on the following:

(a) Ramp Curve D_{C3} of 8° or less

When the through roadway is tangent or a curve to the right, D_{C4} shall be a 150 ft. long simple curve of a degree such that the differential between it and the through roadway will not exceed 4° . When the through roadway is on a curve to the left, a 150 ft. tangent shall be substituted for D_{C4} .

(b) Ramp Curve D_{C3} greater than 8°

A 150 ft. spiral may be substituted for D_{C4} .

D. RAMP WIDTH

1. Normally single lane ramps will have a width of 16 ft. The width shall be increased to 18 ft. when the ramp radius is less than 200 ft. When an 18 ft. wide ramp is used, the 35 ft. exit and 20 ft. entrance terminal widths shall be retained and the 19 ft. and 4 ft. widths reduced by 2 ft.

E. TREATED SHOULDER

1. The treated shoulder along the speed change lanes shall be as shown on Figure 303-1.
2. If the ramp or through roadway has a curb offset greater than 6 ft. (or 3 ft.), the greater width shall be used at the terminal. Retain the 19 ft. width.
3. The Special Detail drawings shall apply when the through roadway is curbed.

Calculation Sheet for Determination of Constrained Traffic Volumes

Example: Determine whether construction of an additional eastbound left turn lane from arterial to interstate would degrade the freeway operation. There is demand for 483 eastbound left turns, 388 westbound right turns, and 4,629 northbound through trips on the freeway mainline at the merge point. See diagram for traffic intersection layout and traffic volumes. The freeway is operating at LOS F in the no-build condition. (Note: An improvement is deemed to degrade the freeway operation if it increases traffic on freeway mainline by greater than 2.00% when the freeway is operating at LOS F in the No-Build condition.)

NO BUILD CONDITION

Full demand eastbound left turn DHV onto freeway ramp = 483 vph

v/c is 1.26 (from HCS analysis), > 1.0 so constrained

Capacity Constrained volume = $vph/(v/c) = 483/1.26 = 383$ vph

Full demand westbound right turn DHV onto freeway ramp = 388 vph

v/c is 0.60 (from HCS analysis), < 1.0 so not constrained

Total volume entering freeway ramp = constrained EBLT +WBRT = 383 + 388 = 771 vph

BUILD CONDITION

Full demand eastbound left turn DHV onto freeway ramp = 483 vph

v/c is 1.00 (from HCS analysis), = 1.0 so at capacity

Capacity Constrained volume = $vph/(v/c) = 483/1.00 = 483$ vph

Full demand westbound right turn DHV onto freeway ramp = 388 vph

v/c is 0.52 (from HCS analysis), < 1.0 so not constrained

Total volume entering freeway ramp = constrained EBLT +WBRT
= 483 + 388 = 871 vph

COMPARISON


871-771 = 100 additional vehicles will enter the freeway when the improvements are constructed.

% traffic added to freeway mainline due to improvements = additional vehicles entering freeway after improvements / (trips on mainline + No Build constrained vehicles entering from ramp)

$100/(4629+771) = 1.85$ % more traffic added to freeway due to improvement

1.85 % < 2.00 % Therefore, improvement does not degrade freeway operation

Example 550-1 Constrained Traffic Volume

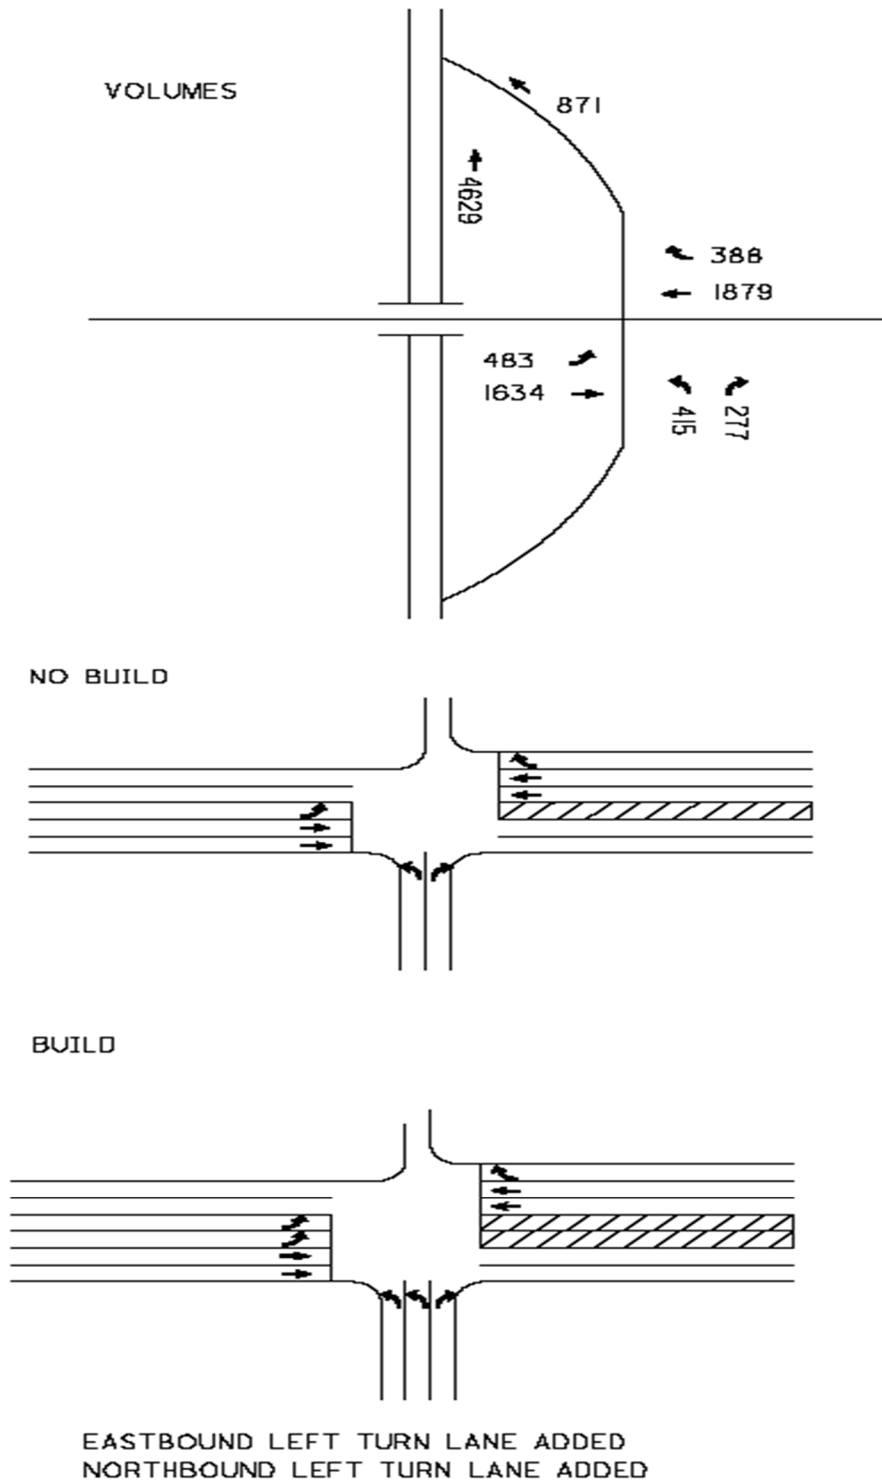

Example 550-1 Constrained Traffic Volume

HCS+: Signalized Intersections Release 5.2

Analyst: Inter.: EXAMPLE
 Agency: ODOT Area Type: All other areas
 Date: 10/13/2004 Jurisd: Anytown, OH
 Period: PM Peak Hour Year : 20 yr design
 Project ID: BUILD CONDITION
 E/W St: Broadway St. N/S St: I-75 Ramps

SIGNALIZED INTERSECTION SUMMARY												
	Eastbound			Westbound			Northbound			Southbound		
	L	T	R	L	T	R	L	T	R	L	T	R
No. Lanes	2	2	0	0	2	1	2	0	1	0	0	0
LGConfig	L	T			T	R	L		R			
Volume	483	1634			1879	388	415		227			
Lane Width	12.0	12.0			12.0	12.0	12.0		12.0			
RTOR Vol					0				0			

Duration	0.25	Area Type: All other areas										
		Signal Operations										
Phase Combination		1	2	3	4			5	6	7	8	
EB	Left	A					NB	Left	P			
	Thru	A	P					Thru				
	Right							Right	P			
	Peds							Peds				
WB	Left						SB	Left				
	Thru		P					Thru				
	Right		P					Right				
	Peds							Peds				
NB	Right						EB	Right				
SB	Right						WB	Right				
Green		14.0	47.5					13.5				
Yellow		3.0	3.0					3.0				
All Red		2.0	2.0					2.0				
Cycle Length: 90.0												secs

Intersection Performance Summary									
Appr/ Lane Grp	Lane Group Capacity	Adj Sat Flow Rate (s)	Ratios		Lane Group		Approach		
			v/c	g/C	Delay	LOS	Delay	LOS	
Eastbound									
L	535	3437	1.00	0.16	77.8	E			
T	2621	3547	0.69	0.74	7.1	A	23.2	C	
Westbound									
T	1872	3547	1.12	0.53	81.2	F	70.1	E	
R	835	1583	0.52	0.53	16.1	B			
Northbound									
L	516	3437	0.89	0.15	58.0	E			
R	242	1615	1.04	0.15	107.3	F	75.4	E	
Southbound									

Intersection Delay = 51.0 (sec/veh) Intersection LOS = D

This page is intentionally blank

600 Roadside Design

Table of Contents

600.1 Introduction.....	6-1
600.2 Clear Zone.....	6-1
600.2.1 Parallel Embankment Slopes & Ditches	6-2
600.2.2 Clear Zone on Low Speed Urban Streets	6-2
601 Warrants.....	6-3
601.1 Roadside Barrier Warrants	6-3
601.1.1 Obstacles	6-3
601.1.2 Slopes.....	6-4
601.1.3 Protection of Others	6-4
601.1.4 Protection on Low Speed Roadways.....	6-4
601.1.5 Protection on Very Low-Volume Local Roads (ADT $\leq$ 400).....	6-4
601.1.6 Preservation of Safety Grading	6-5
601.2 Median Barrier Warrants.....	6-5
601.2.1 Safety Studies.....	6-5
601.3 NHS Criteria	6-5
601.4 Design Considerations for Large Trucks.....	6-6
602 Site Considerations.....	6-7
602.1 Roadside Protection	6-7
602.1.1 Location/Offset.....	6-7
602.1.2 Length of Need on Tangent Alignments	6-7
602.1.3 Length of Need on Curved Alignments.....	6-8
602.1.4 Grading for Barriers & End Treatments	6-8
602.1.5 Guardrail with Curbs.....	6-9
602.1.5.1 On High Speed Roadways	6-9
602.1.5.2 On Low Speed Roadways.....	6-9
602.1.5.3 End Treatments and Impact Attenuators in Curbed Sections	6-10
602.2 Median Protection.....	6-10
602.2.1 Shielding of Fixed Objects in the Median.....	6-10
602.2.1.1 Narrow Median Barrier Installations.....	6-10
602.2.1.2 Wide Median Barrier Installations	6-10
602.2.1.3 Greatest Offset Method to Shield Center Median Piers	6-10
602.2.2 Mitigation of Cross Median Crashes (CMC)	6-11
602.2.2.1 Barrier Selection.....	6-11
602.2.2.2 Cable Barrier Placement in the Median	6-11
602.2.2.3 Cable Anchors.....	6-11
602.2.2.4 Cable Barrier as the Primary Barrier System.....	6-11
602.3 Gore Area Protection.....	6-12
602.4 Protection at Drives and Side Roads	6-12
602.5 Protection at Bridges and Fixed Objects.....	6-12
602.5.1 Guardrail at Bridges & Large Culverts	6-12
602.6 Protection at Drainage Structures.....	6-12
602.6.1 Transverse Drainage.....	6-13
602.6.3 Special End Treatments.....	6-14
602.7 Sight Distance Considerations.....	6-14
603 Roadside Safety Devices.....	6-14
603.1 Longitudinal Barriers.....	6-14
603.1.1 Flexible Cable Systems.....	6-15

600 Roadside Design

603.1.1.1 Generic Low Tension Cable	6-15
603.1.1.2 Proprietary High Tension Cable Systems	6-15
603.1.2 Components: Rail, Posts and Blockouts.....	6-15
603.1.2.1 Type 5, 5A, & 5MR Guardrail	6-16
603.1.2.2 Type 5 Guardrail: Barrier Design	6-16
603.1.2.4 Type 5 Guardrail with Tubular Backup.....	6-16
603.1.2.5 Long Span Guardrail	6-16
603.1.4 Rigid Concrete Barrier.....	6-16
603.1.4.1 Single Slope Barrier	6-17
603.1.4.2 Types B & B1	6-17
603.1.4.3 Type C & C1.....	6-17
603.1.4.4 Type D	6-17
603.1.4.5 New Jersey Shape	6-17
603.1.4.6 Portable Concrete Barrier.....	6-18
603.1.4.7 Zone of Influence	6-18
603.2 Characteristics of Anchor Assemblies & Impact Attenuators.....	6-18
603.2.1 Energy Absorbing.....	6-18
603.2.2 Gating	6-19
603.2.3 Redirection.....	6-19
603.2.4 Proprietary Products.....	6-19
603.3 Anchor Assemblies.....	6-20
603.3.1 Buried-In-Backslope	6-20
603.3.2 Type B (formerly B-98)	6-20
603.3.3 Type E (formerly E-98)	6-20
603.3.4 Type A	6-21
603.3.5 Type T.....	6-21
603.4 Impact Attenuators.....	6-21
603.4.1 Type 1 (formerly 1-98).....	6-22
603.4.2 Type 2 (formerly 2-98).....	6-22
603.4.3 Type 3 (formerly 3-98).....	
603.4.4 Work Zone Impact Attenuators	
603.4.5 Sand Barrels	6-23
603.5 Bridge Terminal Assemblies	6-23
603.5.1 Type 1	6-23
603.5.2 Type 1 Barrier Design	6-23
603.5.3 Type 2.....	6-24
603.5.4 Type 3.....	6-24
603.5.5 Type 4.....	6-24
603.5.6 Type TST	6-24
603.6 Concrete Barrier End Treatment.....	6-24
604 Glare Screen	6-25
604.1 Median Glare Screen	6-25
604.2 Performance Characteristics	6-25
604.3 Glare Screen Options.....	6-25
605 Rumble Strips.....	6-26
605.1 Shoulder Rumble Strips.....	6-26
605.1.1 Locations.....	6-26
605.1.2 Types	6-27
605.1.3 Lateral Clearances for Machinery.....	6-27
605.1.4 Divided Highways.....	6-27
605.1.5 Existing Shoulders	6-27
605.1.6 Bicycle Considerations	6-27

600 Roadside Design

605.1.7 Residential Areas	6-27
605.1.8 Maintenance of Traffic	6-28
605.2 Rumble Strips in Traveled Lanes	6-28
605.2.1 Locations	6-28
605.2.2 Types	6-28
606 Fence	6-29
606.1 Purpose	6-29
606.2 Types	6-29
606.3 Fence on Freeways	6-29
606.3.1 Urban Freeways	6-29
606.3.2 Rural Freeways	6-29
606.3.3 Freeway Fence Design Conditions	6-29
606.3.4 Exceptions to Continuous Freeway Fencing	6-30
606.4 Fence on Arterials	6-30
606.4.1 Urban Arterials	6-30
606.4.2 Rural Arterials	6-30
606.4.3 Arterial Fence Design	6-30
606.5 Fence on Collectors	6-31
606.6 Lateral Location of Fence	6-31
606.7 Fence Approval	6-31
606.8 Bridge Vandal Protection Fence	6-31

600 Roadside Design

This page is intentionally blank

600 Roadside Design

600.1 Introduction

This chapter discusses concepts related to roadside safety features which are intended to reduce occurrences of run-off-the-road crashes and reduce the severity of impact when such an incident does occur. The AASHTO Roadside Design Guide contains additional information on roadside design.

Safety devices are themselves fixed objects, and while they may decrease crash severity, they may also increase the total number of impacts. The potential for impacts can be reduced by placing the safety device as close to the hazard being shielded and as far from the traveled lanes as permitted by the following standards. Roadside safety devices are hazards and must result in a less severe crash than the hazard being shielded.

600.2 Clear Zone

Clear Zone refers to the desirable unobstructed area along a roadway, outside the edge of traveled way, available for the safe recovery of vehicles that have left the traveled way. Within this area, most motorists will be able to safely regain control of their vehicle. Ideally, there should be no obstructions within the clear zone; however, if an obstruction cannot be removed, then engineering judgment must be used to determine how to treat it.

The ultimate goal on new or reconstructed highways is to eliminate all features that may warrant shielding, such as fixed and non-traversable objects, by using good design practices. On other projects, when a warranting feature cannot be removed, the clear zone distances given in **Figure 600-1**, may be used as minimum values. These minimum values should not erroneously be interpreted as permitting or encouraging the construction of potential hazards immediately outside the clear zone at what may be deemed a “safe” distance from the edge of the traveled lanes.

Figure 600-1 contains recommended clear zone widths based on design speed, traffic volume, and the combination of foreslopes and backslopes on the typical cross section for the roadway. The clear zone width should be increased if a site investigation indicates that doing so would significantly lessen the potential for accidents. For example, if an obstruction exists just outside the required clear zone in an otherwise obstruction-free area, it should be considered for removal or protection.

For curves with a history of run-off-the-road crashes and a Degree of Curve of 2E00' or greater, **Figure 600-1** also provides a table of adjustment factors based on design speed that should be used to extend the clear zone. In these cases, the designer should ensure that the roadway has proper superelevation before evaluating the curve's effect on the clear zone.

The preferred order of corrective treatment for fixed objects and non-traversable hazards located within the clear zone is as follows:

1. Remove the obstacle.
2. Redesign the obstacle so that it can be safely traversed.
3. Relocate the obstacle to a point where it is less likely to be struck.
4. Reduce the impact severity by using an appropriate breakaway device.
5. Shield the object with a longitudinal traffic barrier designed for redirection or use a crash cushion.

600 Roadside Design

A barrier should only be installed, however, if the impact resulting from a vehicle striking the barrier will be less severe than an impact with the unshielded object. (See **Section 601** for the preferred order of roadside protection.)

6. Delineate the hazard if the above alternatives are not appropriate.

The overall intent of roadside design is to strive for a forgiving highway. Designing a project exclusively to meet minimum clear zone values may result in a roadside that is not as safe as it could be. On the other hand, the cost of clearing some roadsides may greatly exceed the associated benefits to the traveling public. The optimum solution lies in the judicious application of engineering judgment coupled with a sincere desire to produce safe roadways.

600.2.1 Parallel Embankment Slopes & Ditches

Embankment slopes parallel to the roadway fall into the following categories:

1. Recoverable Slopes – Slopes on which encroaching motorists can generally stop their vehicles or slow down enough to return safely to the roadway. Slopes 4:1 or flatter are considered recoverable.
2. Non-recoverable Slopes - Slopes which may be safely negotiated but are generally too steep for most motorists to stop their vehicles or to return easily to the roadway. Slopes steeper than 4:1 up to and including 3:1 are considered traversable but non-recoverable if they are smooth and free of fixed-object hazards. Since a high percentage of encroaching vehicles will reach the toe of these slopes, a clear runout area at the toe is desirable.
3. Critical Slopes - Slopes steeper than 3:1 on which vehicles are likely to overturn.

Backslopes tend to slow an errant vehicle and are therefore not as critical as foreslopes. They may, under certain conditions, be as steep as 1:1.

Roadside ditches are generally categorized as traversable or non-traversable. **Figures 307-10 and 307-11** present preferred designs for ditches with gradual and abrupt slope changes, respectively. Ditches that fall within the shaded areas of these figures are considered traversable and are preferred for use within the clear zone. Ditch sections that fall outside the shaded areas are considered non-traversable and should generally be located outside the clear zone. There are certain conditions, however, under which these sections may be considered for use within the clear zone. 3R projects; projects with limited right-of-way or rugged terrain; and low volume or low speed roads (particularly if the channel bottom and backslopes are free of any fixed objects) may utilize non-traversable ditch sections when traversable ditches are impractical.

In determining a clear zone width, only recoverable foreslopes (4:1 or flatter), traversable ditches, and backslopes 3:1 or flatter may be included. The recovery area includes the clear zone width plus any non-recoverable slope (over 4:1 through 3:1). These relationships are shown in **Figure 600-2**.

Several examples of clear zone calculations are included after the figures.

600.2.2 Clear Zone on Low Speed Urban Streets

Recent research has found that curb has very little effect on errant vehicles at speeds above 25 mph and thus the clear zone should be calculated as if the curb was not present (based on speed and traffic, **Figure 600-1**).

Clear Zone is intended to provide an off-the-traveled-lane recovery area for errant vehicles. It may not always be practical to provide the preferred clear zone on transportation facilities in urban areas where

600 Roadside Design

right-of-way is often constrained. Where clear zone cannot be provided, a minimum lateral offset to fixed objects (non-breakaway signs and luminaire supports, utility poles, trees larger than 4 inches in diameter fire hydrants, etc.) of 4 feet from face of curb for curbed roadways and 8 feet from the edge of the traveled way for uncurbed roadways is acceptable. For higher risk locations such as along the outside of curves, offset to fixed objects should be increased to 6 feet for curbed and 12 feet for uncurbed roadways. Refer to **Figures 600-3** and **600-4** for additional guidance. Where bike lanes and full-time parking lanes are used, their width can be included as offset to fixed objects. Roadside lateral offset also applies to medians.

Additionally, an operational offset of 1.5 feet should be provided from the face of curb (3 feet at intersections) to accommodate turning trucks and improve sight distance. The operational offset to any objects accommodates motor vehicles and is necessary to:

- Avoid adverse impacts on vehicle lane position and encroachments into opposing or adjacent lanes
- Improve driveway and horizontal sight distance
- Reduce the travel lane encroachments from occasional parked and disabled vehicles.
- Improve travel lane capacity
- Minimize contact from vehicle mounted intrusions (e.g., large mirrors), car doors, and the overhang of turning trucks.

This operational offset will typically become the controlling criteria where bike lanes or parking lanes meet the previously described lateral clearances. As an exception to fixed object operational offset, traffic barriers should be located in accordance with **Section 602.1.5**.

Additional guidance for placement of aesthetic elements (street trees, park benches, trash receptacles etc.) for both curbed and uncurbed urban facilities are provided in the Landscaping Guidelines in the References Section at the end of this Manual.

601 Warrants

601.1 Roadside Barrier Warrants

A roadside barrier is a longitudinal barrier used to shield motorists from natural or man-made obstacles located on the roadside within the clear zone where impacts are expected on one side of the barrier only. In addition to shielding the motorist from roadside obstacles, some types of roadside barrier are required where foreslopes are excessive, and occasionally for the protection of others from vehicular traffic.

601.1.1 Obstacles

Roadside obstacles may be fixed objects or non-traversable terrain. Roadside obstacles located within the clear zone area may or may not require barrier protection. Barriers should be considered in the following circumstances:

1. At bridges, piers and abutments.
2. At culverts, pipes and headwalls depending on traffic volumes, and the culvert's size, location and end treatment. (See **Section 602.6** for additional details.)
3. At non-breakaway sign and light supports.
4. At rough slopes in cut sections.

600 Roadside Design

5. At utility poles that cannot justifiably be relocated.
6. At bodies of water where the normal depth exceeds one foot depending on the location and likelihood of encroachment.
7. At transverse ditches if the likelihood of a head-on impact is high.
8. At retaining walls if the anticipated maximum angle of impact is 15 degrees or where there may be snagging potential. (Estimating an encroaching vehicle's angle of impact is usually done using engineering judgment. In general, higher angles of impact are expected on the outside of curves and at locations where items are flared relative to the roadway.)

Barriers are required to protect mechanically stabilized earth (MSE) retaining wall within the clear zone.

9. At unprotected Noise Walls.

Accident experience, either at the site or at a comparable site, will often be the deciding factor with respect to the placement or omission of a barrier. In all cases, the preferred alternative is to keep the entire clear zone free of fixed objects wherever economically feasible.

601.1.2 Slopes

Embankment height and steepness of foreslopes are the basic factors to be considered in determining the need for barrier slope protection. **Figure 601-1** should be used to determine roadside barrier warrants for embankments.

601.1.3 Protection of Others

Barriers are sometimes required to protect others (schools, residences, businesses, pedestrians, bicyclists, etc.) from vehicular traffic. Barrier criteria for protection of others from errant vehicles are not as defined as in other barrier warrant cases. Such decisions are normally made using accident experience, either at the site or at comparable locations along with engineering judgment.

601.1.4 Protection on Low Speed Roadways

Barrier protection on city streets and urban type facilities with design speeds less than 50 mph is not normally required. All new vehicles must show crashworthiness at 35 mph into a full-width frontal impact in NHSTA's New Car Assessment Program. On residential streets and collectors when the speed limit is less than 30 mph vehicles themselves may provide adequate protection and barrier installations are not generally considered cost effective. However, on roadways where the design speed is greater than 25 and less than 50 mph, the designer should specify protection at locations where geometric conditions, accident experience or other circumstances indicate that protection should be considered.

601.1.5 Protection on Very Low-Volume Local Roads (ADT # 400)

The guidelines presented elsewhere in this section were developed using the AASHTO Roadside Design Guide. Guidelines contained in the AASHTO Guidelines for the Geometric Design of Very Low-Volume Local Roads (less than or equal to 400 ADT) may be used in lieu of those presented here.

On roads with very low traffic volumes, research has found that roadside clear zones provide very little benefit, and that traffic barriers are not generally cost-effective. With no criteria to identify appropriate

600 Roadside Design

locations where a clear zone or barrier may be warranted, the very low-volume guidelines provide great flexibility to the designer in exercising engineering judgment to decide when it is appropriate to provide improved roadsides. These guidelines apply to both new construction and existing roads.

A clear zone of any width should provide some contribution to safety, so when feasible to do so at little or no additional cost, it should be considered for very low-volume local roads. Designers are encouraged to tailor the roadside design to site-specific conditions, considering the tradeoff between cost-effectiveness and safety.

The use of guardrail or other traffic barriers to shield or protect drivers from roadside obstructions is not generally cost-effective for very low-volume local roads. Designers may exercise engineering judgment concerning guardrail placement at locations where the potential consequences for departure from the roadway are likely to be extremely severe.

601.1.6 Preservation of Safety Grading

Designers should preserve unobstructed areas on roadway designed and constructed with safety grading (**Section 307.2.1**). Typically, safety grading was part of the original construction and is intended to provide a safe recovery area outside of the required clear zone. These unobstructed areas should not be used to locate hazards, such as camera towers, ITS or WIM equipment, or aesthetic landscaping. To ensure driver safety and the financial investment made in safety grading the addition of hazards should be located behind existing barriers or as far away from traveled lanes as possible.

601.2 Median Barrier Warrants

A median barrier is a longitudinal barrier used to separate opposing traffic on divided highways having relatively flat, traversable medians. **Figure 601-2** provides barrier warrants for freeways to determine the need for median barriers, based on the width of the median and the volume of traffic on the facility. It may also be used for expressways with full access control. The use of the terms freeway and expressway in this instance apply to the operational characteristics of the highway, not necessarily the functional class designation.

A median barrier may be high tensioned cable, Type 5, Type 5A, 5MR guardrail, or concrete barrier. If the median is wide enough so that the barrier is outside the clear zone of opposing traffic, then roadside barrier warrants may be used.

601.2.1 Safety Studies

Figure 601-2 recommends median barrier on high-speed, fully controlled-access roadways in locations where the median is less than 60 feet with a minimum 20,000 ADT. At median widths of 60 feet and up to 70 feet it is recommended that a safety study be conducted to determine if median barrier protection would be beneficial. ODOT's **Office of System Planning and Program Management** continually monitors such "Hot Spots" and will provide current criteria on segment ranking. One method for mitigation is the installation of shoulder rumble strips. Improved signage or lighting may also be appropriate lower cost options.

If barrier is chosen, see **Section 602.2.2** for median barrier design considerations.

601.3 NHS Criteria

Highway safety features, including longitudinal barriers, anchor assemblies, bridge terminal assemblies and impact attenuators installed on the National Highway System (NHS) must demonstrate satisfactory

600 Roadside Design

crash worthy performance and be accepted by the FHWA. **National Cooperative Highway Research Program (NCHRP) Report 350, Recommended Procedures for the Safety Performance Evaluation of Highway Features** had been the crash testing standard since the 1990's, but the new criteria published in 2009 is titled **MASH (Manual for the Assessment of Safety Hardware)**.

A given feature must be tested to one of six different test levels (TL) defined in Report 350 and MASH. The six test levels correspond to the following crash testing matrix:

Crash Testing Matrix		
Test Level	Vehicle	Speed
TL-1	Passenger fleet	25 mph
TL-2	Passenger fleet	40 mph
TL-3	Passenger fleet	60 mph
TL-4	Single unit delivery van truck	50 mph (55 in MASH)
TL-5	Tractor Trailer	50
TL-6	Tanker Trailer	50

All six levels of testing determine if the barrier is structurally adequate to contain the vehicle type, while TL-1 through TL-3, criteria looks at the vehicle occupant survivability.

In general, all permanent devices installed on the NHS in Ohio must meet TL-3 requirements. Exceptions to this would be allowed in urban situations where a TL-3 protection is not feasible or cost prohibitive; in those locations a TL-2 device may be appropriate.

601.4 Design Considerations for Large Trucks

Designers should consider the catastrophic nature of accidents involving tractor-tanker trucks and other large vehicles, even though such crashes are relatively rare and occur at generally unpredictable locations. Wherever large vehicles comprise a significant percentage of the traffic volume, crash potential or crash histories should be carefully reviewed to determine if higher performance traffic barriers are warranted and likely to be cost-effective.

Most large truck crashes are generally attributed to driver error. However, driver error may be aggravated by a combination of factors such as substandard geometric design, poor advance warning signs and driver expectancy violations. In addition, many crashes may occur at traffic conflict points such as interchange ramps, merge lanes or weaving areas.

If geometric and traffic control deficiencies are addressed and they do not fully rectify the issue, then the installation of NCHRP TL- 5 or TL-6 barriers should be considered. Although objective warrants for the use of these higher performance barriers do not presently exist, subjective factors most often considered for new construction or safety upgrading include:

1. High percentage of heavy vehicles (along major corridors, on hazardous material routes, or near hazardous industries),

600 Roadside Design

2. Adverse geometrics (vehicle conflict points, sharp curvature, long downhill grades, poor sight distance, or adverse pavement surfaces like shoulder wedges or reverse superelevation on shoulders), and
3. Severe consequences associated with the penetration of a large vehicle (buildings or transit facilities underneath a bridge or multi-level interchange, sensitive environmental areas, or at critical bridges and tunnels).

602 Site Considerations

Standards and guidelines are presented in this section for certain general site conditions; however, the designer should recognize that each site is unique and should be examined on a case-by-case basis. For example, there may be locations where existing conditions preclude the acquisition and development of additional right-of-way or easements necessary to build the fill slopes required for the most desirable grading. In these situations, it may be advisable to select a terminal that requires less grading or extend a run of guardrail so that the terminal can be placed on more favorable terrain. A site visit is essential to ensure that all design considerations have been addressed.

602.1 Roadside Protection

When a roadside obstacle needs to be shielded, the designer should initially consider the most flexible barrier system installed as far from the traveled way as possible. Subsequent systems should be considered in order of increasing strength and decreasing distance from the roadway. In general, the designer should consider options for roadside protection in the following order:

1. Install flared guardrail and either terminate the end outside the clear zone or bury it into a backslope.
2. Install tangential guardrail and terminate the end with a Type B flared end terminal.
3. Install tangential guardrail and terminate the end with a Type E tangential end terminal.

Install concrete barrier according to **Section 603.1.5** and terminate the end according to **Section 603.6**.

602.1.1 Location/Offset

The normal roadside barrier location, with respect to the edge of traveled lanes, is shown in **Figure 301-3**. Minimum barrier clearances, measured from the face of the barrier to the face of the obstacle, are shown in **Figure 603-2**. (See **Section 603.4** for minimum clearances for impact attenuators.) Although variations from these offsets may occur as a result of reduced graded shoulder width, the face of barrier should not be located closer than 4 feet to the edge of the traveled lane. See **Section 602.1.5** for guidelines concerning the use of curb with guardrail.

602.1.2 Length of Need on Tangent Alignments

Length of need is the total length of a longitudinal barrier that is needed to shield an area of concern (warranting feature). The length of need point in a gating end terminal or impact attenuator determines how much of the end treatment can be contributed to the length of need for the barrier.

If it is determined that barrier protection is required to shield a fixed object, **Figure 602-1** should be used to determine the length of need. The primary variables are the Runout Length (L_R) and the Lateral Extent of the Hazard (L_H). The Runout Length is the theoretical distance needed for an errant vehicle leaving the

600 Roadside Design

roadway to come to a stop. The Lateral Extent of the Hazard is the distance from the edge of traveled way to the far side of the hazard or to the edge of the clear zone if the hazard extends beyond the clear zone. The other three variables are the Tangent Length of barrier (L_1), the Lateral Distance from edge of traveled way (L_2), and the Flare Rate (a:b).

The formula in **Figure 602-1** shown for computing the barrier length of need is appropriate where tangent roadways are involved.

Short runs of barrier should be avoided where economically feasible. Gaps of 300 feet or less between adjacent runs of guardrail should be closed.

Sample Calculations for length of need on tangent alignments are included in the **Examples**.

602.1.3 Length of Need on Curved Alignments

Horizontal curvature of a roadway may have an effect in determining the barrier length of need in roadway design. In general, the length of need for a barrier on the outside of curves with a degree of curvature equal to 2E00' or flatter can be calculated as if the barrier was installed tangentially. However, a vehicle leaving the roadway on the outside of a curve sharper than this will generally follow a tangential runout path.

For those cases involving a horizontal curve sharper than the limiting values given above, rather than using the theoretical L_R distance, the tangent line from the curve to the outside edge of the warranting feature (or to the clear zone) should be used to determine the appropriate length of barrier needed (See **Figure 602-2**.) The guardrail should not be flared in these locations, since the potential impact angles would generally exceed acceptable design limits.

Lengths of need should not be adjusted on the inside of horizontal curves. These locations should be treated as if they were on a tangent and L_R should be measured along the length of the curve.

Sample Calculations for length of need on curved alignments are included in the **Examples**.

602.1.4 Grading for Barriers & End Treatments

To function properly, anchor assemblies and impact attenuators need to be installed with proper grading. The grading is designed to ensure that an impacting vehicle strikes the device at the appropriate height and with all four wheels on the ground. It also helps to reduce the potential for snagging and vehicle rollover during and after impact. Adequate earthwork and excavation should be included in the plans to ensure that all devices have proper grading.

Ideally, the area immediately behind and downstream of all gating terminals should be reasonably traversable and free from fixed objects to the extent practical. A 20 feet by 75 foot area with 10:1 maximum slopes is required. When this is not practical, due to possible impacts to streams, and wetlands, the designer should consider alternatives. Also, there may be situations where existing conditions may preclude the acquisition of additional rights-of-way or easements necessary to build fill slopes that accommodate this grading. In these situations, it may be advisable to select a terminal that requires less extensive grading (i.e. non-gating or re-directive, see **Section 603.2.1**) or extend a run of guardrail so that the terminal may be placed on more favorable terrain, or buried in the backslope. The designer should attempt to provide a clear area with recoverable slopes (4:1 or flatter) over the same 20 feet by 75 feet area. If a clear runout path is not attainable, this area should be similar in character to the upstream, unshielded roadside area.

In most cases, longitudinal barriers should not be located on slopes steeper than 10:1. Therefore, where a barrier is located outside the graded shoulder, special grading generally will be required to provide

600 Roadside Design

slopes that are 10:1 or flatter. Also, 6:1 slopes are of particular concern due to vehicle ramping effects. Barriers installed on 6:1 slopes should be limited to cases where the barrier is located at least 12 feet or more from the edge of the break point for the 6:1 slope to minimize the potential for an errant vehicle to vault over the guardrail. The Buried-in-Backslope Anchor Assembly is one exception that has been designed specifically for 6:1 or flatter slopes. (See **Section 603.3.1** for additional information.)

602.1.5 Guardrail with Curbs

Curbs are generally classified as mountable or barrier curbs. Vehicles can, and do, safely traverse mountable curbs. Barrier curbs tend to inhibit vehicles from crossing over them at low speeds, but they are not a substitute for longitudinal barriers.

When guardrail must be used in conjunction with a curb the location of the guardrail relative to the curb should be carefully considered to minimize unacceptable post impact vehicle trajectories. When a vehicle strikes a curb, the resulting trajectory may cause the vehicle to impact the guardrail too high. In some cases the vehicle could clear the guardrail altogether.

If guardrail is warranted and curbs are present then the guardrail should be located at the face of the curb. Because of the vehicle vaulting potential, if the guardrail cannot be placed at the face of curb, then the guardrail should be installed well behind the curb to allow the vehicle suspension to return to a normal state as shown in the following table. This table refers to only strong post guardrail systems, like ODOT's Type 5. Curb is required when constructing Bridge Terminal Assembly Type 1 detailed on Standard Construction Drawing GR 3.1.

Speed	Guardrail at Curb	Guardrail Behind Curb
Up to 40 mph	Maximum of 6 inch sloping faced curb flush with guardrail	No closer than 8 feet.
45 and 50 mph	Maximum of 6 inch sloping faced curb flush with guardrail	No closer than 13 feet.
Over 50 mph	Maximum of 4 inch sloping faced curb flush with guardrail. Above 55 mph, the sloping face of the curb should be 3:1 or flatter and 4 inches or smaller.	Guardrail should not be located behind curb.

602.1.5.1 On High Speed Roadways

All guardrail on curbed roadways with a design speed of 50 mph or greater preferably should be located so the face of guardrail is at the face of curb. When curb and gutter is used, the gutter pan width will need to be increased to comply with these guidelines and to maintain a minimum 4 feet guardrail offset from the traveled way.

The curb height should be limited to 4 inches or less when used in conjunction with guardrail on high speed roadways.

602.1.5.2 On Low Speed Roadways

Guardrail is not normally used on curbed roadways having design speeds less than 50 mph (see **Section 601.1.4**). Where guardrail is deemed necessary on these roadways, the same criteria used for roadways with design speeds of 50 mph or greater is recommended. However, since the risk of vaulting is

600 Roadside Design

considerably less on low speed roadways, the designer may give more consideration to the location of the guardrail relative to the edge of traveled way than to its location relative to the curb.

602.1.5.3 End Treatments and Impact Attenuators in Curbed Sections

None of the approved anchor assemblies or impact attenuators listed in **Sections 603.3 and 603.4** have been designed or tested for use with curbs; consequently, the designer should use the guidelines provided for uncurbed sections in addition to engineering judgment and recommendations from the manufacturer to select end treatments in curbed sections. The current recommendation from product vendors is to ensure curbs are not present (if practical) along the length of the product and for a distance of 50 feet in advance of the product. When terminating or removing curbs in the vicinity of end treatments and impact attenuators remember to taper the curb height from 4 or 6 inches to flush with the pavement over a distance of 10 feet.

602.2 Median Protection

Two types of shielding are necessary in medians. First, shielding of fixed objects is required if located in the clear zone of either direction of traffic. Second, if the median width warrants or a safety study shows a history or potential for Cross Median Crashes some type of barrier system may be needed. See **Section 602.2.2**.

602.2.1 Shielding of Fixed Objects in the Median

When a median hazard requires protection, the treatment depends upon the available width of the median. For the purposes of installing barrier, a median is considered wide when the barrier installed in the median does not extend into the clear zone of the opposing side of traffic. Conversely, when the guardrail run extends into the clear zone of the opposite side of traffic, the median is considered narrow.

602.2.1.1 Narrow Median Barrier Installations

Refer to **SCD GR-6.1 and GR-6.2 Design A** for details.

602.2.1.2 Wide Median Barrier Installations

Refer to **SCD GR-6.1 and GR-6.2 Design B** for details.

602.2.1.3 Greatest Offset Method to Shield Center Median Piers

Another design for pier protection (refer to **SCD GR-6.2**) used by some Districts, is to shield center median piers with concrete barrier. This design uses concrete barrier to encase the pier (**SCD RM-4.4**), and then taper the concrete barrier to the end section (**SCD RM-4.6**). Finally install two narrow Type 2 Impact Attenuators, one at each end. This eliminates the need for perhaps hundreds of feet of guardrail as shown in **SCD GR-6.2**. Contact the **Office of Roadway Engineering** for more information and design details. Proper grading in advance and alongside of the barrier is crucial in ensuring proper performance.

600 Roadside Design

602.2.2 Mitigation of Cross Median Crashes (CMC)

602.2.2.1 Barrier Selection

If a median barrier is determined to be necessary for shielding of CMC (**Section 601.2**), then the selection of the type of barrier to be used in the median is based on several factors, including the Test Level desired, median cross section, and barrier deflection.

Test Level - A safety study should determine the causes of CMC to determine the type of vehicle involved, and barrier selection should be based on the study. Guardrail is rated for TL-3 protection, High Tension Cable products are either rated to TL-3 or TL-4 (single unit truck) depending on the product. Single Slope Concrete Barrier is considered a TL-5 system capable of handling a tractor trailer. See **Section 601.4** for further discussion on Large Trucks.

Cross Section Type - Barrier selection also depends on the median configuration, whether or not there is a mounded median, depressed median of 4:1, 6:1, or 10:1 or flatter slopes, the width of the paved shoulder and graded shoulder. Other factors include but are not limited to bifurcation and differential superelevation between the traveled lanes.

Barrier Deflection - The designer also has to be aware of the allowable deflection to appropriately select a median barrier product. On one hand, rigid concrete barriers do not deflect, but may require closed drainage and thus are expensive. High tension cable barrier has large deflections. Designers should provide a factor of safety of 1.5 to the deflection of cable barrier.

602.2.2.2 Cable Barrier Placement in the Median

On 6:1 or flatter depressed median slopes, cable should be placed 8 feet up the slope from the bottom of the ditch to avoid drainage hydraulics, poor soil quality, and vehicle under-ride possibilities. If the median slopes are consistent, placement of cable on the slope outside of this zone is allowed. Another acceptable location for cable placement is at the top slope on one side of the median if the paved shoulder is wide enough to accommodate the cable deflection after the 1.5 factor of safety is applied. This location places the cable at the best grading on the near traffic side and at the farthest point away from opposing traffic. The minimum offset to traveled lane is 12 feet. This location may result in an increase in nuisance hits. Designers need to understand how cable reacts during crashes before the median locations are selected. For more information contact the Standard Engineer in the Office of Roadway Engineering. The maximum post spacing allowed is 15 feet. (Refer to **Figure 602-3 & 602-4**.)

602.2.2.3 Cable Anchors

If installed in the clear zone, cable systems need to be terminated with crashworthy anchors. Most crashworthy designs have breakaway anchors. Breakaway anchors will release the tension in the entire run of cable rendering it ineffective until repaired. If a vehicle is tangled in the cable, tension can be easily dropped out of the system if each run of cable has one set of breakaway anchors.

602.2.2.4 Cable Barrier as the Primary Barrier System

When designing a project utilizing cable barrier, designers should continue to use guardrail or concrete barrier to protect existing fixed objects. Cable barrier should not be used as the primary means of shielding fixed objects in highway medians.

600 Roadside Design

602.3 Gore Area Protection

Diverging gores are locations where one or more lanes of a road carrying traffic in the same direction diverge away from each other. (Unidirectional traffic exists on both sides of a gore.) Impact attenuators are typically used to terminate the ends of longitudinal barriers located in diverging gores. (See **Section 603.4** for additional information on impact attenuators.)

602.4 Protection at Drives and Side Roads

When normal mainline guardrail is interrupted by a side road or drive, the opening should be designed as shown in **Figure 603-3**.

The introduction of barriers at drives and side roads may have an adverse effect on both horizontal and intersection sight distances. These sight distances should be investigated when barriers are used at these locations. (See **Sections 602.6.2** and **602.7** for additional information.)

602.5 Protection at Bridges and Fixed Objects

Concrete barrier end protection, utilizing Type 5 Guardrail with bridge terminal assemblies, shall be used at the approach end of bridge parapets, and other similar fixed objects, on all facilities where the design speed is 50 mph or greater. (See **SCD GR-6.1**)

Pier protection in narrow medians and along the roadside is often accomplished using concrete barrier.

602.5.1 Guardrail at Bridges & Large Culverts

Figures 602-1 and 602-2 should be used to calculate the barrier length of need at all bridges and culverts.

Flared guardrail should be provided at overpasses and on safety and clear zone grading projects according to **SCD GR-6.1**.

Flared guardrail should be provided at underpasses or other fixed objects on safety and clear zone grading projects according to **SCD GR-6.2**.

Tangent guardrail should be provided on common grading projects.

There are occasionally areas where the calculated lengths of need are impractical. An example would be where a drive or intersection is located too close to a bridge and cannot be relocated. In such cases, the approach guardrail length may be reduced as necessary. In no case shall the minimum treatment be less than shown in **Figure 603-4**.

On divided highways, guardrail is not required at either of the bridge parapet trailing ends unless it is warranted because of the lack of clear zone distance, the presence of openings between bridges, or where it is required in conjunction with a bridge railing.

602.6 Protection at Drainage Structures

Adequate drainage is one of the most critical elements in roadway design. A comprehensive drainage design requires consideration of roadside safety as well as hydraulic efficiency.

600 Roadside Design

In general, no part of an unshielded drainage feature within a clear zone graded roadway, excluding curbs, should extend more than 4 inches above the surrounding terrain. (Drainage features that do not comply with this criterion are herein referred to as “protruding.”)

(See the **Location and Design Manual, Volume Two** for specific drainage requirements.)

602.6.1 Transverse Drainage

For pipes with diameters or spans greater than 36 inches:

1. Extend the exposed pipe ends outside the clear zone when practical.
2. When the above option is impractical, shield the ends of the exposed pipe per **Section 602.5.1**.

For pipes with diameters or spans less than or equal to 36 inches located in areas where clear zone or safety grading is not provided:

Provide standard half-height headwalls (SCD HW 2.1 or HW 2.2) at exposed pipe ends.

For pipes with diameters or spans less than or equal to 36 inches located in areas where clear zone or safety grading is provided:

Extend the exposed pipe ends outside the clear zone when practical and provide standard half-height headwalls.

When the above option is impractical, use slope tapered end treatments.

602.6.2 Intersecting Embankments & Parallel Drainage

Intersecting embankments are slopes that are transverse to the roadway. They are usually created by median crossovers, intersecting roadways and driveways. These slopes are typically struck head-on by vehicles that have left the traveled way.

Median crossovers on Interstates/Freeways shall use a 12:1 slope.

Embankment slopes for side roads should be as flat as practical, and drainage pipes underneath side roads should be located outside of the mainline clear zone where practical. This can typically be accomplished with minor adjustments to the ditch profiles.

For driveways on projects with clear zone or safety grading, the intersecting embankment slopes should be as flat as practical and:

1. All protruding drainage appurtenances should be placed outside the mainline clear zone, when practical. Standard half-height headwalls should be provided on all pipe ends located outside the clear zone.
2. If a protruding drainage appurtenance cannot be located outside the clear zone then it should be placed as far from the roadway as practical and treated similarly to drive pipes on projects without clear zone or safety grading.
3. An enclosed drainage system (storm sewer) may also be considered.

For driveways on projects without clear zone or safety grading, the intersecting embankment slopes should be as flat as practical and:

600 Roadside Design

1. Exposed ends of pipes with diameters or spans less than or equal to 24 inches should be miter cut to conform to the prevailing slope.
2. Exposed ends of pipes with diameters or spans over 24 inches should be designed with standard half-height headwalls.
3. An enclosed drainage system may also be considered.

602.6.3 Special End Treatments

End treatments that utilize bars or grates designed as safety treatments for exposed pipe ends are commercially available. However, these end treatments reduce hydraulic efficiency and exhibit a high potential for clogging. This type of end treatment should only be used when all other reasonable options have been exhausted.

602.7 Sight Distance Considerations

The introduction of longitudinal barriers may have an adverse effect on both horizontal and intersection sight distances. The effect on both distances should be investigated at all locations where barriers are used. (See **Sections 201.2.2** and **201.3.2** for additional guidance.)

603 Roadside Safety Devices

The goal of any highway roadside safety device is simply to assist in providing a forgiving roadside for an errant motorist. The goal is met when the feature does one of the following without causing serious injuries to the occupants of the vehicle or to other motorists, pedestrians or work zone personnel:

1. contains or redirects the vehicle away from the hazard,
2. decelerates the vehicle to a stop over a relatively short distance,
3. readily breaks away, fractures or yields,
4. allows a controlled penetration, or
5. allows the vehicle to safely traverse the feature.

National Cooperative Highway Research Program (NCHRP) Report 350, *Recommended Procedures for the Safety Performance Evaluation of Highway Features* and **MASH, Manual of Assessment of Safety Hardware** are currently the safety criteria used to evaluate many of these features. (See **Section 601.3** for additional information.)

603.1 Longitudinal Barriers

Longitudinal barriers function by containing and redirecting impacting vehicles. They are typically classified into three types based on relative strength characteristics: flexible, semi-rigid and rigid.

Flexible barriers, such as cable guardrail and weak post w-beam guardrail, resist impact through the development of tension in the cable or rail element. Semi-rigid barriers, like Type 5 guardrail, resist impact primarily through beam action between the rail, posts, and ground. Rigid barriers resist impacts by

600 Roadside Design

transferring the loads directly into the ground and are not designed to yield during impact. This makes them ideal for use in areas with minimal or no space available to accommodate barrier deflections.

Deflection characteristics of a longitudinal barrier system determine the minimum clearances between the face of the barrier and the face of the object it shields. Minimum barrier clearances are listed in **Figure 603-2** along with typical applications for the standard types of barrier described in the following sub-sections.

603.1.1 Flexible Cable Systems

Cable longitudinal barrier systems have been in use throughout the United States for many decades as either a roadside or median barrier. The system presents designers with a relatively inexpensive method to mitigate cross median crashes. Cable systems are considered flexible systems in that they tend to exhibit large deflections when impacted. Although large deflections can be problematic they produce a relatively soft impact allowing for a gradual deceleration of the vehicle.

603.1.1.1 Generic Low Tension Cable

Generic low tension cable systems are no longer allowed to be constructed on ODOT's system

603.1.1.2 Proprietary High Tension Cable Systems

High Tension systems were originally developed and proven in Europe and started appearing on US highways in the early 2000's and are considered an improvement over the generic system. Although proprietary in nature, high-tensioned systems consists of the same standard cable mounted under substantial tension between anchors, but each system has its own light weight steel post. Ohio does use high tensioned systems in medians of divided highways as a method of preventing cross median crashes.

Currently, five systems are available: Brifen, Gibraltar, NUCOR, Trinity and Safence.

603.1.2 Components: Rail, Posts and Blockouts

The three major components of a strong post barrier are the rail, posts, and blockouts. The most common rail component are 12' 6" long 12 gauge w-beam metal spliced together with 8 splice bolts and connect to posts at periodic intervals. This ribbon of rail acts to capture impacting vehicles and to dissipate energy up and down the rail length. The tension on the rail from an impact can be transferred a considerable distance. Proper anchoring of the rail at both ends is critical in achieving proper performance

Guardrail posts are designed to support the rail at the appropriate height and provide lateral support during an impact. For most impacts, the posts are designed to rotate through the soil, rather than bend at or near the ground surface. This rotation helps to contribute considerably to the energy absorbed in the collision and helps to prevent contact between the vehicle and the posts. For this reason, paving around posts is not advisable if the thickness of the pavement would prevent this rotation from occurring. Three inches of asphalt pavement is the maximum allowable thickness for paving under guardrail. See **Sample Plan Note R116** for additional information on paving under guardrail.

For guardrail installations to perform properly during an impact, adequate soil support must be provided for the posts in the guardrail run. To ensure this support is provided, 9.0 feet long posts should be specified at locations where the distance from the face of the barrier to the slope break point is less than 2.0 feet. These locations should be specifically identified in the plans.

Blockouts minimize the potential for a vehicle's wheels to snag on the posts and reduce the likelihood of a vehicle vaulting over the barrier. This is accomplished by maintaining the height of the rail as the barrier deflects and rotates downward during an impact.

600 Roadside Design

603.1.2.1 Type 5, 5A, & 5MR Guardrail

In Ohio the strong post barrier is known as Type 5 guardrail and is used primarily for roadside protection on any roadway where a minimum barrier clearance of 5.5 feet can be provided. This distance is measured from the front face of guardrail to the warranting object, thus the distance accounts for the width of the barrier. It consists of 12.5 foot long steel w-beam rail elements with either wood or metal posts and wood or recycled plastic blockouts. Posts shall be spaced at 6.25 feet. Type 5 Barrier Design is a median and roadside application where slopes on both sides of the rail have are 10:1 or flatter.

Type 5A guardrail is used primarily for roadside protection on any roadway where a minimum barrier clearance of 3.5 feet can be provided. It consists of the same design for Type 5, except the posts shall be spaced at 3.125 feet.

Type 5MR is a special design of the Type 5 Barrier Design guardrail, but is installed on one side of a depressed median. A rub rail on the median ditch side allows installation on median slopes of up to 6:1.

See **SCD GR-2.1** for additional details.

603.1.2.2 Type 5 Guardrail: Barrier Design

Type 5 barrier design guardrail is identical to standard Type 5 guardrail with the addition of blockouts and rail on the opposite side of the posts. It is used primarily in bi-directional median applications on any roadway where a minimum barrier clearance of 5.5 feet can be provided. See **SCD GR-2.1** for additional details.

603.1.2.4 Type 5 Guardrail with Tubular Backup

Type 5 guardrail with Tubular Backup now meets TL-3 criteria and is designed to be specified over new prefabricated structures roadways where lateral deflections of the rail cannot be tolerated. It consists of steel w-beam rail elements, with sections of tubular steel replacing the blockouts, installed on steel posts. The tubular backup shall extend to the first post off the approach and trailing ends of the structure (or past the component of the structure that is being protected). A Type 4 Bridge Terminal Assembly is required at each end of the tubular backup (see **Section 603.5.5**). See **SCD GR-2.2** for additional details.

603.1.2.5 Long Span Guardrail

A TL-3 long span guardrail design for spanning 25 feet across culverts is shown on **SCD GR-2.3**. This nested guardrail system with breakaway posts and double blockouts has a deflection of 5.0 feet.

SCD GR-2.4 shows a design for spanning culverts with either a 12.5 feet or 18.75 feet span. It is a design for spanning across culverts and other structures with depths of cover less than 2.5 feet. It can be used on any non-NHS roadway where a minimum barrier clearance of 3.5 feet can be provided. It consists of Type 5 guardrail with two w-beam rail elements that are nested. A maximum of two posts can be eliminated to create the clear span. The double rail elements must extend across a minimum of two posts on both sides of the structure.

603.1.4 Rigid Concrete Barrier

Concrete barriers are used in locations where barrier deflections cannot be tolerated. Because of its rigidity and shape, it is very effective for small angle impacts and is preferred for use where the chance of impacting it at an angle of 15 degrees or greater is minimal. It also requires less maintenance than steel beam guardrails. Overall impact severities for these barriers are usually greater than the other types of systems.

600 Roadside Design

At locations where a standard barrier cannot be installed, the face of fixed objects within the clear zone should be designed with the concrete barrier shape. Typical locations are along retaining walls and walls that connect pier columns. On upgrading projects where the face of these fixed objects does not have existing protection, the concrete barrier shape should be provided to shield these objects.

603.1.4.1 Single Slope Barrier

ODOT has changed its standard concrete barrier shape to that of a single slope, from the New Jersey shape. Single slope barriers have advantages of better crash test performance for TL-3 vehicles, and the capability of being a TL-5 barrier. It is also capable of having multiple pavement overlays placed next to it without having to reset the barrier.

The single slope standard does not require a concrete base outside the end sections, as was required with the previous NJ safety shape. The single slope barrier, however, does need a solid base material (asphalt or aggregate) to support its own weight, and an overlay of material at the toe of the barrier. Single slope barrier does not require horizontal steel except in the end sections and end anchorages. It is used on any roadway in areas where signs, lighting or other unyielding objects are to be mounted on top of the barrier. Concrete barriers are to be terminated with reinforced foundations. Use an End Anchor as shown on **SCD RM-4.3**, unless the barrier end connects to an impact attenuator or guardrail, in which case an End Section as shown on **SCD RM-4.6** should be used in lieu of the End Anchor.

603.1.4.2 Types B & B1

Single Slope Concrete Barrier, Type B, is 28 inches wide at the base and 42 inches tall. Single Slope Concrete Barrier, Type B1, is 33.75 inches wide at the base and 57 inches tall. The additional height of the barrier in excess of the Type B serves as the glare screen. Refer to **Section 604** for additional information on glare screens.

603.1.4.3 Type C & C1

Single Slope Concrete Barrier, Types C and C1, are used on any roadway in narrow medians where the difference in elevation on either side of the barrier is less than or equal to 24 inches. The barrier varies in width at the base depending on the height. For Type C, with the height on one side fixed at 42 inches, the other side can vary in height from 42 inches to 66 inches. Type C1 varies from 57 inches to 81 inches on one side while the other side is fixed at a height of 57 inches. Barriers with elevation differences greater than 24 inches are to be individually designed.

603.1.4.4 Type D

Single Slope Concrete Barrier, Type D, is 20 inches wide at the base and 42 inches tall. It has the single slope profile on only one side of the barrier; therefore, it can be used on any roadway where impacts are expected on only one side of the barrier. It is often used for the protection of piers and other fixed obstacles. See **SCD RM-4.5** for barrier and end anchors details and for use at obstructions. See **SCD RM-4.6** for Type D end sections.

603.1.4.5 New Jersey Shape

ODOT's previous standard was the NJ safety shape barrier. This barrier type has a 3 inches vertical portion at the base which plays no significant role in the performance of the barrier, but provides an allowance for one future pavement overlay. The NJ shape continues to meet at least TL-3 requirements

600 Roadside Design

and can be utilized on very short lengths where existing NJ barrier is present. Plan insert sheets of this design are available on the **Office of Roadway Engineering's** web page.

603.1.4.6 Portable Concrete Barrier

Refer to Standard Construction Drawing RM 4.1 and RM 4.2. All portable concrete barrier used on ODOT's system must be constructed using these drawings. For other approved Temporary Traffic Barriers refer to the Office of Roadway Engineering's website for the approved products list.

603.1.4.7 Zone of Influence

Designers are encouraged to minimize objects on top of and behind concrete barriers because of truck box yaw into the barrier in an impact. Discrete objects such as lighting standards or sign supports could be snagged by a box truck, or continuous objects like sound wall mounted on top of barrier could be damaged by a truck's cargo box rotation. For single slope and NJ shape barriers, a reasonable area to keep as free of objects as reasonable would be 32 inches behind the top face of the barrier to 80 inches above it. Generally, objects placed in this area would not compromise the crashworthiness of the barrier, but incidental damage to the impacting truck's cargo box or the object itself may occur.

603.2 Characteristics of Anchor Assemblies & Impact Attenuators

Originally end terminals were designed simply to anchor the ends of guardrail runs. However, over the years safety at the ends has become a major concern. As a result, guardrail end terminals (anchor assemblies) have taken on additional functions. An anchor assembly can function by:

1. Decelerating a vehicle to a safe stop within a relatively short distance permitting controlled penetration of the vehicle behind the device;
2. Containing and redirecting the vehicle;
3. A combination of the above.

Anchor assemblies must also be capable of developing the full tensile strength of the rail elements.

Impact attenuators (crash cushions) are designed primarily to safely stop a vehicle within a relatively short distance. Some common uses of impact attenuators are at exit gores, on or under bridges where piers require shielding, and at the ends of roadside and median barriers.

Crashworthy anchor assemblies and impact attenuators can be classified as either (1) energy absorbing or not, (2) gating or non-gating and (3) redirective or non-redirective.

603.2.1 Energy Absorbing

When a vehicle impacts an energy absorbing end terminal, energy from the impact is dissipated in a variety of ways through the deformation of the vehicle's crush zone and also from the barrier itself. An energy absorbing system is designed to expend crash energy by crumbling steel or other material so that most of the energy will be dissipated internally within the barrier system. The advantage of an energy absorbing system is that a vehicle and its occupants can be decelerated to a stop within 30 to 50 feet under designed impact.

600 Roadside Design

603.2.2 Gating

A non-gating system will bring an impacting vehicle to a controlled stop or redirect it while a gating system will allow a vehicle impacting the system at an angle to pass through the system along the same general path. Gating guardrail end terminals, will remove very little of the impacting energy, thus vehicles will pass through the system at close to the impacting speed. See **Section 602.1.4** for proper grading recommendations with regards to gating end terminals, especially the 20 feet by 75 feet run out area behind and beyond the start of the gating terminal.

The length of need (LON) point in a non-gating system is located at the nose of the system. When using a gating system, the LON point needs to be identified to determine what portion of the system can be used as part of the barrier's LON. See **Sections 602.1.2** and **602.1.3** for additional information on length of need.

603.2.3 Redirection

A redirective system will redirect an impacting vehicle away from a fixed object when the system is struck at an angle on the side. A non-redirective system will allow a vehicle to continue in approximately the same direction until it comes to a stop.

A non-redirective system is designed to contain and capture a vehicle impacting downstream from the nose of the unit. It provides protection in an end-on collision by absorbing the impacting vehicle's kinetic energy; however, it does not control an angle impact and it may allow pocketing or penetration. (Pocketing is said to have occurred if, upon impact, relatively large lateral displacements happen over a relatively short longitudinal distance.) All non-redirective devices are also gating. LON is established at the rear of the device. Sand barrel arrays are typical non-redirective devices.

A redirective, gating system has redirective capabilities over a portion of its length. The LON point varies from system to system. These devices are almost always anchor assemblies.

A redirective, non-gating system is designed to contain and redirect a vehicle impacting downstream from the nose of the unit. Redirection is provided over the entire length of the device; therefore, the LON is established at the nose of the device.

603.2.4 Proprietary Products

Many of the following devices are proprietary products, which are subject to change at the manufacturer's discretion. The information provided in this manual is accurate and up-to-date at the time of publication and represents the currently approved versions of these products. New products may be introduced and modifications to existing products may occur, which may or may not be approved by ODOT. Shop drawings of all approved proprietary devices are provided with the standard construction drawings. For additional guidance link to **Office of Roadway Engineering's** web page on Proprietary Roadside Safety Devices at www.dot.state.oh.us/Divisions/ProdMgt/Roadway/roadwaystandards/Pages/default.aspx or contact the **Roadway Standards Engineer**.

Each proprietary end terminal and impact attenuator must be installed according to the manufacturer's recommendations.

600 Roadside Design

603.3 Anchor Assemblies

603.3.1 Buried-In-Backslope

The buried-in-backslope anchor assembly is a flared, redirective, non-gating, non-proprietary, end terminal. The length of this terminal varies depending upon field conditions. Its construction is similar to Type 5 guardrail except the buried-in-backslope terminal uses 8.0 feet long posts and a rubrail. It is installed with 6:1 or flatter foreslopes and backslopes as steep as 1:1. A vehicle impacting this terminal close to the buried end may be able to climb 2:1 or flatter backslopes and encroach behind the guardrail. Consequently, where backslopes are 2:1 or flatter a 75 feet minimum length of guardrail must be provided upstream between the warranting feature and the intersection of the guardrail with the ditch flowline. Where backslopes are steeper than 2:1 this provision is not applicable.

This anchor assembly may be used as an approach end treatment for guardrail on any roadway. **Table 603-1** gives additional information on where to use this anchor assembly. See **SCD GR-4.5** for additional details.

There is a version of the Buried-in-Backslope that Report 350 approved for 4:1 foreslopes. Contact the **Office of Roadway Engineering** for more information on this design.

603.3.2 Type B (formerly B-98)

The Type B anchor assembly is a flared, redirective, gating end terminal. The length of both systems should be considered 37.5 feet inclusive of three 12.5 feet rail elements. For the Type B, 25.0 feet may be deducted from the guardrail length of need. The SRT-350 is installed with a curved flare while the FLEAT-350 uses a tangent flare, both with an offset of four feet.

The Type B may be used as an approach end treatment for guardrail on any roadway. The Type B cannot be used when the back side of the device is in the clear zone of bidirectional traffic. The Type B products require a recovery area immediately behind the terminal detailed on **SCD GR-5.2**. Designers should check that this grading is present on existing cross-slopes or otherwise revise the cross-slopes to conform. **Table 603-1** provides guidance on where to use this anchor assembly. See **Roadway Sample Plan Note R112** in Appendix B for additional information. All products listed in this section are gating as described in Section 602.1.4. These end treatments should connect to Type 5 guardrail, but it is acceptable to connect to Standard Bridge Terminal Assemblies.

An earlier version of the Type B known as the ELT or MELT depicted on Standard Drawings until 1994 is still found throughout the state highway system. This generic flared end terminal has not meet Report 350 criteria, and should be systematically replaced with the newer version.

603.3.3 Type E (formerly E-98)

The Type E anchor assembly is a tangent, redirective, gating end terminal. These systems are 50 feet in length, with 37.5 feet may be deducted from the guardrail length of need.

The Type E may be used as an approach end treatment for guardrail on any roadway. The Type E cannot be used when the back side of the device is in the clear zone of bidirectional traffic. The Type E products require a recovery area immediately behind the terminal detailed on **SCD GR-5.3**. All products listed in this section are gating as described in Section 602.1.4. These end treatments connect to Type 5 guardrail, but it is acceptable to connect to Standard Bridge Terminal Assemblies.

The terminal should be offset to minimize the potential for impacts caused by vehicles clipping the portion of the impact head that protrudes in front of the face of the guardrail. The preferred offset method is detailed on **SCD GR-5.3**. The Type E may also be installed with a 50:1 flare over the full length of the

600 Roadside Design

terminal or with a 25:1 flare over the first 25 feet of the device. **Table 603-1** gives guidance on where to use this anchor assembly. See **Roadway Sample Plan Note R113** in Appendix B for additional information.

Table 603-1		
Foreslope	New Construction / Major Reconstruction	3R, HSP and Bridge Replacement
6:1 or flatter	Buried-in- Backslope or Type B	Buried-in- Backslope or Type B
Steeper than 6:1 up to 4:1	Type B	Type E
Steeper than 4:1	Type E	Type E

603.3.4 Type A

The Type A anchor assembly (twisted turned-down end) is a non-proprietary, non-redirective end terminal. It is 25.0 feet long and may be used as an approach or trailing guardrail end treatment in any of the following situations:

1. On non-NHS arterials, collectors and local roads with a design year ADT of 4000 vpd or less.
2. On non-NHS roadway outside the clear zone.
3. On non-NHS roadway with a design speed of less than 50 mph.

Since the LON point is at the rear of this device, no portion of the Type A can be included within the guardrail length of need. See **SCD GR-4.1** for additional details.

603.3.5 Type T

The Type T anchor assembly is a non-proprietary, non-redirective end terminal that may be used on any roadway in any of the following situations:

1. On trailing ends of guardrail runs on multi-lane roadways, where located outside the clear zone of opposing traffic. Since the LON point is at the rear of this device, no portion of the Type T can be included within the guardrail length of need.
2. In guardrail runs where directional changes are made using a radius of less than 25 feet (see **Figures 603-3 and 603-4**).
3. On the ends of guardrail runs on drive approaches (see **Figure 603-3**).

The Type T is 12.5 feet long.
See **SCD GR-4.2** for additional details.

603.4 Impact Attenuators

Impact Attenuators, also known as crash cushions, are generally used to shield motorists from rigid structures like bridge piers and end of concrete barriers. Since impact attenuators can be installed in two sided situations, they are idea for median or gore applications. Refer to <http://www.dot.state.oh.us/Divisions/ProdMgt/Roadway/roadwaystandards/Pages/default.aspx> for links and shop drawings of approved proprietary products.

600 Roadside Design

603.4.1 Type 1 (formerly 1-98)

Type 1 impact attenuators are re-directive, gating, proprietary median guardrail terminal and crash cushion. Type 1's can be installed on any roadway in unidirectional and bidirectional configurations, but they must have at least 10 feet of clearance on both sides of the device. A maximum flare of 20:1 is permissible. Generally Type 1 Impact Attenuators are used in wider medians to safely end barrier design guardrail runs. See **Roadway Sample Plan Note R123** in Appendix B for approved products, specifications, and manufacturer's drawings.

Type 1 impact attenuators are gating systems before the LON of the system, but are re-directive after that point. All systems are sacrificial, meaning they absorb impact kinetic energy by deforming the steel rail elements and/or breaking wood posts. Most of these systems are not reusable after an impact and must be replaced with new parts.

603.4.2 Type 2 (formerly 2-98)

Type 2 impact attenuators are reusable, re-directive, non-gating proprietary systems that can be installed on any roadway in unidirectional and bidirectional configurations. Some of the major components of these crash cushions can be reused after an impact. It is important to note that if any of the components are damaged new parts will need to be installed during the repair in order to make the entire unit crashworthy.

Since the footprint for each product varies the designer should be specific about the available footprint, design speeds, and width of hazard. In some cases when there is a limited footprint available the designer should specify only the appropriate products. If cross slopes are steeper than 8 percent (12:1) or vary by more than 2 percent over the length of the unit, a leveling pad may be used.

Type 2 attenuators are ideal to protect the ends of rigid objects like concrete barrier ends. Some other uses could be for connection to guardrail runs in diverging gores or narrow medians, as well as temporary work zone locations. See Roadway Sample Plan Note R124 for approved products, specifications, and manufacturer's drawings. Plan notes are in Appendix B.

603.4.3 Type 3 (formerly 3-98)

Type 3 impact attenuators are low-maintenance/self-restoring crash cushions typically considered for use at locations where a high frequencies of impacts is expected. Maintenance is required with these units after impacts to restore full capacity for design impact conditions. These units could be cost-beneficial at locations with high frequency of impacts despite the high initial costs because of the lower repair costs over the life of the product. These units are typically restored with minimal labor and replacement parts after a design impact. Often these products are preferred in high speed, high traffic volume ramps or medians in order to reduce the exposure of maintenance workers to the traffic.

Type 3 impact attenuators should be specified in lieu of Type 2 impact attenuators when a higher than normal impact frequency would be expected. They are cost-effective when considering the benefits of faster and easier repair. Additionally, the safety benefits for maintenance personnel's exposure while repairing frequently damaged units cannot be discounted.

See **Roadway Sample Plan Note R125** in Appendix B for approved products, specifications, and manufacturer's drawings.

600 Roadside Design

603.4.4 Work Zone Impact Attenuators

All Type 2 and Type 3 impact attenuators are considered acceptable for use in temporary work zones. Additional products specifically listed in this category are approved only for temporary work zones to protect hazards 24" and smaller, and are beneficial in locations where foundations and anchors are not required. Typically considered to be sacrificial units, they are crashworthy roadside safety devices designed for a single impact, usually protecting the end of temporary barriers. Most of the systems are gating, non-redirective, and absorb impact energy through crushing the product elements. These systems' major components are destroyed in an impact and must be replaced. Refer to the Traffic Engineering Manual sections 642-30 and 642-31 for additional design requirements.

603.4.5 Sand Barrels

Sand barrel arrays are proprietary sand-filled modules of varying sizes arranged in a pattern designed to protect wide hazards. Sand barrel arrays are appropriate in limited situations for the protection of wide hazards when no other product is acceptable. Because each product is different a specific design layout is required for each location based on the design speed and width of the hazard being shielded. All arrays installed on the NHS must meet NCHRP Report 350 Test Level 3 criteria.

603.5 Bridge Terminal Assemblies

When a less rigid barrier is to be connected to a more rigid barrier, a stiffening transition is needed to make the connection. A transition from a more rigid barrier to a less rigid barrier doesn't require any stiffening unless the barrier can be struck from the opposite direction. Even when the difference in strength is not an issue, a transition is frequently required simply to connect two barrier systems that have different hardware components. Transitions in Ohio are called Bridge Terminal Assemblies because they are typically required where guardrail is warranted in conjunction with bridge parapets/railings. They are also used to connect guardrail to concrete barrier and other similar fixed objects.

603.5.1 Type 1

The Bridge Terminal Assembly, Type 1 is commonly used to connect Type 5 guardrail to a concrete barrier or a concrete bridge parapet on an undivided bi-directional highway. It uses blocked-out, nested, thrie-beam, guardrail panels attached to a vertical concrete surface to transition to the Type 5 guardrail. The addition of a curb and a stiffer thrie-beam transition panel enables the assembly to meet into TL-3.

It is generally installed at the following locations:

1. At the approach end of a rigid object.
2. At the trailing end of a rigid object if it is located within the clear zone of opposing traffic.

See **SCD GR-3.1** for additional details.

603.5.2 Type 1 Barrier Design

The Bridge Terminal Assembly, Type 1: Barrier Design is commonly used to connect Type 5 Barrier Design guardrail or a Type 1 Impact Attenuator to a concrete median barrier. It uses blocked-out, nested, thrie-beam, guardrail panels attached to a vertical face on both sides of the barrier to transition to the guardrail or attenuator. As with the Type 1, the curb and stiffer thrie beam transition panels enables the assembly to meet into TL-3.

See **SCD GR-3.5** for additional details.

600 Roadside Design

603.5.3 Type 2

The Bridge Terminal Assembly, Type 2 is commonly used to connect Type 5 guardrail to the trailing end of a concrete barrier or bridge parapet located outside the clear zone of opposing traffic. It uses standard w-beam guardrail panels attached to a vertical face on the concrete barrier to transition to the guardrail. When used as a trailing end assembly, it can be used on the NHS. See **SCD GR-3.2** for additional details.

603.5.4 Type 3

The Bridge Terminal Assembly, Type 3 is commonly used to connect Type 5 guardrail to a three-beam bridge railing on an undivided bi-directional highway. It uses blocked-out, nested, three-beam, guardrail panels to transition to the Type 5 guardrail.

It is generally installed at the following locations:

1. At the approach end of a rigid object.
2. At the trailing end of a rigid object if it is located within the clear zone of opposing traffic.

See **SCD GR-3.3** for additional details.

603.5.5 Type 4

The Type 4 Bridge Terminal Assembly is used to connect Type 5 guardrail to the approach and trailing ends of bridges having tubular backup bridge railing. It is also used to transition between Type 5 guardrail and Type 5 guardrail with Tubular Backup.

See **SCD GR-3.4** for additional details.

603.5.6 Type TST

Type TST is a TL-3 Bridge Terminal Assembly used to connect Type 5 guardrail to the approach and trailing ends of bridges having twin steel tube bridge railing. Details are found on **SCD GR-3.6**.

603.6 Concrete Barrier End Treatment

The end of a concrete barrier may be a hazard if not treated properly. Since a rigid barrier generally does not require end anchorage to develop its strength, the simplest means of providing impact protection for the barrier end may be to terminate the barrier beyond the clear zone. When this approach is used, the flare rate used to offset the barrier should not exceed the flare rates recommended in **Figure 602-1**. However, when the end of a concrete barrier is located within the clear zone, a terminal is necessary to protect a vehicle's occupants in an end-on impact.

Acceptable end treatments include the following:

1. Transition to Type 5 guardrail using a bridge terminal assembly and terminate the end of the guardrail run with an anchor assembly.
2. Use an impact attenuator as discussed in **Section 603.4**.
3. Terminate the concrete barrier directly into a cut backslope.

600 Roadside Design

4. Use a tapered end section only: (1) when the barrier is terminated outside the clear zone (See **Figure 603-5**), or (2) when the barrier is on a non-NHS road with a design speed less than or equal to 40 mph (NCHRP Report 350 TL-2) and space is limited by right-of-way constraints or presence of other roadside features that preclude the use of an approved end treatment.

604 Glare Screen

Glare screen is used primarily for the shielding of motorists from headlight glare of opposing traffic. It is normally used in the median of divided highways but may be used in other areas where a specific problem exists or is anticipated.

There are locations, other than in the median, where glare screen may be justified. An example would be between a parallel facility and the mainline where geometrics or unusual sources of light cause a glare problem.

604.1 Median Glare Screen

Glare screen is justified based on traffic volumes and median widths in unlighted sections, and on traffic volumes and the number of lanes in lighted sections. **Figure 604-1** shows this relationship. Median glare screen may also be justified when glare problems are experienced on isolated sharp curves. Median glare screen installation should be as continuous as practical. Gaps of approximately 1 mile or less in length should be avoided.

604.2 Performance Characteristics

Expected performance characteristics of glare screens include the following:

1. Does not penetrate the passenger compartment or present an undue hazard to other traffic when hit.
2. Exhibits predictable impact performance.
3. Effectively reduces glare.
4. Is resistant to damage during impacts.
5. Is easy and economical to repair.

604.3 Glare Screen Options

Glare screening may be accomplished in a number of ways. These include, but are not limited to, the following options (shown in order of preference):

1. Use a taller standard barrier. For example use Type B1 in lieu of Type B concrete barrier.
2. On a NJ shape barrier, install a concrete cap to extend the height of existing 32 inch concrete barrier where barrier thickness is adequate.
3. Attach a paddle or intermittent type of glare screen to the top of a 42 inch Single Slope or 32 inch tall NJ shape concrete barrier, or on top of steel beam guardrail. These devices shall be designed using a 20-degree cut-off angle measured relative to the centerline of the barrier. They shall be securely fastened to the barrier using the hardware and procedures specified by the manufacturer. Contact the **Office of Materials Management** for a list of approved manufacturers.

600 Roadside Design

4. Install special glare screen fencing fabric used at normal fence locations.

Options 1-3 may only be used in locations where barrier is required. Option 4 should be limited to locations outside the clear zone wherever possible.

605 Rumble Strips

605.1 Shoulder Rumble Strips

A shoulder rumble strip is a pattern of grooves or depressions made in paved highway shoulders to produce an audible and/or vibratory warning to drivers whose vehicles have drifted off the traveled way.

SCD BP-9.1 contains design details and options for the placement of rumble strips on shoulders. Shoulder rumble strips have proven to be effective in reducing run-off-the-road accidents due to driver inattention, monotony and fatigue. They also may serve as an audible form of roadway edge delineation in adverse weather conditions. Rumble strips are most appropriate for use on higher speed facilities where access is controlled through interchanges or widely-spaced intersections (several miles apart) and are also appropriate for other roadways with a history of run-off-the-road accidents due to driver inattention.

605.1.1 Locations

Shoulder rumble strips will be installed at the following locations:

1. On new, reconstructed, and resurfaced shoulders of all rural fully access-controlled highways (Interstates and freeways).
2. On sections of any highway with a history of run-off-the-road accidents due to driver inattention, fatigue, or sleep. For this purpose, a threshold rate of 0.25 run-off-the-road accidents per million vehicle miles will be used.

Shoulder rumble strips should be considered at the following locations:

1. On new, reconstructed, or resurfaced shoulders of urban fully access-controlled highways and rural partially access-controlled multilane highways.
2. At certain critical locations, such as: in gore areas, ahead of impact attenuators and next to concrete median barriers.

Shoulder rumble strips may be installed at the following locations:

1. At other locations, where deemed to be a safety enhancement, at the discretion of the **District Deputy Director**. This decision should be based on a review and recommendation by the **District Safety Review Team**.
2. On local roads and streets in Federal-aid projects that are not on the NHS, at the discretion of the responsible local agency. (See **SCD BP-9.1** for additional details on the location of shoulder rumble strips.)

600 Roadside Design

605.1.2 Types

Shoulder rumble strips are appropriate for use on either asphalt or concrete shoulders. They can be milled into existing or new shoulders of either asphalt or concrete pavement (Type 2), or formed into new concrete shoulders (Type 3). (See **SCD BP-9.1** for additional details.)

Type 2 is the most effective of the three types because it produces a noticeable vibratory and audible warning to drivers. It is the preferred treatment for use on most rural roadways. Types 3 produce little vibratory effect and a less audible warning than the Type 2 pattern and are therefore the recommended treatments for use in most urban areas and in all residential areas to minimize noise levels.

605.1.3 Lateral Clearances for Machinery

The machinery used in the milling process to construct Type 2 rumble strips requires a lateral clearance of at least 34 inches from the outside edge of the pattern to any obstruction (guardrail, a barrier, curbs, etc.).

605.1.4 Divided Highways

Rumble strips should be installed on both shoulders (right and left) of divided roadways, but individual circumstances may dictate use on only one shoulder.

605.1.5 Existing Shoulders

Rumble strips should only be installed on existing paved shoulders that are in good condition and have the following minimum widths of 2.5 feet. Where existing shoulders are to be resurfaced either permanently or for maintenance of traffic conditions, the existing rumble strip pattern shall be restored on the new shoulder in accordance with this manual.

605.1.6 Bicycle Considerations

Rumble strips generally should not be used on the shoulders of roadways designated as bicycle routes or having substantial volumes of bicycle traffic, unless the shoulder is wide enough to accommodate the rumble strips and still provide a minimum clear path of 4 feet from the rumble strip to the outside edge of the paved shoulder or 5 feet to adjacent guardrail, curb or other obstacle.

The rumble strip pattern should not be continuous but should consist of an alternating pattern of gaps and strips, each 10 feet in length. Also, gaps should be provided in the rumble strip pattern ahead of intersections, crosswalks, driveway openings, and at other locations where bicyclists are likely to cross the shoulder.

605.1.7 Residential Areas

In residential areas, noise generated by rumble strips could be objectionable. Rumble strips installed in these areas may be placed further from the edge of the traveled lane than shown on **SCD BP-9.1** to reduce the frequency of contact while still providing some degree of warning to drifting drivers.

The distance from the edge of the traveled lane to the rumble strip pattern should not exceed 2.0 feet on the outside shoulder. Also, the use of either Type 1 or Type 3 is preferable to the use of Type 2 in these areas. (See **Section 605.1.2**.)

600 Roadside Design

605.1.8 Maintenance of Traffic

Where shoulders are to be used for maintenance of traffic purposes, rumble strips should be positioned to adapt to phased construction sequencing. See **SCD BP-9.1**.

605.2 Rumble Strips in Traveled Lanes

Rumble strips in traveled lanes are used to alert drivers of unusual or unexpected traffic conditions or geometrics and to bring the driver's attention to other warning devices. They are not intended for traffic calming and they should only be installed after all other appropriate standard traffic control devices have been utilized and have failed to resolve the problem satisfactorily.

Rumble strips are most effective when they surprise motorists enough to catch their attention. For this reason, they should be used sparingly. (See **Section 605.2.1** for typical locations.)

605.2.1 Locations

Typical locations for the installation of rumble strips in a traveled lane are at the following:

1. Rural stop approaches with high accident rates.
2. Signalized intersections with high accident rates.
3. Short exit ramp deceleration lanes or hidden intersections.

Other possible locations include:

1. Locations with abrupt changes in horizontal alignment.
2. Intersections with inadequate stopping sight distance caused by vertical or horizontal alignment.
3. Railroad crossings with sight distance restrictions and a history of accidents.
4. Approaches to toll booths and narrow bridges.
5. At the approach to work zones and at other locations within the work zone.

605.2.2 Types

See **Section 605.1.2** for information on acceptable rumble strip types.

600 Roadside Design

606 Fence

606.1 Purpose

Highway fences are a part of the highway facility and are placed within the right-of-way limits of highways having controlled or limited access right-of-way. They act as physical barriers to enforce observance of the acquired access rights. The State or other agency responsible for the maintenance of the facility shall assume the responsibility for the maintenance of these fences.

606.2 Types

It is ODOT's policy to construct only the standard types of fence described below in accordance with the current Standard Construction Drawings and Construction and Material Specifications.

TYPE 47 - Woven wire fence with a 47-inch fabric, steel line posts, and one strand of barbed wire on the top. (See **SCD F-2.1**.)

TYPE 47RA - Woven wire fence with 47-inch fabric, wood line posts, and no barbed wire. (See **SCD F-2.1**.)

TYPE CLT - Chain link fence with 60-inch fabric but with a tension wire in lieu of the top rail. (See **SCD F-1.1**.)

606.3 Fence on Freeways

606.3.1 Urban Freeways

Urban freeways shall be continuously fenced. Innerbelts and radials shall use Type CLT. Outerbelts shall use Types CLT or 47 depending upon the adjacent land use.

606.3.2 Rural Freeways

Rural freeways shall be continuously fenced, usually with Type 47 fence; however, Type CLT may be used in areas where there are schools, subdivisions or other developments.

606.3.3 Freeway Fence Design Conditions

1. Where chain link fence is located within the design clear zone, such as along the edge of a roadway shoulder, in a median, or between a frontage road and the mainline, a fence with tension wire, Type CLT, shall be used.
2. Type 47RA fence shall be used to fence rest areas where the highway fence is Type 47. It may also be used in other locations where the aesthetics of the area make this type more desirable.
3. Fence installed across a stream or ditch shall be designed using fence terminals or crossings as shown in **SCD F-3.3 and F-3.4**, respectively.
4. Where a drainage channel is located parallel to the freeway in a channel easement, the fence shall be located on a bench between the main facility and the channel. Maintenance openings shall be

600 Roadside Design

provided at 700 feet maximum intervals where the length of fence between a deep channel and the freeway exceeds 1800 feet, unless access can be provided by another means.

5. Fence shall be provided in the median to connect the abutments of all twin bridges on divided highways.
6. All types of fence shall be grounded where a power line passes over them. Fence shall also be grounded where a parallel power line easement is within 50 feet of the fence. For grounding details see **SCD HL-50.11**, published by the **Office of Traffic Engineering**.
7. In the vicinity of some airports, fencing should be non-metallic since it sometimes interferes with airport traffic control radar. The **Federal Aviation Administration** should be contacted to ascertain if metallic fencing will be a problem.
8. Fence should normally be continued behind a noise wall. Sufficient distance should be provided between the fence and the noise wall to permit normal maintenance operations. If there is no critical maintenance responsibility between the noise wall and the right-of-way or limited access line (generally in "cut" sections) the fence may be terminated at each end of the noise wall.

606.3.4 Exceptions to Continuous Freeway Fencing

1. Fence shall be terminated with an end post assembly at an existing $\frac{1}{2}$:1 or steeper slope, measured along the fence centerline. However, if the ground approaching the $\frac{1}{2}$:1 slope is too steep to allow proper fence installation, a Type E fence terminal shall be installed at the edge of the slope. (See *Figure 606-1(a) and (b)* for details.)
2. Fence shall be terminated in a cut section that exceeds 30 feet in vertical height with a backslope of $\frac{1}{2}$:1 or steeper. An End Post Assembly and a Type E fence terminal shall be located as shown in **Figure 606-1(c)**.
3. Where the fence intersects a crossroad right-of-way line at interchanges, it shall be constructed along the crossroad to the limits of the limited access right-of-way.

606.4 Fence on Arterials

606.4.1 Urban Arterials

Fence shall be Type CLT or Type 47 depending upon the adjacent land use. Type CLT should be used where there is any doubt that Type 47 would be adequate to prohibit undesired intrusions.

606.4.2 Rural Arterials

Fence should normally be Type 47.

606.4.3 Arterial Fence Design

Fence shall be provided along the limited access right-of-way line on arterials but shall terminate at the end of limited access right-of-way at crossroads or railroads, and at stream banks and driveways. Fence shall be omitted where the highway right-of-way adjoins lateral features which would prevent vehicular access, such as: railroads, streams, deep ditches, swamps, strip mines or other steep slopes. Type CLT and 47RA shall be used on arterials in the same locations as described for freeways in **Section 606.3.3 (1) and (3)**.

600 Roadside Design

606.5 Fence on Collectors

Fencing of limited access right-of-way on urban or rural Collectors (or lower classifications) with partial access control will be determined on an individual project basis using arterial requirements as a guide.

606.6 Lateral Location of Fence

Section 607.06 of the **Construction and Material Specifications** gives line post and fence location as related to the right-of-way line. Normally, woven wire fence should be placed 2.0 feet inside the right-of-way line and chain link 1.0 feet

When viewed at a flat angle, chain link fencing restricts sight distance. This should be considered when placing fence in interchange areas and intersections.

606.7 Fence Approval

Determination of the type and extent of fencing will be made during the development of the contract plans and will be completed in time for the Stage 3 review.

606.8 Bridge Vandal Protection Fence

For policy and details of vandal protection fence, see the **Bridge Design Manual and SCD VFP-1-90**, both published by the **Office of Structural Engineering**.

This page is intentionally blank

600 Roadside Design

List of English Figures

<u>Figure</u>	<u>Date</u>	<u>Title</u>
600-1	April '99	Clear Zone Widths
600-2	January '04	Clear Zone Measurements
600-3	April '10	Urban Lateral Offsets at Horizontal Curves and Merge Points
600-4	October '10	Urban Lateral Offsets at Driveways and Sidewalk Buffer Strips
601-1	April '99	Barrier Warrants for Embankments
601-2	October '10	Median Barrier Warrants
602-1	April '12	Barrier Length of Need (Tangent Alignment)
602-2	January '04	Barrier Length of Need (Curved Alignment)
602-3	April '11	Tensioned Cable Median Placement
602-4	April '11	Tensioned Cable Overlapping Other Barrier
603-1	January '07	Barrier Types
603-2	January '07	Typical Barrier Uses & Minimum Clearances
603-3	January '04	Drive and Side Road Guardrail Openings
603-4	January '07	Minimum Bridge Protection Involving Drives or Side Roads
603-5	January '04	Concrete Barrier Median Transition
604-1	April '99	Median Glare Screen Use Guide
606-1	April '99	Exceptions to Continuous Freeway Fencing

Sample Calculations

Ex. 600-1	April '12	Clear Zone Measurement Using Slope Averaging (Traversable Ditch)
Ex. 600-2	April '12	Clear Zone Measurement For A Non-Traversable Ditch
Ex. 600-3	April '12	Clear Zone Measurement For A Cut Slope
Ex. 602-1	April '12	Tangent Barrier Design for a 2-Lane Road
Ex. 602-2	April '12	Length of Need at a Large Culvert
Ex. 602-3	April '12	Tangent and Flared Barrier Design for a Divided Highway
Ex. 602-4	April '12	Barrier on the Outside of a Curve

This page is intentionally blank

CLEAR ZONE WIDTHS	600-1E
	REFERENCE SECTIONS 600.2

Design Speed	Design ADT	Foreslope		Backslope		
		6:1 or Flatter	Steeper than 6:1 to 4:1	6:1 or Flatter	Steeper than 6:1 to 4:1	Steeper than 4:1
40 mph or less	<750	8 ft	8 ft	8 ft	8 ft	8 ft
	750-1500	11	13	11	11	11
	1501-6000	13	15	13	13	13
	>6000	15	17	15	15	15
45-50 mph	<750	11	13	11	9	9
	750-1500	13	18	15	13	11
	1501-6000	17	23	17	15	13
	>6000	19	26	21	19	15
55 mph	<750	13	16	11	11	9
	750-1500	17	22	17	15	11
	1501-6000	21	27	21	17	15
	>6000	23	29	23	21	17
60 mph	<750	17	22	15	13	11
	750-1500	22	29	21	17	13
	1501-6000	28	36*	25	21	16
	>6000	31*	40*	27	25	21
65-70 mph	<750	19	23	15	15	11
	750-1500	25	32*	21	19	14
	1501-6000	30	38*	27	23	18
	>6000	32*	42*	28	28	23



* Use a **maximum clear zone** of 30 feet unless a site specific investigation or accident history indicates a high potential of continuing accidents. When the potential for continuing accidents is high, the widths in the above chart should be multiplied by the following curve correction factors to extend the clear zone on the outside of curves having a Degree of Curvature of 2 degrees or sharper.

Degree of Curvature	HORIZONTAL CURVE CORRECTION FACTORS						
	Design Speed (mph)						
	40	45	50	55	60	65	70
2.0	1.1	1.1	1.1	1.2	1.2	1.2	1.3
2.5	1.1	1.1	1.2	1.2	1.2	1.3	1.3
3.0	1.1	1.2	1.2	1.2	1.3	1.3	1.4
3.5	1.1	1.2	1.2	1.3	1.3	1.4	1.5
4.0	1.2	1.2	1.2	1.3	1.4	1.4	
4.5	1.2	1.2	1.3	1.3	1.4	1.5	
5.0	1.2	1.2	1.3	1.4	1.5		
6.0	1.2	1.3	1.4	1.4	1.5		
7.0	1.3	1.3	1.4	1.5			
8.0	1.3	1.4	1.5				
9.0	1.3	1.4	1.5				
10.0	1.4	1.5					
15.0	1.5						

CLEAR ZONE MEASUREMENTS

600-2E

REFERENCE SECTIONS
600.2.1

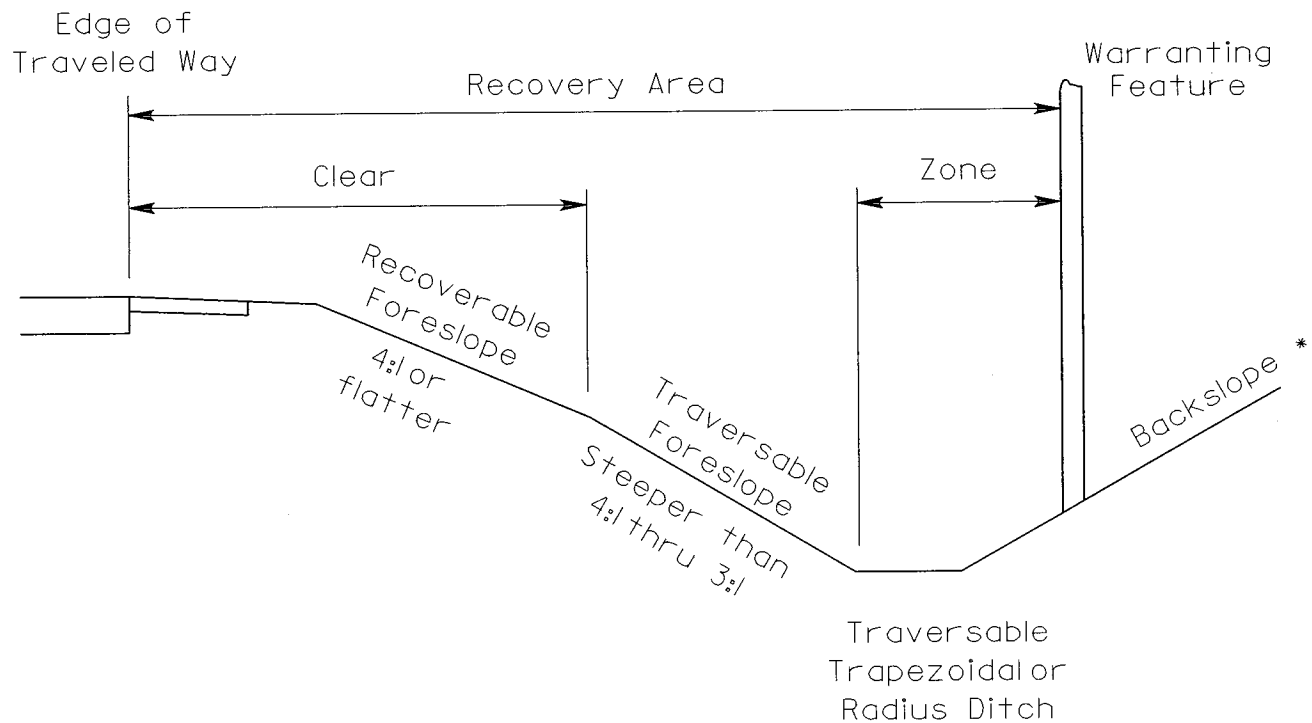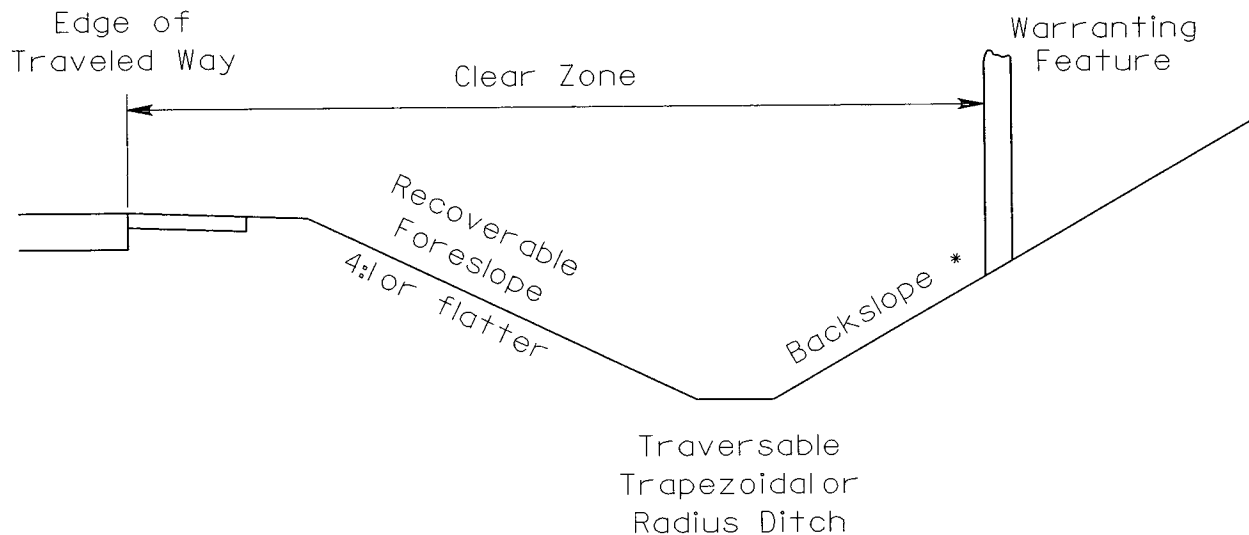

* For acceptable foreslope and backslope combinations that produce traversable trapezoidal and radius ditches, see Figures 307-3 and 307-2, respectively.

For clear zone widths, see Figure 600-1.



For 3R projects, see Section 906.1.

January 2004

URBAN LATERAL OFFSETS AT HORIZONTAL CURVES AND MERGE POINTS

600-3

REFERENCE SECTION
600.2.2

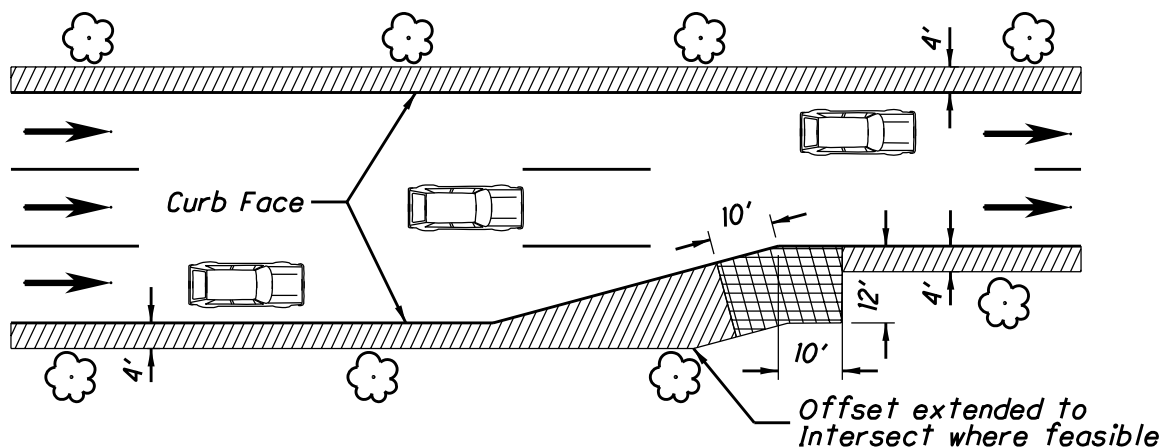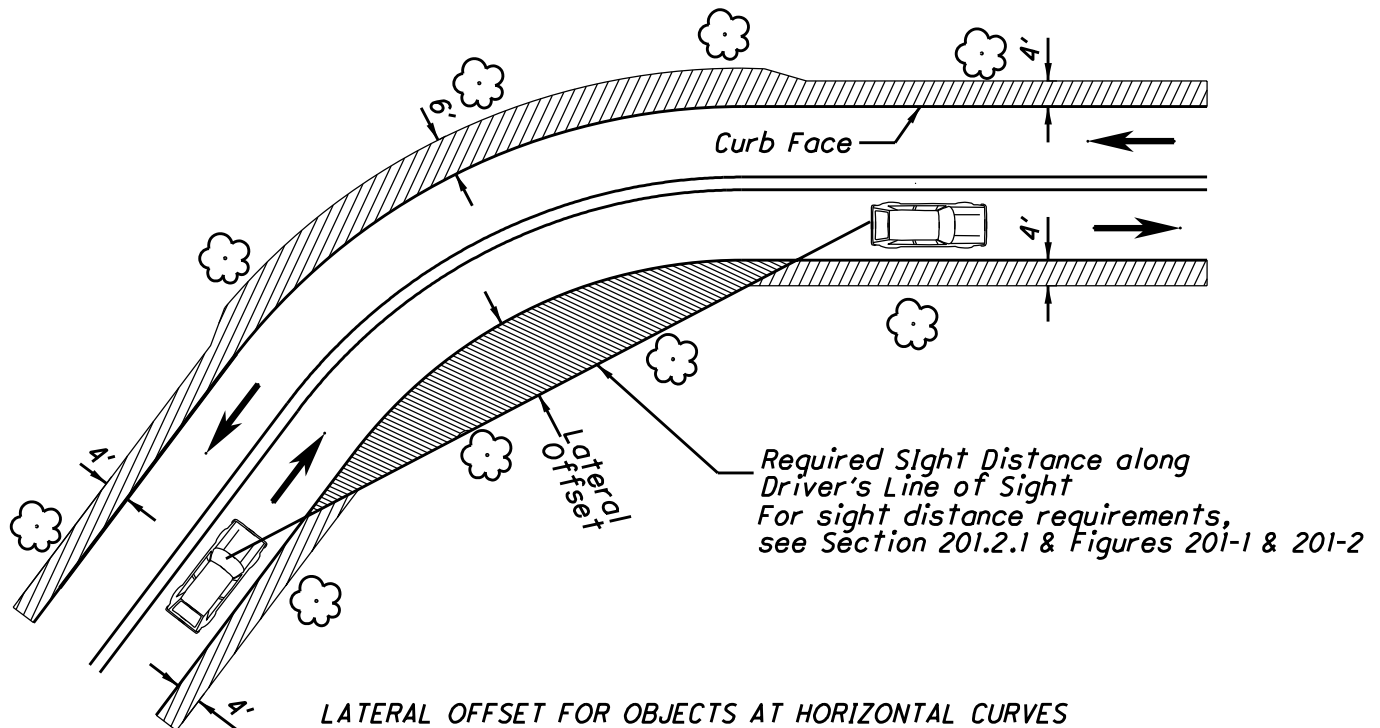

LATERAL OFFSET CONFIGURATION APPLIES TO LANE MERGES,
ACCELERATION LANES, AND BUS BAY RETURNS

 Std. Recommended
Lateral Offset


 Lateral Offset
at Inside of Curve

 Lateral Offset
at Taper Point


URBAN LATERAL OFFSETS AT DRIVEWAYS AND SIDEWALK BUFFER STRIPS

600-4

REFERENCE SECTION
600.2.2

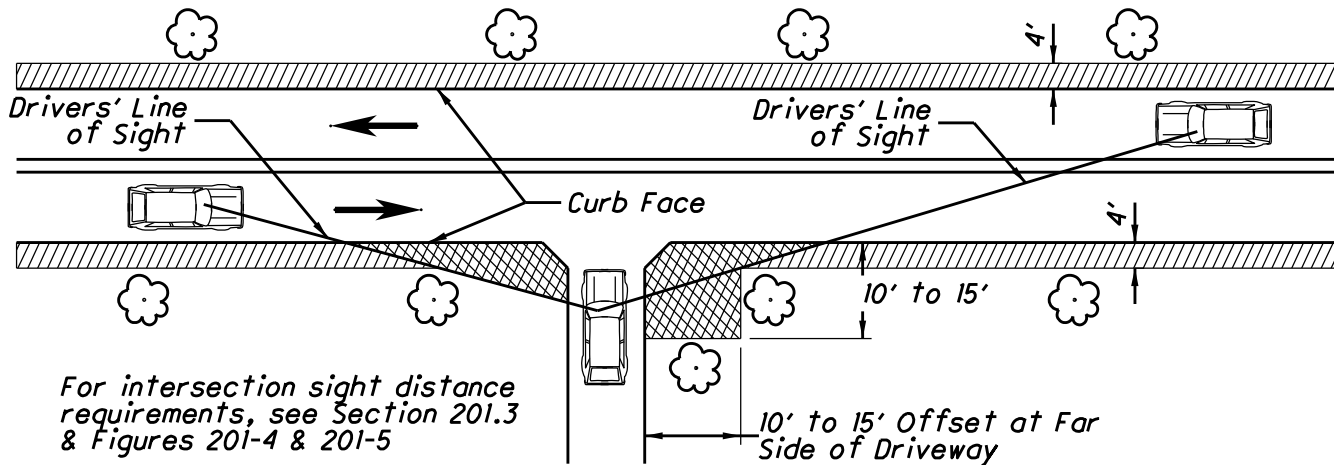

ROADSIDE LATERAL OFFSETS AT DRIVEWAYS

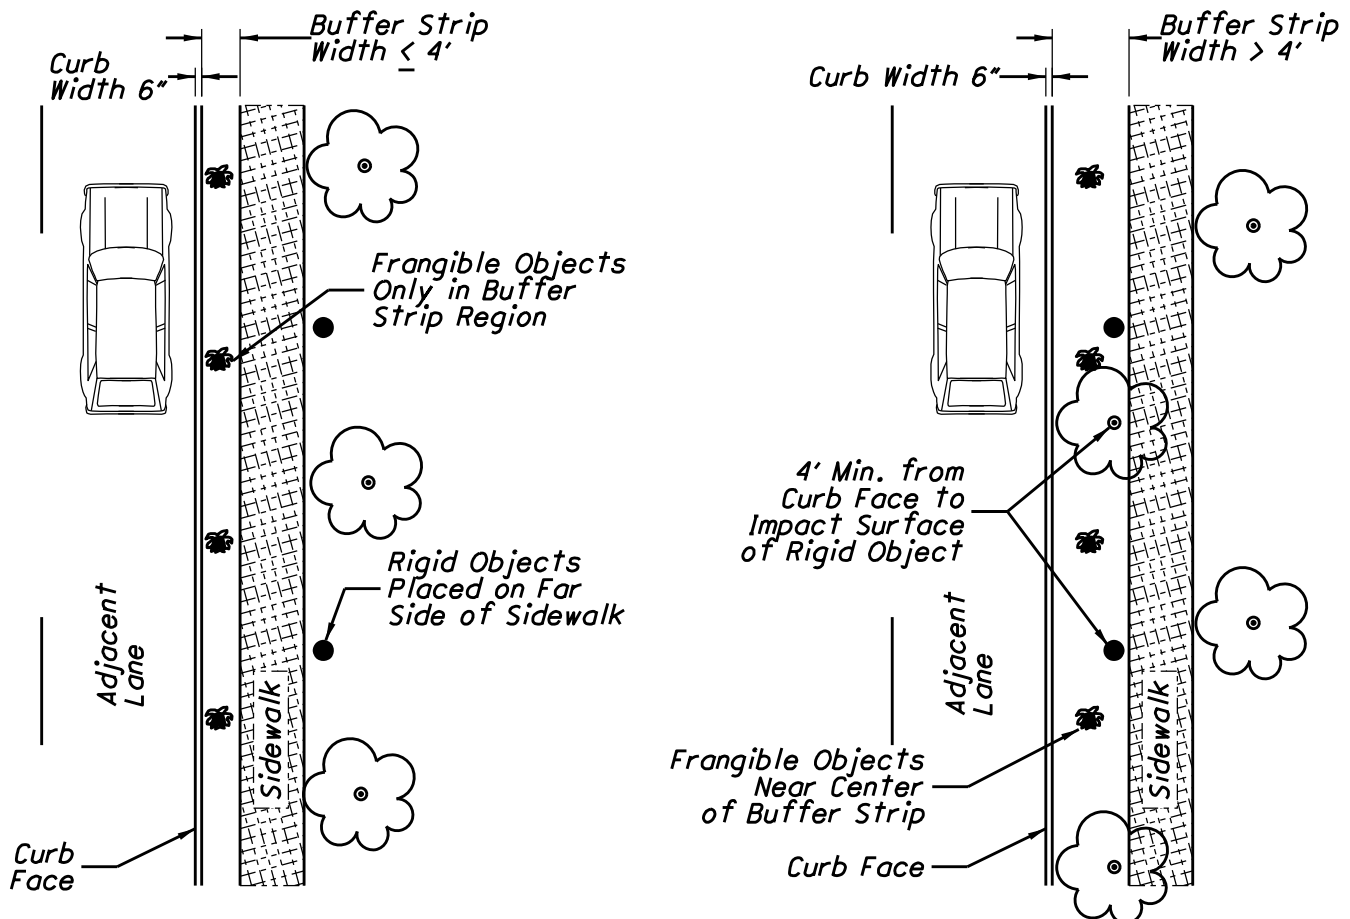

LANDSCAPE AND RIGID OBJECT PLACEMENT FOR BUFFER STRIPS



Lateral Offset
due to Driveway



Std. Recommended
Lateral Offset





Sidewalk

BARRIER WARRANTS FOR EMBANKMENTS


601-1E

REFERENCE SECTIONS
601.1.2

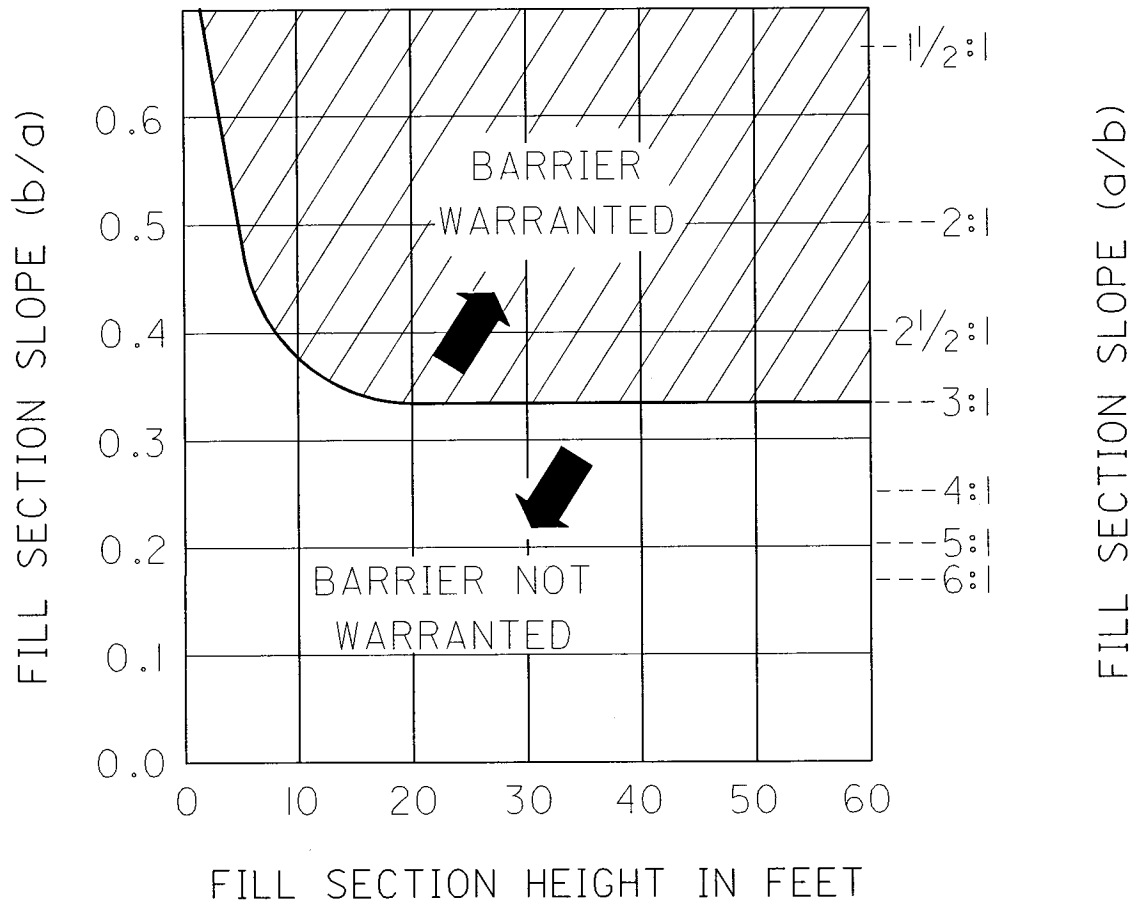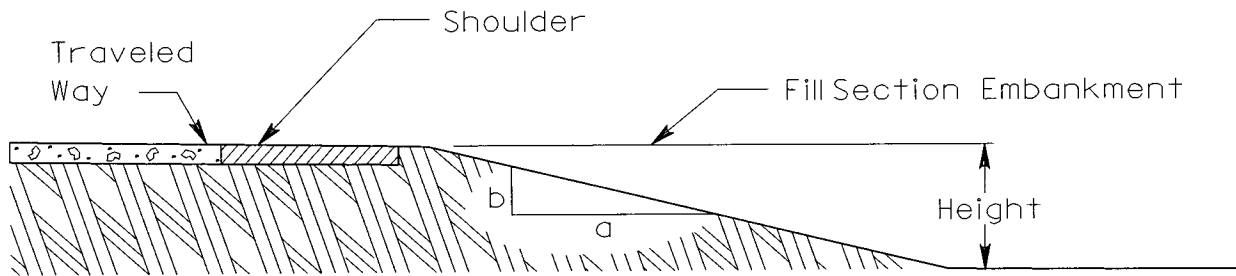

On or below the curve barrier is not warranted for embankment. However, check barrier need for other roadside hazards within the clear zone.

MEDIAN BARRIER WARRANTS	601-2E
	REFERENCE SECTIONS 601.2

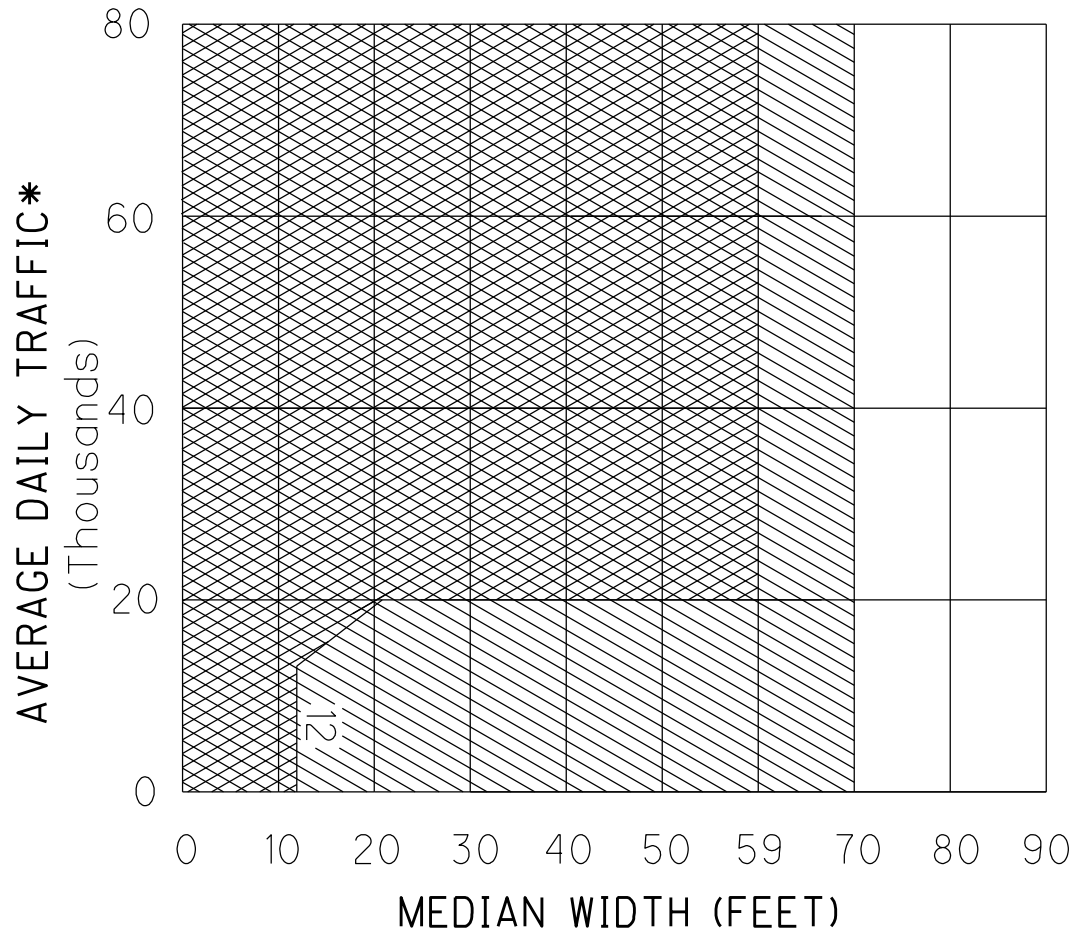

Warrants for median barriers on freeways

* Based on a 5-year projection



OPTIONAL



BARRIER RECOMMENDED




NOT REQUIRED

BARRIER LENGTH OF NEED (TANGENT ALIGNMENT)

602-1E

REFERENCE SECTIONS
602.1.2, 602.5.1, 603.6

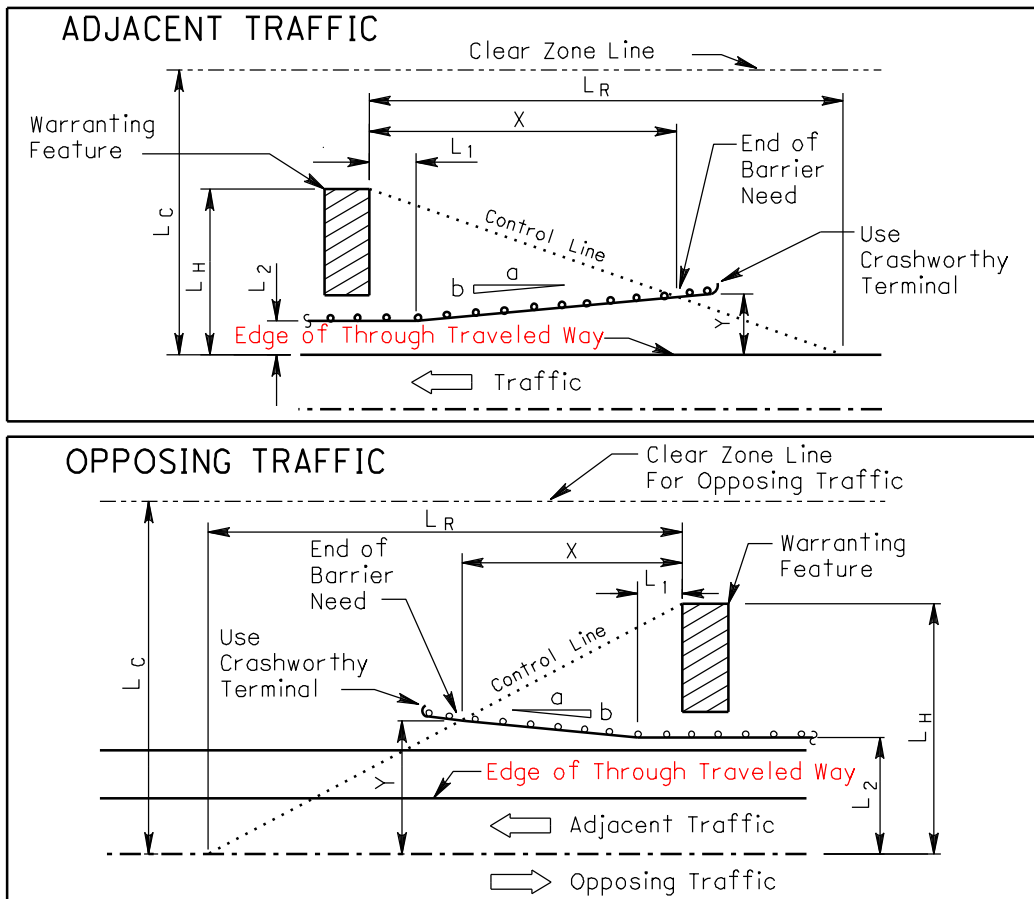


Design Speed (mph)	Flare Rate (a:b)		Runout Length, L _R (ft) Per Design Year ADT				Formulas
	Concrete Barrier	Steel Beam Guardrail	Over 10,000 veh/day	5,000-10,000 veh/day	1,000-5,000 veh/day	Under 1,000 veh/day	
70	20:1	15:1	360	330	290	250	X = Length of Need L_R = Runout Length L_C = Required Clear Zone L_H = Lateral Offset to Back of Warranting Feature L₂ = Lateral Offset to Face of Barrier (see Figure 301-3) L₁ = Varies (Typically measured to the end of a full panel of guardrail) If L_H < L_C: $X = \frac{L_H + (b/a)L_1 - L_2}{(b/a) + L_H/L_R}$ Y = L_H - X(L_H/L_R) If L_H > L_C: Substitute L_C in the above formulas.
65	19:1	14:1	330	290	250	225	
60	18:1	14:1	300	250	210	200	
55	16:1	12:1	265	220	185	175	
50	14:1	11:1	230	190	160	150	
45	12:1	10:1	195	160	135	130	
40	10:1	8:1	160	130	110	100	
35	9:1	8:1	135	110	95	85	
30	8:1	7:1	110	90	80	70	

BARRIER LENGTH OF NEED (CURVED ALIGNMENT)

602-2E

REFERENCE SECTIONS
602.1.3, 602.5.1, 603.6

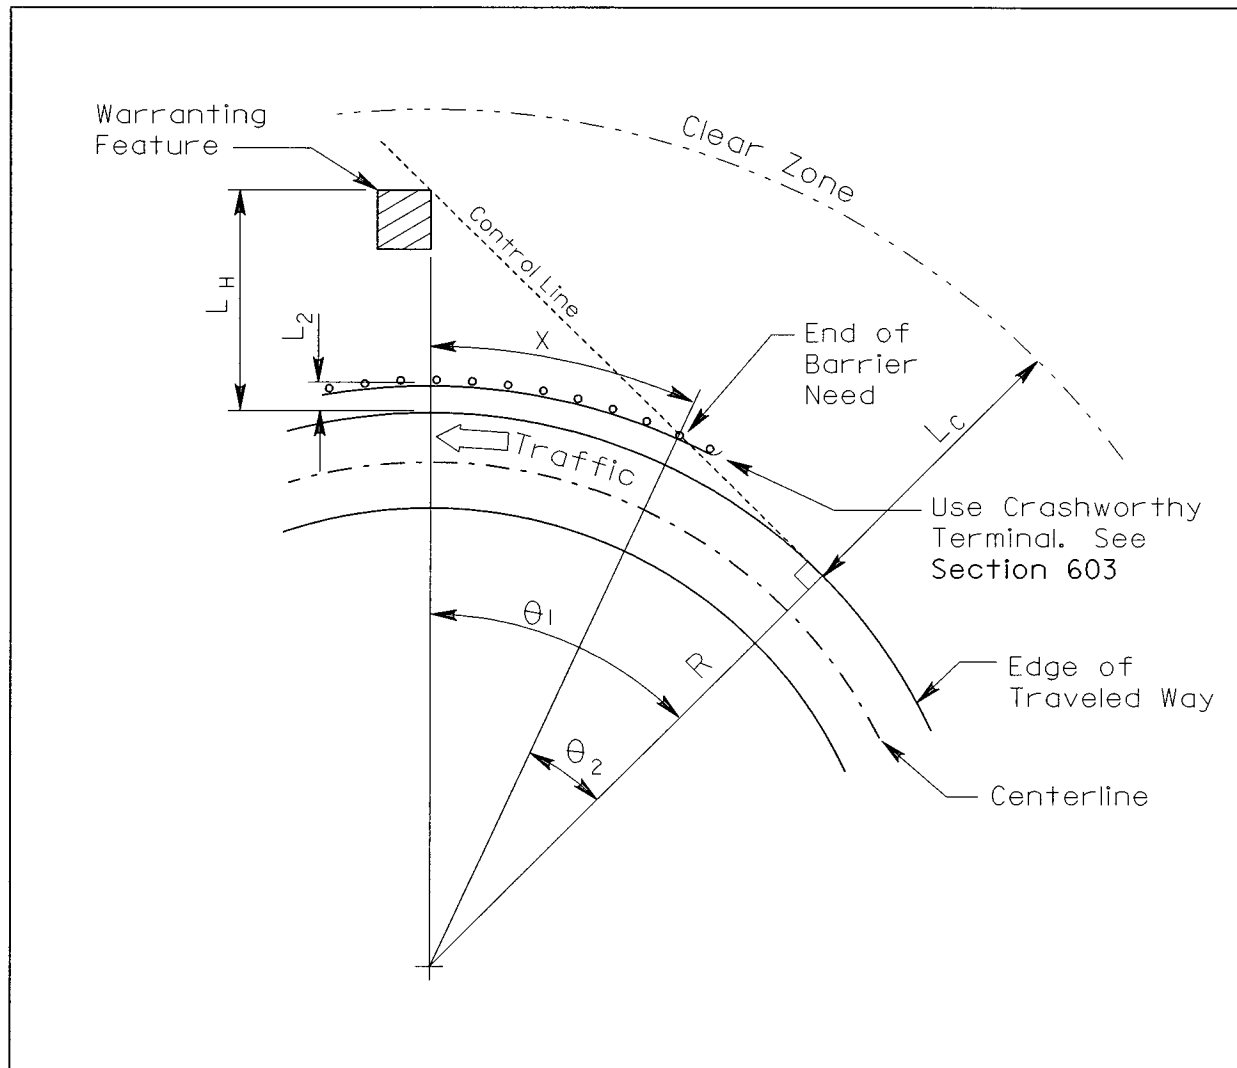

Formulas

X = Length of Need

L_C = Required Clear Zone

L_H = Lateral Offset to Back of Warranting Feature

L_2 = Lateral Offset to Face of Barrier (See Figure 301-3.)

If $L_H \leq L_C$: $X = (R + L_2) (\theta_1 - \theta_2)$ radians where $\theta_1 = \cos^{-1} (R/(R + L_H))$ and $\theta_2 = \cos^{-1} (R/(R + L_2))$

$R = 5729.58/D_C$

where D_C = decimal degree of curvature

1 degree = $\pi/180$ radians


If $L_H > L_C$: Substitute L_C in the above formulas.

January 2004


TENSIONED CABLE MEDIAN PLACEMENT

602-3E


REFERENCE SECTIONS
602.2.2, 603.1.1

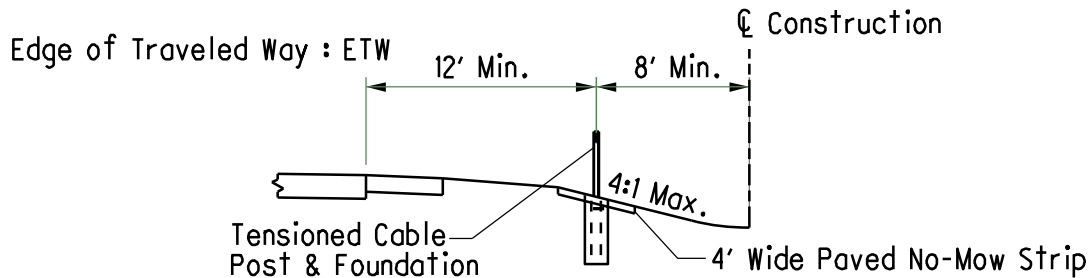

TENSIONED CABLE TYPICAL CROSS-SECTION PLACEMENT

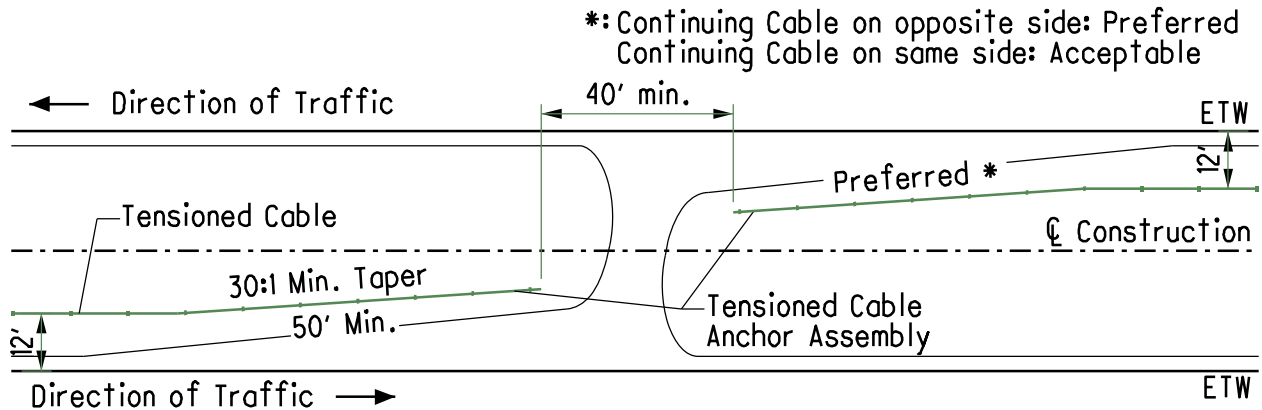

TENSIONED CABLE AT MEDIAN CROSS-OVER

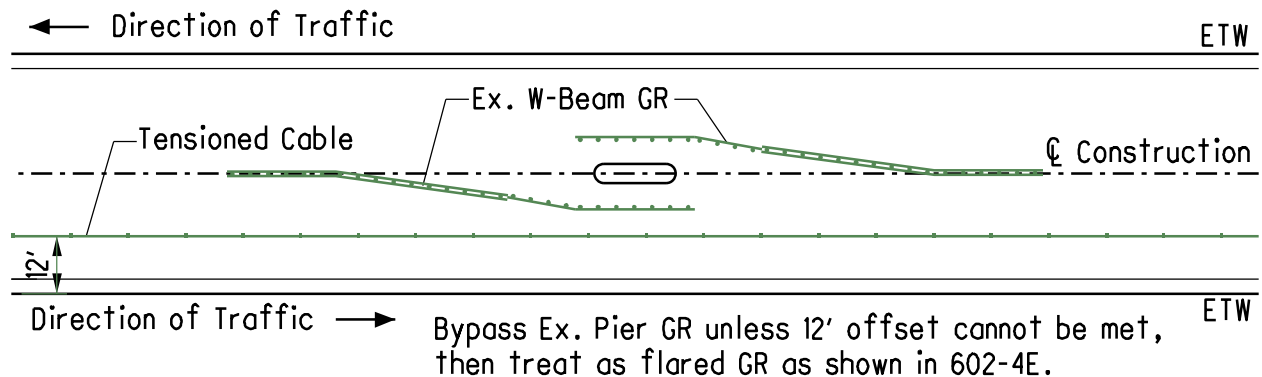


TENSIONED CABLE AT BRIDGE PIERS


TENSIONED CABLE OVERLAPPING OTHER BARRIER

602-4E


REFERENCE SECTIONS
602.2.2, 603.1.1

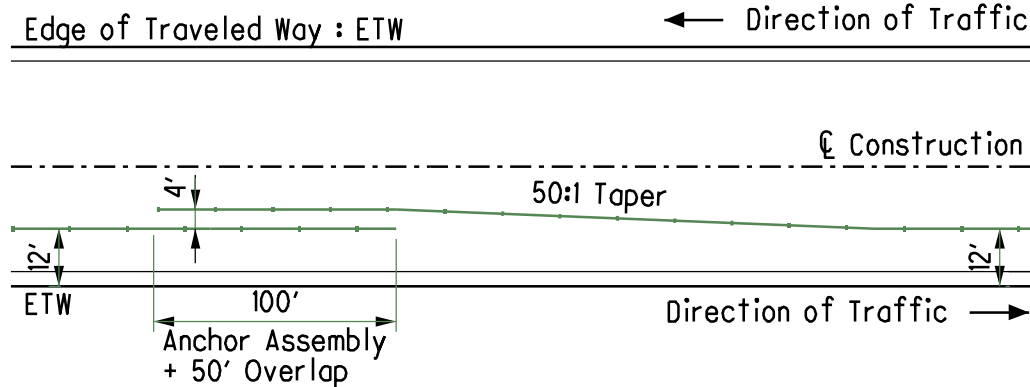

TENSIONED CABLE ANCHOR ASSEMBLY OVERLAP

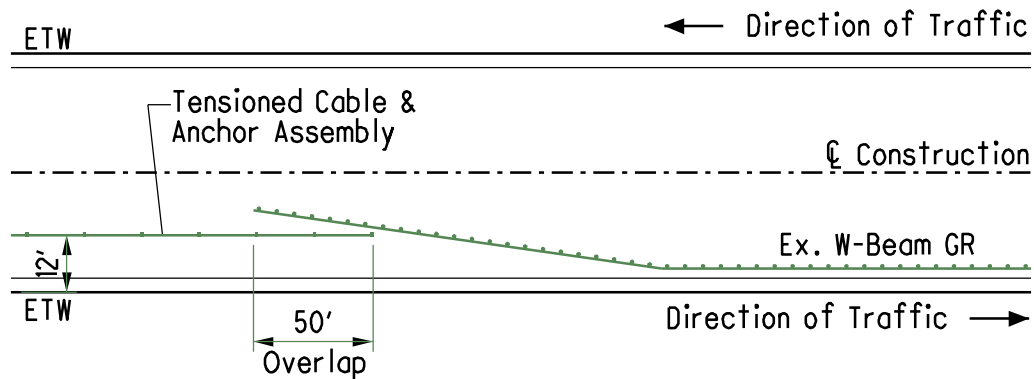

ENDING TENSIONED CABLE AT EX. FLARED GUARDRAIL

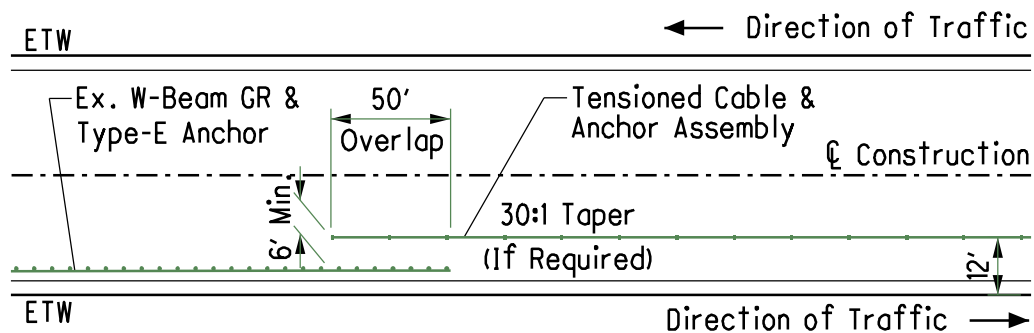


BEGIN/END TENSIONED CABLE AT EX. TYPE-E ANCHOR ASSEMBLY


BARRIER TYPES

603-1E


REFERENCE SECTIONS
603.1



TYPE 5 & 5A




TYPE 5: Barrier




TYPE 5
w/ Tubular
Backup


STEEL BEAM GUARDRAIL




TYPE B



TYPE BI

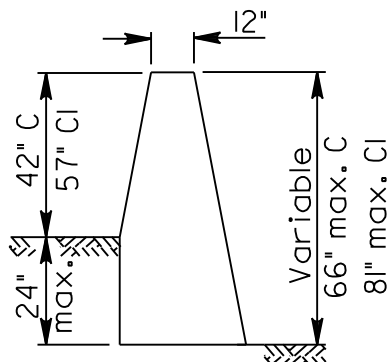

TYPE C & CI



TYPE D

SINGLE SLOPE BARRIER

TYPICAL BARRIER USES & MINIMUM CLEARANCES	603-2E
	REFERENCE SECTIONS 602.1.1, 603.1




	Barrier Type	Standard Drawing	Minimum Barrier Clearance*	Typical Use
STEEL BEAM GUARDRAIL	Type 5	GR-2.1	5' 6"	Roadside protection. 6' 3" Post Spacing /12' 6" Rails
	Type 5A	GR-2.1	3' 6"	Roadside protection adjacent to fixed objects. 3' 1-1/2" Post Spacing /12' 6" Rails
	Type 5: Barrier	GR-2.1 GR-6.1 GR-6.2	5' 6"	Narrow medians where deflections can be tolerated.
	Type 5 with Tubular Backup	GR-2.2	Width of Barrier Approx. 24"	Prefabricated structures where other guardrail system minimum barrier clearances cannot be provided.
	Long Span Across Culvert	GR-2.3	5' 0"	Used primarily to span across precast structures that have limited depths of cover.
		GR-2.4	3' 7"	
CONCRETE BARRIER	50" PCB	RM-4.1	6' 3"	These clearances represents unanchored PCB lateral offset to fixed objects. Can be installed with recommended 2-foot offset to MOT traffic lanes.
	32" PCB	RM-4.2	5' 6"	
	Type B	RM-4.3	Width of Barrier 28"	Narrow medians where raceways or median lighting is used.
	Type B1	RM-4.3	Width of Barrier 33-3/4"	Narrow medians where additional height is required and raceways are needed.
	Type C	RM-4.3	Width of Barrier Varies up to 32-3/8"	Narrow medians where the difference in shoulder elevation is 24 inches or less.
	Type C1	RM-4.3	Width of Barrier Varies up to 38-1/4"	
	Type D	RM-4.5	Width of Barrier 20"	Roadside protection adjacent to fixed obstacles. Areas where impact angles over 15 degrees are unlikely or where maintenance may be difficult/dangerous.

* Measured from the face of the barrier to the obstacle.

DRIVE AND SIDE ROAD GUARDRAIL OPENINGS

603-3E



**REFERENCE SECTIONS
602.4, 603.3.5**

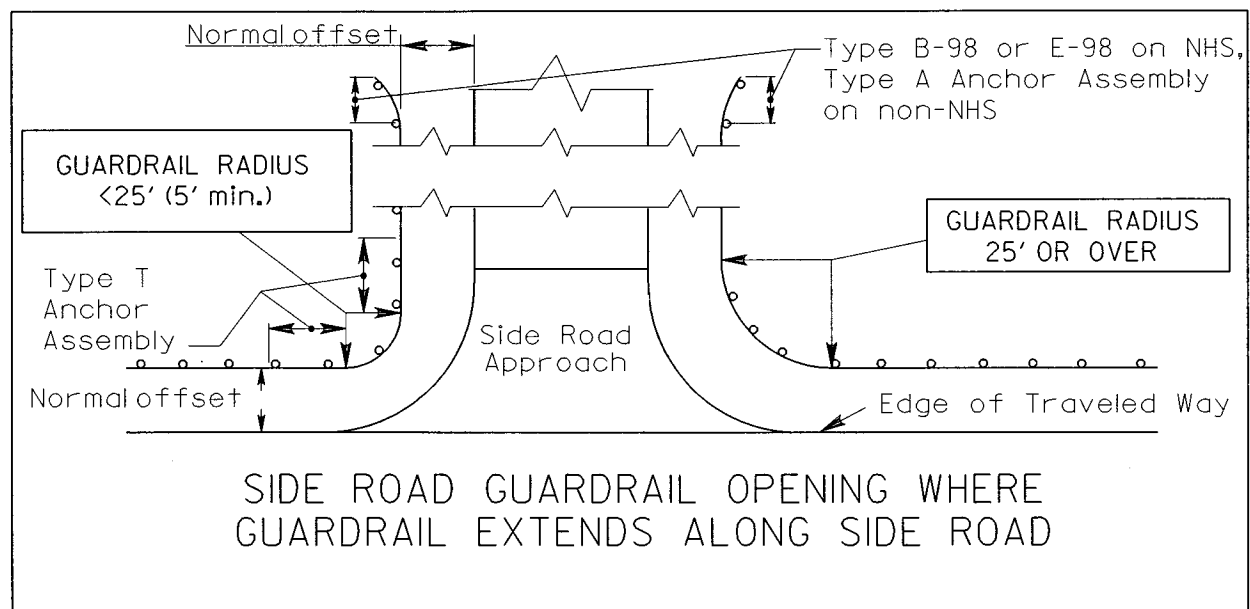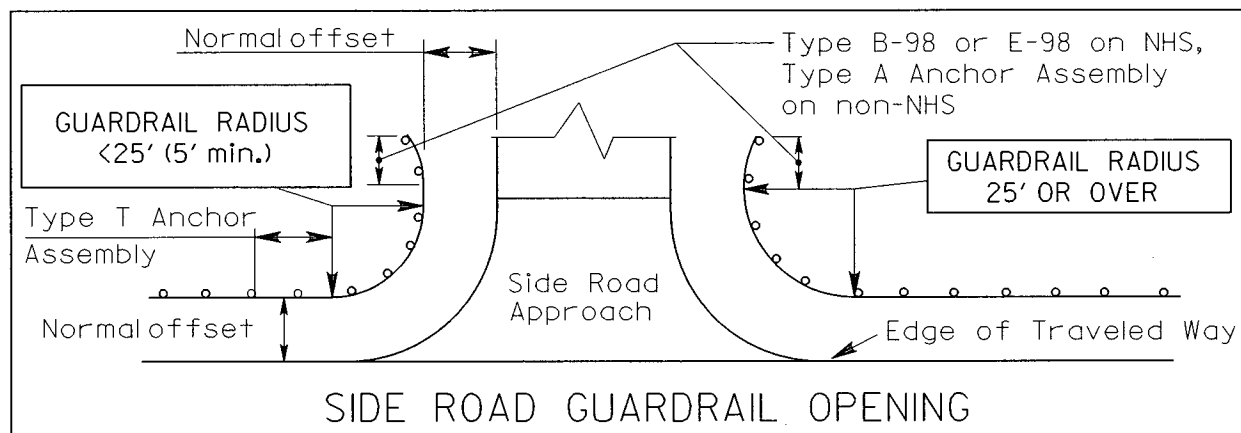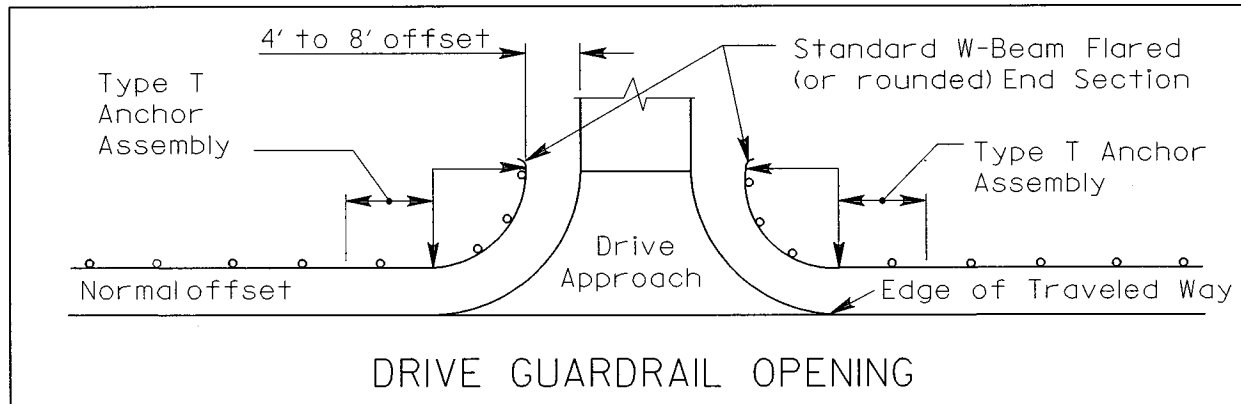

MINIMUM BRIDGE PROTECTION INVOLVING DRIVES OR SIDE ROADS

603-4E


REFERENCE SECTIONS
602.5.1, 603.3.5

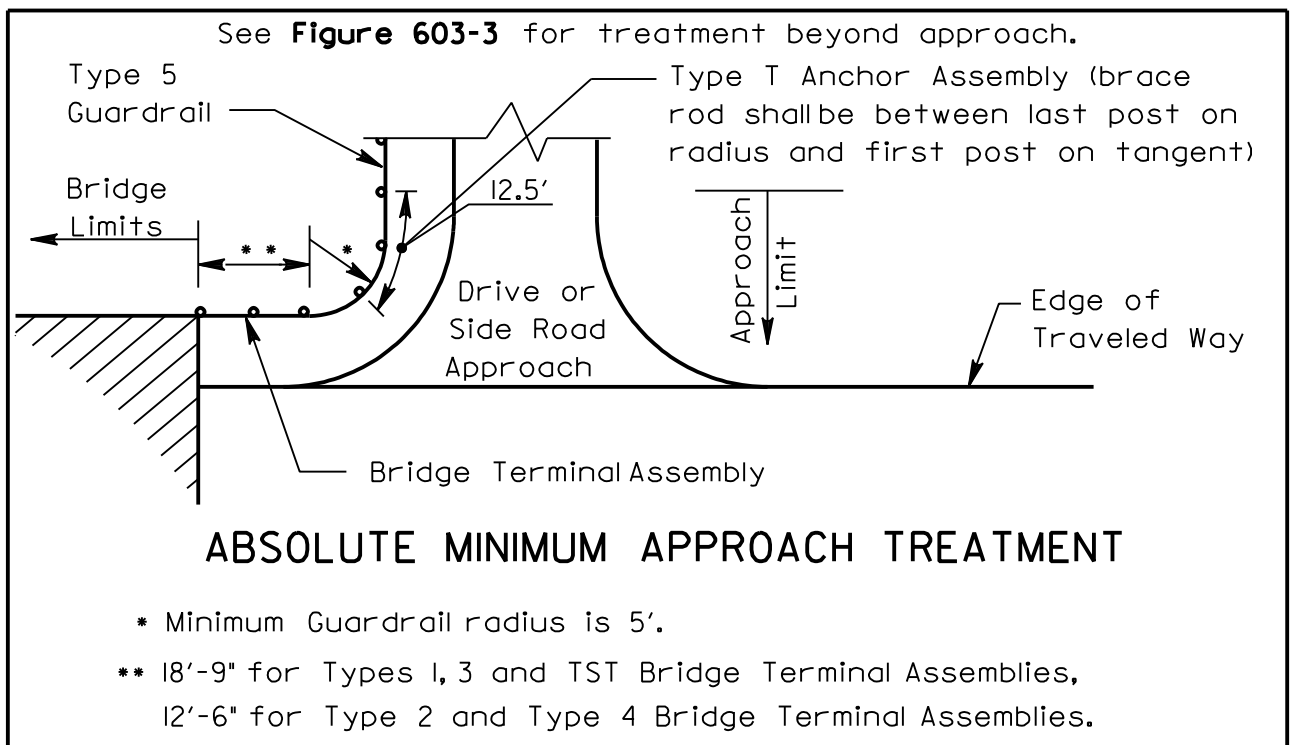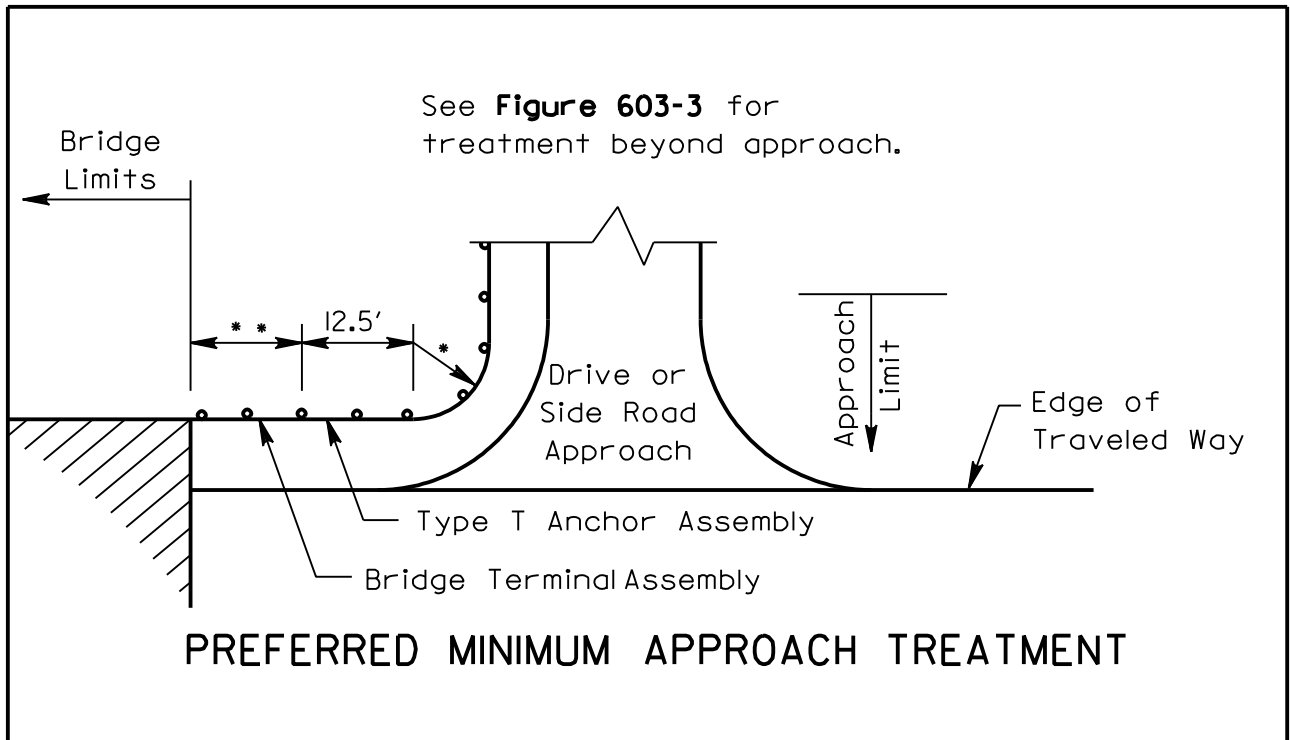

CONCRETE BARRIER MEDIAN TRANSITION

603-5E

REFERENCE SECTIONS
603.6

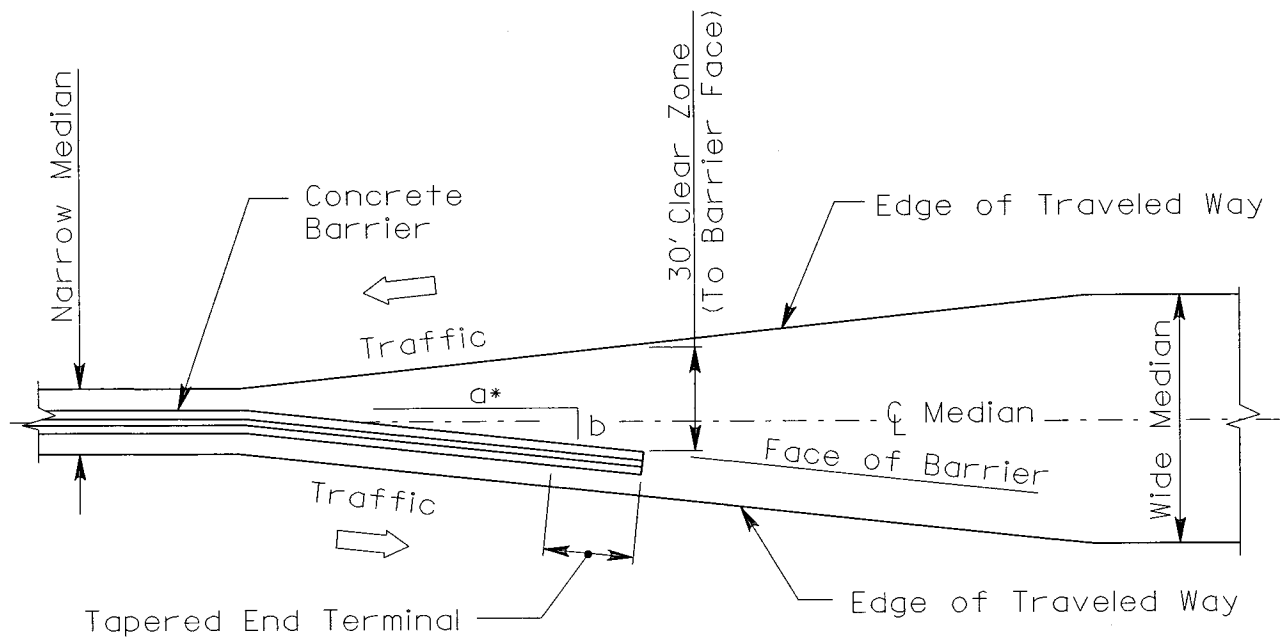


* See Figure 602-1 for barrier flare rates.

MEDIAN GLARE SCREEN USE GUIDE

604-1E

REFERENCE SECTIONS
604.1

UNLIGHTED HIGHWAYS

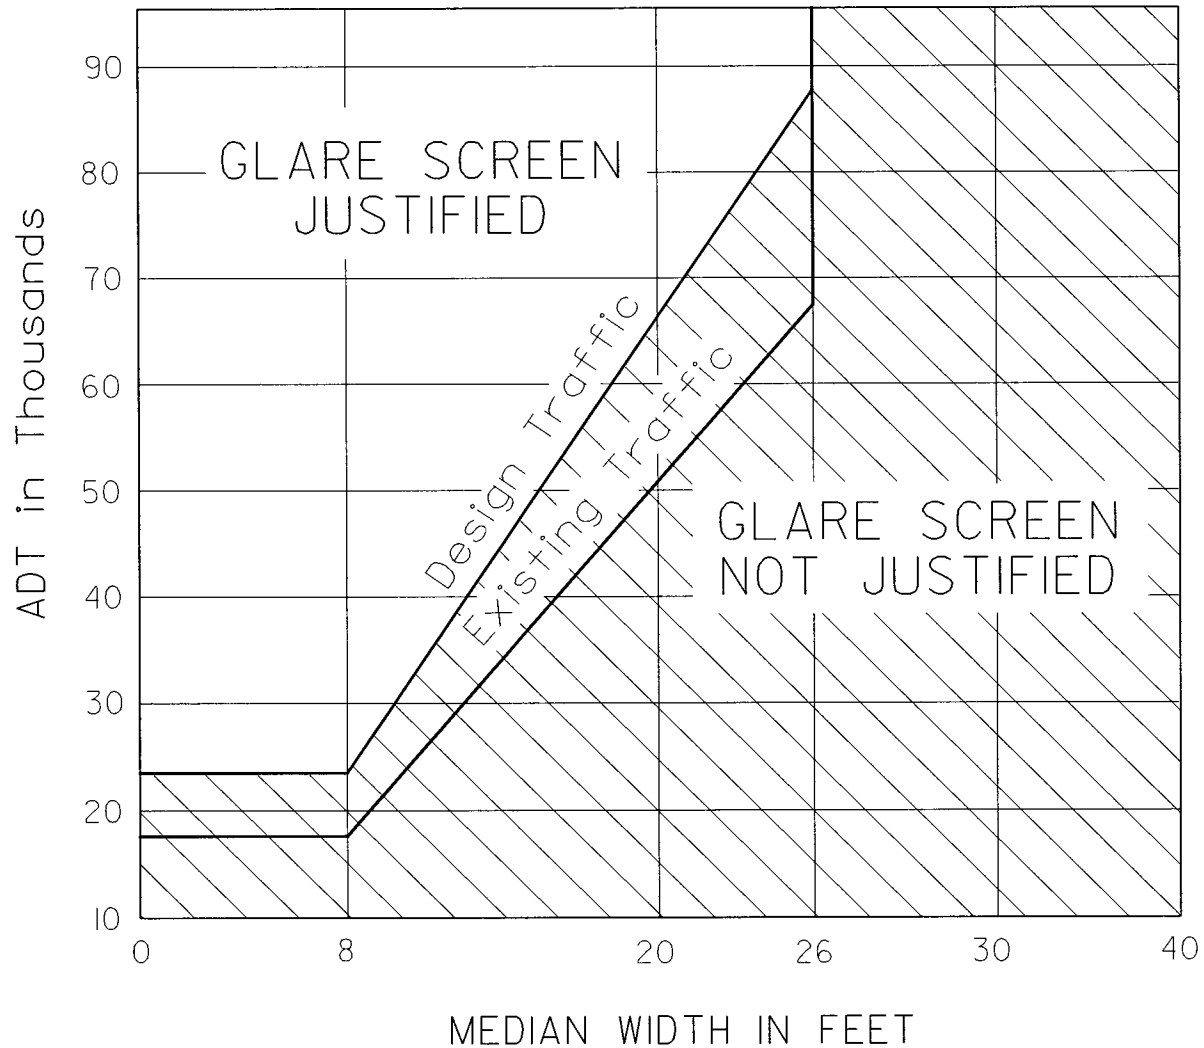

LIGHTED HIGHWAYS


TOTAL MAINLINE LANES	GLARE SCREEN JUSTIFIED WHEN ADT (DESIGN OR EXIST) EXCEEDS
4	50,000
6	75,000
8	100,000

April 1999


EXCEPTION TO CONTINUOUS FREEWAY FENCING

606-1E


REFERENCE SECTIONS
606.3.4

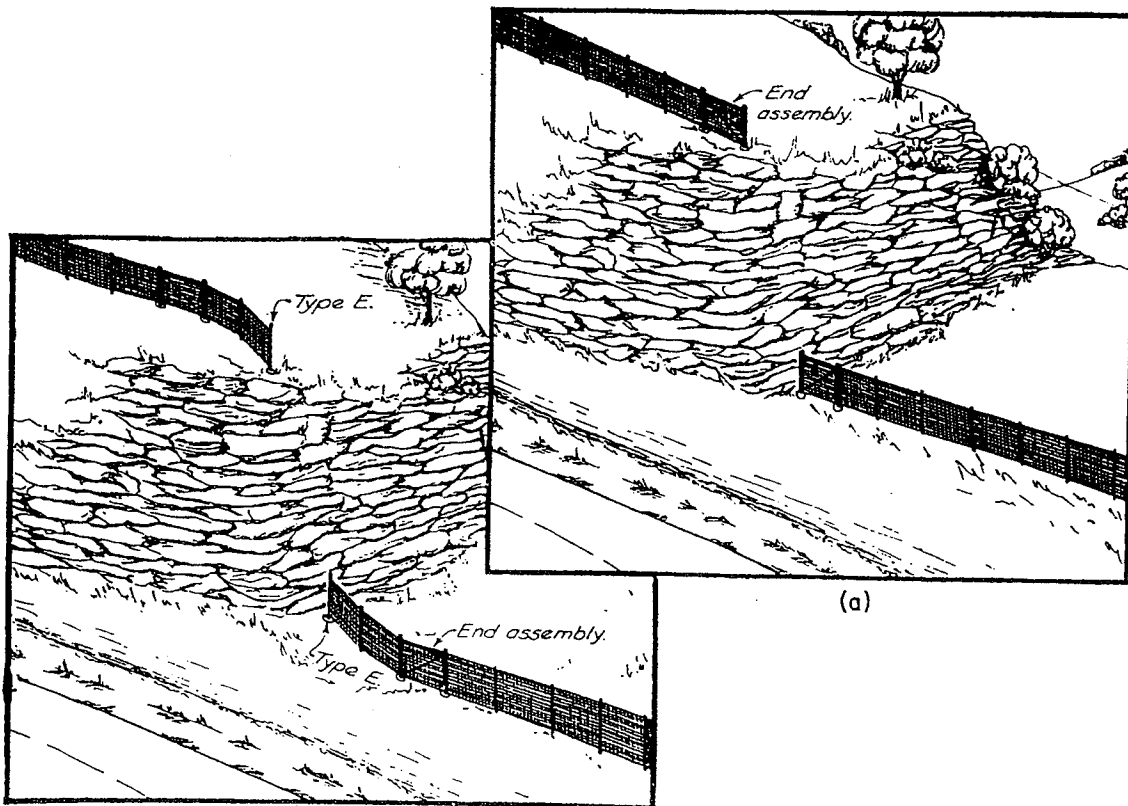

(a)

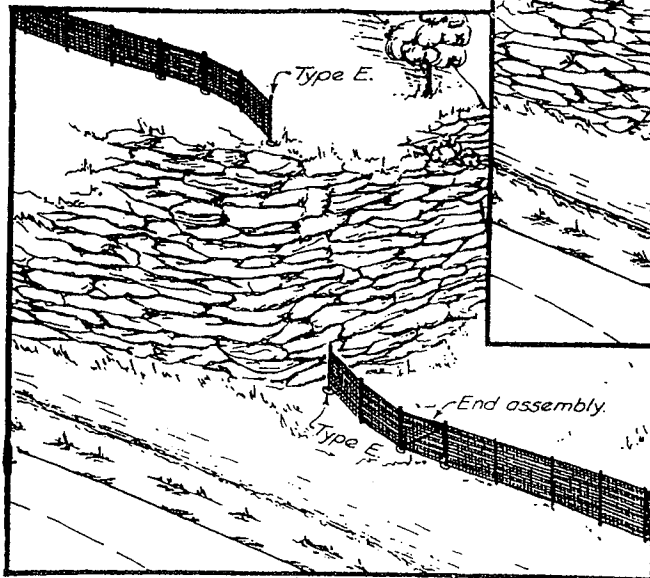

(b)

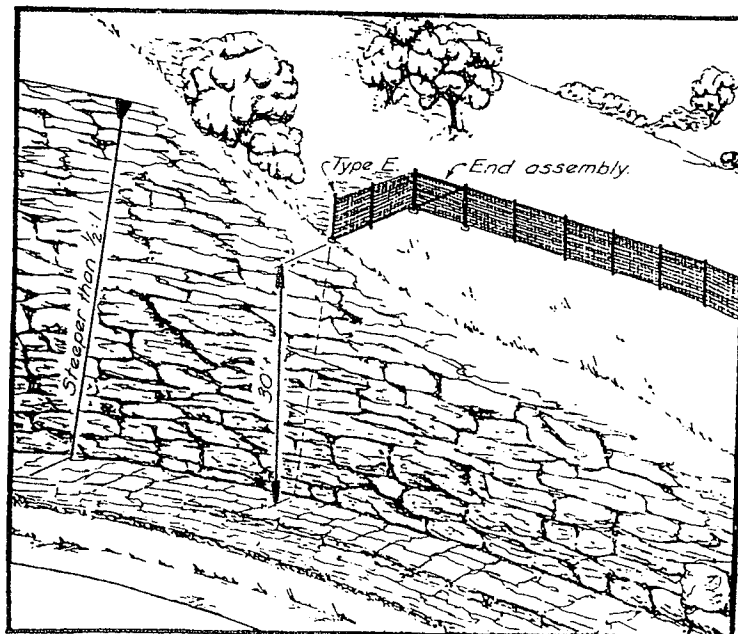

(c)


This page is intentionally blank

SAMPLE CALCULATIONS

Ex. 600-1

**Clear Zone Measurement Using Slope Averaging
(Traversable Ditch)**

Problem 1: Compute the safe distance from the edge of traveled way to locate a tower for lighting. The project has a design speed of 55 mph, a design year traffic volume of 3,400 ADT and the following cross section in the area where the tower is to be located:

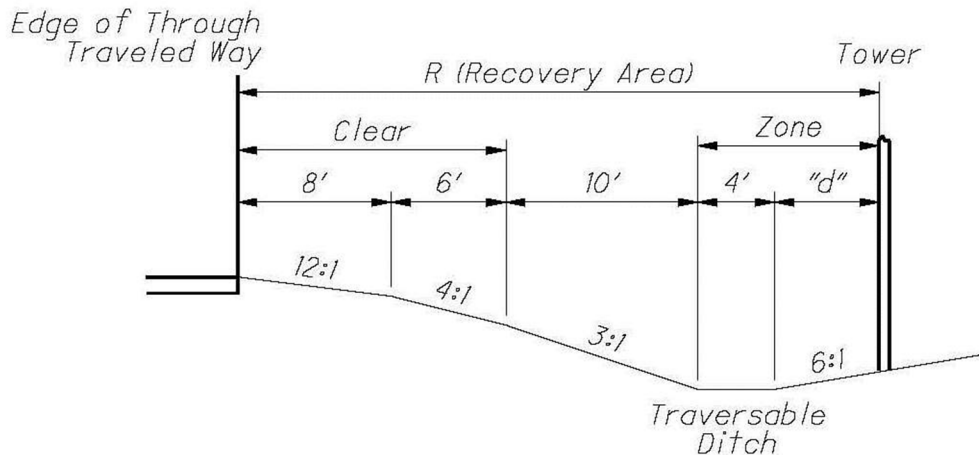

Solution 1: **Step 1** - Check the foreslope from the edge of traveled way to the backslope to determine if all intermediate foreslopes are either recoverable or non-recoverable. (See **Figure 600-2**.)

Since the foreslope has intermediate slopes that are recoverable (12:1 & 4:1) and non-recoverable (3:1), the clear zone may extend into the backslope if necessary.

Step 2 - Determine the weighted average of the foreslope. For sections flatter than or equal to 10:1, use a 10:1 slope. (The 12:1 shoulder slope is typically ignored; however, for this example it is included for illustrative purposes.) Decimal results of 0.5 or greater should be rounded up to the next whole numbered slope while decimal results less than 0.5 should be rounded down to the next whole numbered slope.

First, multiply the width of each slope by the rate of the slope to obtain the weighted average rise for the foreslope. Include half of the ditch bottom in the foreslope.

$$8' (1/10) + 6' (1/4) + (0^*) + 4'/2 (1/10) = 2.5'$$

* Since the 3:1 foreslope is non-recoverable, it is not included.

SAMPLE CALCULATIONS

Ex. 600-1

**Clear Zone Measurement Using Slope Averaging
(Traversable Ditch)**

(continued)

Next, add the width of each foreslope used above.

$$8' + 6' + 4'/2 = 16'$$

Then, divide the total recoverable width by the weighted average rise to obtain the weighted average of the foreslopes.

$$16'/2.5' = 6.4 \text{ (Rounded to 6:1 slope)}$$

Now, enter **Figure 600-1** (for 6:1 or flatter foreslopes, 55 mph Design Speed and $1,501 < \text{ADT} < 6,000$) to determine that the required clear zone distance is 21 feet.

Since the required clear zone is 21 feet and only 16 feet of recoverable clear zone exists, additional width must be considered from the backslope.

Step 3 - Determine if the ditch section is traversable.

Using **Figure 307-11**, a ditch with a 3:1 foreslope and 6:1 backslope is traversable.

If a non-traversable ditch section had been provided then the designer would have to consider other site conditions to determine whether or not the ditch should be used within the clear zone or if guardrail should be installed.

Step 4 - Determine the clear zone using the backslope.

Determine how much of the backslope should be included in the clear zone.

$$21' - 8' - 6' - 4' = 3'$$

Therefore, the clear zone must extend 3 feet into the backslope.

The "Recovery Area" includes the clear zone width plus any intermediate widths where the slopes are traversable, but not recoverable.


$$\text{Recovery Area: } 8' + 6' + 10' + 4' + 3' = 31'$$

SAMPLE CALCULATIONS

Ex. 600-2

Clear Zone Measurement Using Slope Averaging (Traversable Ditch)

- Problem 2:**
- a) Determine the required clear zone distance for the following location on a project with a tangent alignment, a design speed of 55 mph and a design year traffic volume of 1,700 ADT.
 - b) Assuming this cross section occurs on the outside of a 2-Degree curve, how would this change the above results?
 - c) Determine the clear zone distance for a Degree of Curve of 3 degrees.

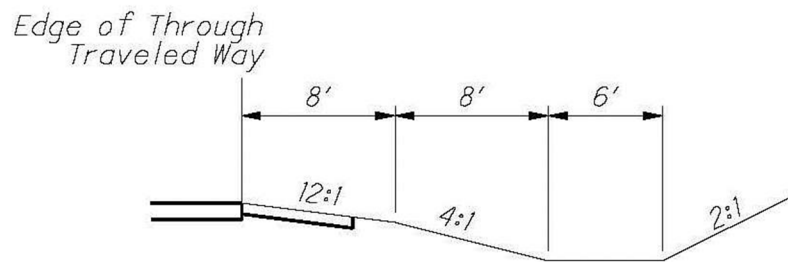

- Solution 2:**
- a) - The required clear zone distance (for foreslopes steeper than 6:1 up to 4:1, 55 mph design speed, and $1,501 \leq \text{ADT} \leq 6,000$) is 27 feet. 19 feet of clear distance is available up to the center of the ditch. A trapezoidal ditch with a 4:1 foreslope, 2:1 backslope and a width equal to or greater than 4 feet is a non-traversable design (see **Figure 307-11**) and generally should not be located within the clear zone. However, if the probability of encroachment is low no additional improvement may be needed.
 - b) - Since this location is on the outside of a curve where the probability of encroachment is high, the designer should consider reshaping the ditch or installing guardrail.
 - c) - The required clear zone distance determined above for a tangent alignment needs to be increased by a factor of 1.2 for locations on the outside of curves with a curvature of 3 degrees and a design speed of 55 mph. (See **Figure 600-1**.) The adjusted clear zone distance is $27 (1.23) = 33.2'$. Since the adjusted value is greater than 30', use 30'.


Since 19 feet or only 63% of the required clear zone distance exists on the outside of this curve, the designer should consider reshaping the ditch or installing guardrail.

SAMPLE CALCULATIONS

Ex. 600-3

Clear Zone Measurement For a Cut Slope

Problem 3: Determine the required clear zone distance for the following location on a project with a design speed of 45 mph and a design year traffic volume of 1,300 ADT.

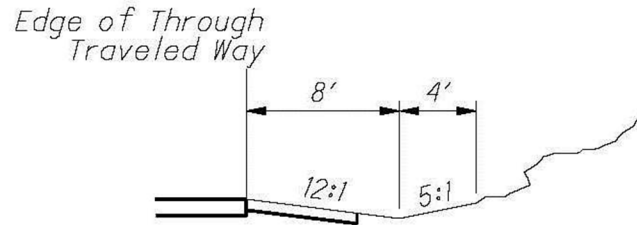


Solution 3: The required clear zone distance (for backslopes steeper than 6:1 up to 4:1, 45 mph design speed and $750 \leq \text{ADT} \leq 1,500$) is 13 feet. (See **Figure 600-1**.) The required clear zone is 13 feet but only 12 feet exist. If this section of roadway has a history of accidents with the cut face then guardrail should be installed.

SAMPLE CALCULATIONS

Ex. 602-1

Tangent Barrier Design For a 2-lane Road

Problem 1: Design barrier if needed to shield the fixed object located on the two-lane non-NHS rural collector shown below. The project has a design speed of 60 mph, a design year traffic volume of 2,200 ADT and a 6:1 foreslope. Assume that the object cannot be removed, relocated or made traversable.

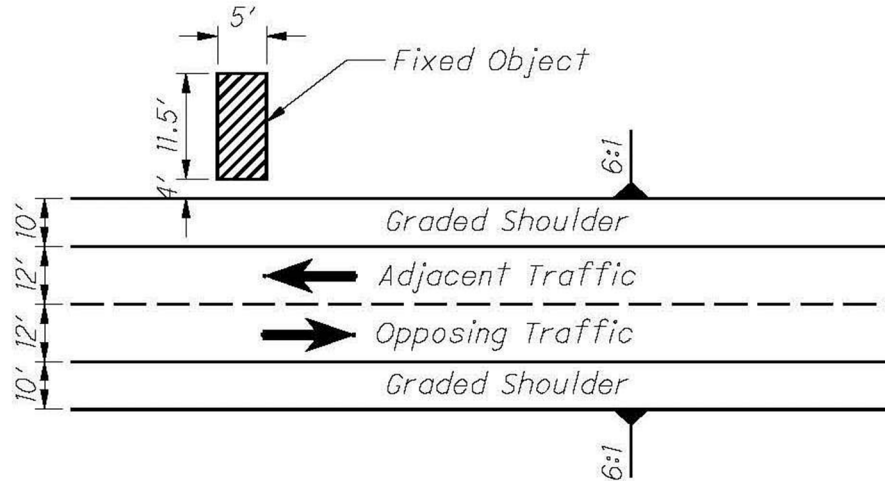

Solution 1: **Step 1** - Determine whether or not the fixed object is in the clear zone for adjacent traffic. Refer to **Figure 600-1** (for 6:1 or flatter foreslope, 60 mph design speed and $1501 \leq \text{ADT} \leq 6000$) to determine that the required clear zone distance is 28 feet.

The available clear area for adjacent traffic is $10' + 4' = 14$ ft.

Since the object cannot be removed, relocated or made traversable and it is inside the required clear zone, a barrier should be installed to shield it.


SAMPLE CALCULATIONS

Ex. 602-1


Tangent Barrier Design For a 2-lane Road

(continued)

Step 2 - Select the type of barrier to be installed. Using **Figure 301-3**, the normal (minimum) barrier offset for a rural collector (Design Year ADT greater than 2000) is 8 feet from the edge of traveled way. The available barrier clearance at this location is $(10' - 8') + 4' = 6$ ft; therefore, use Type 5 Guardrail which has a minimum barrier clearance of 5.5 feet. (See **Figure 603-2**.)

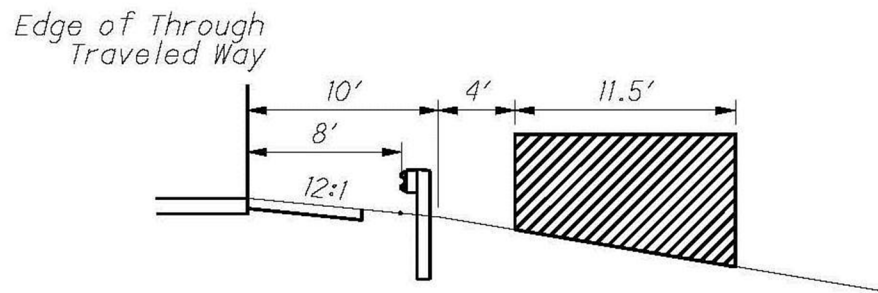

Step 3 - Calculate the length of need for adjacent traffic. Assume the area along the front of the fixed object cannot be graded to provide 10:1 foreslopes; therefore, the guardrail cannot be installed with a flare.

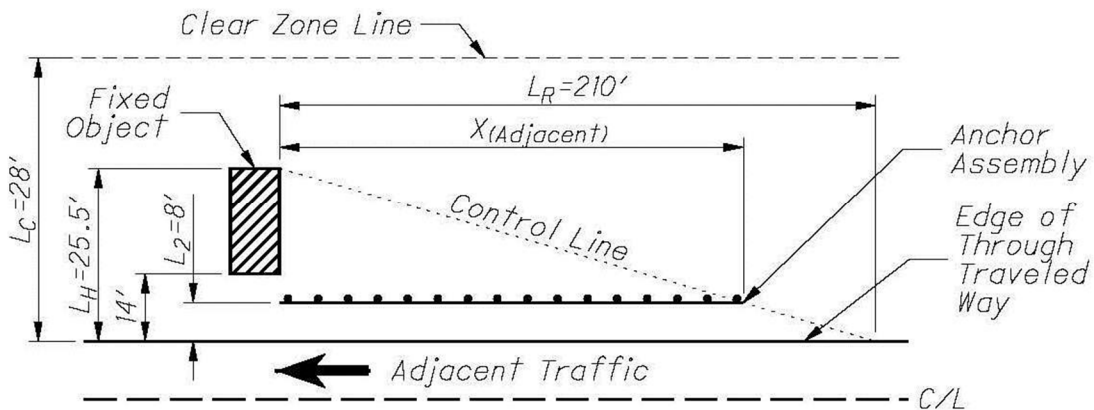

SAMPLE CALCULATIONS

Ex. 602-1

Tangent Barrier Design For a 2-lane Road

(continued)

From **Figure 602-1**, $L_R = 210$ ft. (for design speed = 60 mph and $1000 \leq ADT \leq 5000$). Since the lateral offset to the back of the object (L_H) is less than the required clear zone distance (L_C), use L_H in the LON formula.


$$x = \frac{L_H + L_1 b/a - L_2}{b/a + L_H/L_R}$$

Start measuring the length of guardrail needed at the edge of the fixed object. Since the guardrail will not be flared, $b/a = 0$.

$$X_{\text{(adjacent)}} = \frac{25.5 + 0 - 8}{0 + 25.5/210} = 144.12 \text{ ft.}$$

Step 4 - Determine whether or not the fixed object is in the clear zone for opposing traffic. The required clear zone is still 28 feet. The available clear area is $12' \text{ (lane width)} + 14' = 26$ ft. Since the object is in the clear zone, calculate the offset to the back of the object, L_H .

$$L_H = 12' + 14' + 11.5' = 37.5 \text{ ft.}$$

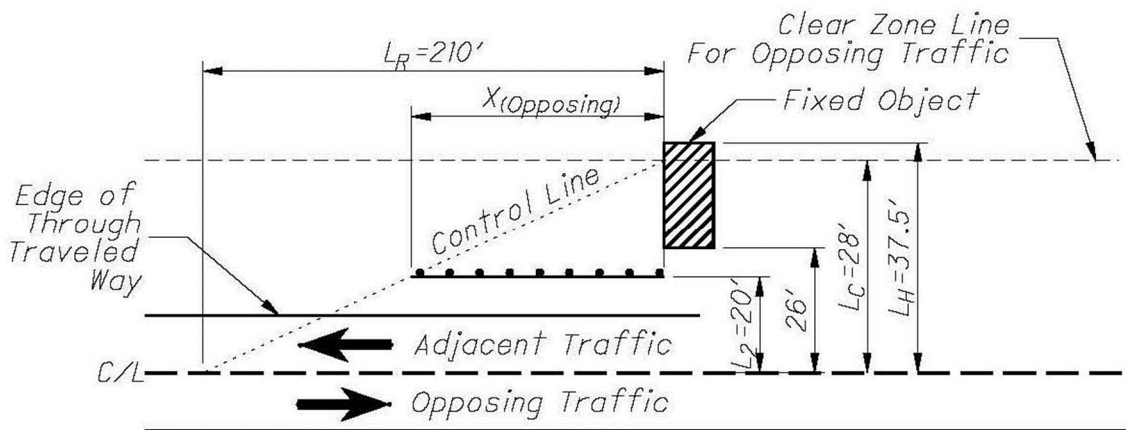

Since $L_H > L_C$, protection only needs to be provided up to the clear zone.

$$X_{\text{(opposing)}} = \frac{L_C + L_1 b/a - L_2}{b/a + L_C/L_R} = \frac{28' + 0 - 20'}{0 + 28/210} = 60.00 \text{ ft.}$$

SAMPLE CALCULATIONS

Ex. 602-1

Tangent Barrier Design For a 2-lane Road

(continued)

The total length of guardrail required is:

$$X_{(\text{adjacent})} + \text{width of object} + X_{(\text{opposing})} = 144.12 + 5' + 60.00' = 209.12\text{ft.}$$

The length provided should be a multiple of even 12'-6" panel lengths.

$$x = 209.12' / 12.5' = 16.73 \quad \text{Use 17 panels or } 17(12.5') = 212.5 \text{ ft.}$$

Note - If the designer had chosen to shield the entire object from opposing traffic instead of providing protection up to the clear zone, then

$$X_{(\text{opposing})} = \frac{L_H - L_2}{37.5/210} = \frac{37.5 - 20}{37.5/210} = 98 \text{ ft.} \quad L_H/L_R$$

The total length of guardrail needed would have been:

$$144.12' + 5' + 98' = 247.12 \text{ ft.} \quad (\text{or 20 panels})$$

Three additional panels (37.5 feet) of guardrail would be installed. In some cases, the designer may choose to shield the entire object even though a portion of it is outside the clear zone; however, in some cases it may be uneconomical to do so.


Step 5 - Select Anchor Assemblies. Since this is a non-NHS collector with a design year $ADT \leq 4000$, a Type A Anchor Assembly may be installed on the approach and trailing ends of the guardrail run.

SAMPLE CALCULATIONS

Ex. 602-2

Length of Need at a Large Culvert

Problem 2: Design barrier if needed to shield the culvert headwalls located on the two-lane non-NHS rural collector shown below. This bridge replacement project has a design speed of 55 mph, a design year traffic volume of 4,100 ADT and 4:1 foreslopes.

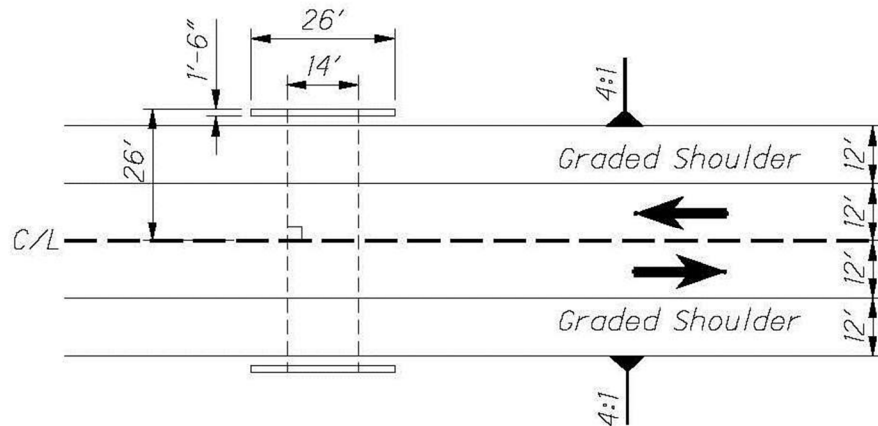

Solution 2 Step 1 - Determine whether or not the headwall is in the clear zone for adjacent traffic. Refer to **Figure 600-1** (for foreslopes steeper than 6:1 up to 4:1, 55 mph design speed and $1501 \leq \text{ADT} \leq 6000$) to determine that the required clear zone distance is 27 feet measured from the edge of traveled way.

The available clear area for adjacent traffic is $26' - 12' - 1'-6" = 12'-6"$.

It is impractical to almost double the length of the culvert to get the headwalls outside the clear zone; therefore, barrier should be provided.


Step 2 - Select the type of barrier to be installed. Using **Figure 301-3**, the normal barrier offset for a rural collector (Design Year ADT greater than 2000) is 10' from the edge of traveled way. The available barrier clearance at this location is $(12' - 10') + (2' - 1.5') = 2.5$ ft.

SAMPLE CALCULATIONS

Ex. 602-2


Length of Need at a Large Culvert

(continued)

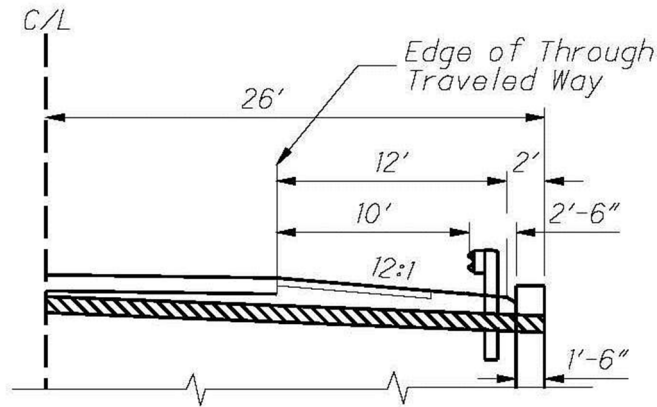

Since there is not enough clearance available for Type 5 Guardrail, which has a minimum barrier clearance of 5'-6", use Type 5 Guardrail with Tubular Backup, which has a minimum barrier clearance of 24." (See **Figure 603-2.**)

Step 3 - Calculate the length of need for adjacent traffic. Since the foreslope along the face of the fixed object cannot be regraded to 10:1, do not flare the guardrail. (The geometrics of the roadway and the offset to the headwall are the same on both sides of the road; therefore, the lengths calculated for adjacent and opposing traffic for the eastbound lane will be the same as those calculated for adjacent and opposing traffic for the westbound lane.)

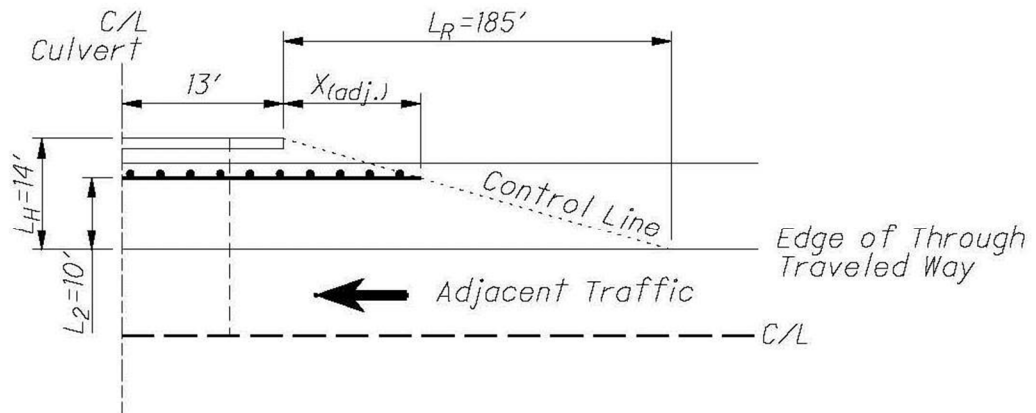

SAMPLE CALCULATIONS

Ex. 602-2

Length of Need at a Large Culvert

(continued)


From **Figure 602-1**, $L_R = 185$ ft. (for design speed = 55 mph and $1000 \leq ADT \leq 5000$). Since the lateral offset to the back of the headwall (L_H) is less than the required clear zone distance (L_C), use L_H in the LON formula.

$$x = \frac{L_H + L_1 b/a - L_2}{b/a + L_H/L_R}$$

Start measuring the length of guardrail needed at the edge of the headwall. Since the guardrail will not be flared, $b/a = 0$.

$$X_{\text{(adjacent)}} = \frac{14' + 0 - 10'}{0 + 14'/185'} = 52.85 \text{ ft.}$$

Step 4 - Determine whether or not the headwall is in the clear zone for opposing traffic. The required clear zone distance is still 27 feet. The available clear area is $26' - 1'-6" = 24'-6"$.

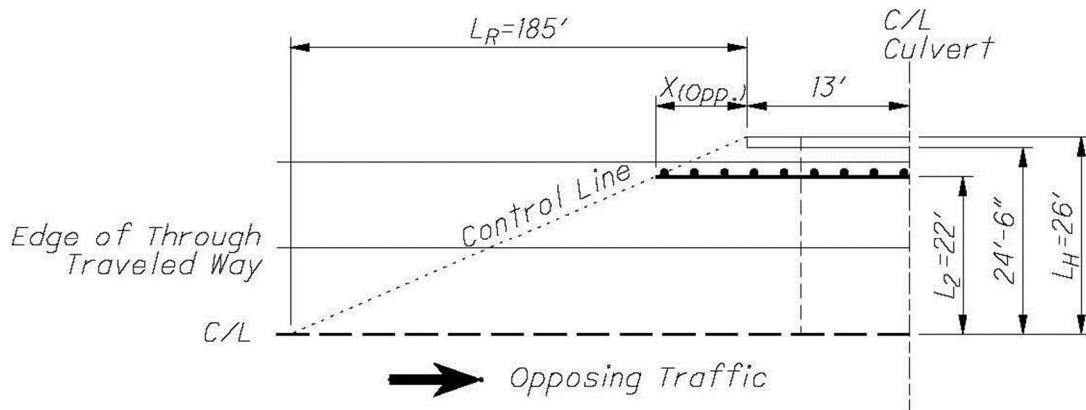

Since $L_H < L_C$, $x = \frac{L_H + L_1 b/a - L_2}{b/a + L_H/L_R}$

Start measuring the length of guardrail needed at the edge of the headwall. Since the guardrail will not be flared, $b/a = 0$.

$$X_{\text{(opposing)}} = \frac{26' + 0 - 22'}{0 + 26'/185'} = 28.46 \text{ ft.}$$

SAMPLE CALCULATIONS

Ex. 602-2

Length of Need at a Large Culvert

(continued)

The total length of guardrail required is:

$$X_{(\text{adjacent})} + \text{width of headwall} + X_{(\text{opposing})} = 52.85' + 26' + 28.46' = 107.32 \text{ ft.}$$

The length provided should be a multiple of even 12'-6" guardrail panel lengths.

$$x = 107.32/12.5 = 8.59 \quad \text{Use 9 panels or } 9(12.5') = 112.5 \text{ ft.}$$

Step 5 - Detail the final installation, including the anchor assemblies. The Type 5 Guardrail with Tubular Backup should extend to the first post off the approach and trailing ends of the structure. In this case, the headwall (not the culvert itself) is the structure that is being protected. This headwall is slightly longer than 2 panels of guardrail so use 3 panels (37'-6"). A Type 4 Bridge Terminal Assembly is required at each end of the Type 5 Guardrail with Tubular Backup. This 25' long transition is paid for as a unit and its length can be included as part of the total of Type 5 Guardrail being installed.

Type A Anchor Assemblies are not permitted because the design year ADT is over 4000. See **Section 603.3.4**. Refer to **Table 603-1** in **Section 603.3.3** for a Bridge Replacement Project with foreslopes steeper than 6:1 up to 4:1 to determine that a Type E Anchor Assembly should be used on the approach and trailing ends. (It is required on the trailing end because it is within the clear zone for opposing traffic.)

Since up to 37'-6" of the 50' long Type E can be deducted from the guardrail length of need, decrease the amount of rail specified for the approach end by this amount. In this case, the 25' of the BTA + the 37.5' of the Type E + 5.75' Tubular Backup = 68.25', which exceeds the 52.85' LON.

On the trailing end the amount of barrier included in the Bridge Terminal Assembly and the Type E also exceeds the 28.46' LON. (See the following final detail.)


Note: Many large culverts are located in deep channels with steep side slopes. This may necessitate that the designer use $L_H = L_C$ when calculating the required length of need.

SAMPLE CALCULATIONS

Ex. 602-2

Length of Need at a Large Culvert

(continued)

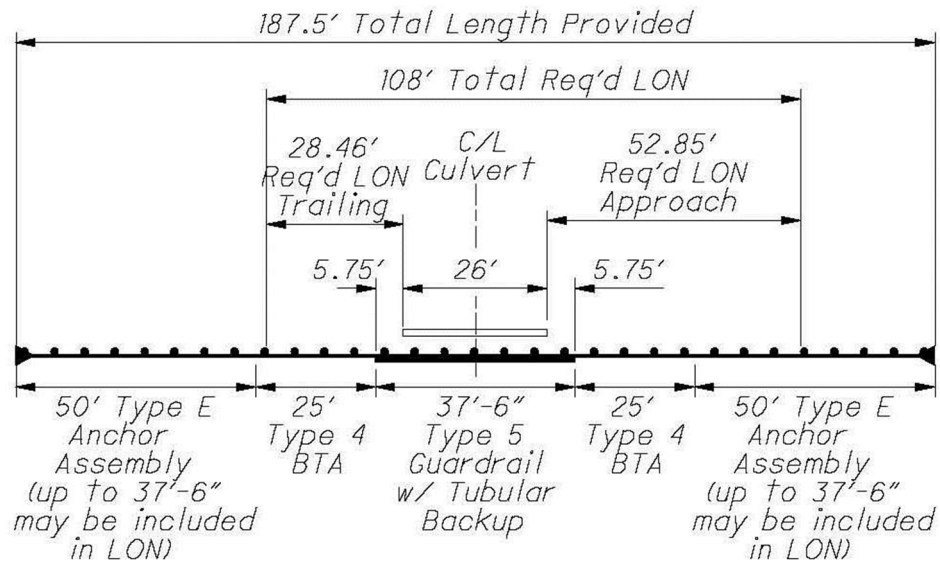


SAMPLE CALCULATIONS

Ex. 602-3

Tangent and Flared Barrier Design For a Divided Highway

Problem 3: Design barrier if needed to shield the 3' diameter footing located on the 4-lane, divided, NHS, urban, interstate reconstruction project shown below. The project has a design speed of 70 mph, a design year traffic volume of 12,000 ADT and 10:1 foreslopes. If barrier is needed calculate how much should be provided if it is installed **a)** at the normal (minimum) barrier offset on a tangent, **b)** at the normal (minimum) barrier offset on a flare, **c)** as close to the footing as permissible on a tangent and **d)** as close to the footing as permissible on a flare.

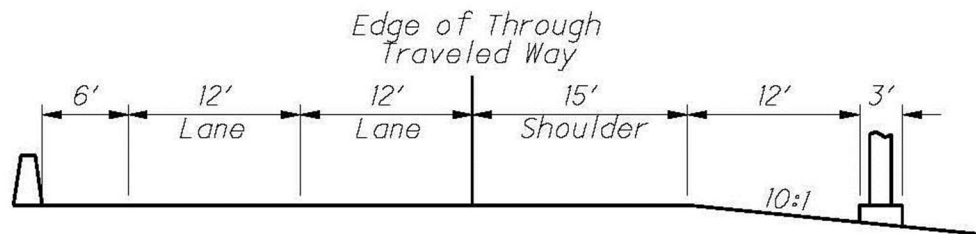

Solution 3: **Step 1** - Determine whether or not the footing is in the clear zone for adjacent traffic. Refer to **Figure 600-1** (for foreslopes 6:1 or flatter, 70 mph design speed and ADT > 6000) to determine that the required clear zone distance is 32 feet measured from the edge of traveled way. However, since this is not a high accident area a maximum clear zone distance of 30' should be used.

The available clear area for adjacent traffic is $15' + 12' = 27'$

Assuming the footing cannot be relocated outside the clear zone, barrier should be provided.


Step 2 - Select the type of barrier to be installed. Using **Figures 301-4 & 301-3**, the normal (minimum) barrier offset for an urban interstate route is 12' from the right edge of traveled way. The available barrier clearance at this location is $3' + 12' = 15'$; therefore, use Type 5 Guardrail, which has a minimum barrier clearance of 5.5'. (See **Figure 603-2**.)

SAMPLE CALCULATIONS

Ex. 602-3

Tangent and Flared Barrier Design For a Divided Highway

(continued)

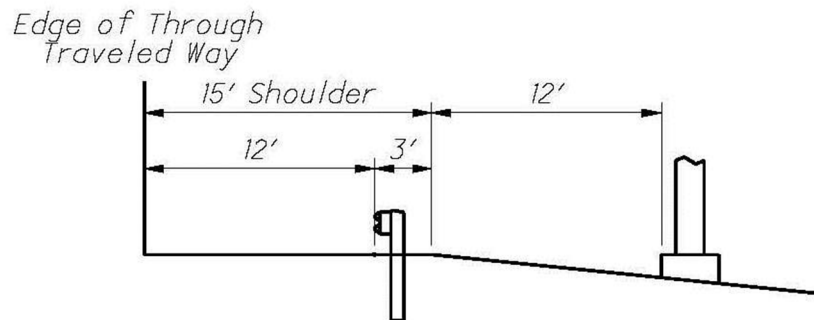

Step 3 - Calculate the length of need for adjacent traffic. (A calculation for opposing traffic is unnecessary because the concrete median barrier prevents encroachments by opposing vehicles.)

From **Figure 602-1**, $L_R = 360$ ft. (for Design Speed = 70 mph and ADT over 10000).

a) For tangent guardrail at the normal (minimum) barrier offset, $L_H = L_C = 30'$, $L_2 = 12'$, and $b/a = 0$.

$$x = \frac{L_H + L_1 b/a - L_2}{b/a + L_H/L_R} = \frac{30' + 0 - 12'}{0 + 30'/360'} = 216' \quad \text{Use 18 panels.}$$

b) For flared guardrail at the normal (minimum) barrier offset, $b/a = 1/15$. (See **Figure 602-1**.) Let $L_1 = 12'-6"$ (one panel length). In this case, this is an arbitrary selection. Site conditions typically control the amount of tangent barrier that should be provided past the warranting feature before a flare is introduced. For instance, where a flared section of Type 5 Guardrail is attached to a tangent section of Type 5A, it is advisable to extend the Type 5A past the warranting feature such that L_1 is at least equal to one panel length. Since Type 5 and 5A have different deflection characteristics, this ensures adequate protection at the edge of the warranting feature.

$$x = \frac{30' + 12.5'(1/15) - 12'}{1/15 + 30'/360'} = \frac{30' + 0.83' - 12'}{0.15'} = 125.55' \quad \text{Use 10 panels.}$$

SAMPLE CALCULATIONS

Ex. 602-3


Tangent and Flared Barrier Design For a Divided Highway

(continued)

c) Guardrail can be installed on slopes that are 10:1 or flatter. Since Type 5 Guardrail has a minimum barrier clearance of 5.5' the guardrail can be placed at this distance in front of the footing.

$L_2 = 15' + 12' - 5.5' = 21.5'$. For tangent guardrail, $b/a = 0$. L_H is still equal to 30'.

$$x = \frac{30' + 0 - 21.5'}{0 + 30'/360'} = 102' \quad \text{Use 9 panels.}$$

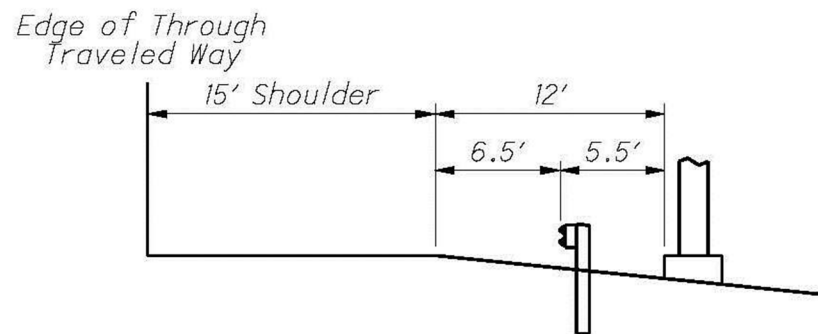

d) For flared guardrail offset at 21.5':

$$x = \frac{30' + 12.5'(1/15) - 21.5'}{1/15 + 30'/360'} = \frac{30' + 0.83' - 21.5'}{0.15'} = 62.22' \quad \text{Use 5 panels.}$$

All of these solutions are correct; however, d) is the best solution because it provides the most recovery area with the least amount of barrier.


Step 4 - Select Anchor Assemblies. Refer to **Table 603-1** for a major reconstruction project with 6:1 or flatter foreslopes to determine that the approach terminal should be either a Buried in Backslope or Type B Anchor Assembly. There is no backslope so select the Type B. Use a Type T Anchor Assembly on the trailing end since it cannot be impacted by opposing traffic.

SAMPLE CALCULATIONS

Ex. 602-4

Barrier on the Outside of a Curve

Problem 4: Calculate the barrier length of need to shield the 200-yr old 5-ft. diameter tree located on the outside of a 3-degree curve as shown below. The HSP project is on a rural arterial and has a design speed of 55 mph, a design year traffic volume of 3800 ADT and 5:1 foreslopes. Assume that the HSP project is needed to address run-off-the-road impacts with the tree and also assume that the tree cannot be removed.

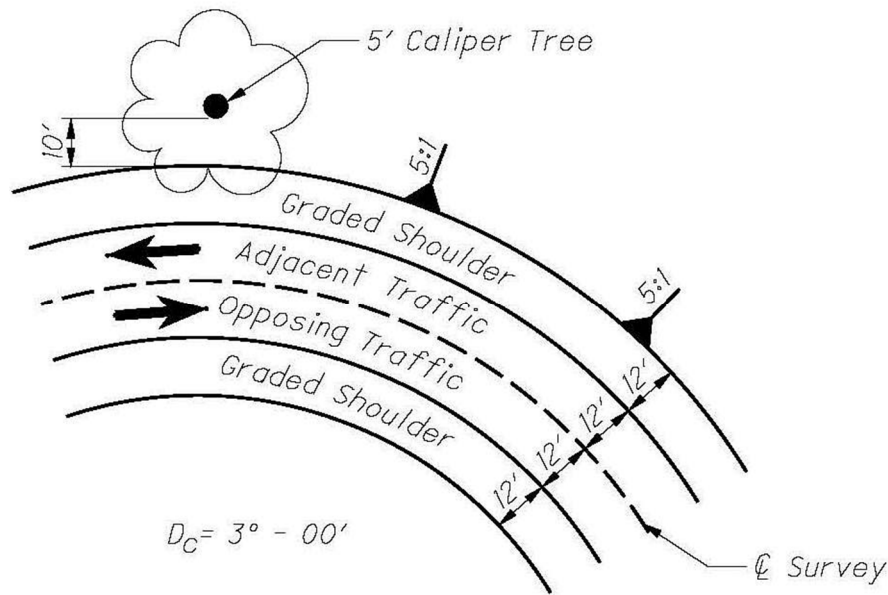

Solution 4: **Step 1** - Determine whether or not the tree is in the clear zone for adjacent traffic. From **Figure 600-1** (for foreslopes steeper than 6:1 up to 4:1, 55 mph design speed and $1501 \leq \text{ADT} \leq 6000$) the required clear zone distance is 27 feet measured from the edge of traveled way. Since the tree is on the outside of a 3-degree curve, the clear zone should be widened by using the curve correction factor for 55 mph design speed (1.2) from the chart at the bottom of **Figure 600-1**.

Required Clear Zone = $1.23 (27') = 33.21 \text{ ft.}$

Do not reduce this value to 30 ft. since this is a high accident location.

The offset to the face of the tree is $12' + 10' = 22 \text{ ft.}$ This is less than $L_C = 33.21 \text{ ft.}$; therefore, install barrier.

SAMPLE CALCULATIONS

Ex. 602-4

Barrier on the Outside of a Curve

(continued)

Step 2 - Select the type of barrier to be installed. Using **Figure 301-3**, the normal (minimum) barrier offset for a rural arterial (Design year ADT greater than 2000) is 10 feet from the right edge of traveled way. The available barrier clearance at this location is 12 feet; therefore, use Type 5 Guardrail, which has a minimum barrier clearance of 5.5 feet. (See **Figure 603-2**.)

Step 3 - Calculate the length of need for adjacent traffic. The radius for the 3-degree curve is $R_{\text{centerline}} = 5729.58/D_C = 5729.58/3.0 = 1909.86'$.

The radius at the edge of traveled way is $1909.86' + 12' = 1921.86'$.

The lateral offset to the back of the tree is, $L_H = 22' + 5' = 27'$.


$$\theta_1 = \cos^{-1} (R_{\text{adj}} / (R_{\text{adj}} + L_H)) = \cos^{-1} (1921.86 / (1921.86 + 27)) = 9.5484^\circ$$

$$9.5484^\circ(\pi/180) = 0.1666 \text{ radians}$$

$$\theta_2 = \cos^{-1} (R_{\text{adj}} / (R_{\text{adj}} + L_2)) = \cos^{-1} (1921.86 / (1921.86 + 10)) = 5.8323^\circ$$

$$5.8323^\circ(\pi/180) = 0.1018 \text{ radians}$$

$$X = (R_{\text{adj}} + L_2) (\theta_1 - \theta_2) \text{ rad.} = (1921.86 + 10) (0.1666 - 0.1018) = 125.18'$$

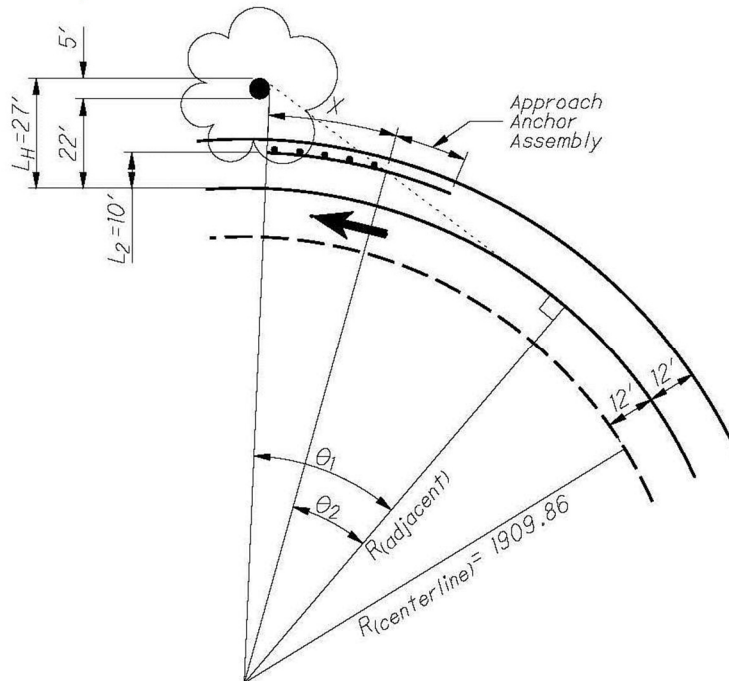

SAMPLE CALCULATIONS

Ex. 602-4

Barrier on the Outside of a Curve


(continued)

Step 4 - Determine whether or not the tree is within the clear zone for opposing traffic. The offset to the face of the tree is $12' + 12' + 10' = 34'$. Since this is outside the clear zone, guardrail is not needed past the left side of the tree to shield it from opposing traffic.

The total length of guardrail needed is $125.18' + 5' = 130.18'$
Use 11 panels (137.5').

Refer to **Table 603-1** in **Section 603.3.3** to determine the recommended anchor assembly for an HSP project with foreslopes steeper than 6:1 up to 4:1. On the approach end install a Type E Anchor Assembly. Since 37'-6" of the 50' long Type E can be deducted from the guardrail length of need, decrease the amount of rail specified above at the approach end by this amount. (Use 100'.) On the trailing end install a Type T Anchor Assembly because it is outside the clear zone for opposing traffic.

Notes - If a point of curvature exists in the vicinity of the runout path, the curve may need to be extended past the PC or PT (into the tangent portion of the roadway) in order to construct the tangent control line. If this is the case, then the standard runout lengths for tangent roadways should be used to calculate length of need.

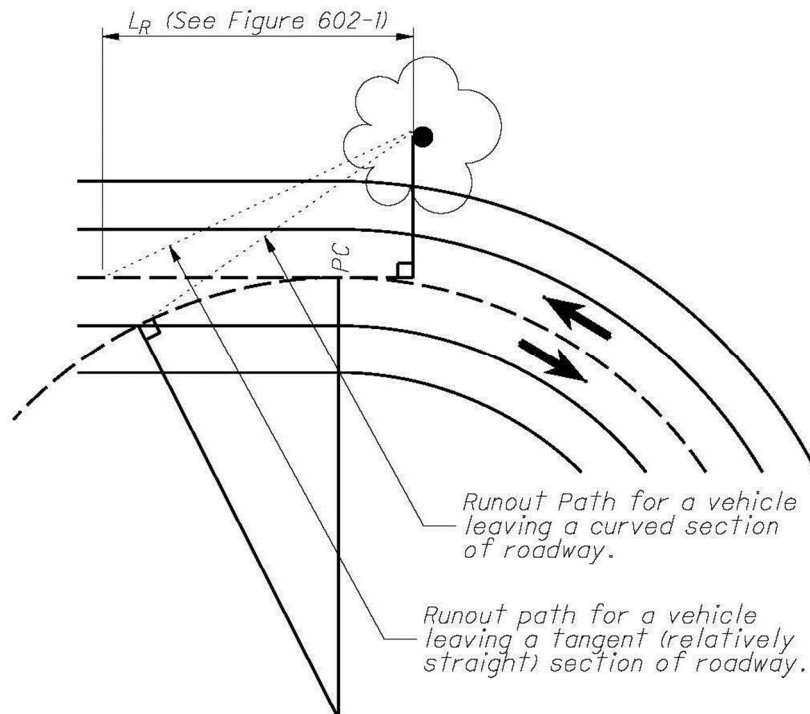

This page is intentionally blank

700 Multi-Modal Considerations

Table of Contents

701 Railroads	7-1
701.1 Background	7-1
701.2 Crossing At-Grade	7-1
701.2.1 General	7-1
701.2.2 Railroad Parallel to Highway	7-1
701.3 Lateral Clearances	7-1
701.3.1 New Construction	7-1
701.3.2 Reconstruction	7-1
701.4 Vertical Clearance	7-1
701.4.1 New Construction	7-1
701.4.2 Reconstruction	7-1
701.4.3 Construction Clearances	7-2

This page is intentionally blank

700 Multi-Modal Considerations

701 Railroads

701.1 Background

Ohio is interlaced with a network of railroad systems controlled by a multiplicity of local and state laws and regulations. The complexity of railroad operations and regulations requires that special consideration be given to the location of highways with respect to railroad tracks, whether it be the intersection of a highway with a railroad, or the location of a highway adjacent to a railroad facility.

701.2 Crossing At-Grade

701.2.1 General

Highways that cross railroad tracks on a common grade should be located to provide for a minimum of interference to highway traffic and the least amount of adjustment of railroad facilities.

Crossings at-grade will not be permitted on freeways. The creation of new grade crossings where none now exist should be avoided and will require railroad and Court of Common Pleas approval. (Sec. 957.29 et. seq. ORC).

701.2.2 Railroad Parallel to Highway

When locating a highway parallel to a railroad track, consideration shall be given to the need for space adjacent to railroad tracks for future industrial development. It is desirable to locate the highway a sufficient distance from the railroad to permit rail service to industrial areas without crossing the highway.

Sufficient distance from a railroad to a parallel highway should be provided along crossroads on which traffic must stop before entering the highway, to permit vehicles to stop clear of the railroad track.

701.3 Lateral Clearances

The standard gage of railroad tracks is 4 feet 8½ inches [1.435 meters]. Where two or more tracks are parallel, the normal centerline spacing is 14 feet [4.27 meters].

701.3.1 New Construction

Although minimum lateral clearances vary with railroad ownership, clearance from the centerline of the outside track should normally be at least 18 feet [5.5 meters]. An additional 8 feet [2.5 meters] of lateral clearance should be provided when a railroad off-track equipment road is located parallel to the tracks.

701.3.2 Reconstruction

The above clearances should be provided when replacing an existing structure when such additional work can be accomplished at a reasonable cost. A horizontal clearance less than the existing clearance will not be permitted.

701.4 Vertical Clearance

701.4.1 New Construction

A minimum of 23 feet [7.0 meters] between the top of rail and the bottom of an overpassing structure should be provided. This vertical clearance should extend 6 feet [1.8 meters] on each side of the centerline of the outside tracks. Actual clearance requirements will be determined after the location plan has been submitted.

701.4.2 Reconstruction

Every attempt should be made to increase the minimum vertical clearance to 23 feet [7.0 meters] when such additional work can be accomplished at a reasonable cost. A vertical clearance less than the existing clearance will not be permitted.

700 Multi-Modal Considerations

701.4.3 Construction Clearances

Construction clearances should also be considered in the design stages since they could be a factor in the location of certain items such as catch basins, headwalls, etc. A minimum of 9 feet [2.75 meters] of lateral clearance should be maintained at all times from the centerline of the track during construction unless this is not possible because of existing conditions.

800 Access Control, R/W Use Permits and Drive Design

Table of Contents

801 Access Control	8-1
801.1 Access Control Directives	8-1
801.2 Access Control Policies	8-1
801.2.1 Interstate Limited Access	8-1
801.2.2 Limited Access	8-1
801.2.3 Controlled Access Highways	8-1
801.2.4 Non-Limited Access Highways	8-2
801.2.5 Interchange Controls	8-2
802 Highway Use Permits	8-2
802.1 General R/W Use Criteria	8-2
802.1.1 Approvals and Agreements	8-2
802.1.2 Authority	8-2
802.1.3 Application Procedures	8-2
802.1.4 Right-of-Way Use Prohibitions	8-2
802.1.5 Future Highway Improvement Controls	8-3
802.1.6 Drainage Considerations	8-3
802.2 General Access Criteria	8-3
802.2.1 Highway Access Considerations	8-3
802.2.2 Median Openings	8-3
802.2.3 Added Highway Lanes	8-4
802.2.4 Number of Drives Permitted	8-4
802.2.5 Joint Drives	8-4
802.2.6 Location of Drive in Relation to Side Property Line	8-4
802.2.7 Location of Drive in Relation to an Intersection	8-4
802.2.8 Drive Sight Distance	8-5
802.2.9 Location of High Volume Drives	8-5
803 Drive Geometric Design	8-5
803.1 Mailbox Facilities	8-5
803.1.1 Mailbox Supports	8-5
803.1.2 Mailbox Turnouts	8-6
803.2 Rural Residential and Field Drives	8-6
803.2.1 Drive Intersection Angle	8-6
803.2.2 Drive Widths	8-6
803.2.3 Drive Radii	8-6
803.2.4 Curbed Drives	8-7
803.3 Urban Residential Drives	8-7
803.4 Service Station Drives	8-7
803.5 Commercial Drives	8-7
803.5.1 Standard Commercial Drives (See Figure 803-8)	8-7
803.5.2 Exceptions to Standard Commercial Drives	8-7
803.6 Shopping Center and Industrial Drives (See Figure 803-9)	8-8
804 Drive Profile Design	8-8
804.1 Drive Profiles (Uncurbed Roadways)	8-8
804.2 Drive Profiles (Curbed Roadways)	8-8
804.3 Commercial Drive Profiles (Curbed Roadways)	8-9

800 Access Control, R/W Use Permits and Drive Design

805 Drive Pavement Design	8-9
805.1 Field Drives	8-9
805.2 Residential Drives.....	8-10
805.3 Commercial Drives	8-10
805.4 Pavement Treatment of Undisturbed Drives	8-11

800 Access Control, R/W Use Permits and Drive Design

801 Access Control

801.1 Access Control Directives

Access policies for highway right-of-way are as set forth in the following directives:

Directive PH-P-409 and Standard Operating Procedure PH-P-403 establishes procedures for processing permit applications and defines permissible uses of right of way for various highway classifications.

Directive H-P-406 establishes guidelines for access provisions adjacent to major commercial and industrial developments.

It is intended that **Section 800** of this manual supplement the above directives with respect to access policies and R/W use permits as well as provide the designer with the criteria necessary to design most types of drives.

801.2 Access Control Policies

The policy of permitting access on highways is summarized below:

801.2.1 Interstate Limited Access

Direct access to an Interstate Highway will not be permitted. All crossroads and railroad grades shall be separated.

801.2.2 Limited Access

If a highway is now, or is designated to be an ultimate fully limited access freeway and access rights have been acquired:

1. If the highway has no existing private access points, direct private access to such highway will not be permitted.
2. If the highway has existing private access points and the ultimate freeway design has been determined, temporary access improvements may be permitted. However, at the time the improvement is permitted, the method for deleting the temporary access points must be determined and necessary agreements made with the property owner to facilitate their deletion in the future.
3. If the highway has existing private access points and the ultimate freeway design has not been established, modifications of existing access will not be permitted until the ultimate freeway design has been determined.
4. Provision generally shall be made for future separation of crossroads and railroad grades by purchase of right-of-way as a part of the initial project.

801.2.3 Controlled Access Highways

Modifications of existing points of access or changes from one location to another within the limits of the applicant's property may be permitted, if such modification or change would be beneficial to both the

800 Access Control, R/W Use Permits and Drive Design

highway operation and property development. However, new additional points of access will not be permitted. Crossroads and railroads need not be separated unless very high volumes dictate its consideration.

801.2.4 Non-Limited Access Highways

Access to a non-limited access highway is permissible at any and all points along the highway. However, such access is subject to the conditions prescribed by the Director of Transportation under authority granted by **Section 5515.01 of the Ohio Revised Code**.

801.2.5 Interchange Controls

No access shall normally be allowed on intersecting highways adjacent to highway interchanges for a minimum of 600 feet [180 m] at diamond-type interchanges and 1,000 feet [300 m] at other types of interchanges. This distance applies to each direction along the intersecting highway, measured from the outer-most ramp terminal intersections with the highway. See **Figures 801-1 and 801-2** for additional details.

802 Highway Use Permits

802.1 General R/W Use Criteria

802.1.1 Approvals and Agreements

Permission to use highway R/W is required for fencing, storm sewers, sanitary sewers, public utilities, points of access, or other similar types of work. When a request is made to alter, modify or otherwise use highway R/W, Federal and/or State approvals must be obtained and the necessary agreements or permits between the State and applicant must be completed before any work can be initiated.

802.1.2 Authority

Permits for the use or occupancy of State Highway right-of-way may be granted, upon formal application, by the Director of Transportation. Such permits, when granted, shall be subject to the policies and regulations set forth herein under authority granted by **Section 5515.01 of the Revised Code of Ohio**.

802.1.3 Application Procedures

The procedure for applying for permits is included in Directive H-P-409 and Standard Operating Procedure PH-P-403.

802.1.4 Right-of-Way Use Prohibitions

No parking, servicing of vehicles, erection of lights, signs or other advertising devices will be permitted on highway right-of-way. Similarly, no device or structure will be permitted to overhang highway right-of-way. Provisions should be made in the design of driveways or approaches on rural highways so that a

800 Access Control, R/W Use Permits and Drive Design

vehicle will not be required to back onto the right-of-way or highway pavement to gain access to the highway.

802.1.5 Future Highway Improvement Controls

When granting permits, consideration should be given to the extent of future highway improvements. The location and design of driveways or public road approaches should then be governed by the general access criteria (**Section 802.2**) of the future highway facility.

802.1.6 Drainage Considerations

When any owner or developer of land adjacent to highway R/W proposes to route site drainage into the highway drainage system, the following shall apply and be the responsibility of the owner/developer:

1. There shall be no diversion of flow to the highway.
2. Flow peaks from areas contributing to the highway drainage system shall not be increased, unless the highway drainage system and the drainage system downstream from the highway are of adequate capacity to convey the augmented flow. If downstream capacity is inadequate, flow detention or increased capacity of the downstream system shall be provided.
3. When the owner/developer collects and concentrates surface water, or increases flow, peaks or volumes contributing to the highway drainage system, adequate measures to prevent erosion and/or structural damage shall be provided.
4. Adequate erosion control measures shall be provided during construction to minimize downstream sedimentation.
5. Drainage plans and calculations shall be submitted for review by the Department of Transportation prior to the start of construction.

802.2 General Access Criteria

802.2.1 Highway Access Considerations

The basic considerations that govern the location and design of highway access shall be to facilitate:

1. The safe and expeditious movement of vehicles on the street or highway.
2. The provision of the best service possible to the private or public facility being served by the drive access.
3. The safe movement of pedestrian traffic.

802.2.2 Median Openings

Median openings are normally not permitted on divided highways. Exceptions may be for public roads or streets or traffic generators such as large shopping centers or industrial plants, if satisfactorily justified and in the public interest.

If a median opening exists prior to the construction of a drive, the opening may be further modified, including relocation, to accommodate the turning movements of the expected traffic. The design modifications shall, however, be consistent with the overall design of the highway.

800 Access Control, R/W Use Permits and Drive Design

802.2.3 Added Highway Lanes

The construction of an additional lane adjacent to the existing highway lanes to serve as an acceleration, deceleration, turning or passing lane may be permitted if benefit to the operation of the through highway will result. The design of any added lane must be consistent with the overall design of the highway.

802.2.4 Number of Drives Permitted

When adequate frontage is available on a non-limited access highway, two driveways to a property used for a single purpose may be permitted. When a single property is used for two or more purposes and two driveways cannot provide adequate access, then more than two drives may be permitted. Each request for more than two drives must be accompanied by sufficient information to justify the request.

802.2.5 Joint Drives

A jointly owned drive may be permitted upon joint application by both property owners.

802.2.6 Location of Drive in Relation to Side Property Line

Figure 802-1 shows the controls for locating drives in relation to side property lines.

1. Controls
 - a. 90° Control Line - a line at right angles to the centerline of the highway which extends through the intersection of the side property line with the highway right-of-way line.
 - b. 4-foot Control [1.2 m] - maximum width of driveway approach flare as measured along the 90° control line from the highway pavement edge.
2. Curbed Highways - the approach radius may begin at the intersection of the 90° control line with the highway pavement edge but may not cross the 90° control.
3. Uncurbed Highways - the approach radius, but not the approach edge extension, may cross the 90° control line within the limits of the 4-foot [1.2 m] control.

A permit may be issued for the construction of a driveway which encroaches on the abutting property frontage in excess of the controls set forth above only when written permission from the affected property owner is presented and made a part of the State's record of the permit, and only when such encroachment does not interfere with an existing driveway. It shall be the responsibility of the permit applicant to make all necessary arrangements and agreements with the affected property owners when the relocation of existing driveways is necessary. The expense involved shall be borne by the applicant.

802.2.7 Location of Drive in Relation to an Intersection

The proximity of a new drive to a highway intersection shall conform to the corner island details shown in **Figure 802-2** and to the following

1. When the intersection radius is:

800 Access Control, R/W Use Permits and Drive Design

- a. 40 FEET, OR LESS [less than or equal to 12 m], the beginning of the approach radius shall be at least 20 feet [6 m] from the angular bisector as measured along the face of curb or pavement edge, EXCEPT:
 - i. Where a sidewalk exists, the beginning of the approach radius shall not begin nearer the roadway intersection than the back edge of the sidewalk.
 - b. GREATER THAN 40 FEET [greater than 12 m], the beginning of the approach radius shall not begin closer to the roadway intersection than a distance equal to one-half the effective intersection radius as measured from the angular bisector along the face of curb or pavement edge, EXCEPT
 - i. When the highway intersection is 120°, or greater, the beginning of the approach radius may begin 20 feet [6 m] from the angular bisector, as measured along the face of curb or pavement edge.
 - ii. When the highway intersection radius is greater than 80 feet [24 m] the beginning of the approach radius may begin 40 feet [12 m] from the angular bisector.
2. AT CHANNELIZED INTERSECTIONS the above conditions shall apply, unless their use would encourage "wrong-way" operation along a directional portion of the intersection. In such case, special drive designs will be required.

802.2.8 Drive Sight Distance

Wherever possible, drives should be located in accordance with the intersection sight distance criteria in **Section 201.3**.

802.2.9 Location of High Volume Drives

Special consideration should be given to the location of drive access to high volume traffic generators such as shopping centers, industrial plants and parks, as well as other types of development having similar traffic characteristics.

A new driveway should not be located where it will create an offset intersection opposite an existing street, highway, or major commercial driveway.

A driveway serving all directions of traffic should be located a minimum of 600 feet [180 m] from the nearest major highway or street intersection.

803 Drive Geometric Design

803.1 Mailbox Facilities

803.1.1 Mailbox Supports

Mailbox installations located within the clear zone shall be installed as shown in **Figure 803-1** using "breakaway" type supports. Satisfactory supports are as follows:

800 Access Control, R/W Use Permits and Drive Design

1. Maximum 4 inches by 4 inches [100 mm x 100 mm] square or 4½ inch diameter [115 mm] round timber.
2. Maximum 2 inch diameter (2-3/8" O.D.) [Maximum 60.3 mm O.D.] Schedule 40 standard strength steel pipe.
3. Any material with breakaway cross section characteristics equivalent to 1 or 2 above.

Group mailbox supports should be placed on three foot centers and the turnout lengthened to accommodate the grouping. No more than two mailboxes shall be placed on each post.

Where guardrail exists, mailboxes and their supports should be located behind the guardrail. Supports must still meet the breakaway requirements listed above.

803.1.2 Mailbox Turnouts

Where the existing or proposed highway shoulder paving is less than 6 feet [1.8 m] wide, mailbox turnouts should be provided as shown in **Figure 803-1** and **SCD BP-4.1**. Mailbox turnouts should be constructed of the same material used in the drive approach and combined with the drive approach where possible.

803.2 Rural Residential and Field Drives

Rural residential drives and field drives should normally conform to the Type 1 design shown in **SCD BP-4.1**.

803.2.1 Drive Intersection Angle

New drives should intersect the highway at an angle between 70° and 90°. However, in some cases, it may be necessary to retain existing drive angles that vary from these desirable angles.

803.2.2 Drive Widths

If the project involves existing drives, the existing width is normally retained unless it is less than 12 feet [3.6 m]. In which case, it should be widened to provide a 12 foot [3.6 m] throat width. In the case of new drives, the width should normally be 12 feet [3.6 m]. If the new driveway is a combined drive between two properties, the width should normally not exceed 24 feet [7.2 m]. Also, a wider field drive may be used if it will keep the farm equipment operator from encroaching on the opposing traffic lane when entering or exiting the highway.

803.2.3 Drive Radii

The radii of the Type 1 driveway should normally be 25 feet [7.5 m]. The radii may be increased on field drives if it is deemed that the larger values will improve driveway operation and reduce the hazard to the motorists and farm equipment operator.

800 Access Control, R/W Use Permits and Drive Design

803.2.4 Curbed Drives

Driveways abutting uncurbed highways may be curbed. However, the curb shall not extend closer to the through pavement edge than 8 feet [2.4 m] or the treated shoulder width, whichever is greater, to avoid curb obstruction for vehicles, snowplows, etc., using the shoulder.

803.3 Urban Residential Drives

Either Type 1 or 2 drives, shown in **SCD BP-4.1**, may be used in urban areas. If used in urban areas, the radii and flare dimensions may be reduced so that the apron does not extend past the back of the sidewalk, or past the right-of-way line if there are no sidewalks. The desirable minimum radii for Type 1 drives, when the through highway is curbed, is 15 feet [5 m].

Shown on **Figure 803-2** are three methods for designing driveways between the curb line and sidewalk to provide for turning vehicles. Other designs, may be used if they are approved for use by the local governmental agencies responsible for maintenance of the project. Additional details are shown in **Figure 803-3** when the tree lawn is less than 6 feet [2 m]. Residential drives on curbed streets should use a dropped curb as shown in **Section B-B on Figure 803-2**.

803.4 Service Station Drives

--Section Deleted--

803.5 Commercial Drives

The access requirements of most commercial developments can be served by driveways having standard design characteristics. The exceptions are driveways having high traffic volumes, those being used by large vehicles, or those serving businesses which have traffic patterns unique to the business being conducted.

803.5.1 Standard Commercial Drives (See Figure 803-8)

1. Radii:
 - a. 15 foot [5 m] minimum, when the through highway is curbed.
 - b. 25 foot [8 m] minimum, when the through highway is uncurbed.
2. Width - 35 foot [10.5 m] maximum
3. A dropped curb should be used on curbed streets as shown in **Section B-B on Figure 803-2**.

803.5.2 Exceptions to Standard Commercial Drives

Where access requirements are such that a non-standard driveway is necessary, the design may approximate the design of shopping center driveways as discussed in **Section 803.6** or public road intersections, **Section 401**.

800 Access Control, R/W Use Permits and Drive Design

Specially designed radii and a width greater than 35 feet [10.5 m] may be permitted, as necessary, to accommodate the type vehicle using the driveway. (Example: A truck stop may require two one-way driveways or a single drive with width greater than 35 feet [10.5 m] and radii as great as 75 feet [23 m] to facilitate turning movements).

803.6 Shopping Center and Industrial Drives (See Figure 803-9)

This section is intended as a guide for the design of driveways to high volume traffic generators such as shopping centers, industrial plants, industrial parks, and other types of developments having similar traffic characteristics. Many of the design features discussed in **Section 401**, Intersections At-Grade, will be applicable. Geometric considerations are listed below:

1. Driveways should intersect the highway at an angle between 70° and 90°.
2. Each driveway traffic lane should have a minimum width of 10 feet [3.0 m], with 12 feet [3.6 m] preferred.
3. Major driveways in shopping centers should be constructed to prevent cross movement of internal traffic within 100 feet [30 m] of the entrance approach. This may be accomplished by use of a raised divider, 6 inches [150 mm] high, 6 feet [2 m] wide (min.) and 100 feet [30 m] long, and/or by use of curbing, sidewalk or other barrier along the drive edges for a length of 100 feet [30 m] (See **Figure 803-9**).
4. Driveways designed for traffic signal operation should have curbed radii and should provide a minimum of two lanes for vehicles entering the highway.

804 Drive Profile Design

804.1 Drive Profiles (Uncurbed Roadways)

Drive profiles on uncurbed roadways shall slope down and away from the pavement edge at the same slope as the graded shoulder. Any vertical curve should be developed outside the normal graded shoulder width. Vertical curve lengths should be 10 feet [3.0 m] to 20 feet [6.0 m], depending on the grade differential. Under normal circumstances, rural drive grades should not exceed 10 percent with 8 percent considered to be the preferred maximum.

804.2 Drive Profiles (Curbed Roadways)

The design vehicle used to develop the profile criteria of this section is shown on **Figure 803-2**. The profile criteria shown provides clearance for this vehicle when its springs are completely compressed. If conditions of a particular driveway do not meet the cross-section criteria listed below, a template of the design vehicle can be used to design the driveway profile.

For tree lawns 6 feet [2 m] or wider, the ramp grade from the gutter to the edge [the ramp cross-slope rate from the gutter to] of the sidewalk will be 1 inch per foot [0.08] or less for normal cross-section design.

Figure 803-2 shows this condition for the following cross-section conditions:

1. Sidewalk and tree lawn slope of 1/4 inch per foot [0.02], and

800 Access Control, R/W Use Permits and Drive Design

2. 6 inch [150 mm] height of curb with pavement slope of 3/16 inch per foot [0.016] or 1/4 inch per foot [0.02], or
3. Type 2 curb and gutter with pavement slope of 3/16 inch per foot [0.016].

If the cross-section design does not meet the above conditions (has sharper grade breaks), the profile should be designed using a template of the design vehicle.

For tree lawns less than 6 feet [2 m] wide, **Figure 803-3** shows the profile treatment. Clearance for the design vehicle is achieved by depressing the sidewalk 1 inch [25 mm] at the driveway. The sidewalk cross-slope of 1/4 inch per foot [0.02] is retained. The design may be used directly with curbed highways having cross-section criteria as listed above and the profile conditions of **Figure 803-2**. For other cross-sections, a template of the design vehicle may be used to design the profile.

Figure 803-3 shows an isometric view and profile for a driveway where only a 3-foot [1.0 m] tree lawn is available. This design is shown, not because it is desirable, but because right-of-way width and property development may require this type of design. Whenever feasible, the tree lawn should be 8 feet [2.5 m] or wider, as discussed in **Sections 306.2.4 and 306.2.5**.

Where the total width of tree lawn and sidewalk is less than 6 feet [2.0 m], the minimum 3-foot [1.0 m] apron designs are inappropriate, and cannot be used, as they extend curb or sharp flares into the sidewalk area. For this condition, the sidewalk and curb are transitioned to meet the drive profile as shown on the lower portion of **Figure 803-3**. The profile of the drive meets the 1 inch [25 mm] depressed grade of the sidewalk as shown in the drive profile of **Figure 803-3**.

The tree lawn and walk design shown in **Figures 803-2 and 803-3** will keep storm water, flowing at the curb design height or less, from flowing over the sidewalk. If it is necessary to lower the curb and sidewalk more than 1 inch [25 mm], the drainage condition should be checked thoroughly.

804.3 Commercial Drive Profiles (Curbed Roadways)

Commercial drive profiles usually use a dropped curb across the approach. However, some commercial drives serving large traffic generators may be designed as at-grade intersections, without dropped curbs, because of their high traffic volumes.

Shown on **Figure 804-1** are the grade controls for commercial driveways. The grade should be as flat as possible and still meet drainage requirements. The 20-foot [6 m] length between grade breaks is required by the low clearance and the long axle spacing of the commercial design vehicle (**Figure 804-2**). Tree lawn profile design should be in accordance with **Figures 803-2 and 803-3**. The grade break at the face of the curb is critical for some commercial vehicles and the cross-section requirements for residential drives on curbed streets should be used.

805 Drive Pavement Design

805.1 Field Drives

Field driveways should be paved with 6 inches [150 mm] of 411 or 304 aggregate. They shall be paved from the edge of the pavement or treated shoulders, to a point where the grade of the new driveway intersects the grade of the existing driveway, or on relocated driveways to where the grade of the new driveway intersects the existing ground.

800 Access Control, R/W Use Permits and Drive Design

805.2 Residential Drives

Residential driveways shall be paved from the edge of new pavement to the point where the grade of the new driveway intersects the grade of the existing driveway, or on relocated driveways to the point where the geometric limits of the new driveway meet the existing driveway.

Residence driveways having an existing hard surface or an existing aggregate surface shall be replaced with a pavement of a similar type, insofar as practicable, using one of the following designs for the portion beyond the flared apron:

1.	6 inches [150 mm]	452	Non-Reinforced Concrete Pavement
2.	2 inches [50 mm]	448	AC Surface Course, Type 1, PG64-22
		408	Prime Coat
	6 inches [150 mm]	304	Aggregate Base (or 411 Stabilized Crushed Aggregate)
3.	1.25 inches [32 mm]	448	AC Surface Course, Type 1, PG64-22
		407	Tack Coat
	3.5 inches [90 mm]	301	Asphalt Concrete Base, PG64-22
4.	8 inches [200 mm]	304	Aggregate Base (or 411 Stabilized Crushed Aggregate)

Apply Item 408 Prime Coat at 0.4 gallon per square yard [1.8 l/m²].

Apply Item 407 Tack Coat at 0.04 gallon per square yard [0.18 l/m²].

The Item 448 Asphalt Concrete may be changed to match the asphalt concrete material specified on the adjacent pavement.

In uncurbed areas, the apron pavement design depends on the treated shoulder material as follows:

1. The flared portion of residence driveways adjacent to paved shoulders shall be constructed of the same material and composition as used in the treated shoulder paving.
2. The flared portion of residence driveways adjacent to surface treated aggregate shoulders shall be constructed of the same material as used in the treated shoulder, except it shall be surfaced with 2 inches [50 mm] of 448 Asphalt Concrete, Type 1, PG64-22.
3. The flared portion of residence driveways on projects for which earth shoulders are specified shall be paved with either 6 inches [150 mm] 452 Non-Reinforced Concrete Pavement, or with 2 inches 2 inches [50 mm] of 448 Asphalt Concrete, Type 1, PG64-22 on 6 inches [150 mm] of 411 or 304 aggregate.

805.3 Commercial Drives

Commercial driveways shall be paved from the edge of the new pavement to the point where the grade of the new driveway intersects the grade of the existing driveway, or on relocated driveways to the point where the geometric limits of the new driveway meet the existing driveway.

Commercial driveways having an existing hard surface or aggregate surface shall be replaced with a pavement of a similar type insofar as practical, using one of the following designs for the portion beyond the return or apron:

800 Access Control, R/W Use Permits and Drive Design

1.	8 inches [200 mm]	452	Non-Reinforced Concrete Pavement
2.	1.25 inches [32 mm]	448	AC Surface Course, Type 1, PG64-22
		407	Tack Coat, for Intermediate Course
	1.75 inches [45 mm]	448	AC Intermediate Course, Type 2, PG64-22
		408	Prime Coat
	8 inches [200 mm]	304	Aggregate Base
3	1.25 inches [32 mm]	448	AC Surface Course, Type 1, PG64-22
		407	Tack Coat
	5 inches [125 mm]	301	Asphalt Concrete Base, PG64-22
4.	10 inches [255]	304	Aggregate Base (or 411 Stabilized Crushed Aggregate)

Apply Item 408 Prime Coat at 0.4 gallon per square yard [1.8 l/m²].

Apply Item 407 Tack Coat at 0.04 gallon per square yard [0.18 l/m²].

The Item 448 Asphalt Concrete may be changed to match the asphalt concrete material specified on the adjacent pavement.

Additional thicknesses may be provided for the above courses where unusual weights or types of vehicles are expected to use the commercial driveway.

Commercial driveway aprons shall be constructed as previously outlined for residential driveway aprons, except that additional thicknesses should be provided to meet nominal pavement design for commercial driveways.

805.4 Pavement Treatment of Undisturbed Drives

The preceding treatment of driveways does not apply to resurfacing or widening and resurfacing projects when the existing driveway is not disturbed beyond the edge of proposed pavement. Item 411 or 304 aggregate shall be used to adjust aggregate driveways to meet the new pavement surface for widening and/or resurfacing projects. Asphalt concrete shall be used for adjusting bituminous or concrete driveways to meet the new pavement surface, which adjustment shall be accomplished within a reasonable distance from the edge of the pavement. As a general rule, this can be done within the limits of the roadway shoulders.

This page is intentionally blank

800 Access Control, R/W Use Permits and Drive Design


List of Figures

<u>Figure</u>	<u>Date</u>	<u>Title</u>
801-1	October 92	Guidelines for Limitation of Access at Diamond Type Interchanges
801-2	October 92	Guidelines for Limitation of Access at Cloverleaf Type Interchanges
802-1	December 90	Location of Drives in Relations to Property Lines
802-2	December 90	Corner Island Detail
803-1	October 92	Mailbox Facilities
803-2	October 92	Urban Residential Drive Details
803-3	October 92	Urban Residential Drive Details
803-8	October 92	Standard Commercial Drive Designs
803-9	October 92	Shopping Center & Industrial Drive Designs
804-1	October 92	Commercial Drive Profile Data
804-2	October 81	Commercial Design Vehicle

This page is intentionally blank

GUIDELINES FOR LIMITATION OF ACCESS AT DIAMOND TYPE INTERCHANGES

801-1

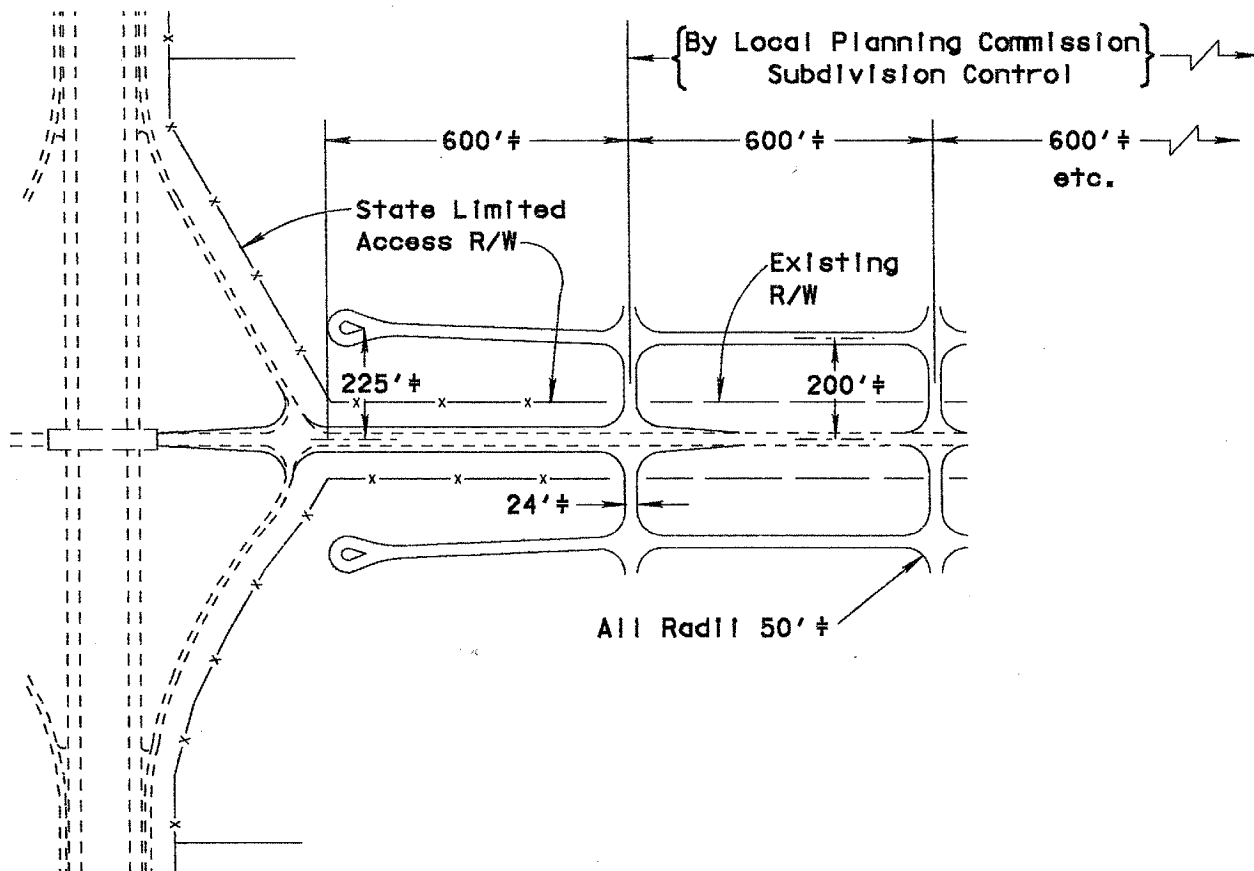
REFERENCE SECTION
801.25**NOTE:**

(± symbol indicates desirable minimum)

RURAL INTERCHANGES

The control of developments, adjacent to diamond type interchanges on limited access highways can be effectively controlled by county, regional, or city planning commissions, through subdivision controls and building developments, and in addition by local zoning commissions as to zoning regulations. County commissioners or township trustees may exercise similar controls in the absence of planning and zoning commissions.

GUIDELINES FOR LIMITATION OF ACCESS AT CLOVERLEAF-TYPE INTERCHANGES	801-2
	REFERENCE SECTION 801.25

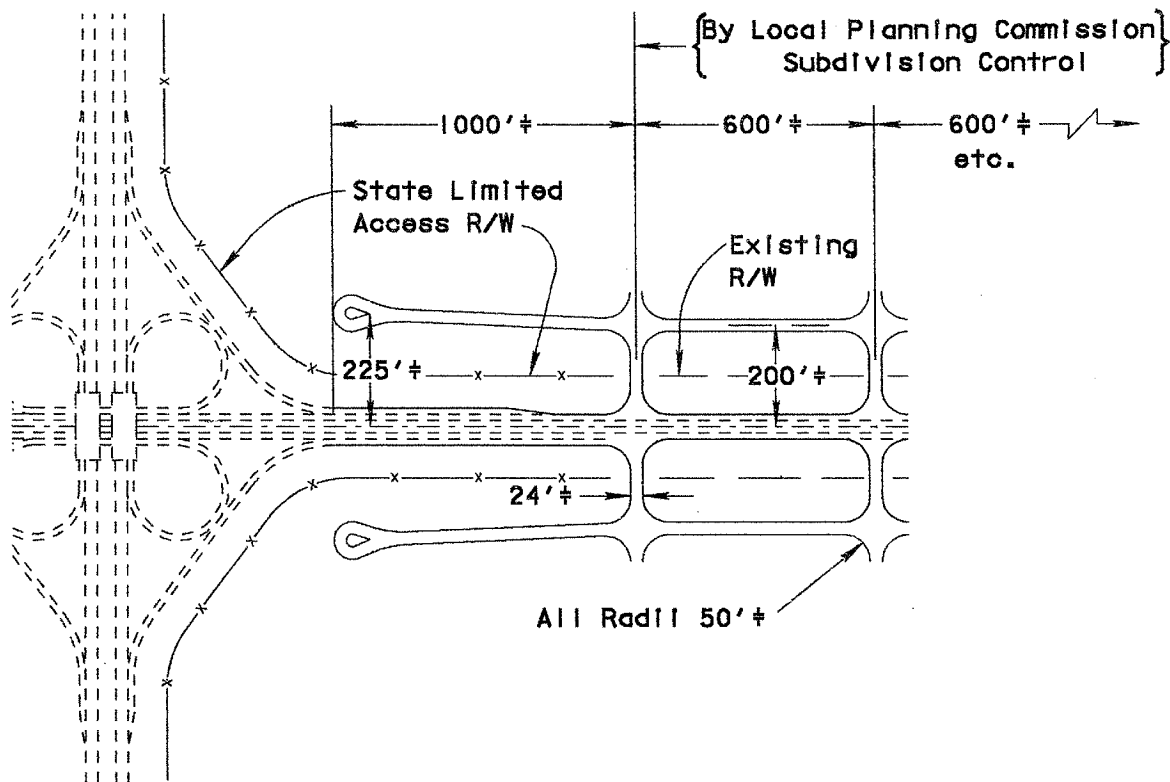

NOTE:
(± symbol indicates
desirable minimum)

RURAL INTERCHANGES


The control of developments, adjacent to cloverleaf type interchanges on limited access highways can be effectively controlled by county, regional, or city planning commissions, through subdivision controls and building developments, and in addition by local zoning commissions as to zoning regulations. County commissioners or township trustees may exercise similar controls in the absence of planning and zoning commissions.

LOCATION OF DRIVES IN RELATION TO PROPERTY LINES



802-1

REFERENCE SECTION
802.26

LOCATION OF APPROACHES ALONG CURBED HIGHWAYS

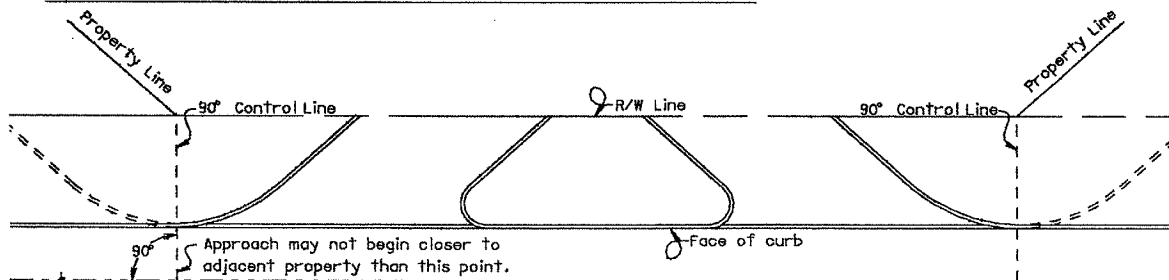

LOCATION OF APPROACHES ALONG UNCURBED HIGHWAYS

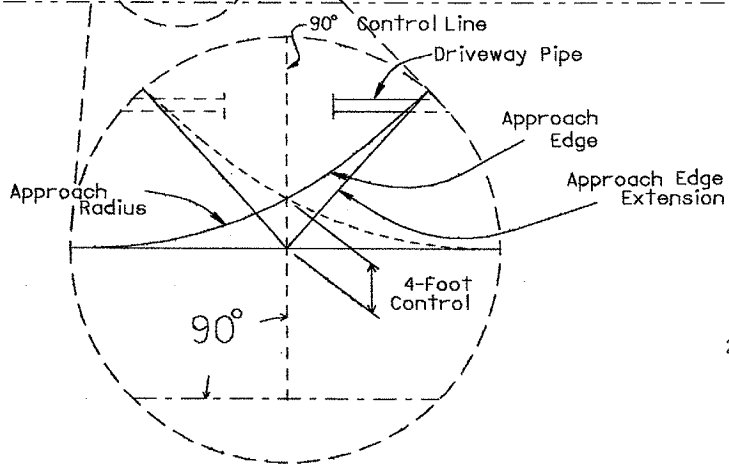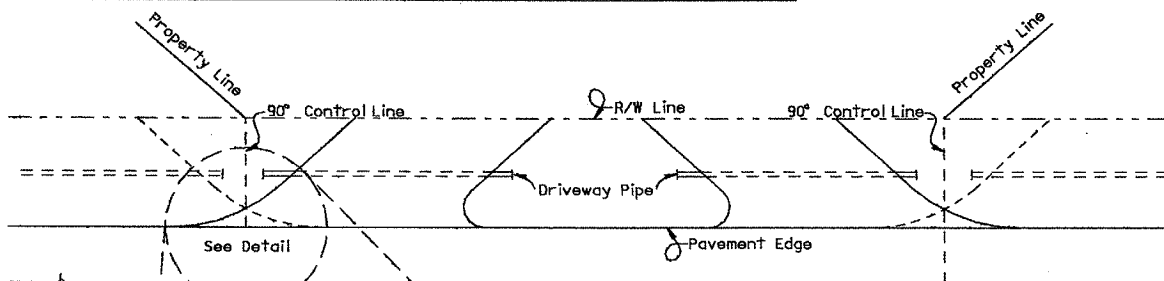

DETAIL FOR DETERMINING
MAXIMUM UTILIZATION OF
HIGHWAY FRONTAGE



1. Approach edge extension must not cross the 90° Control Line.
2. Approach Radius may cross the 90° Control line only within the limits of the 4-foot Control

CORNER ISLAND DETAIL

802-2



REFERENCE SECTION
802.27

INTERSECTION RADIUS LESS THAN 40 FEET

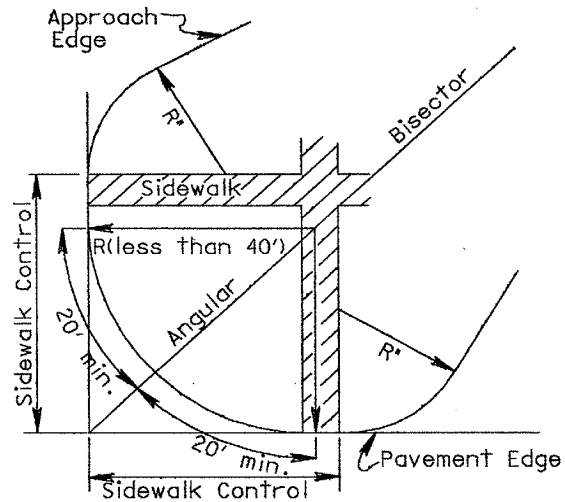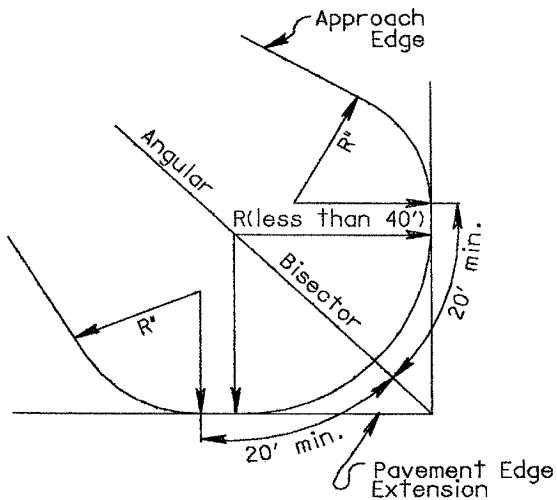

R INTERSECTION RADIUS
 R^* APPROACH RADIUS - Turning

INTERSECTION RADIUS GREATER THAN 40 FEET

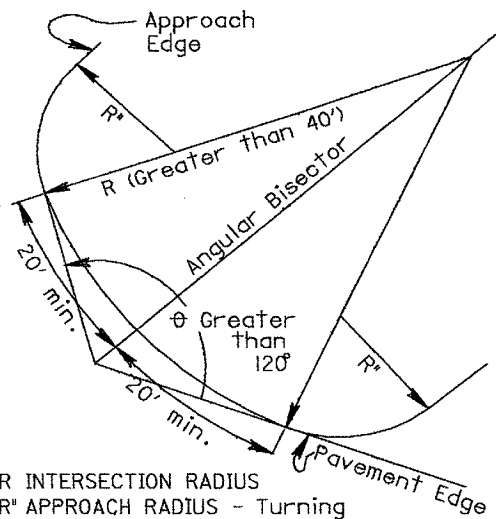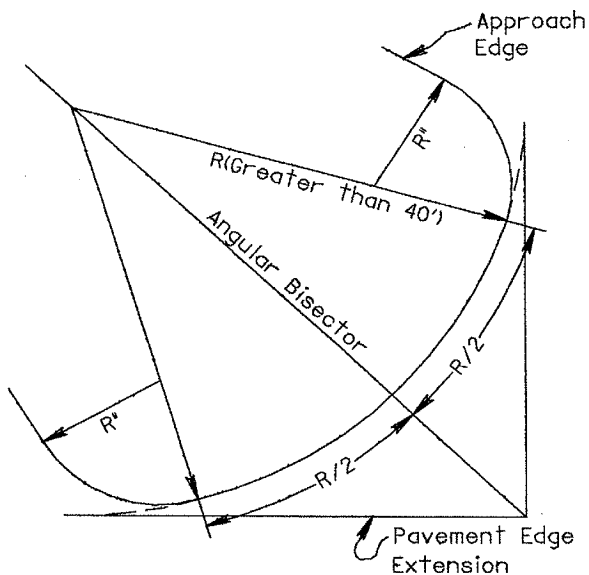

R INTERSECTION RADIUS
 R^* APPROACH RADIUS - Turning
 $R/2$ 20' Minimum. Maximum need not be greater than 40'.


October 1992

MAILBOX FACILITIES



803-1

REFERENCE SECTION


803.1

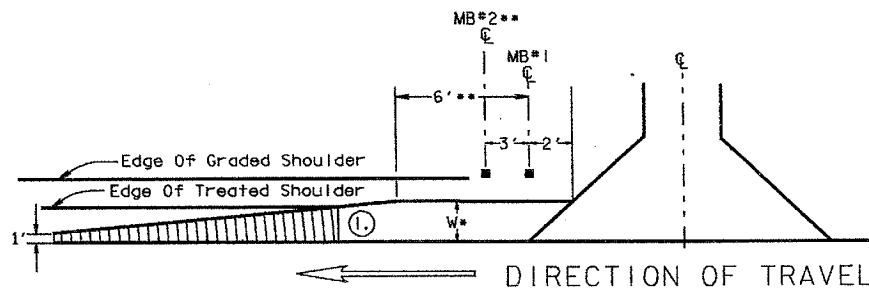

- ① End mailbox turnout at edge of treated shoulder or 1' which ever is greater
 - Where posts are behind guardrail, turnout shall extend to face of guardrail. Where no guardrail is required, turnout width shall be 6' minimum.
- ** Add 3' for each additional mailbox

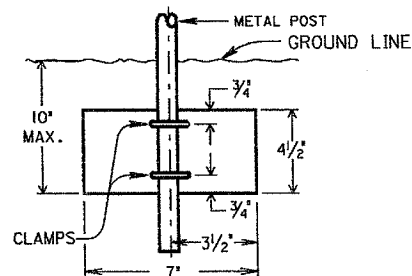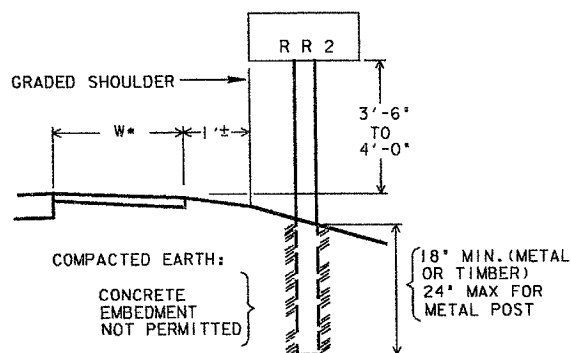

ANTI-TWIST PLATE

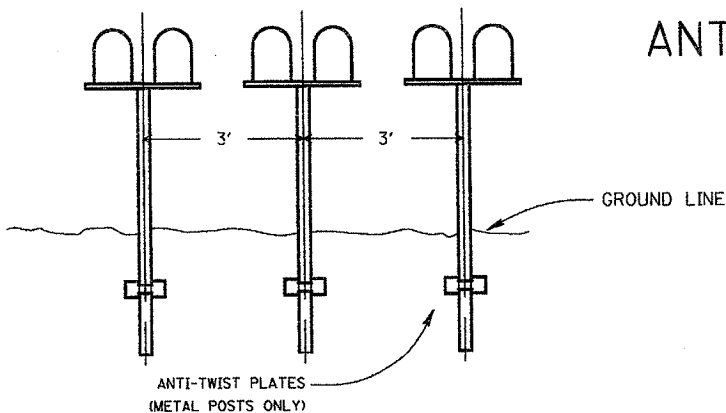


GROUP MAILBOX INSTALLATION


URBAN RESIDENTIAL DRIVE DETAILS

803-2



REFERENCE SECTION
803.3 & 804.2

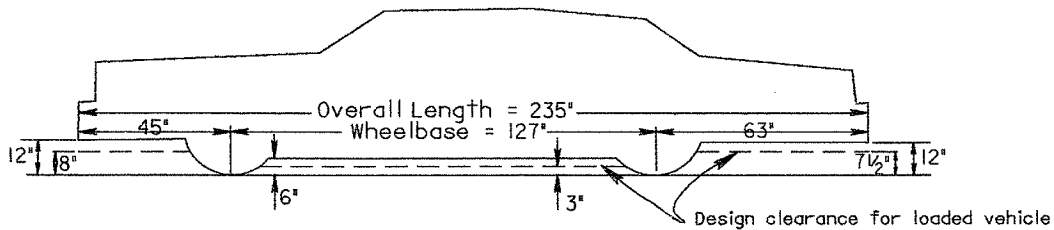

DESIGN VEHICLE

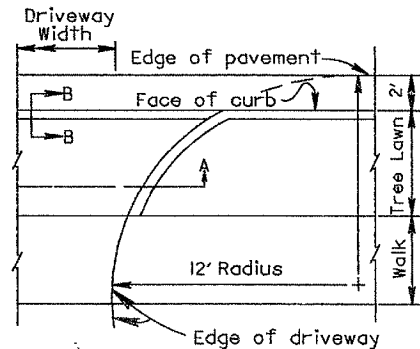


R = Tree Lawn width, 3' minimum
L = 1/2 Tree lawn width, 1'-6" min.

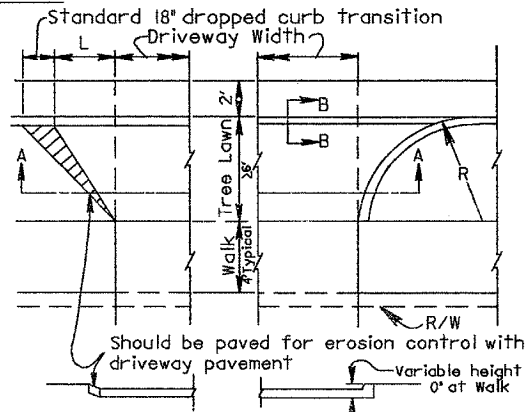

RESIDENTIAL DRIVEWAYS


(Plan view of three apron designs)

SECTION A-A

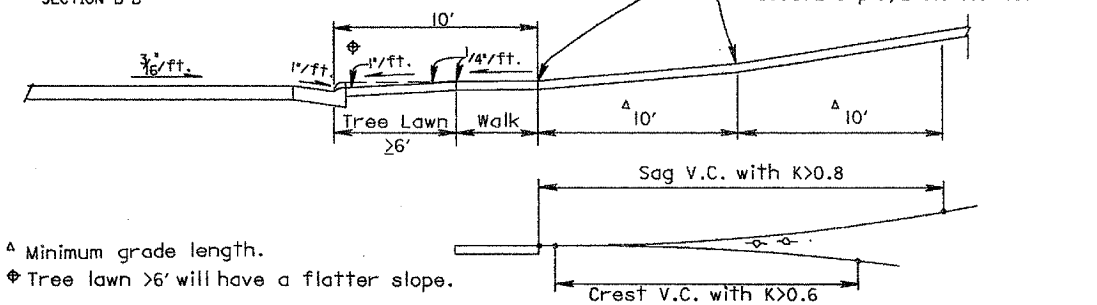

△ Minimum grade length.

◆ Tree lawn >6' will have a flatter slope.

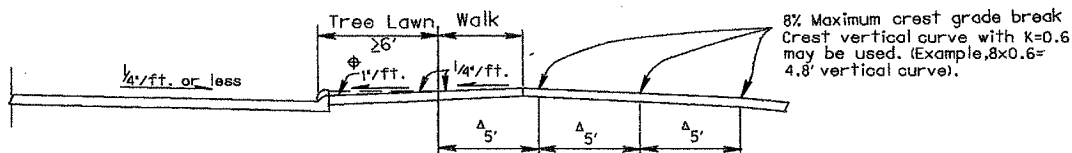

RESIDENTIAL DRIVEWAY PROFILES 6' OR GREATER TREE LAWN


STANDARD COMMERCIAL DRIVE DESIGNS

803-8

REFERENCE SECTION

803.51


UNCURBED DRIVEWAY ALONG UNCURBED HIGHWAY

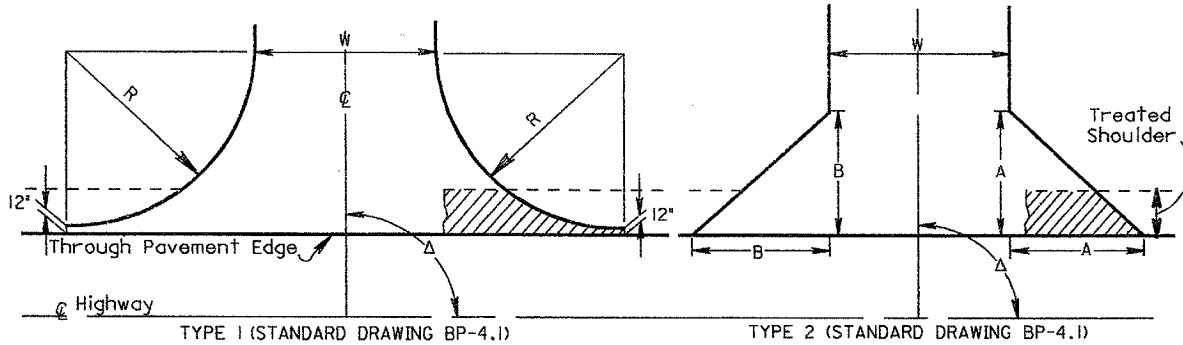


W = 35 ft. Maximum
 R = 25 ft. Minimum on Uncurbed Highway
 15 ft. Minimum on Curbed Highway
 T = Taper Curb Height from 6 in. to 2 in.
 in. 4 ft.
 Δ = 70° to 90° (two-way operation)

Δ	A	B
85° to 90°	20'	20'
75° to 85°	25'	16'
65° to 75°	28'	13'
55° to 65°	33'	12'

CURBED DRIVEWAY ALONG UNCURBED HIGHWAY

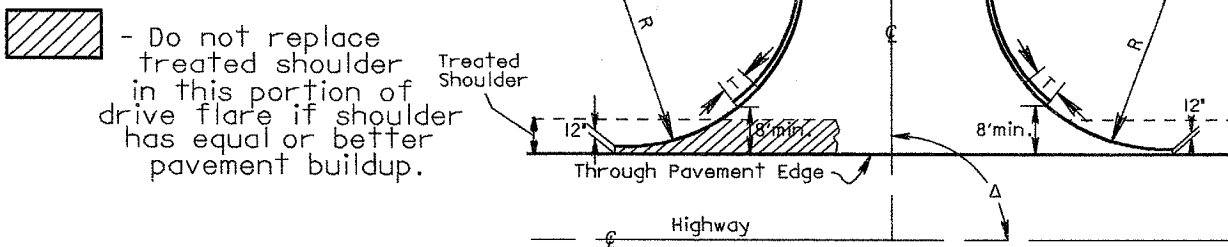


CURBED OR UNCURBED DRIVEWAYS ALONG CURBED HIGHWAY

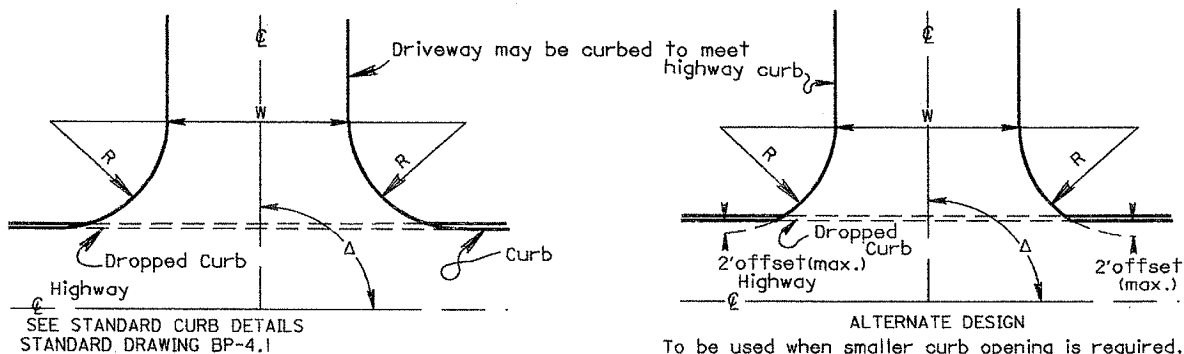

SHOPPING CENTER & INDUSTRIAL DRIVE DESIGNS


803-9

REFERENCE SECTION 803.6

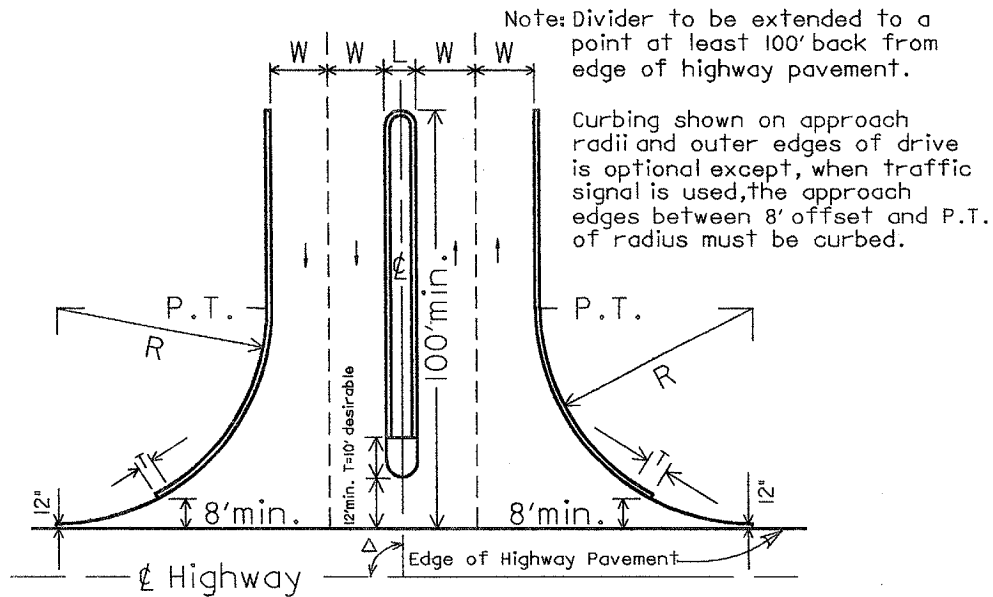

DIVIDED DRIVE

- T = Taper Curb Height from 6" to 2" in 4' or greater.
W = 10' to 14' per single traffic lane.
R = 35' Minimum, 50' Desirable.
▲ = 70° to 90°
L = Median Width, 6' Minimum.
(Median must be curbed for 6' to 15' widths)

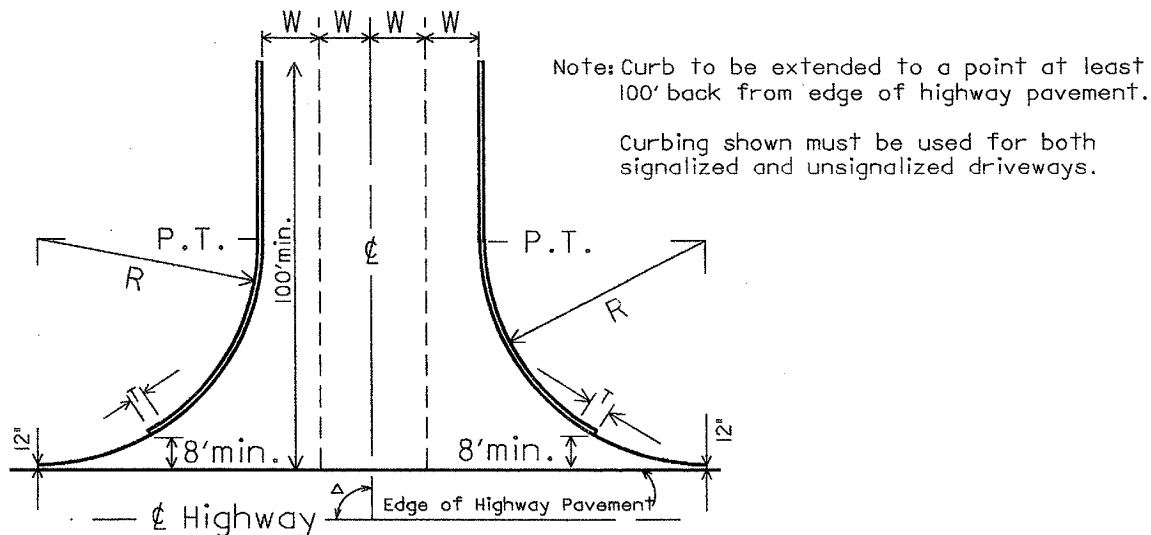


UNDIVIDED DRIVE

COMMERCIAL DRIVE PROFILE CRITERIA

804-1

REFERENCE SECTION

804.3

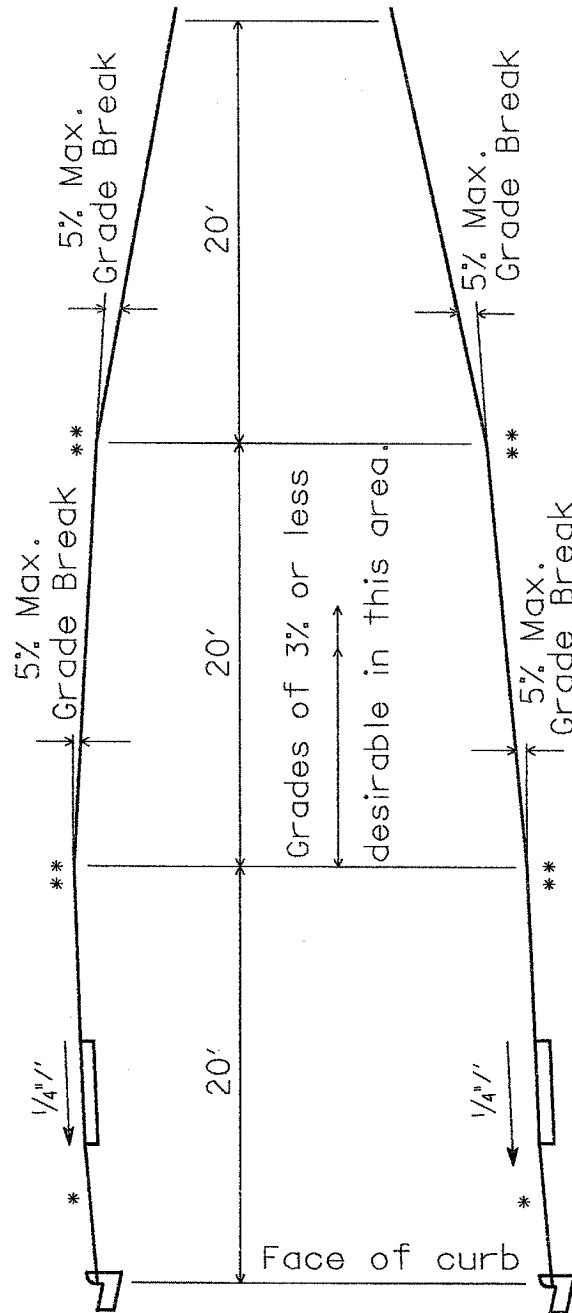

*See Fig. 803-2 & 803-3 for tree lawn and walk treatment.


**Although the use of grade breaks is allowable, a 10' rounding is desirable at these locations.

COMMERCIAL DESIGN VEHICLE

804-2

REFERENCE SECTION

804.3

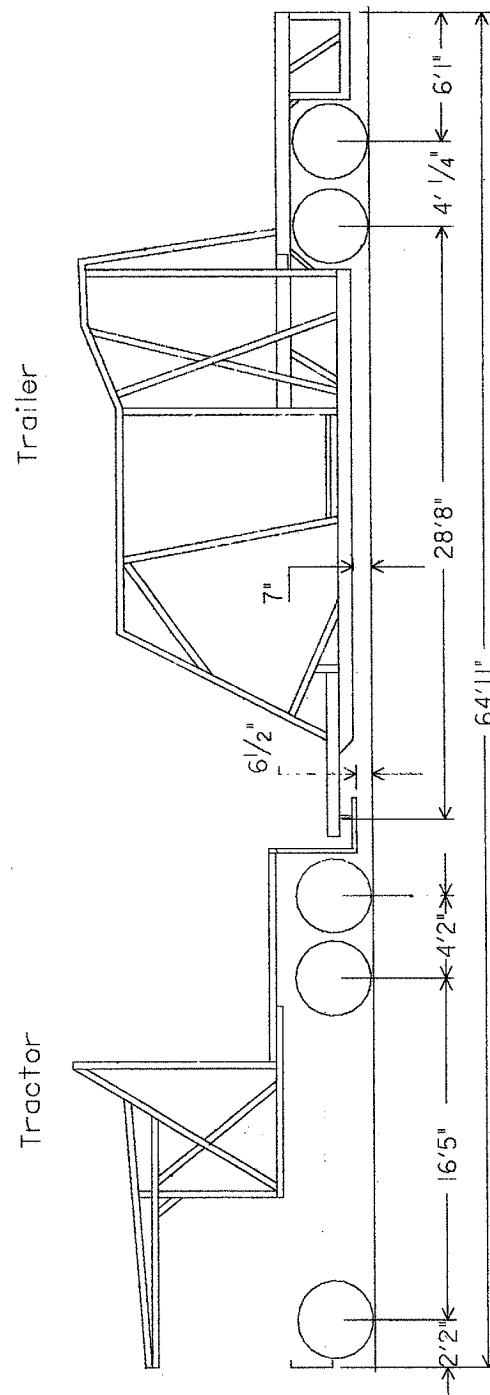

This page is intentionally blank

Table of Contents

900 Non-Freeway Resurfacing, Restoration and Rehabilitation (3R)	
Improvements	9-1
901 3R Improvements and Values	9-1
901.1 3R Improvements	9-1
901.2 3R Values	9-1
901.3 Exceptions to 3R Values	9-2
901.4 3R Design Speed	9-2
902 3R Sight Distance	9-2
902.1 Stopping Sight Distance	9-2
903 3R Horizontal Alignment	9-2
903.1 Horizontal Curves	9-2
903.2 Superelevation	9-2
904 3R Vertical Alignment	9-2
904.1 Grades	9-2
904.2 Crest Vertical Curves	9-2
904.3 Sag Vertical Curves	9-3
905 3R Cross Section Elements	9-3
905.1 Roadway Criteria	9-3
905.11 Lane Width	9-3
905.12 Shoulder Width	9-3
905.13 Pavement Cross Slopes	9-3
905.2 Bridge Criteria	9-3
905.21 Non-Freeway Bridges to Remain	9-3
906 3R Special Considerations	9-3
906.1 Clear Zone	9-3
906.2 Barriers	9-3
906.21 Adjusting Barrier Height	9-3
906.22 Guardrail Post Soil Support	9-3
907 Pavement Rehabilitation	9-4
907.1 Pavement	9-4
907.11 Pressure Relief Joints	9-4
907.12 Rehabilitation and Resurfacing	9-4
907.2 Shoulders	9-4
907.21 Shoulder Build Up	9-4
907.22 Heavy Overlay Shoulder Treatment	9-4

This page is intentionally blank

900 Non-Freeway Resurfacing, Restoration and Rehabilitation (3R) Improvements

901 3R Improvements and Values

901.1 3R Improvements

Modification of existing highway facilities requires a different approach to design than the construction of a new facility. The designer is charged with the responsibility of salvaging as much of the existing as possible while, at the same time, updating the facility to improve safety and operation.

A special classification of improvements for non-freeway resurfacing, restoration and rehabilitation projects has therefore been established, referred to as 3R improvements. The purpose of 3R is to preserve and extend the life of existing highways and to enhance safety.

Figure 901-1 outlines the factors which must be considered to determine if a project qualifies as a non-freeway 3R improvement. Obviously, the first factor to consider is the functional classification of the facility. In order to be considered as a non-freeway 3R improvement, the functional classification must be expressway, arterial, collector or local. Interstate or other freeways do not qualify for non-freeway 3R improvements.

The next thing that must be considered is the type of improvement. In order to qualify as a non-freeway 3R improvement, the work to be accomplished must fall into one or more of the following:

- A. Resurfacing
- B. Pavement structural and joint repair
- C. Minor lane (less than a full lane) and shoulder widening
- D. Minor alterations to vertical grades and horizontal curves
- E. Bridge repair
- F. Removal or protection of roadside obstacles
- G. Spot safety improvements

Non-freeway functional classification projects meeting the above criteria are considered to qualify as non-freeway 3R improvements. Projects not included in the types of improvements listed above are considered either reconstruction or new construction. 3R improvements may be combined on projects with reconstruction improvements. However, the reconstruction improvement portion of the project must meet the normal design criteria noted in previous sections of the manual and would not qualify for the use of 3R values discussed in Section 901.2. If 3R and reconstruction improvements are combined into one project, the limits of each must be clearly defined in the review process and in the final plans.

901.2 3R Values

Once a project qualifies as a non-freeway 3R improvement, further investigation of accident history is required to determine if special 3R values may be used or if normal design criteria is required. Normal design criteria is considered to be the criteria for new or reconstructed facilities included in previous sections of the manual. The 3R values were developed using the concepts contained in "Special Report 214, Designing Safer Roads, Practices for Resurfacing, Restoration and Rehabilitation", Transportation Research Board, 1987.

As shown in the flow chart on Figure 901-1, an investigation must be made as to whether an accident problem exists. A 3R Safety Study is therefore required to make this determination. Guidelines for completing this Safety Study, as well as sample forms, threshold values and example studies can be found in Volume 3 of the Location and Design Manual. If significant accident problems are identified, a more detailed study is required to determine the type and frequency of the accidents and whether they can be attributed to any substandard condition on the existing facility. Whenever it is determined that existing roadway elements may have contributed to an accident problem, normal design criteria must be used in correcting those specific elements in that portion of a project where the problem exists. Other portions of the same project and other elements which are not contributing to an accident problem may utilize 3R values.

3R Improvements

Section 900 includes 3R values for many design features. If a 3R value for a certain feature is not addressed in this section, the designer should refer to other sections of this manual.

901.3 Exceptions to 3R Values

There may be cases on projects eligible for the use of 3R values where existing conditions are less than 3R values. When existing features do not meet 3R values, there are three alternative courses of action which may be taken:

1. Retain existing conditions and obtain a design exception based on normal design criteria.
2. Design to less than normal design criteria and obtain a design exception based on normal design criteria.
3. Design to normal design criteria.

It is important to remember that, if a design exception is required, the design exception must be based on normal design criteria.

901.4 3R Design Speed

The design speed for 3R improvements shall be the legal speed for the facility.

902 3R Sight Distance

902.1 Stopping Sight Distance

Existing stopping sight distances are considered acceptable (except as discussed in 904.2).

903 3R Horizontal Alignment

903.1 Horizontal Curves

An existing horizontal curve may be retained if:

- A. The design ADT is less than 750, or
- B. The existing degree of curve provides an actual design speed that is not lower than 15 mph below the design speed of the facility.

903.2 Superelevation

Existing superelevation may be retained if:

- A. The design ADT is less than 750, or
- B. The roadway is a low speed urban facility (40 mph or less), or
- C. For rural and high-speed urban conditions, the combination of existing superelevation and degree of curve provides an actual design speed that is not lower than 15 mph below the design speed of the facility.

See Figures 903-1 and 903-2 for determining the design speed met for an existing curve with an existing maximum superelevation rate. Figure 903-1 is for rural roadways and is based on a maximum superelevation rate of .083 ft/ft. Figure 903-2 is for high-speed urban roadways and is based on a maximum rate of .06 ft/ft.

If an existing horizontal curve is retained, the existing superelevation must be improved to the point where the combination of superelevation and existing degree of curve provides an actual design speed that is not lower than 15 mph below the design speed of the facility. Existing superelevation may be improved beyond this point if it does not meet the criteria discussed in Section 202.41. However, it is suggested that deficient (or excessive) superelevation be corrected by no more than 0.02 feet per foot per each resurfacing unless more is needed to satisfy condition B above.

904 3R Vertical Alignment

904.1 Grades

Existing grades may be retained.

904.2 Crest Vertical Curves

An existing crest vertical curve may be retained if all of the following conditions exist:

- A. The design ADT is 1500 or less, and

B. The existing crest vertical curve design speed, based on minimum stopping sight distance, is 20 mph or less below the design speed of the facility, and

C. The existing crest vertical curve does not hide from view a potential problem area, such as: an intersection, a sharp horizontal curve or a narrow bridge.

904.3 Sag Vertical Curves

Existing sag vertical curves may be retained.

905 3R Cross Section Elements

905.1 Roadway Criteria

905.11 Lane Width

The existing lane width may be retained if it meets the values shown in Figure 905-1. The minimum treated shoulder width should be 2 feet of compacted aggregate unless turf shoulders are permitted.

905.12 Shoulder Width

The existing graded shoulder width may be retained if it meets the values shown in Figure 905-1.

905.13 Pavement Cross Slopes

When an existing pavement cross slope does not meet the criteria outlined in Section 301.15, it should be corrected if the project includes resurfacing.

905.2 Bridge Criteria

905.21 Non-Freeway Bridges to Remain

Figure 905-2 contains the minimum criteria to permit non-freeway bridges to remain. The criteria shown is applicable for all non-freeway bridges except those considered to be new or reconstructed (See Figure 302-2).

906 3R Special Considerations

906.1 Clear Zone

The guidelines for clear zone in Section 600 are applicable to new construction or major reconstruction. On 3R improvements, unless accident history, public complaint or site inspections indicate a problem, it may not be cost effective to fully comply with the clear zone requirements in Figure 601-2. Therefore, the clear zone criteria shown in Figure 601-2 may be reduced by 50% on 3R improvements. It is recommended that all obstacles within this clear zone be considered for removal, treatment, or protection. It shall not be a requirement to remove or treat obstacles that are not within the existing R/W. The clear zone width shall not be less than the graded shoulder widths shown on Figure 905-1 for rural sections or 1.5 feet in curbed urban areas, and all obstacles within these zones shall be removed, treated, or protected.

906.2 Barriers

906.21 Adjusting Barrier Height

On pavement overlay projects, existing steel beam guardrail shall be raised to standard height if the top of the rail height would be less than 24 inches. See Standard Construction Drawing GR-2.1 for Raising Guardrail Height.

If the existing guardrail is Type 4 and it is either too low or the current traffic volumes exceed 400 ADT, the Type 4 guardrail should be replaced with Type 5.

Concrete Barrier must be replaced, raised or extended in height whenever the overlay is such that it decreases the effective height of the barrier to less than 29 inches.

906.22 Guardrail Post Soil Support

Where guardrail is to be replaced or installed at new locations on existing facilities, the designer should ensure that the proper soil support is not compromised due to the location of the guardrail installation relative to the embankment slope break point.

3R Improvements

Proper soil support is provided under the conditions shown on Figure 906-1 where standard length guardrail posts (6'-0") are depicted. Figure 906-1 also depicts conditions where proper soil support for guardrail posts is not provided, and longer posts should be specified in the plans.

907 Pavement Rehabilitation

907.1 Pavement

907.11 Pressure Relief Joints

On resurfacing projects involving jointed, rigid pavement, Type B or C (Standard Construction Drawing BP-2.4) pressure relief joints shall be installed at all bridge approaches and at about 2000 foot intervals in any pavement that has a history of blowup problems, except that pressure relief joints shall not be installed:

- A. In pavements where these type joints now exist.
- B. Within 2000 feet of a full depth flexible repair which extends across an entire pavement width.
- C. Where the uninterrupted length of the section of rigid pavement is 500 feet or less.

907.12 Rehabilitation and Resurfacing

Design guidelines for minor rehabilitation and resurfacing projects are included in Appendix B.

907.2 Shoulders

907.21 Shoulder Build Up

When a paved shoulder is overlaid, the area outside the paved portion shall be adjusted to grade with Item 617 Compacted Aggregate, Type A, no more than 4" thick and sloped to drain at the rate of 3/4 inch per foot. On projects with overlays requiring more than 4" of material, the top 4 inches next to the paved shoulder is to be Item 617, Compacted Aggregate, Type A, and the remainder constructed using Item 203 Embankment.

907.22 Heavy Overlay Shoulder Treatment


When the overlay of the paved shoulder is too thick to use the treatment described in 907.21, the shoulder area outside the paved portion and slope should be built up to compensate for the additional thickness as shown in Figure 907-1.

900 Resurfacing, Restoration and Rehabilitation (3R) Projects

List of Figures

<u>Figure</u>	<u>Subject</u>
901-1	Flow Chart to Determine Use of 3R Values
903-1	Design Speed Met by Combination of Degree of Curve and Superelevation Rate for Rural Highways
903-2	Design Speed Met by Combination of Degree of Curve and Superelevation Rate for High-Speed Urban Highways
905-1	3R Values - Lane and Graded Shoulder Widths
905-2	Criteria for Non-Freeway Bridges to Remain
906-1	Guardrail Post Length Determination
907-1	Heavy Overlay Shoulder Treatment

This page is intentionally blank

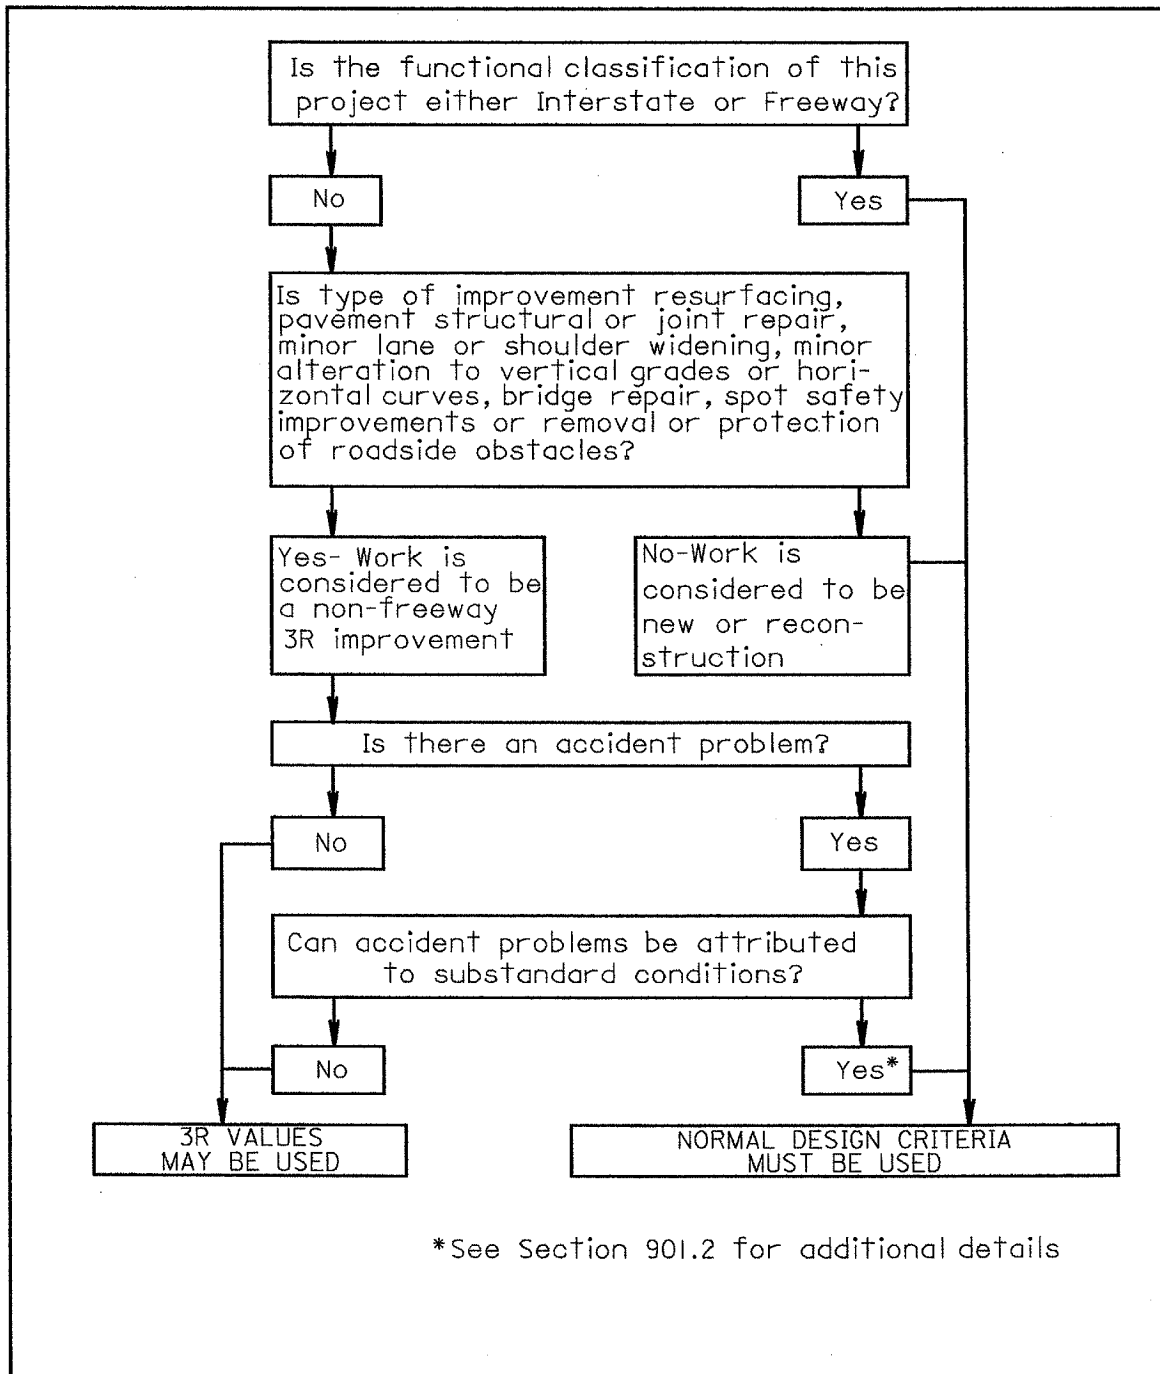**FLOW CHART TO DETERMINE
USE OF 3R VALUES****901-1****REFERENCE SECTION****901.2**


**DESIGN SPEED MET BY COMBINATION
OF DEGREE OF CURVE AND SUPERELEVATION
RATE FOR RURAL HIGHWAYS**

903-1

REFERENCE SECTION

903.2

NOTE - Based on a maximum rate of 0.083 ft/ft and data contained on Figure 202-3.

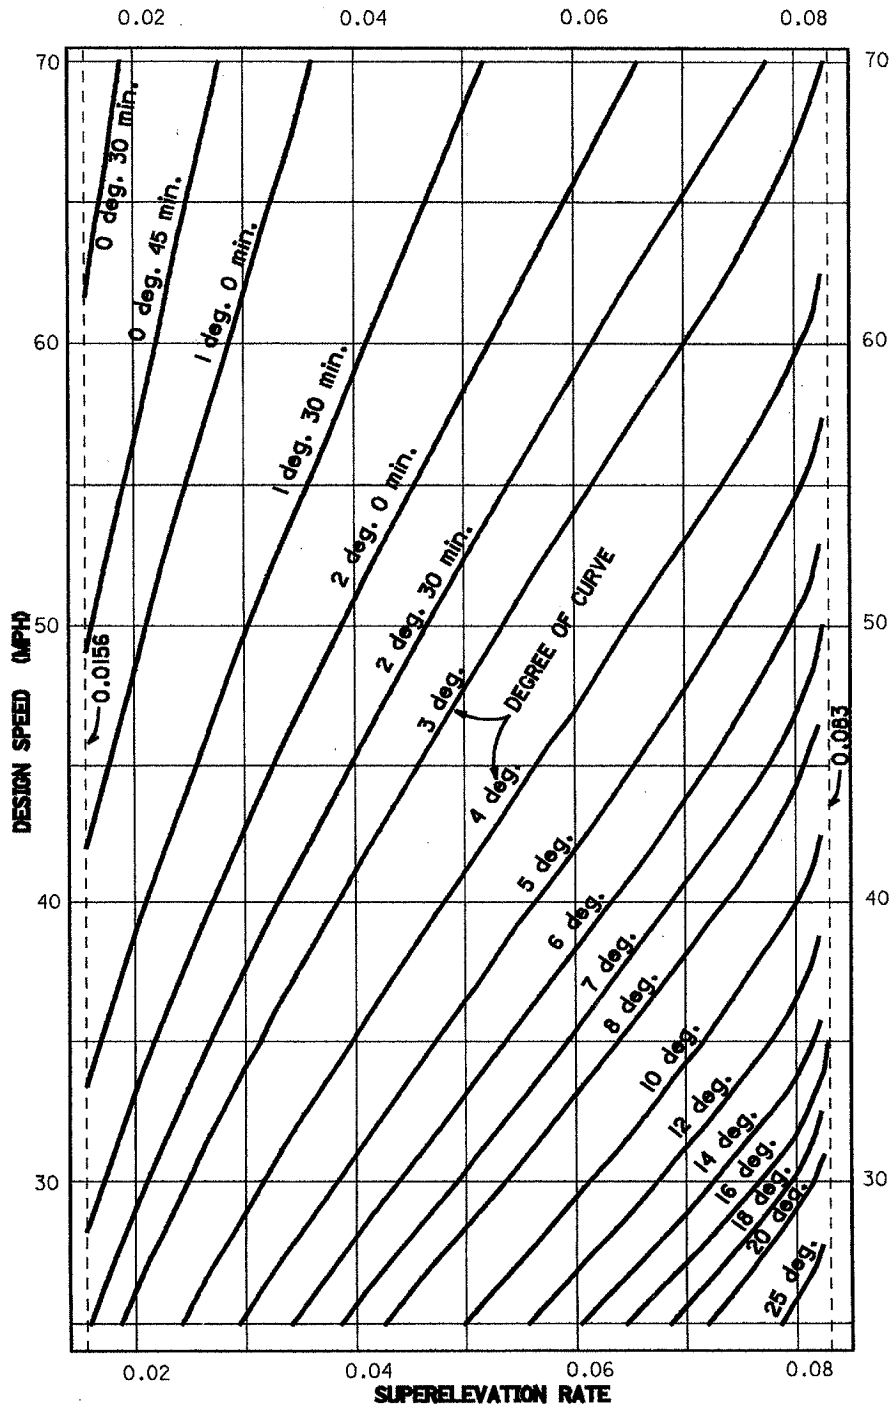

**DESIGN SPEED MET BY COMBINATION OF
DEGREE OF CURVE AND SUPERELEVATION
RATE FOR HIGH-SPEED* URBAN HIGHWAYS**


903-2

REFERENCE SECTION

903.2

NOTE - Based on a maximum rate of 0.06 ft/ft and data contained on Figures 202-4 and 202-10.

*Greater than 40 mph.

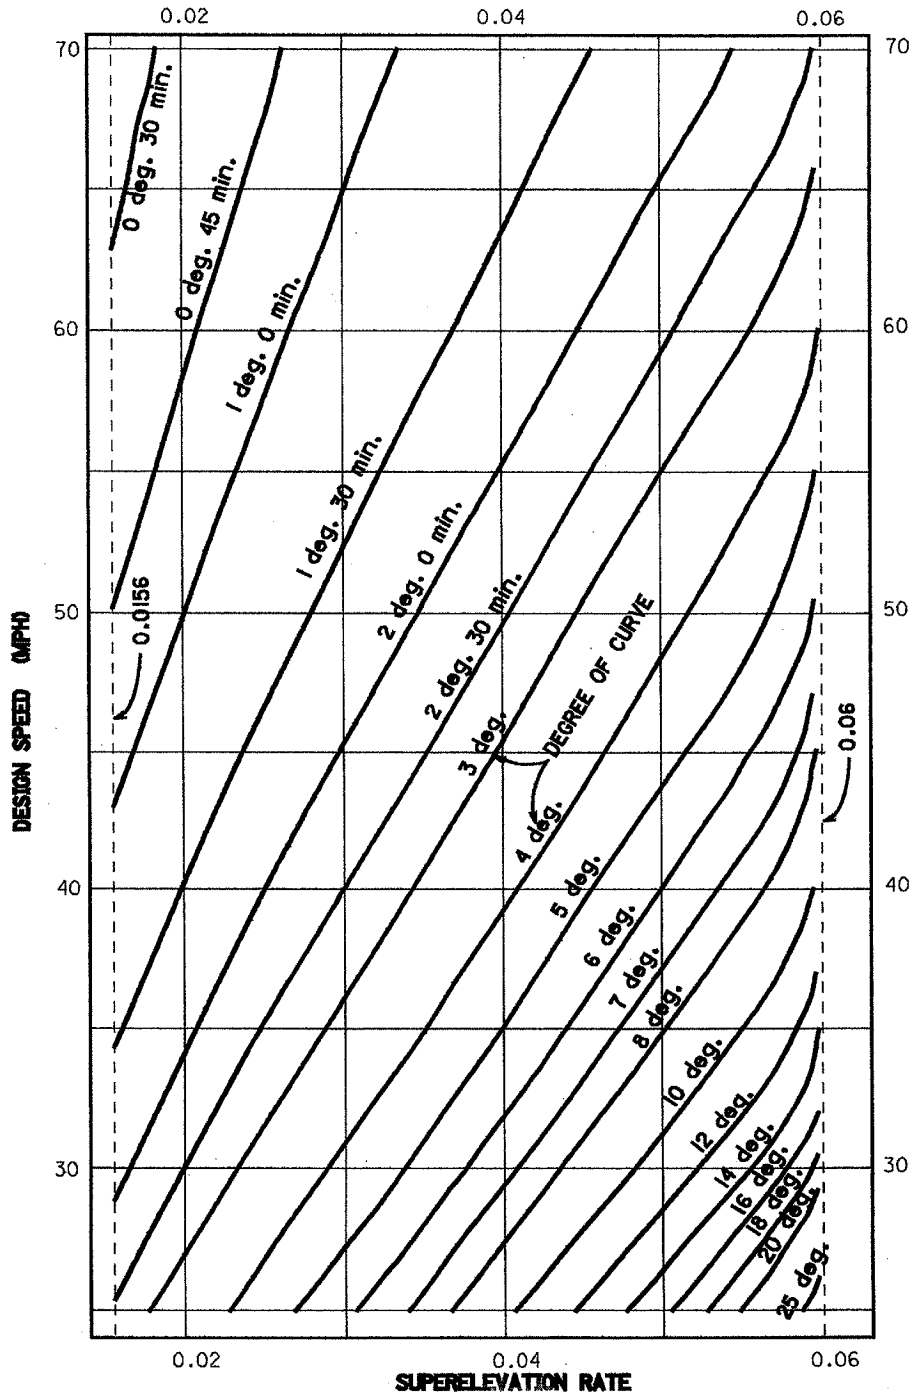

3R VALUES LANE AND GRADED SHOULDER WIDTHS	905-1
	REFERENCE SECTION 905.11, .12

RURAL AREAS

DESIGN ADT	DESIGN SPEED	LANE WIDTH (A)		GRADED SHOULDER WIDTH (C)	
		<10% TRUCKS	≥10% TRUCKS	WITH GUARDRAIL (B)	W/O GUARDRAIL
LESS THAN 750	50 OR OVER	10'	10'	4'	2'
	LESS THAN 50	9'	10'	4'	2'
751 TO 2000	50 OR OVER	11'	12'	5'	3'
	LESS THAN 50	10'	11'	4'	2'
OVER 2000	50 OR OVER	11'	12'	8'	6'
	LESS THAN 50	11'	12'	8'	6'

URBAN AREAS

FUNCTIONAL CLASSIFICATION	LANE WIDTH (A)	CURBED SHOULDER WIDTH (NO PARKING)	PARKING LANE
ARTERIAL STREETS	11' (D)	0'	8'
COLLECTOR STREETS	10'	0'	Comm./Ind. 8'
			Residential 7'
LOCAL STREETS	10'	0'	7'

- At least one 12' lane in each direction must be provided on all Federal aid Primary projects.
- Guardrail offset distances shall be the same as the values shown in the W/O guardrail column above.
- Divided facilities shall have a minimum median graded shoulder width of 4' W/O guardrail and 6' with guardrail.
- 10' lane widths are acceptable on minor arterials.

CRITERIA FOR NON-FREEWAY BRIDGES TO REMAIN

905-2

**REFERENCE SECTION
905.21**

FUNCTIONAL CLASSIFI- CATION	DESIGN ADT	MINIMUM LATERAL CLEARANCE (H)		MINIMUM VERTICAL CLEARANCE	MINIMUM DESIGN LOADING
		ON BRIDGE (A)	UNDER BRIDGE (D)		
EXPRESSWAYS AND ARTERIALS	>4000	6' (B)	CURBED OR TREATED SHOULDER WIDTH PLUS BARRIER CLEARANCE (E)	14'	HS-20 (F)
	≤4000	3'			
COLLECTORS	>4000	6' (B)		14'	HS-15
	2001-4000	3'			
	750-2000	2'			
	<750	0'			
LOCALS	>4000	6' (B)		14'	HS-15 (G)
	2001-4000	3'			
	750-2000	2'			
	<750	0' (C)			

THIS TABLE IS APPLICABLE TO ALL NON-FREEWAY BRIDGES EXCEPT THOSE CONSIDERED NEW OR RECONSTRUCTED

- A. Distance measured to curb or railing, whichever is less. In no case shall the minimum width be less than the approach pavement.
- B. On mainline bridge having a length of 100' or more, the minimum may be reduced to 3'
- C. One lane bridges may have a total minimum width of 18'.
- D. Distance measured to face of walls, abutments or piers.
- E. See Figure 601-6 for minimum barrier clearance.
- F. Existing bridges should be considered for ultimate replacement or strengthening if the operating rating capacity cannot safely service the system for an additional 20 years. The existing structure shall be capable of carrying at least 100% of the state's legal load at operating capacity.
- G. Minimum loading may be H-10 if current ADT is 50 or less.
- H. Divided facilities shall have a minimum of 3' lateral clearance on the median side.


GUARDRAIL POST LENGTH DETERMINATION

906-1

**REFERENCE SECTION
906.22**

**Standard post lengths may be used for the
situations depicted below:**

(6'-0" posts, 3'-5" min. embedment depth)

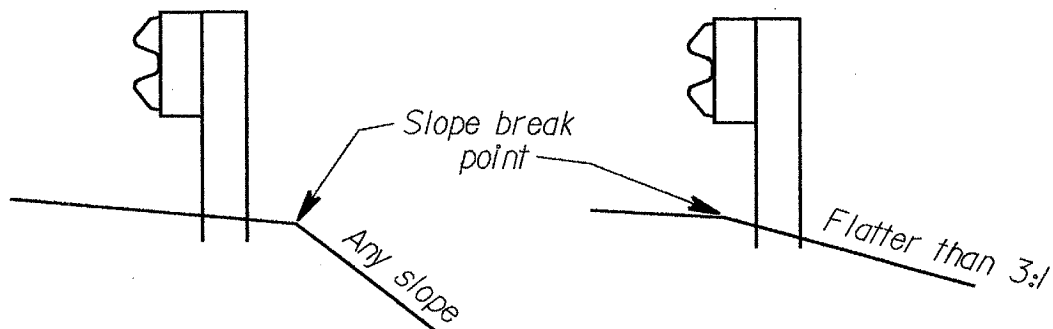


*Locations where the slope break point
is at or beyond the back of the posts.*

*Locations where the foreslope
is flatter than 3:1, regardless of
location of slope break point.*

**Longer post lengths are required for the
situations depicted below:**

(9'-0" posts, 6'-5" min. embedment depth)

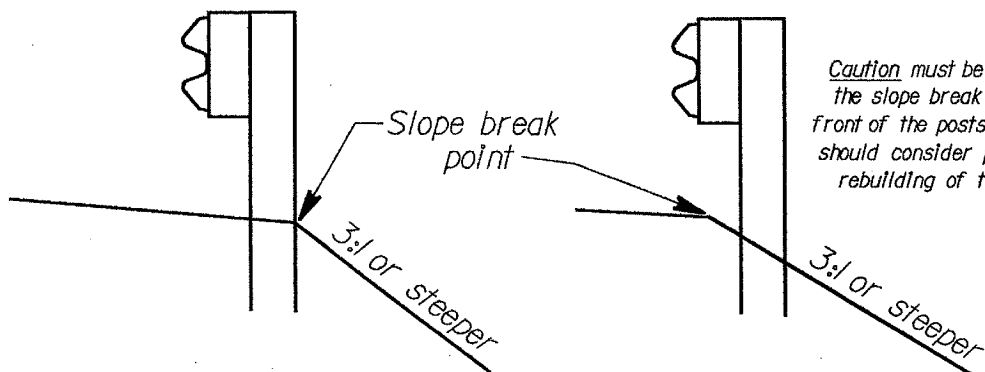

*Caution must be taken when
the slope break point is in
front of the posts. The designer
should consider providing for
rebuilding of the shoulder.*




*Any installation where foreslopes are 3:1 or steeper and the slope
break point is at, or in front of, the back of the posts.*

October 1992

HEAVY OVERLAY SHOULDER TREATMENT

907-1

REFERENCE SECTION
907.22

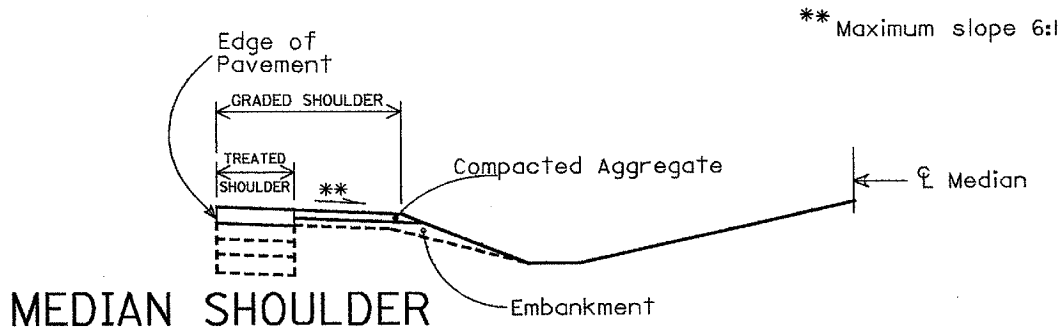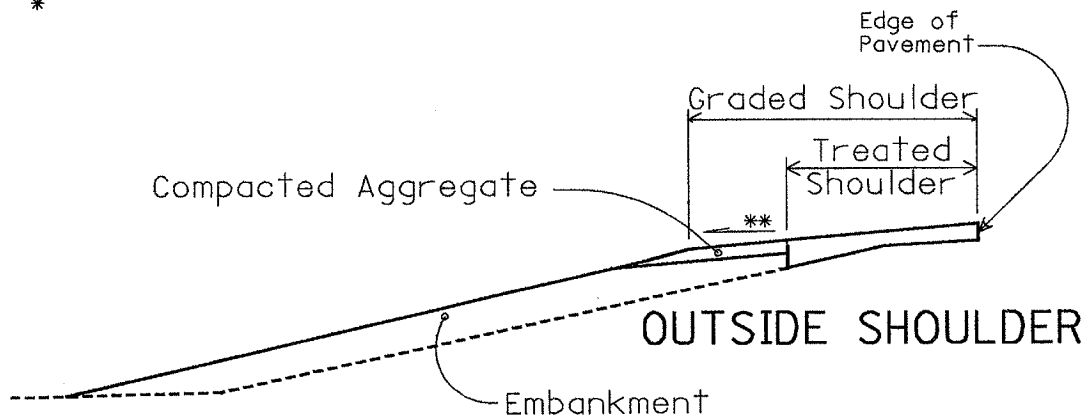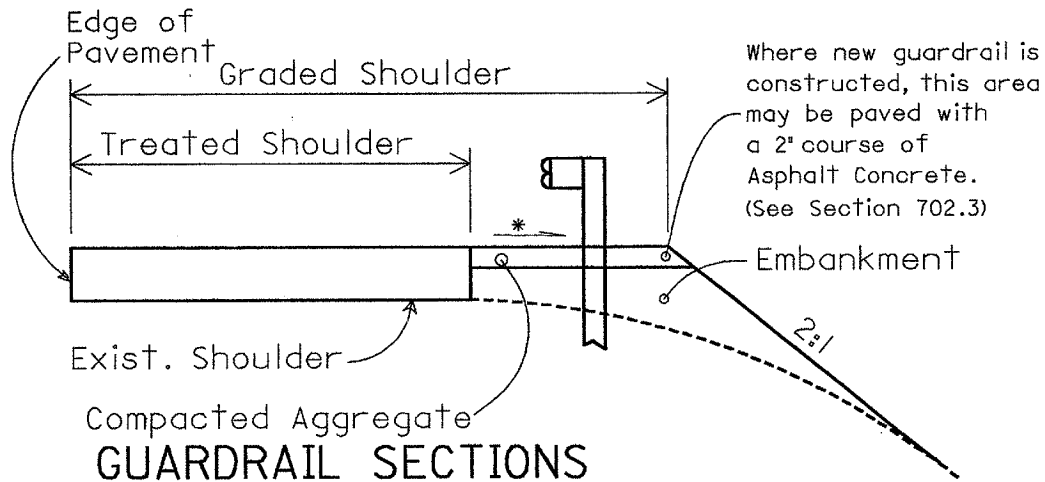

This page is intentionally blank

Appendices

Table of Contents

Appendix A

Interchange Justification/Interchange Modification Studies

NAME	DATE	REFERENCED SECTION
Access to the Interstate System (8/27/09)	Oct. 2011	550.1
IJS/IMS Report Outline	Oct. 2004	550.2
Requirement Checklist	Oct. 2011	550.2

Appendix B

Roadway Sample Plan Notes

NUMBER	NAME	DATE	REFERENCED SECTION
R111	Connection Between Existing and Proposed Guardrail	Oct. 2009	n/a
R112	Item 606 - Anchor Assembly, Type B	Apr. 2011	603.3.2
R113	Item 606 - Anchor Assembly, Type E	Apr. 2011	603.3.3
R116	Paving Under Guardrail	Oct. 2009	n/a
R118	Item Special - Mailbox Support	Oct. 2009	n/a
R123	Item 606 - Impact Attenuator, Type 1 (Unidirectional or Bidirectional)	Apr. 2011	603.4.1
R124	Item 606 - Impact Attenuator, Type 2 (Unidirectional or Bidirectional)	Apr. 2011	603.4.2
R125	Item 606 - Impact Attenuator, Type 3 (Unidirectional or Bidirectional)	Apr. 2011	603.4.3
R127	Item 606 - Cable Guardrail	Apr. 2011	602.2.2.2

Appendices

Appendix C

Design Software

Default Values and Guidance

Appendix A

FHWA Policy – Additional Interchanges to the Interstate System

[Federal Register: August 27, 2009 (Volume 74, Number 165)]
[Notices]
[Page 43743-43746]
From the Federal Register Online via GPO Access [wais.access.gpo.gov]
[DOCID:fr27au09-110]

DEPARTMENT OF TRANSPORTATION

Federal Highway Administration

Access to the Interstate System

AGENCY: Federal Highway Administration (FHWA), DOT.

ACTION: Notice of revised policy statement.

SUMMARY: This document issues the revised FHWA policy statement regarding requests for new or modified access points to the Interstate System. The policy includes the requirements for the justification and documentation necessary to substantiate any request that is submitted to FHWA for approval.

FOR FURTHER INFORMATION CONTACT: For technical information: Mr. Jon Obenberger, Office of Program Administration (HIPA-20), (202) 366-2221. For legal information: Mr. Robert Black, Office of the Chief Counsel (HCC-32), (202) 366-1359, Federal Highway Administration, 1200 New Jersey Avenue, SE., Washington, DC 20590. Office hours are from 7:45 a.m. to 4:15 p.m., e.t., Monday through Friday, except Federal holidays.

SUPPLEMENTARY INFORMATION:

Background

The surface transportation system plays a key role in shaping the economic health, quality of life and sustainability of a metropolitan area, region, and State. The Interstate System is a critical element providing a network of limited access freeways which facilitate the distribution of virtually all goods and services across the United States. The Interstate System also influences the mobility and safety of people and goods by providing access to local highways and a network of public

[[Page 43744]]

streets. As a result, it is in the national interest to preserve and enhance the Interstate System to meet the needs of the surface transportation system of the United States for the 21st century.

The FHWA's Policy on Access to the Interstate System provides the requirements for the justification and documentation necessary to substantiate any proposed changes in access to the Interstate System.

Appendix A

This policy also facilitates decisionmaking regarding proposed changes in access to the Interstate System in a manner that considers and is consistent with the vision, goals and long-range transportation plans of a metropolitan area, region and State. This policy reflects the congressional intent and direction provided in section 1909(a)(3) of the Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (SAFETEA-LU) (Pub. L. 109-59, 119 Stat. 1144), which amended section 101 of title 23, United States Code by adding subsection (b)(3)(H): ``the Secretary should take appropriate actions to preserve and enhance the Interstate System to meet the needs of the 21st century.''

Section 111 of title 23, United States Code, provides that all agreements between the Secretary and the State departments of transportation (State DOTs) for the construction of projects on the Interstate System shall contain a clause providing that the State will not add any points of access to, or exit from, the project in addition to those approved by the Secretary in the plans for such project, without the prior approval of the Secretary. The Secretary has delegated the authority to administer 23 U.S.C. 111 to the Federal Highway Administrator pursuant to 49 CFR 1.48(b)(1). A formal policy statement including guidance for justifying and documenting the need for additional access to the existing sections of the Interstate System was published in the Federal Register on October 22, 1990 (55 FR 42670), and modified on February 11, 1998 (63 FR 7045).

The FHWA has adopted the AASHTO publication ``A Policy on Design Standards--Interstate System'' as the standard for projects on the Interstate System as incorporated by reference at 23 CFR 625.4(a)(2). Section 625.4(a)(2) further requires that access to the Interstate System shall be fully controlled, and that access to the Interstate System shall be achieved by interchanges at selected public highways.

Summary of Changes

The changes in FHWA's policy were made to reflect the direction provided in SAFETEA-LU, to clarify the operational and safety analysis and assessment of impacts that provides the basis for proposed changes in access to the Interstate System, and to update language at various locations to reference Federal laws, regulations, and FHWA policies. The following specific revisions have been made to the existing policy statement:

1. Updates were made to Requirement 1 clarifying the need for agencies to analyze and justify that the projected design-year traffic demands cannot be adequately accommodated by existing access to the Interstate.
2. Additional examples were added to Requirement 2 to identify the type of improvements to be considered in the planning for and development of proposed changes in access.
3. Text was added to Requirement 3 to clarify that the safety and operational analysis to be performed and documentation to be submitted provide the justification for proposed changes in access.
4. Revisions were made to Requirement 4 clarifying the need to meet or exceed design standards for all roadway improvements included in proposals to change access.
5. Changes were made to Requirement 5 to reference the current requirements contained in SAFETEA-LU and 23 CFR part 450.
6. Text was added to Requirement 6 clarifying the analysis to be

Appendix A

performed in support of proposed changes in access involving multiple interchanges.

7. Clarification to Requirement 7 was made identifying the justification needed to support any proposed change in access due to changes in land use or density of development.

8. Revision was made to Requirement 8 to clarify and avoid duplication with Requirement 5.

9. Updates were made to the Application section to reference current Federal laws, regulations, and FHWA policies. Revisions were made to paragraph 4 and a new paragraph 5 was added to clarify what is a change in access and how this policy may apply to different types of access changes. Paragraph 8 was added to clarify how FHWA's review and approval of proposed changes in access relate to other Federal actions, reviews, and approvals. Paragraph 9 was added to clarify that proposals for changes in access need to be reevaluated and the proposal resubmitted to FHWA for review and approval if the project has not proceeded to construction within 8 years.

The revised policy statement also includes various editorial changes to enhance clarity and readability. The revised policy statement is as follows:

Policy

It is in the national interest to preserve and enhance the Interstate System to meet the needs of the 21st Century by assuring that it provides the highest level of service in terms of safety and mobility. Full control of access along the Interstate mainline and ramps, along with control of access on the crossroad at interchanges, is critical to providing such service. Therefore, FHWA's decision to approve new or revised access points to the Interstate System must be supported by substantiated information justifying and documenting that decision. The FHWA's decision to approve a request is dependent on the proposal satisfying and documenting the following requirements.

Considerations and Requirements

1. The need being addressed by the request cannot be adequately satisfied by existing interchanges to the Interstate, and/or local roads and streets in the corridor can neither provide the desired access, nor can they be reasonably improved (such as access control along surface streets, improving traffic control, modifying ramp terminals and intersections, adding turn bays or lengthening storage) to satisfactorily accommodate the design-year traffic demands (23 CFR 625.2(a)).

2. The need being addressed by the request cannot be adequately satisfied by reasonable transportation system management (such as ramp metering, mass transit, and HOV facilities), geometric design, and alternative improvements to the Interstate without the proposed change(s) in access (23 CFR 625.2(a)).

3. An operational and safety analysis has concluded that the proposed change in access does not have a significant adverse impact on the safety and operation of the Interstate facility (which includes mainline lanes, existing, new, or modified ramps, ramp intersections with crossroad) or on the local street network based on both the current and the planned future traffic projections. The analysis shall, particularly in urbanized areas, include at least the first adjacent

Appendix A

existing or proposed interchange on either side of the proposed change in access (23 CFR 625.2(a), 655.603(d) and 771.111(f)). The crossroads and the local street network, to at least the first major intersection on either side of the proposed change in access, shall be included in this analysis to the extent necessary to fully evaluate the safety and operational impacts that

[[Page 43745]]

the proposed change in access and other transportation improvements may have on the local street network (23 CFR 625.2(a) and 655.603(d)). Requests for a proposed change in access must include a description and assessment of the impacts and ability of the proposed changes to safely and efficiently collect, distribute and accommodate traffic on the Interstate facility, ramps, intersection of ramps with crossroad, and local street network (23 CFR 625.2(a) and 655.603(d)). Each request must also include a conceptual plan of the type and location of the signs proposed to support each design alternative (23 U.S.C. 109(d) and 23 CFR 655.603(d)).

4. The proposed access connects to a public road only and will provide for all traffic movements. Less than ``full interchanges'' may be considered on a case-by-case basis for applications requiring special access for managed lanes (e.g., transit, HOVs, HOT lanes) or park and ride lots. The proposed access will be designed to meet or exceed current standards (23 CFR 625.2(a), 625.4(a)(2), and 655.603(d)).

5. The proposal considers and is consistent with local and regional land use and transportation plans. Prior to receiving final approval, all requests for new or revised access must be included in an adopted Metropolitan Transportation Plan, in the adopted Statewide or Metropolitan Transportation Improvement Program (STIP or TIP), and the Congestion Management Process within transportation management areas, as appropriate, and as specified in 23 CFR part 450, and the transportation conformity requirements of 40 CFR parts 51 and 93.

6. In corridors where the potential exists for future multiple interchange additions, a comprehensive corridor or network study must accompany all requests for new or revised access with recommendations that address all of the proposed and desired access changes within the context of a longer-range system or network plan (23 U.S.C. 109(d), 23 CFR 625.2(a), 655.603(d), and 771.111).

7. When a new or revised access point is due to a new, expanded, or substantial change in current or planned future development or land use, requests must demonstrate appropriate coordination has occurred between the development and any proposed transportation system improvements (23 CFR 625.2(a) and 655.603(d)). The request must describe the commitments agreed upon to assure adequate collection and dispersion of the traffic resulting from the development with the adjoining local street network and Interstate access point (23 CFR 625.2(a) and 655.603(d)).

8. The proposal can be expected to be included as an alternative in the required environmental evaluation, review and processing. The proposal should include supporting information and current status of the environmental processing (23 CFR 771.111).

Application

This policy is applicable to new or revised access points to

Appendix A

existing Interstate facilities regardless of the funding of the original construction or regardless of the funding for the new access points. This includes routes incorporated into the Interstate System under the provisions of 23 U.S.C. 103(c)(4)(A) or other legislation.

Routes approved as a future part of the Interstate System under 23 U.S.C. 103(c)(4)(B) represent a special case because they are not yet a part of the Interstate System. Since the intention to add the route to the Interstate System has been formalized by agreement, any proposed new or significant changes in access beyond those covered in the agreement, regardless of funding, must be approved by FHWA.

This policy is not applicable to toll roads incorporated into the Interstate System, except for segments where Federal funds have been expended or these funds will be used for roadway improvements, or where the toll road section has been added to the Interstate System under the provisions of 23 U.S.C. 103(c)(4)(A). The term ``segment'' is defined as the project limits described in the Federal-aid project agreement.

Each break in the control of access to the Interstate System right-of-way is considered to be an access point. For the purpose of applying this policy, each entrance or exit point, including ``locked gate'' access, is considered to be an access point. For example, a diamond interchange configuration has four access points.

Ramps providing access to rest areas, information centers, and weigh stations within the Interstate controlled access are not considered access points for the purpose of applying this policy. These facilities shall be accessible to vehicles only to and from the Interstate System. Access to or from these facilities and local roads and adjoining property is prohibited. The only allowed exception is for access to adjacent publicly owned conservation and recreation areas, if access to these areas is only available through the rest area, as allowed under 23 CFR 752.5(d).

Generally, any change in the design of an existing access point is considered a change to the interchange configuration, even though the number of actual points of access may not change. For example, replacing one of the direct ramps of a diamond interchange with a loop, or changing a cloverleaf interchange into a fully directional interchange would be considered revised access for the purpose of applying this policy.

All requests for new or revised access points on completed Interstate highways must closely adhere to the planning and environmental review processes as required in 23 CFR parts 450 and 771. The FHWA approval constitutes a Federal action and, as such, requires that the transportation planning, conformity, congestion management process, and the National Environmental Policy Act procedures be followed and their requirements satisfied. This means the final FHWA approval of requests for new or revised access cannot precede the completion of these processes or necessary actions.

To offer maximum flexibility, however, any proposed change in access can be submitted by a State DOT to the FHWA Division Office for a determination of engineering and operational acceptability. This flexibility allows agencies the option of obtaining this acceptability determination prior to making the required modifications to the Transportation Plan, performing any required conformity analysis, and completing the environmental review and approval process. In this manner, State DOTs can determine if a proposal is acceptable for inclusion as an alternative in the environmental process. This policy in no way alters the planning, conformity or environmental review and

Appendix A

approval procedures as contained in 23 CFR parts 450 and 771, and 40 CFR parts 51 and 93.

An affirmative determination by FHWA of engineering and operational acceptability for proposals for new or revised access points to the Interstate System should be reevaluated whenever a significant change in conditions occurs (e.g., land use, traffic volumes, roadway configuration or design, environmental commitments). Proposals shall be reevaluated if the project has not progressed to construction within 8 years of receiving an affirmative determination of engineering and operational acceptability (23 CFR 625.2(a)). If the project is not constructed within this time period, an updated justification report based on current and projected future conditions must be submitted to FHWA to receive either an affirmative determination of engineering and operational acceptability, or final approval if all
[[Page 43746]]

other requirements have been satisfied (23 U.S.C. 111, 23 CFR 625.2(a), and 23 CFR 771.129).

Implementation

State DOTs are required to submit requests for proposed changes in access to their FHWA Division Office for review and action under 23 U.S.C. 106 and 111, and 23 CFR 625.2(a). The FHWA Division Office will ensure that all requests for changes in access contain sufficient information, as required in this policy, to allow FHWA to independently evaluate and act on the request. Guidance to assist with the implementation and consistent application of this policy can be accessed electronically through the FHWA Office of Infrastructure's Web page at: <http://www.fhwa.dot.gov/programadmin/index.htm>.

Policy Statement Impact

The policy statement, first published in the Federal Register on October 22, 1990 (55 FR 42670), and modified on February 11, 1998 (63 FR 7045), describes the justification and documentation needed for requests to add or revise access to the existing Interstate System.

The revisions made by the publication of this policy statement reflect the direction provided in SAFETEA-LU, clarify the operational and safety analysis to accompany proposed changes in access on the Interstate System, and update language at various locations to ensure consistency with other Federal laws, regulations and FHWA policies. State DOTs should take these factors into consideration when making requests for new or revised access points, but the overall effort necessary for developing the request will not be significantly increased.

(Authority: 23 U.S.C. 111 and 315; 49 CFR 1.48)

Issued on August 18, 2009.
Victor M. Mendez,
Federal Highway Administrator.
[FR Doc. E9-20679 Filed 8-26-09; 8:45 am]
BILLING CODE 4910-22-P

Appendix A

IJS/IMS Report Outline

- I. Executive Summary
- II. Background
 - a. Previous Studies
 - b. MPO Coordination, as applicable
 - c. Support & Commitment from Sponsoring Agencies
- III. Purpose and Need
- IV. Study Area
 - a. Include Study Area Map(s)
- V. Existing Conditions
 - a. Road Geometry & Access Locations
 - b. Physical Conditions – terrain
 - c. Crash Data
 - d. Demographics – population & employment
 - e. Land Use
- VI. Analysis Years
 - a. Opening Year & Design Year
 - b. Staged Improvements, as applicable
- VII. Alternatives Considered
 - a. No Build Alternative
 - b. Build Alternatives Considered and Dismissed
 - c. TSM Options (i.e. HOV, ITS, ramp metering, transit)
 - d. Local Road Improvements, as applicable
 - e. Preferred (Build) Alternative
 - i. Include Limits of L/A ROW
- VIII. Traffic Volumes
- IX. Traffic Analyses, No Build and Build
 - a. Freeway Section Analyses
 - b. Ramp Junction Analyses
 - c. Weave Analyses
 - d. Ramp Intersection Analyses
 - i. Constrained Analyses, as applicable
 - ii. Mitigative Measures, as applicable
 - e. Other Intersection Analyses
 - f. Turn Lane Storage Length Recommendations
 - g. Summary of Results
- X. Cost Estimate
- XI. Environmental Overview
- XII. Conclusion and Recommendations

List of Exhibits

General Location Map
Study Area Map
Aerial Photo(s) (if available)
No Build and Build LOS Exhibit including Number of Lanes
Proposed Turn Lane Length Tables
Build Exhibit including L/A ROW limits
Cost Estimate Table
Conceptual Signing Plan, as applicable

Appendices

Letter(s) of Commitment
Certified Traffic
HCS Analyses (No Build and Build)
Turn Lane/Queue Length Calculations

Appendix A

Requirement Checklist

ODOT Access Point Request Document Checklist per L&D Section 550.2					
Section 550.2 Point	Report Section	Title	Not Included	Included	Relevant Points to Cover
1	VII	Existing Conditions			existing access &/or local roads cannot handle design year volumes nor be improved to do so
	IX	Traffic Analysis			public need for new access point (if new interchange)
2	VI	Alternatives Considered			design options
					location options
					transportation system management has been assessed
3	IX	Traffic Analysis			certified traffic used with proper land use projections (20 year design from opening day)
					discussion of distance to and size of communities served if new interchange
					no significant adverse impact on safety and operation of freeway
					correct LOS criteria used
					funding sources identified
					conceptual signing plan for complex projects
4	VI	Alternatives Considered			access connects to public road
					access provides for all traffic movements (no partial interchanges)
					access meets or exceeds current design standards
5	II	Background			proposal is consistent with local and regional land use plans
					compatible with local road network
					letters of support from sponsoring agencies are included
					If new interchange, proposal is discussed w/in context of LRP
6	A	Appendix, as necessary			provide supporting documentation of the freeway network study including recommendations
7	II XII	Background Conclusion			if due to new or expanded development, evidence of coordination between the development and the necessary transportation improvements and identification of funding sources
8	XI	Environmental Overview			alternative will be included & assessed in environmental document
					status of environmental process

Roadway Sample Plan Notes

R111 - CONNECTION BETWEEN EXISTING AND PROPOSED GUARDRAIL

WHEN IT IS NECESSARY TO SPLICE PROPOSED GUARDRAIL TO EXISTING GUARDRAIL, ONLY THE EXISTING GUARDRAIL SHALL BE CUT, DRILLED, OR PUNCHED. THE CONNECTION SHALL BE MADE USING A "W-BEAM RAIL SPLICE" AS SHOWN IN AASHTO M 180. PAYMENT SHALL BE INCLUDED IN THE CONTRACT PRICE FOR THE RESPECTIVE GUARDRAIL ITEMS.

Designer Note: Use this note when connections are required between existing and proposed guardrail runs. Locations shall be noted on the plans.

Roadway Sample Plan Notes

R112 - ITEM 606 - ANCHOR ASSEMBLY, TYPE B

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY OF THE GUARDRAIL END TERMINALS AS LISTED ON ROADWAY ENGINEERING'S WEB PAGE UNDER ROADSIDE SAFETY DEVICES FOR APPROVED GUARDRAIL END TREATMENTS. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

REFER TO THE MANUFACTURER'S INSTRUCTIONS REGARDING THE INSTALLATION OF, AND THE GRADING AROUND, THE FOUNDATION TUBES AND GROUND STRUT. THE TOP OF ANY FOUNDATION TUBE SHOULD BE LESS THAN 4 INCHES ABOVE THE GROUND. THE PLACEMENT OF THE FOUNDATION TUBES SHOULD BE AN APPROPRIATE DEPTH BELOW THE LEVEL LINE IN ORDER TO MAINTAIN THE FINISHED GUARDRAIL HEIGHT OF 27.75 INCHES FROM THE EDGE OF THE SHOULDER.

ON-SITE GRADING IS REQUIRED IF THE TOP OF THE FOUNDATION TUBES OR TOP OF THE GROUND STRUT DOES PROJECT MORE THAN 4 INCHES ABOVE THE GROUND LINE.

THE FACE OF THE TYPE B IMPACT HEAD SHALL BE COVERED WITH TYPE G REFLECTIVE SHEETING, PER CMS 730.19.

PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, ANCHOR ASSEMBLY, TYPE B, EACH, AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL ANCHOR ASSEMBLY SYSTEM, INCLUDING REFLECTIVE SHEETING AND ALL RELATED HARDWARE, GRADING, EMBANKMENT AND EXCAVATION NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER.

Designer Notes:

1. The length of need (LON) point is at post number 3; therefore, after calculating the required LON for the guardrail, deduct the last 25'-0" of the unit (from post # 3 to post # 9) from the length of need for the guardrail. The designer should show the LON point on all guardrail runs in the plans.
2. Pre-approved shop drawings are reviewed and are on the Office of Roadway Engineering's web page under Roadside Safety Devices.
3. These end treatments are gating systems.
4. The standard offset at post #1 for the B is 4'-0". This offset can be reduced to a minimum of 3'-0" at locations where the 4'-0" offset is impractical.

Roadway Sample Plan Notes

R113 - ITEM 606 - ANCHOR ASSEMBLY, TYPE E

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY OF THE GUARDRAIL END TERMINALS AS LISTED ON ROADWAY ENGINEERING'S WEB PAGE UNDER ROADSIDE SAFETY DEVICES FOR APPROVED GUARDRAIL END TREATMENTS. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

THE FACE OF THE TYPE E IMPACT HEAD SHALL BE COVERED WITH A SHEET OF TYPE G REFLECTIVE SHEETING, PER CMS 730.19.

REFER TO THE MANUFACTURER'S INSTRUCTIONS REGARDING THE INSTALLATION OF, AND THE GRADING AROUND THE FOUNDATION TUBES AND GROUND STRUT. THE TOP OF ANY FOUNDATION TUBE SHOULD BE LESS THAN 4 INCHES ABOVE THE GROUND. THE PLACEMENT OF THE FOUNDATION TUBES SHOULD BE AN APPROPRIATE DEPTH BELOW THE LEVEL LINE IN ORDER TO MAINTAIN THE FINISHED GUARDRAIL HEIGHT OF 27.75 INCHES FROM THE EDGE OF THE SHOULDER.

ON-SITE GRADING IS REQUIRED IF THE TOP OF THE FOUNDATION TUBES OR TOP OF THE GROUND STRUT DOES PROJECT MORE THAN 4 INCHES ABOVE THE GROUND LINE.

PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, ANCHOR ASSEMBLY, TYPE E, EACH, AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL ANCHOR ASSEMBLY SYSTEM, INCLUDING ALL RELATED TRANSITIONS, REFLECTIVE SHEETING, HARDWARE, GRADING, EMBANKMENT AND EXCAVATION NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER.

Designer Notes:

1. The length of need (LON) point for both systems is at post number 3; therefore, after calculating the required LON for the guardrail, deduct the last 37'-6" of the unit (from post # 3 to post # 9) from the length of need for the guardrail. The designer should show the LON point on all guardrail runs in the plans.
2. Pre-approved shop drawings are reviewed and are on the Office of Roadway Engineering's web page under Roadside Safety Devices.
3. These end treatments are gating systems.
4. A Type C delineator should be installed on a flexible post at the head of all Type E units located on the right side of the through roadway in areas that have known snowdrift/piling problems, or per District policy. A Type D delineator should be installed on a flexible post at the head of all Type E units located on the left side of the through roadway. Delineators shall be itemized separately and shall comply with Standard Construction Drawing TC-61.10 and CMS 620.

Roadway Sample Plan Notes

R116 - PAVING UNDER GUARDRAIL

THIS OPERATION SHALL INCLUDE PREPARATION OF THE GRADED SHOULDER USING ITEM 209, LINEAR GRADING, AS PER PLAN AND PAVING UNDER THE GUARDRAIL USING 448 ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, PG 64-22, UNDER GUARDRAIL, AS PER PLAN.

ITEM 209, LINEAR GRADING, AS PER PLAN SHALL CONSIST OF EXCAVATING TOPSOIL, and PLACING GRANULAR MATERIAL.

ALL COLLECTED DEBRIS AND TOPSOIL, INCLUDING RHIZOMES, ROOTS AND OTHER VEGETATIVE PLANT MATERIAL SHALL BE REMOVED AND DISPOSED OF AS SPECIFIED IN 105.17.

THE REMOVED MATERIAL SHALL BE REPLACED WITH COMPACTABLE GRANULAR MATERIAL CONFORMING TO 703.16 PLACED TO GRADE AS DETAILED ON THE TYPICAL SECTION OR AS APPROVED BY THE ENGINEER.

ALL EQUIPMENT, MATERIALS AND LABOR REQUIRED TO PERFORM THE WORK OUTLINED ABOVE SHALL BE INCLUDED FOR PAYMENT UNDER ITEM 209, LINEAR GRADING, AS PER PLAN.

PAVING UNDER GUARDRAIL SHALL CONSIST OF PLACING ITEM 448 TO THE DEPTH SPECIFIED USING ONE OF THE FOLLOWING METHODS:

METHOD A:

1. SET GUARDRAIL POSTS
2. PLACE ITEM 448

METHOD B:

1. PLACE ITEM 448
2. BORE ASPHALT AT POST LOCATIONS (MAY BE OMITTED IF STEEL POSTS ARE USED)
3. SET GUARDRAIL POSTS
4. PATCH AROUND POSTS. THE MATERIALS USED FOR PATCHING SHALL BE AN ASPHALT CONCRETE APPROVED BY THE ENGINEER. PATCHED AREAS SHALL BE COMPACTED USING EITHER HAND OR MECHANICAL METHODS. FINISHED SURFACES SHALL BE SMOOTH AND SLOPED TO DRAIN AWAY FROM THE POSTS.

ALL EQUIPMENT, MATERIALS AND LABOR REQUIRED TO PERFORM THE WORK OUTLINED ABOVE, WITH THE EXCEPTION OF SETTING GUARDRAIL POSTS, SHALL BE INCLUDED FOR PAYMENT UNDER ITEM 448, ASPHALT CONCRETE, INTERMEDIATE COURSE, TYPE 1, PG 64-22, UNDER GUARDRAIL, AS PER PLAN.

Designer Note: Quantities for Item 448 should be calculated in Cubic Yards. The asphalt concrete thickness should be shown on the typical sections. The depth may vary according to project requirements, but shall be a maximum of 3 inches. The area to be paved shall be from the edge of the paved shoulder to the break point between the graded shoulder and the foreslope. The slope shall be the same as the graded shoulder slope. The designer may specify either paving Method A or B, or leave the option to the contractor.

Guardrail shall be paid for under Item 606.

Roadway Sample Plan Notes

R118 - ITEM SPECIAL - MAILBOX SUPPORT

THIS WORK SHALL CONSIST OF FURNISHING AND ERECTING MAILBOX SUPPORTS AND ANY ASSOCIATED MOUNTING HARDWARE IN ACCORDANCE WITH PLAN DETAILS, AND ATTACHING AN OWNER-SUPPLIED MAILBOX AT LOCATIONS SPECIFIED IN THE PLAN, OR OTHERWISE ESTABLISHED BY THE ENGINEER.

WOOD POSTS SHALL BE NOMINAL 4 INCHES BY 4 INCHES SQUARE OR 4.5 INCHES DIAMETER ROUND, AND CONFORM TO 710.14.

STEEL POSTS SHALL BE NOMINAL PIPE SIZE 2 INCHES I.D., AND CONFORM TO AASHTO M 181.

ALL HARDWARE INCLUDING BUT NOT LIMITED TO PLATES, SCREWS, BOLTS, AND ETC. SHALL BE COMMERCIAL-GRADE GALVANIZED STEEL.

POSTS SHALL BE SET PER THE FIRST PARAGRAPH OF 606.03, AND SHALL IN NO INSTANCE BE ENCASED IN CONCRETE.

SUPPORT HARDWARE SHALL ACCOMMODATE EITHER A SINGLE OR A DOUBLE MAILBOX INSTALLATION, AND NO MORE THAN TWO BOXES MAY BE MOUNTED ON A SINGLE POST.

THE MAILBOX SHALL BE SECURELY AND NEATLY ATTACHED BY THE CONTRACTOR TO THE NEW SUPPORT. THE CONTRACTOR SHALL FURNISH ALL NECESSARY ATTACHMENT HARDWARE (NUTS, BOLTS, PLATES, SPACERS, AND WASHERS) AS NECESSARY TO ACCOMMODATE THE COMPLETE INSTALLATION.

IN THE ABSENCE OF A NEW BOX SUPPLIED BY THE OWNER, THE CONTRACTOR SHALL SALVAGE THE EXISTING BOX AND PLACE IT ON THE NEW SUPPORT. DUE CARE SHALL BE EXERCISED IN SUCH AN OPERATION, AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY BOX DAMAGED BY IMPROPER HANDLING ON HIS PART, AS JUDGED AND DIRECTED BY THE ENGINEER.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH THE LOCAL POST MASTER REGARDING THE TIMING OF THE MOVEMENT OF ANY MAILBOX TO A NEW LOCATION.

PAYMENT UNDER THIS ITEM SHALL BE LIMITED TO FINAL PERMANENT INSTALLATIONS. TEMPORARY INSTALLATIONS SHALL BE IN ACCORDANCE WITH 107.10. HOWEVER, THE SAME MATERIAL AND SIZE LIMITATIONS AS FOR PERMANENT INSTALLATIONS SHALL APPLY.

MAILBOX SUPPORTS, COMPLETE IN PLACE, WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER EACH, FOR ITEM SPECIAL MAILBOX SUPPORT SYSTEM, (SINGLE) (DOUBLE).

Designer Note: The above note should be used for the replacement of existing mailbox supports constructed of materials which may be considered "hazardous" because they exceed the size stated with the note. See Figure 803-1 in Volume One (Roadway Design) of the Location and Design Manual for more information.

Roadway Sample Plan Notes

R123 - ITEM 606 - IMPACT ATTENUATOR, TYPE 1 (UNIDIRECTIONAL OR BIDIRECTIONAL)

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY ONE OF THE TYPE 1 IMPACT ATTENUATORS AS LISTED ON THE OFFICE OF ROADWAY ENGINEERING'S WEB PAGE. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

THE FACE OF THE TYPE 1 IMPACT HEAD SHALL BE COVERED WITH A SHEET OF TYPE G REFLECTIVE SHEETING, PER CMS 730.19. PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, IMPACT ATTENUATOR, TYPE 1 [(UNIDIRECTIONAL OR BIDIRECTIONAL)], EACH, AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL IMPACT ATTENUATOR SYSTEM, INCLUDING ALL RELATED TRANSITIONS, HARDWARE, REFLECTIVE SHEETING AND GRADING, NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER.

Designer's Notes:

1. After calculating the required Length of Need for the guardrail, deduct the last 12'-6" of the unit from the length of need for the guardrail. The designer should show the LON point on all guardrail runs in the plans. Refer to the approved products listed on the Office of Roadway Engineering's Web Page.
2. The 6'-3" section directly behind the Type 1 shall be parallel to the centerline of the unit. A maximum flare of 3 degrees (20:1) is permissible. A cross slope of no more than 8% (5 degrees) is recommended.
3. Bidirectional should be specified for locations where traffic is expected to be in opposing directions on either side of the barrier. Unidirectional shall be specified when traffic is expected to move in the same direction on both sides of the barrier.
4. All curbs and islands should be removed for optimum impact performance.
5. More information is located in Section 600 of the Location and Design Manual Volume 1.

Roadway Sample Plan Notes

R124 - ITEM 606 - IMPACT ATTENUATOR, TYPE 2 (UNIDIRECTIONAL OR BIDIRECTIONAL)

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY OF THE TYPE 2 IMPACT ATTENUATORS AS LISTED ON THE OFFICE OF ROADWAY ENGINEERING'S WEB PAGE. WHEN BI-DIRECTIONAL DESIGNS ARE SPECIFIED, THE CONTRACTOR SHALL SUPPLY APPROPRIATE TRANSITIONS. PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, IMPACT ATTENUATOR, TYPE 2 [(SPEED (IN MPH), HAZARD WIDTH (IN INCHES)), (UNIDIRECTIONAL OR BIDIRECTIONAL)], EACH, AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL IMPACT ATTENUATOR SYSTEM, INCLUDING ALL RELATED BACKUPS/BACKSTOPS, TRANSITIONS, HARDWARE AND GRADING, NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

Designer Notes:

These systems are non-gating and redirective therefore the entire length of the unit can be included as part of the calculated length of need.

The shop drawings are approved by the Standards Engineer and are available on the Office of Roadway Engineering's website.

This note should be used for the protection of Type 5 Barrier Design Guardrail, concrete median barrier and other fixed objects.

The designer must specify Test Level 3 (TL-3) configurations for installations on the NHS.

If cross slopes are steeper than 8% (12:1) or if the cross slope varies by more than 2% over the length of the unit, a leveling pad may be used.

Rear fender panels may slide 60 inches rearward upon impact, so ensure the specified width is adequate.

Bidirectional should be specified for locations where traffic is expected to be in opposing directions on either side of the barrier. Unidirectional shall be specified when traffic is expected to move in the same direction on both sides of the barrier.

Each of the Type 2 products have a wide variety of related units (families), typically covering various design speeds (number of bays) and protected widths. The designer should also identify on the project plans for each unit specified on the plan any contingencies needed to construct a complete device. They include:

- Design speed
- Width of hazard
- Available foot print area for the product
- Foundation type (asphalt, concrete, bridge deck)
- Transition type (concrete barrier or guardrail)
- Backup support (A standard concrete backup is detailed on SCD RM-4.6. Otherwise, specify an independent stand-alone anchorage like the product's own concrete backup, or its tension strut backup)
- Any unique characteristics of the site (curb, expansion joints, etc.)

Roadway Sample Plan Notes

R125 - ITEM 606 - IMPACT ATTENUATOR, TYPE 3 (UNIDIRECTIONAL OR BIDIRECTIONAL)

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY OF THE TYPE 3 IMPACT ATTENUATORS AS LISTED ON THE OFFICE OF ROADWAY ENGINEERING'S WEB PAGE. WHEN BI-DIRECTIONAL DESIGNS ARE SPECIFIED, THE CONTRACTOR SHALL SUPPLY APPROPRIATE TRANSITIONS. PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, IMPACT ATTENUATOR, TYPE 3 [(SPEED (IN MPH), HAZARD WIDTH (IN INCHES)), (UNIDIRECTIONAL OR BIDIRECTIONAL)], EACH, AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL IMPACT ATTENUATOR SYSTEM, INCLUDING ALL RELATED BACKUPS/BACKSTOPS, TRANSITIONS, HARDWARE AND GRADING, NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

Designer Notes:

These systems are non-gating and redirective therefore the entire length of the unit can be included as part of the calculated length of need.

The shop drawings are approved by the Standards Engineer and available on the Office of Roadway Engineering website.

This note should be used for the protection of Type 5 Barrier Design Guardrail, concrete median barrier and other fixed objects.

The designer must specify Test Level 3 (TL-3) configurations for installations on the NHS.

If cross slopes are steeper than 8% (12:1) or if the cross slope varies by more than 2% over the length of the unit, a leveling pad may be used.

Rear fender panels may slide 60" rearward upon impact, so ensure the specified width is adequate.

Bidirectional should be specified for locations where traffic is expected to be in opposing directions on either side of the barrier. Unidirectional shall be specified when traffic is expected to move in the same direction on both sides of the barrier.

Each of the Type 3 products have a wide variety of related units (families), typically covering various design speeds (number of bays) and protected widths. The designer should also identify on the project plans for each unit specified on the plan any contingencies needed to construct a complete device. They include:

Design speed

Width of hazard

Available footprint area for the product

Foundation type (asphalt, concrete, bridge deck)

Transition type (concrete barrier or guardrail)

Backup support (A standard concrete backup is detailed on SCD RM-4.6. Otherwise, specify an independent stand-alone anchorage like the product's own concrete backup, or its tension strut backup)

Any unique characteristics of the site (curb, expansion joints, etc.)

The REACT 350 is 48 inches tall, if sight distance is needed where the attenuator will be installed the designer shall note the React 350 is not allowed at that location.

Roadway Sample Plan Notes

R127 - ITEM 606 – CABLE GUARDRAIL

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING ANY ONE OF THE HIGH TENSION FOUR CABLE GUARDRAIL SYSTEMS AS LISTED ON THE OFFICE OF ROADWAY ENGINEERING'S WEB PAGE. PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 606, GUARDRAIL, MISC., TENSIONED CABLE WITH CONCRETE FOUNDATION LINE POSTS (SOCKETED), AND ITEM 606, GUARDRAIL, MISC. TENSIONED CABLE ANCHOR TERMINAL AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT A COMPLETE AND FUNCTIONAL HIGH TENSION CABLE GUARDRAIL SYSTEM NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER.

INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS, IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

SYSTEMS SHALL HAVE A MAXIMUM DEFLECTION OF 8 FEET AND THE MAXIMUM LONGITUDINAL DISTANCE BETWEEN POSTS SHALL BE 15 FEET.

INSTALLATION WILL BE A FOUR CABLE HIGH TENSION SYSTEM INSTALLED IN SOCKETED POSTS FOUNDATION WITH A FOUR FOOT WIDE "NO MOW STRIP".

CONTRACTOR SHALL PROVIDE DELINEATORS ON THE POSTS AT A MINIMUM INTERVAL OF 100 FEET AND ON ALL ANCHOR TERMINALS.

TRANSITIONS TO W-BEAM GUARDRAIL ARE NOT ALLOWED.

REFER TO MANUFACTURER FOR MAXIMUM OFFSET FROM BREAK POINT.

TORPEDO OR BULLET SPLICES ARE NOT ALLOWED. ALL CABLE SPLICES SHALL BE A SWAGED OR OPEN BODY DESIGN THAT ALLOWS FOR ANNUAL INSPECTION BETWEEN THE WEDGE AND STRANDS OF CABLE.

POSTS ARE SET IN SOCKETED CONCRETE FOUNDATIONS AND SHALL NOT BE PERMANENTLY INSTALLED UNTIL THEIR RESPECTIVE RUNS OF TENSIONED CABLE GUARDRAIL ARE READY FOR FINAL CONNECTION TO THE END TERMINAL ASSEMBLY. THE CONTRACTOR SHALL REPLACE ANY POSTS DAMAGED DURING INSTALLATION AS DETERMINED BY THE ENGINEER AT NO ADDITIONAL COST TO THE STATE.

Designer Notes:

High tension cable barrier systems shall only be installed to meet the requirements of Location and Design Manual Section 601.2 Median Barrier Warrants.

Designer should look at the entire corridor before selecting which side of the median the cable will be installed on. At breaks in the runs of cable such as turnarounds the layout of the cable should limit the gating potential of the cable end treatments. Installing the end treatments behind the trailing bridge parapets can eliminate the gating part of the end treatments. When overlapping cable runs eliminate all of the gating part of the end treatments. **Review Figure 602-3E and 602-4E of L&D Vol. 1 for appropriate layouts.**

Additional information is provided in Location and Design Manual Volume 1 Section 600 and the manufacturer.

This page is intentionally blank

Appendix C

Design Software

Traffic operational analysis used for design purposes must use the current version of **Highway Capacity Software** (HCS) by McTrans. ODOT may allow use of other traffic analysis and modeling programs when HCS is incapable of providing analysis results or when supplemental analysis is desired. Software currently used by ODOT for traffic analysis includes Synchro/Simtraffic, CORSIM, VISSIM, and SIDRA. While other programs may be considered for unique situations, it is preferred that these programs be used. Use of non-HCS analysis must be approved by the Office of Roadway Engineering.

Default Values and Guidance

The following section provides information on default values to be used for traffic analysis and methodologies.

Highway Capacity Software/Synchro

- Use all software defaults except as otherwise noted below.
- **PHF (peak hour factor) use HCM 2010 default**
- RTOR (right turn on red) = 0
- Arrival Type = 3, or as authorized by ODOT.
- Critical approach delay for the east-west approach (worst approach) should be balanced with the critical approach delay for the north-south approach.
- For an intersection analysis, individual lane v/c ratios should be less than 1.00, and preferably less than .90.

Microsimulation software (Simtraffic/CORSIM/VISSIM)

- Analysis should use a minimum of 3 simulation runs with different number seeds.
- Refer to the FHWA Traffic Analysis Tools Program for additional guidance on using simulation software: <http://ops.fhwa.dot.gov/trafficanalysisitools/index.htm>

This page is intentionally blank

References

Table of Contents

DOCUMENT	DATE	REFERENCED SECTION
Procedures for Developing Design Designations for Non-Interstate Bridge Replacement/Rehabilitation Projects	Sept. 11, 1998	102.1
Guidelines for Identifying Acceptable Locations for the Disposal of Waste Material and Construction Debris or The Excavation of Borrow Material Within ODOT Right-of-Way	April 30, 2002	307.6
Landscaping Guidelines	April 16, 2010	n/a

This page is intentionally blank

**PROCEDURES FOR DEVELOPING DESIGN DESIGNATIONS
FOR NON-INTERSTATE BRIDGE
REPLACEMENT/REHABILITATION PROJECTS**

**OHIO DEPARTMENT OF TRANSPORTATION
OFFICE OF TECHNICAL SERVICES**

**NOVEMBER 17, 1993
REVISED SEPTEMBER 11, 1998**

**PROCEDURES FOR DEVELOPING DESIGN DESIGNATIONS
FOR NON-INTERSTATE BRIDGE**

REPLACEMENT/REHABILITATION PROJECTS

The procedures contained in this revised procedural manual are to be used to develop design designations for non-interstate bridge replacement/rehabilitation projects. Such bridge projects may be located on U.S. highways, state routes, county routes, township routes, or local streets. These procedures replace those found in the manual dated November 17, 1993.

Traffic forecasts for bridge projects on the Interstate System must continue to be provided or certified by the Office of Technical Services. For these bridges, the district offices may either forward design designations to Technical Services or request that the Technical Services provide them. Design designations for bridge projects that include more than simple replacement/rehabilitation must also be provided by Technical Services. This would include bridges with major approach work, bridges on new alignments, or bridges that are part of major capacity addition projects.

Bridge projects within a metropolitan planning organization (MPO) area should be coordinated with the MPO. Since a bridge project involving federal funds must be included on the MPO's transportation improvement program (TIP), coordination should take place at the time the project is added to the TIP.

This responsibility was originally delegated to the district offices in November, 1993, based on approval from FHWA in a letter dated September 29, 1993 (see Appendix A). The original version of this manual was designed to provide a cookbook approach to developing design designations for bridge projects for use by the district offices. The changes are intended to make the projections more accurate by giving the district offices more flexibility in developing them.

The major changes in this edition of the manual are as follows:

- the elimination of generalized growth rates by county and their replacement with a statewide continuous range of rates to provide flexibility in the selection of an accurate rate specific to the site and the individual project;
- changes in the terminology used to refer to the year of construction from "Current Year" to "Opening Year" to eliminate confusing "current" with the current calendar year or with the year of the most recent count data;
- changing the Design Year to be either 12 or 20 years after the Opening Year, consistent with the draft Pavement Design Manual (paragraph 2.02.1.1);
- providing a range of values for the selection of the K factor, the calculation of the DHV on the worksheet, and the replacement in the design designation of K with the DHV;
- three choices for the D factor, depending on whether the bridge is within or outside an MPO's boundaries and whether the bridge is one-way or two-way;

- providing a “comments” section on the worksheet for use in documenting the selection of the growth rate, for substituting refined output from the MPO models, for noting more detailed available truck information (the “B” and “C” components), and/or for noting directional imbalances in the ADT such as those found on bridges on routes over freeways between ramp termini;
- dropping the request for forwarding completed design designations to Technical Services; and
- the update of terms to reflect current terminology in use in the department.

The worksheet, itself, is now larger, the equivalent of two 8 ½ by 11 inch sheets. However, the form can be reproduced as a two-sided 8 ½ by 11 inch form or side by side on an 11 by 17 inch sheet, etc.

Any comments or questions on the use of this manual, including the discovery of any errors or inconsistencies, should be directed to the Office of Technical Services at (614) 644-8195.

Worksheet Instructions (Note: the worksheet is found on pages 6 and 7.)

1A. Enter the PID.

1B. Enter the County-Route-Log. If the project is not on the State System, enter an appropriate project identifier.

2A. Enter the Existing ADT. The ADT selected should be the most recent, accurate, seasonally adjusted 24-hour volume available. The most recent ADT may be obtained from the latest Traffic Survey Report (TSR) if the project is on the State System. Other data sources may be used (ODOT data obtained since the last TSR, count data from county engineers, MPOs, consultants, cities, etc.). Partial-day counts may be expanded to 24-hours using average values for the proportion of each hour in the daily total. Expansion tables and seasonal adjustment factors can be obtained from the Office of Technical Services' Traffic Monitoring Section. If the available count data is three (3) years or older, consideration should be given to obtaining a new count.

2B. Enter the 24-hour B&C volume (trucks). If no data is available, leave this box blank.

2C. Enter the Existing Year. This is the year the count was taken. For TSR data, assume this is the year of the report (e.g., for a report published in 1996, assume the data is from 1996) unless the specific ADT is known to come from a count taken in an earlier year.

3. Enter the Opening Year. The Opening Year is the year construction will be completed and the bridge will reopen to traffic.

4. Enter the Design Year. The Design Year is either 12 or 20 years after the Opening Year. This is determined by the scope and intent of the project and is unlikely to be an option available to the user of this manual. Most projects will have a 20-year life; a 12-year design year would occur only when the bridge is part of an overall 12-year pavement rehabilitation project.

5A. Enter the number of years from the Existing Year to the Opening Year. Enter the difference between the Opening Year and the Existing Year: **(3) - (2C).**

5B. Enter the number of years from the Existing Year to the Design Year. Enter the difference between the Design Year and the Existing Year: **(4) - (2C).**

6. Select a growth rate. The growth rate is to be selected from the continuous range of rates shown on the worksheet. The range of rates for each category is subjective, as are the categories, themselves. Judgment must be used in selecting an appropriate rate. If the project lies within an MPO area, manually adjusted output from a travel demand forecasting model provided by the MPO may be used in place of the growth rate. A rate derived from a regression analysis of historical traffic volumes over at least a twelve year period (equivalent to three traffic survey reports—five preferred) may be used as a tool for selecting the growth rate. It is important to recognize that a high rate derived from a regression analysis, based on only a few data points may not be sustainable when projected 20 or more years into the future. The

implicit growth rate based on the Design Year ADT and the Existing Year ADT should be calculated and evaluated against the rates shown. The use of model output in place of the given rates should be noted in “Comments” (Section 15) of the worksheet.

7. Enter the Opening Year Factor. This factor is calculated as follows: $[(6) \times (5A)] + 1$. Multiply the growth rate by the difference between the Opening Year and the Existing Year, then add 1.
8. Enter the Design Year Factor. This factor is calculated as follows: $[(6) \times (5B)] + 1$. Multiply the growth rate by the difference between the Design Year and the Existing Year, then add 1.
9. Enter the Opening Year ADT. The Opening Year ADT is obtained by multiplying the Existing ADT by the Opening Year Factor: $(2A) \times (7)$.
10. Enter the Design Year ADT. The Design Year ADT is obtained by multiplying the Existing ADT by the Design Year Factor: $(2A) \times (8)$.
- 11A. Enter K. The K factor is selected from the chart on the worksheet. The volume groupings shown are subjective. When count data exists, it is possible to estimate K by dividing the peak hour volume by the ADT. However, K is to reflect the 30th highest hour of the year. For a count on a given day, there is no way to know how the peak hour for that day compares to the 30th highest hour, but “true” K would almost always be higher than this estimated K.
- 11B. Enter the DHV. The DHV (Design Hourly Volume) is obtained by multiplying the projected Design Year ADT by the K Factor: $(10) \times (11A)$.
12. Enter the D factor. The D factor is assumed to be .55 for projects outside an MPO’s boundaries and .60 for projects on or within an MPO’s boundaries, except for a one-way bridge, in which case the D factor is always 1.00. The D factor, representing the directional distribution in the design hour, is used to calculate the Directional Design Hourly Volume (DDHV). Like the K factor, it can also be estimated from available count data.

The directional distribution in the ADT is entirely different from D. In the ADT, the directional split is usually close to 50/50. If known to vary significantly from 50/50, such as between the ramps on a bridge on a roadway over a freeway, then the directional distribution should be noted in the “Comments” section of the worksheet.
13. Enter the T24 factor. T24 represents the proportion of B&C commercial vehicles in the ADT. T24 is calculated based on the Existing Year data and assumed to apply to the Design Year. Information is seldom available that warrants selecting a T24 value for the Design Year that differs from T24 as calculated from the Existing Year data. T24 is calculated as: $(2B)/(2C)$. If no count data exists, assume $T24 = .03$ or obtain new count data that provides truck data.
14. Enter the TD factor. TD is the proportion of B&C commercial vehicles in the design hour. If the number of trucks in the peak hour is included in any available count data, an estimate of TD can be calculated directly. However, TD is usually close to 60 percent of the T24 value, which an acceptable approximation for use here. TD is calculated as $(13) \times .6$.

15. The comments section may be used for noting the substitution of MPO model output for volume estimates based on growth rates, the B and C components of the truck traffic, a significant departure from the expected 50/50 split in the daily directional distribution rate, or anything else the user wishes to document.

The Design Designation is summarized at the end of the worksheet from the above information. The design values (D, T24, and TD) are commonly listed as percents rather than decimal proportions. DHV is usually shown on the plans instead of K, although to assess the reasonableness of the DHV, it is usually easier to think in terms of K.

References:

1. Pavement Design and Rehabilitation Manual, Draft, Office of Materials Management, transmitted on August 10, 1998.
2. Guidelines for Developing Design Year Traffic on Local Roads and Streets, prepared by the Bureau of Technical Services, December, 1976.
3. Procedures for ODOT District Offices for use in Developing Design Designations for Non-Interstate Bridge Replacement/Rehabilitation Projects, Bureau of Technical Services, November 17, 1993.
4. Traffic Survey Reports prepared by the Bureau/Office of Technical Services, 1975-1998 (some in preparation, older reports exist).

BRIDGE PROJECT DESIGN DESIGNATION WORKSHEET											
1A	Enter the PID:		1A								
1B	Enter the County-Route-Log or other identifier:		1B								
2A	Enter the Existing ADT (Total Vehicles):		2A								
2B	Enter 24-hour B&C (commercial) volume if available:		2B								
2C	Enter the Existing Year:		2C								
3	Enter the Opening Year:		3								
4	Enter the Design Year:		4								
5A	Enter the number of years from the Existing Year to the Opening Year: (3) - (2C) =		5A								
5B	Enter the number of years from the Existing Year to the Design Year: (4) - (2C) =		5B								
6	Select a growth rate from the following range of rates: Stable .0025-.0050 Moderate .0100-.0200 Low .0050-.0100 High .0200-.0300		6								
7	Enter the Opening Year Factor: [(6) x (5A)]+1 =		7								
8	Enter the Design Year Factor: [(6) x (5B)]+1 =		8								
9	Enter the Opening Year ADT: (2A) x (7) = Round to nearest 100 vehicles (nearest 10 vehicles if < 1000)		9								
10	Enter the Design Year ADT: (2A) x (8) = Round to nearest 100 vehicles (nearest 10 vehicles if < 1000)		10								
11A	Enter K, selected from the following table of Design Year ADT : <table border="0"> <tr> <td>< 1000</td> <td>.12</td> <td>5001 - 15000</td> <td>.10</td> </tr> <tr> <td>1001 - 5000</td> <td>.11</td> <td>15001 <</td> <td>.09</td> </tr> </table>	< 1000	.12	5001 - 15000	.10	1001 - 5000	.11	15001 <	.09		11A
< 1000	.12	5001 - 15000	.10								
1001 - 5000	.11	15001 <	.09								
11B	Enter the DHV: (10) x (11A)		11B								
12	Enter the D Factor (for DDHV): within an MPO area: .60 outside an MPO area: .55 any one-way bridge: 1.00		12								
13	Enter the T24 factor (the proportion of B&C vehicles in ADT): [(2B)/(2A)] or .03 if (2B) is blank		13								
14	Enter the TD factor (the proportion of B&C vehicles in the design hour): (13) x 0.6		14								

BRIDGE PROJECT DESIGN DESIGNATION WORKSHEET

[illegible]



OHIO DEPARTMENT OF TRANSPORTATION

INTER-OFFICE COMMUNICATION

TO: D-1 Distribution

FROM: Cash Misel, Assistant Director, Planning and Production Management
Mary Ellen Kimberlin, Assistant Director, Highway Management

Cash Misel
MEL

DATE: April 30, 2002

SUBJECT: Guidelines For Identifying Acceptable Locations For The Disposal of Waste Material And Construction Debris or The Excavation of Borrow Material Within ODOT Right-of-Way

Attached for your immediate use, are the above referenced guidelines to be used in evaluating projects for acceptable locations within ODOT Right-of-Way for the disposal of waste material or the excavation of borrow. These guidelines should be used to evaluate sites during design of a project or to evaluate contractor proposed sites after sale of the project. The guidelines use the 2001 AASHTO Design Criteria and the attached figures from the ODOT L&D Manual, Volume 1 have been revised to conform to the 2001 AASHTO Design Manual. The ODOT L&D Manual, Volume 1 will be updated to the 2001 AASHTO Design Criteria in the near future. Please share these guidelines with your staff.

Any questions should be directed to the Office of Roadway Engineering Services.

Attachment

GUIDELINES FOR IDENTIFYING ACCEPTABLE LOCATIONS FOR THE DISPOSAL OF WASTE MATERIAL AND CONSTRUCTION DEBRIS OR THE EXCAVATION OF BORROW MATERIAL WITHIN ODOT RIGHT-OF-WAY

PURPOSE

This guide provides the criteria to be used when evaluating a project for acceptable locations for the disposal of waste material and construction debris or the excavation of borrow material within highway rights-of-way.

REFERENCES

1. Ohio Department of Transportation, "Location & Design Manual (LDM), Volume 1 & III".
2. Ohio Department of Transportation, "Construction and Materials Specifications (CMS)".
3. American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets, 2001".
4. FHWA Policy, "Recycled Materials Policy", dated February 7, 2002.

SCOPE

All Districts, Divisions and Offices of the Ohio Department of Transportation (ODOT) involved in the design, construction and maintenance of roadways and all consultants and contractors who provide similar services to ODOT.

BACKGROUND

The use of ODOT right-of-way for disposal of waste material and construction debris or the excavation of borrow material is now prohibited, unless locations are identified in the plans (see CMS Sections 104.03, 105.16, 105.17 and 107.11). With the increased need to remove and replace the pavements of our Interstate and Freeway System as the pavements approach or exceed their design life, the disposal of the existing pavement, much of it concrete, that cannot be recycled or used as part of the new pavement structure has become a problem. These guidelines have been developed to give designers the criteria that should be used in the evaluation of a project for acceptable waste or borrow areas within the right-of-way of a project.

DEFINITIONS

Clear Zone: The desirable unobstructed area along a roadway, outside the edge of pavement, available for the safe recovery of vehicles that have left the traveled way. (Section 600.2, LDM)

Safety Grading: The shaping of the roadside using 6:1 or flatter slopes within the clear zone area and 3:1 or flatter foreslopes and recoverable ditches extending beyond the clear zone. (Figures 307-1 and 307-2, LDM)

Clear Zone Grading: The shaping of the roadside using 4:1 or flatter foreslopes and traversable ditches within the clear zone area. (Figure 307-3, LDM)

Decision Sight Distance: The distance needed for a driver to detect, recognize and select an appropriate course of action for an unexpected or otherwise difficult-to-perceive condition in the roadway. (Section 201.5 and Figure 201-5, LDM)

PROJECT EVALUATION

Waste Disposal Areas

All projects with large amounts of cut and fill or projects with pavement removal, particularly non-recyclable concrete pavement, should be evaluated for acceptable disposal areas within the right-of-way. Acceptable disposal areas would preferably enhance the safety of the roadway and should not provide a less safe highway than now exists. The total width of existing right-of-way should be considered. Examples of roadway safety enhancements would include the use of safety grading where clear zone grading or less now exists, the use of clear zone grading where something less exists and the elimination of barrier. In accordance with Section 307.21 of the LDM, all interstate and interstate look alike roadways should use safety grading. If safety grading now exists, consider the possibility of extending it to the right-of-way line. If clear zone grading now exists, consider the use of safety grading or consider the possibility of extending clear zone grading to the right-of-way line. Existing barrier locations should be evaluated to see if the application of safety grading, or at a minimum clear zone grading, would eliminate the need for barrier. Adjustments to drainage or drainage structures may also be required. Not all acceptable disposal areas will enhance the safety of the roadway. Areas that do not affect the safety of the roadway (areas outside a safety graded or clear zone graded section) and do not affect wetlands or other environmental regulations but are within the right-of-way of the project should also be considered as acceptable disposal areas.

Although interchange infields seem like obvious or ideal areas to dispose of waste material, great care not to restrict sight distances is required.

Exit Ramps - Decision stopping sight distance, Avoidance Maneuver A or B, as per Figure 201-5 of the LDM should be provided for the design speed of the ramp (Figure 404-1 and Section 404.2 of the LDM). Fills may be placed in the infield areas as long as the decision stopping sight distance is provided and 6:1 or flatter slopes are provided in the gore areas (Section 307.53 of the LDM). Fills within the infields of diamond interchanges should not affect the intersection sight distance at the intersection of the crossroad and the exit ramp.

Entrance Ramps - Decision sight distance, Avoidance Maneuver C or E, as per Figure 201-5 of the LDM should be provided for the design speed of the ramp (Figure 404-1 and Section 404.2 of the LDM). The decision sight distance is measured from a point on the ramp where a driver on the ramp has an unobstructed view of vehicles on the mainline to a point on the ramp where the driver no longer has a lane width available on the ramp and must start to merge. This is the distance that the merging ramp driver has to decide where he can safely merge into the mainline traffic. This distance should also be unobstructed for the mainline driver to react to the ramp vehicle by either a lane or speed change.

Loop Ramps - The infields of loop ramps generally should not be filled unless it is to

eliminate barrier or provide safety graded slopes. Loop ramps have a higher than average number of run off the road accidents due to the sharp curvature and high speeds. When the infields of these ramps are filled, not only are sight distances decreased but the driver also loses a sense of how sharp the curvature of the ramp is when he cannot see the entire ramp but only a small portion of it. If considered an acceptable fill site, then at a minimum, decision sight distance, Avoidance Maneuver A or B for the exit end of the ramp and Avoidance Maneuver C or E for the entrance end of the ramp, as per Figure 201-5 of the LDM should be provided for the appropriate design speed of the ramp (Figure 404-1 and Section 404.2 of the LDM).

Fill Restrictions - Fill heights greater than 10 feet should be reviewed by the Office of Geotechnical Engineering. Slopes should not exceed 4:1 for ease of maintenance. Fill material and fill construction shall be in accordance with the Construction and Materials Specifications, Item 203.

Borrow Areas

All projects requiring borrow should be evaluated for acceptable borrow areas within the right-of-way. The same criteria used to evaluate the waste disposal areas should be used to evaluate borrow areas within the right-of-way. The safety of the highway should be enhanced, if possible. Consider applying safety grading when something less than safety grading exists or clear zone grading when something less than clear zone grading exists.

The determination as to whether or not to allow the disposal of waste material or the excavation of borrow within the right-of-way of a project should be made as soon as possible in the project development process. Possible waste areas or borrow areas within the project right-of-way should be identified during the field review prior to final scope preparation so that the evaluation of these areas can be included as part of the scope for the project. If during plan development these areas are found to be acceptable as waste areas or borrow areas, then they shall be identified in the construction plan along with their limits. Acceptable locations should be identified on the schematic plan, plan and profile sheets or in a general note (see Location & Design Manual, Volume III, Section 1303.20 and Appendix B, Sample Plan Note G105). If the project has no acceptable waste areas or borrow areas within the project right-of-way, then it shall be stated on the construction plans by plan note, that an evaluation has been completed and no acceptable waste areas or borrow areas exist within the right-of-way of the project. Another consideration should be the impact of the allowed waste area or borrow area on future projects. One should not allow the placement of fill or excavation for borrow in an area that would require its removal or fill in the near future by another project. Environmental regulations, public involvement commitments, erosion control, the effects on utilities and the effects on drainage should also be considered. CMS Section 105.16 addresses erosion control and environmental regulations controlling borrow and waste areas. Coordination with utilities will be required and drainage structures may need extended or adjusted to grade.

DECISION SIGHT DISTANCE

201-5

REFERENCE SECTION

201.5

HEIGHT OF EYE 3.50'

HEIGHT OF OBJECT 2.00'

DESIGN SPEED (mph)	DECISION SIGHT DISTANCE (FT)				
	AVOIDANCE MANEUVER				
	A	B	C	D	E
30	220	490	450	535	620
35	275	590	525	625	720
40	330	690	600	715	825
45	395	800	675	800	930
50	465	910	750	890	1030
55	535	1030	865	980	1135
60	610	1150	990	1125	1280
65	695	1275	1050	1220	1365
70	780	1410	1105	1275	1445

The Avoidance Maneuvers are as follows:

- A - Rural Stop
- B - Urban Stop
- C - Rural Speed/Path/Direction Change
- D - Suburban Speed/Path/Direction Change
- E - Urban Speed/Path/Direction Change

Decision Sight Distance (DSD) is calculated or measured using the same criteria as Stopping Sight Distance; 3.50 ft eye height and 2.00 ft object height.

Use the equations on Figures 203-3, 203-6 and 201-2 to determine the DSD at vertical and horizontal curves.


APRIL, 2002

SAFETY GRADING SECTIONS


307-1E

REFERENCE SECTIONS
307.21

CUT SECTION RURAL INTERSTATE

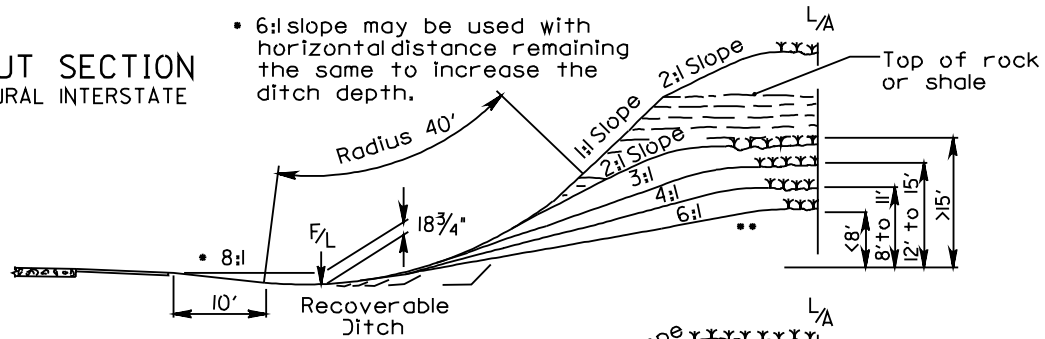


CUT SECTION URBAN INTERSTATE, OTHER FREEWAYS AND EXPRESSWAYS

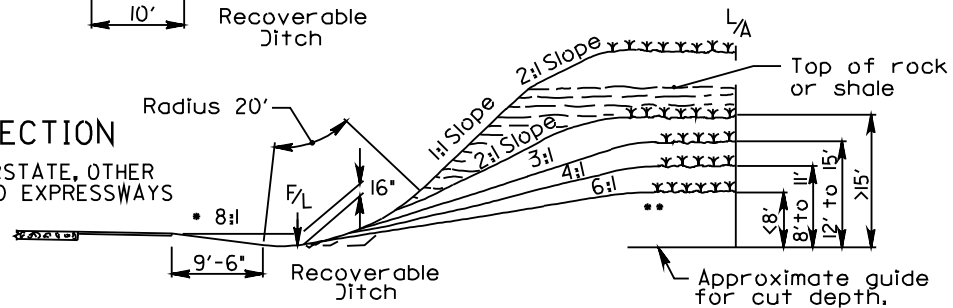


•• 4' Rounding

SHALLOW CUT OR LOW FILL



Slope transition between low fill design and medium fill design shall be such that the flowline of the roadside ditch does not turn toward the roadway.

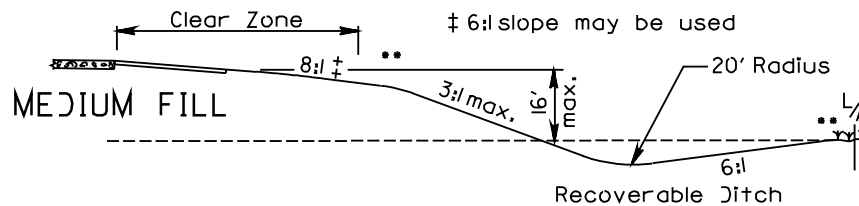

Application of these sections may vary to avoid frequent slope changes and to maintain reasonably straight ditches.

See Figure 307-2 for Recoverable Ditch details.


APRIL, 2002

**CLEAR ZONE
GRADING SECTIONS
(TRAVERSABLE DITCH SECTIONS)**


307-3E

REFERENCE SECTIONS
307.21, 601.1

CUT SECTION

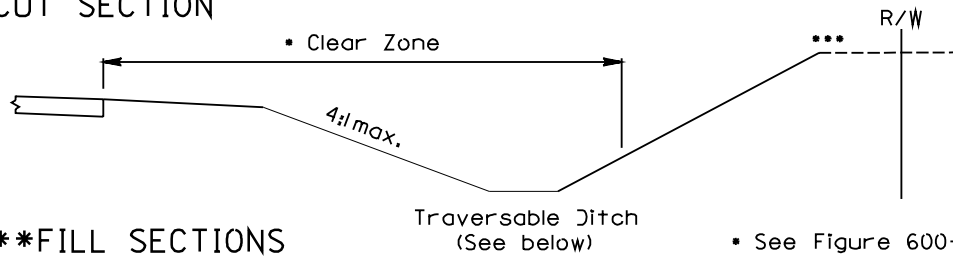


****FILL SECTIONS**

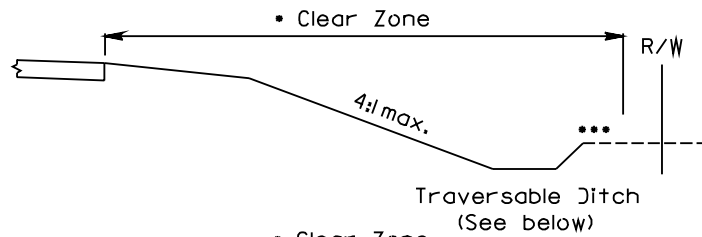

• See Figure 600-1
for clear zone
distance.

... 4' Rounding

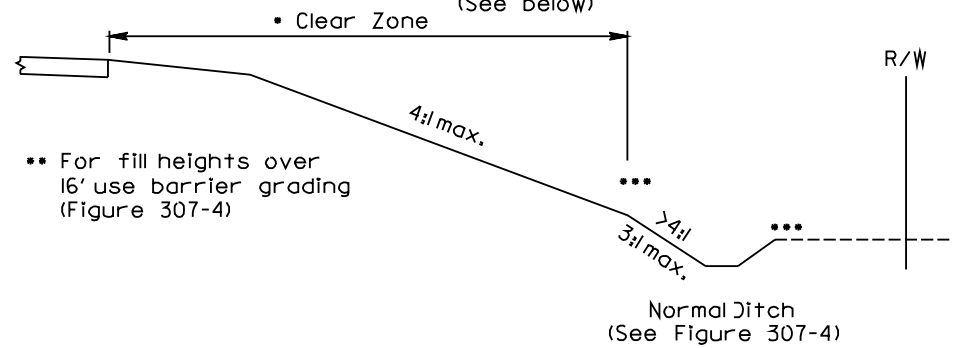

** For fill heights over
16' use barrier grading
(Figure 307-4)

FOR ACCEPTABLE COMBINATIONS OF FORESLOPE AND
BACKSLOPE FOR TRAVERSABLE DITCHES SEE FIGURES
307-10 AND 307-11.

Minimum Ditch Depth
Cut: 1.5', Fill: 1.0'

Appendix B

Roadway Sample Plan Notes



Universal TAU-II configurations approved for use in Ohio on the NHS						
Speed	Width	Configuration	Bays	Approx. Length	Drawing	Recommended Foundation & Backstop
60 mph [100 km/h]	up tp 30"	Parallel	8	27'-5"	B040239	PCC Pad, Flush Mount A040420
	36"	Combination (Parallel & Flared)			B033001	PCC Pad, Wide Flange A040108
	42"					
	48"					
	54"					
	60"					
	66"		7	24'-7"		
	72"	B033004				
	Flared	B033005				
		B033006				
		B033007				
		B033008				
		B033009				
	96"	B033010				
70 mph [110 km/h]	up to 30"	Parallel	10	33'-1"	B040239	PCC Pad, Flush Mount A040420
	36"	Combination (Parallel & Flared)			B033097	PCC Pad, Wide Flange A040108
	42 "					
	48"					
	54"					
	60"					
	66"		9	30'-4"		
	B033099					
	72"	8	27'-5"	B033100		
	Flared			B033101		
				B033102		
				B033103		
				B033104		
				B033105		
B033106						
102"	B033107					

Other TAU II models are available. See System Capacity Drawing for various configurations.

PREFERRED CROSS SECTIONS FOR DITCHES WITH ABRUPT SLOPE CHANGES

307-10E

April 1999

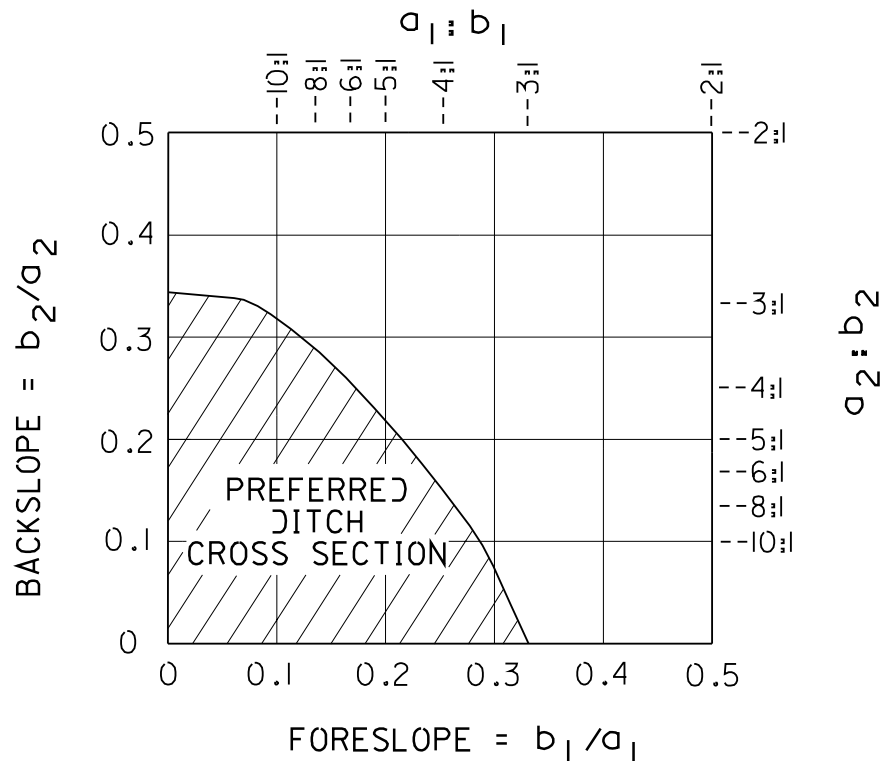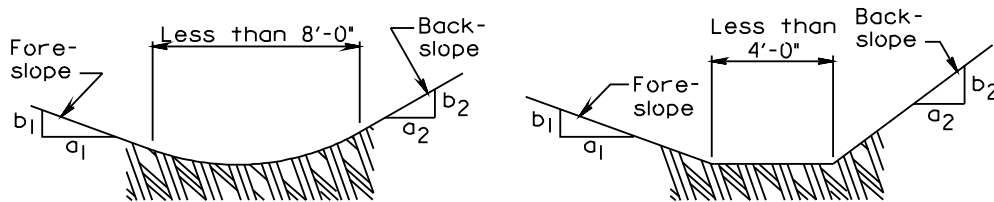



This chart is applicable to vee ditches, rounded ditches with bottom widths less than 8'-0", and trapezoidal ditches with bottom widths less than 4'-0".

Ditches that fall within the shaded areas are considered traversable and are preferred for use within the clear zone.

PREFERRED CROSS SECTIONS FOR DITCHES WITH GRADUAL SLOPE CHANGES

307-11E

April 1999

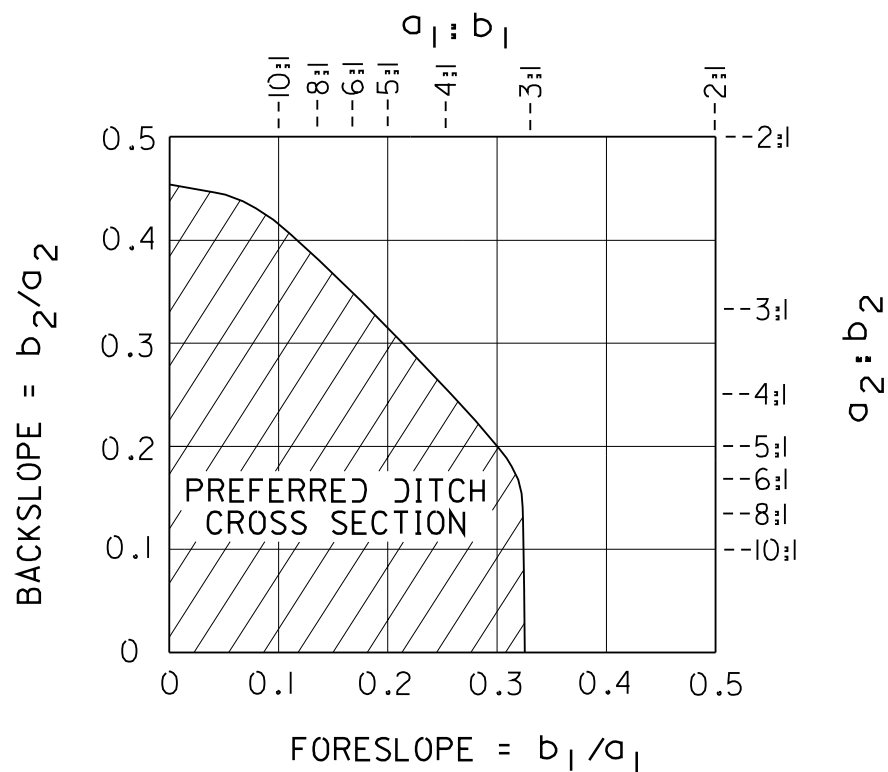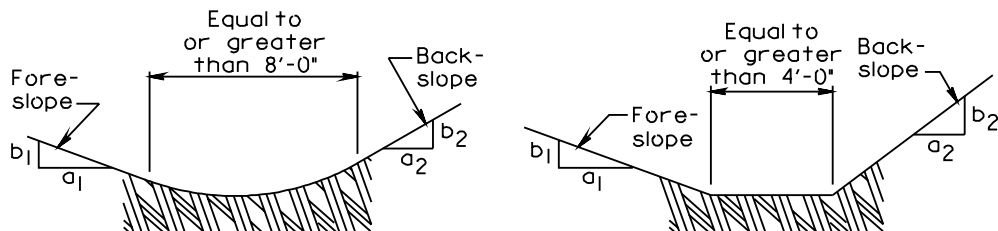

This chart is applicable to rounded ditches with bottom widths of 8'-0" or more, and to trapezoidal ditches with bottom widths equal to or greater than 4'-0".

Ditches that fall within the shaded areas are considered traversable and are preferred for use within the clear zone.

Roadside Safety Landscaping Guidelines

Table of Contents

1 PURPOSE.....	1
1.1 GENERAL	1
1.2 BACKGROUND	1
1.3 ADDITIONAL INFORMATION	1
2 GENERAL SAFETY.....	1
3 PLAN REQUIREMENTS.....	1
3.1 PRELIMINARY FIELD REVIEW	1
3.2 SCOPING.....	2
3.3 LANDSCAPE PLAN DETAILS.....	2
3.4 PERMIT APPLICATIONS	2
3.5 FINAL FIELD REVIEW	2
4 LANDSCAPE DESIGN CONSIDERATIONS.....	2
4.1 GENERAL	2
4.2 LANDSCAPING ELEMENTS & FIXED OBJECTS.....	3
4.3 BODIES OF WATER	3
4.4 ACCESSORIES.....	4
4.5 IRRIGATION SYSTEMS.....	4
5 PLACEMENT FOR SAFE ROADSIDE DESIGN	4
5.1 ROADSIDE GRADING	4
5.1.1 Safety Graded Sections	4
5.1.2 Clear Zone Graded Sections.....	5
5.1.3 Common Graded Sections	5
5.1.4 Barrier Graded Sections.....	5
5.1.5 Gating End Terminals	5
5.2 URBAN DESIGN	6
5.3 HIGHWAY DESIGN ELEMENTS.....	6
5.3.1 Interchanges	6
5.3.2 Intersections.....	6
5.4 ADDITIONAL PLANTING CONSTRAINTS	7
6 PLANT MATERIAL.....	7
6.1 NATIVE OR NON-INVASIVE PLANTS	8
6.1.1 Wildflowers.....	8
6.1.2 Seedlings	8
6.1.3 Trees and Shrubs.....	8
6.1.4 Species	8
6.2 ZONES.....	8
6.3 EMERALD ASH BORER INSECT	8
7 PLANTING.....	9
8 MAINTENANCE.....	9
8.1 GENERAL	9
8.2 WATERING, PRUNING, MOWING, AND REPLACEMENT.....	9
8.3 PLANTING STAKES	9
8.4 WINTER HAZARDS	10
8.5 MAINTANCE OF "NO MOW" AREAS.....	10
Figures	11
Appendices.....	19

Roadside Safety Landscaping Guidelines

This page is intentionally blank

Roadside Safety Landscaping Guidelines

1 PURPOSE

1.1 GENERAL

These guidelines provide direction for landscaping within highway rights-of-way. They should be used in conjunction with the ODOT Location and Design Manual (LDM), Volumes One, Two and Three and other applicable standards, policies and guidelines. The information provided in this guide is primarily safety-related and is intended for use by designers who already possess a good working knowledge of roadside safety design and landscape design. ODOT's Vision is to provide a safe and mobile transportation system. Landscape projects, therefore, shall be designed with the safety of the traveling public and maintenance crews as the top priority.

1.2 BACKGROUND

The basis for these guideline stems from the fact that trees are a major cause of injuries and fatalities on the nation's highways. While it is a Policy within ODOT to increase the amount of aesthetics on the State highway system, and these guidelines tries to encourage that end, it cannot be understated: trees are proven killers when placed by the roadside. The following guidelines follow the principles offered by AASHTO's Roadside Design Guide. Single vehicle crashes with trees account for 3,000 persons each year nationwide. Trees are not generally a highway element that engineers have control over, except in landscaping projects where the designer can make decisions to reduce the consequences of vehicles leaving the road.

1.3 ADDITIONAL INFORMATION

This guideline is written for primarily the roadside safety aspect of landscaping. However, by necessity, this guideline contains other information for the landscape designer to consider in developing themes, schemes and layouts. But in no way is this information considered to be all inclusive and designer information is available through ODOT's Design Aesthetics initiative and ODOT's Gateway Landscaping Program. Also, non-intrusive plant lists, plants hardiness in the harsh roadway environment, and other assistance may be obtained from ODOT's Landscape Architects. The Standards section in the Office of Roadway Engineering is available for assistance with roadside safety design.

2 GENERAL SAFETY

Trees are potential obstructions by virtue of their size and their location in relation to vehicular traffic. Generally, existing trees with an expected mature size of greater than 4 inches are considered fixed objects. Landscaping elements shall be selected and located to maintain adequate sight distances and clear zone setbacks. These elements shall not interfere with the function of the pavement, shoulders, longitudinal barriers, end treatments, drainage systems, traffic signs, signals, utilities and other highway structures and appurtenances.

3 PLAN REQUIREMENTS

3.1 PRELIMINARY FIELD REVIEW

All landscape projects should involve a preliminary field review prior to the scoping meeting with the consultant/designer and a district/county designee(s) knowledgeable in landscape design and roadside design/safety. At the preliminary field review, conceptual locations available for planting wildflowers, seedlings, trees, shrubs and other landscaping elements should be identified.

Roadside Safety Landscaping Guidelines

3.2 SCOPING

Experience has shown that proper project scoping is invaluable in heading off later misunderstandings between landscaping proponents and highway engineers. Agreeing in advance of the project to require detailed plans, permissible landscape elements, final field reviews, and maintenance agreements are important to providing a beautiful, yet safe roadside landscaping.

3.3 LANDSCAPE PLAN DETAILS

Landscape plan should be concise and easily understood. Plans should be drawn to scale and developed on standard plan and profile sheets. Plans should indicate the following:

- design and legal speeds for the landscaped roadways
- type of adjacent land use (e.g. farmland, commercial, residential, etc.)
- topographic features such as slope limits and slope rates
- contour grading at interchanges is preferred
- locations of all utilities
- location and descriptions of existing landscaped areas
- location of all existing longitudinal barriers, end treatments, impact attenuators, curbs and sidewalks
- location and configuration of ditches and other drainage features
- plant lists (including botanical and common names)
- size and spacing of plants as well as area of occupancy at maturity

Although many landscape designers desire to use "conceptual" layouts, it is imperative for the highway engineer to have as much of the above information as possible in a standard format to make informed decisions on the safety merits of the plan. Omission of such information will only lead to delays, and possibly to denial of otherwise acceptable planting arrangements.

3.4 PERMIT APPLICATIONS

Requests for a permit shall include landscape plans as described in Section 3.3 and be directed to the District Deputy Director. A Maintenance & Repair permit application (M&R 505) can be obtained from the District Permit Office. The District should consult the ODOT County Manager before issuing the permit to ensure coordination of different projects scheduled in the same area.

3.5 FINAL FIELD REVIEW

After the plans have been accepted and all permits have been approved, the consultant/designer and a district/county designee(s) knowledgeable in landscape design and roadside design/safety should conduct a final field review.

4 LANDSCAPE DESIGN CONSIDERATIONS

4.1 GENERAL

Landscape design can serve several important functions within the highway environment. In addition to making the roadway more aesthetically pleasing, landscaping can also be used to do the following:

- control erosion
- create a living snow fence
- minimize maintenance requirements and costs
- screen undesirable views
- preserve desirable views

Roadside Safety Landscaping Guidelines

- shield headlight glare
- preserve/enhance the natural environment
- reduce unwanted noise, and possibly to serve as a substitute for noise barrier at the request of a local community (see Vegetative Screening in lieu of Noise Barrier in Appendix A of this Guideline)

Landscaping projects must be done as a part of a community sponsored comprehensive plan. The plan must be sponsored by the public agency that will also be responsible for maintenance of the landscape features. Landscaping at an interchange should incorporate the entire interchange rather than just individual ramps. Landscaping may be permitted along highway segments if it is sponsored and maintained by a public agency. The goal is to provide a community endorsed, consistent theme along the highway rather than isolated, independent projects. Landscaping that contains advertising or company logos will not be permitted. It is permissible for individual property owners abutting the highway to request a permit to clear, mow, or plant replacement trees along their frontage to improve the visibility from the highway per Standard Procedure 512-001 Vegetation Maintenance Permitting for Visibility of Locations Off the Right-Of-Way.

It is recommended that designer choose plants carefully. Highway plantings used in the roadside environment should be hardy for the Planting Zone, salt sprays, and air pollutants (see Section 6).

Trees are not to encroach on the sight distances, have trunks greater than 4" mature diameter when planted in certain locations, or have canopies that will encroach over the road.

Highway landscaping should result in designs that do not require extensive maintenance. In fact, at the end of the five year maintenance period described in Section 8.1, landscaped areas should not require any more maintenance than the natural roadside. Therefore, plant materials noninvasive to the area should be used whenever practical.

4.2 LANDSCAPING ELEMENTS & FIXED OBJECTS

Landscaping elements may consist of natural as well as manmade features, e.g., groundcovers, flowers, trees, and pavers. Many of these features such as most groundcovers and pavers allow a vehicle to safely pass over them and, therefore, do not pose a significant risk to an errant motorist. However, other features may be considered fixed objects and are, therefore, potential safety hazards. In general, a fixed object is any object that cannot be driven over safely by an errant vehicle. This includes but is not limited to the following:

- individual trees with a trunk caliper (diameter) greater than 4 inches at maturity, trunk caliper is measured at Dead Breast Height (DBH) or 54" up from the ground,
- clusters of smaller caliper trees or shrubs with multiple trunks or groups of small trees planted close together (within 6 feet), where the sum of their calipers at maturity exceeds 4 inches,
- decorative walls,
- rock formations and other free standing objects or fixed objects with a diameter or height greater than 4 inches. Fixed objects shall not be installed within medians or along the roadside within the setback areas specified in Section 5.

4.3 BODIES OF WATER

Bodies of water present unique safety concerns. The department recommends the use of longitudinal barriers to protect naturally occurring ponds located within the setback areas. Ponds/pools and other landscape water features shall not be built within highway rights-of-way. This does not preclude the construction of treatment ponds or water retention basins within the right-of-way when mandated in the environmental process.

Roadside Safety Landscaping Guidelines

4.4 ACCESSORIES

In community gateways and downtown business districts many municipalities seek to install street furniture, pavers, bollards, ornamental lighting, planters and other landscaping features to the design. Features within the lateral offset distances described in Figures 2a-2d are to be crashworthy, as specified in NCHRP Report 350 or MASH. Amenities located beyond the appropriate offset distances shown in this guideline may be allowed. Any feature placed within ODOT's Right-of-Way is allowed solely at ODOT's discretion. Landscaping plans that include decorative signs must conform to Section 210-3 of the Traffic Engineering Manual.

4.5 IRRIGATION SYSTEMS

Many lavish plantings are doomed to die unless maintenance is provided. Some communities protect their investment by installing irrigation systems. Irrigation systems cannot be a hazard to the motorist. Systems cannot have hazardous stub heights (4" diameter max.), exposed pipes or meters in the specified offset distance. Nor should the spray be directed to the roadway, nor is ponding or sheet flow permitted on the traveled way. In all cases, maintenance and repair of irrigation systems will be the responsibility of the project sponsor.

5 PLACEMENT FOR SAFE ROADSIDE DESIGN

5.1 ROADSIDE GRADING

Since operational safety can be affected by the landscape, a continuous length of the highway must be visible to the driver (sight distance) and a lateral run out area (clear zone) must be traversable and free of physical obstructions.

Clear zones provide areas for drivers of errant vehicles to regain control after running off the road. Although minimum setbacks for large trees and other fixed objects are prescribed in the following sections, consideration should be given to providing additional clearance where practical. Setback distances are measured to the face of the fixed object from the traveled edge line of the adjacent roadway. For facilities with curb and gutter, setback distances are measured from the face of curb to the face of the object. Bike lane and parking lane widths may be included in the setback distance. For trees, this measurement shall be taken to the face of the trunk 2 feet above the ground line.

Large trees and shrubs may be planted within the setback limits specified in this guide where the likelihood of an impact by an errant vehicle is negligible; for example, on cut slopes above a retaining wall or behind existing longitudinal barrier. See LDM, Volume One, Section 307 for details on the following types of grading, Section 600 for clear zone criteria, and Section 201 for details on required sight distances.

5.1.1 Safety Graded Sections

Safety grading is the shaping of the roadside using 6:1 or flatter slopes within the clear zone area and 3:1 or flatter foreslopes with traversable ditches beyond the clear zone. Safety grading is used primarily on Interstate, other freeways and expressways. Trees and large shrubs shall not be planted within 50 feet of the edge of the traveled way on safety graded sections. Low maintenance flowers, ground covers and other plants 18 inches or less in height at maturity may be located within this setback area as long as adequate sight distance is provided. See LDM, Volume One, Figure 307-1 for Safety Grading.

Roadside Safety Landscaping Guidelines

Trees and other plants taller than 18 inches may be located beyond this setback distance with the following restrictions:

- These plants shall not be located within a ditch or on a backslope within 20 feet of the ditch flowline.

5.1.2 Clear Zone Graded Sections

Clear zone grading is the shaping of the roadside using 4:1 or flatter foreslopes and traversable ditches within the clear zone area. 3:1 traversable foreslopes may be used but are not considered part of the clear zone. Clear zone grading is used primarily on high speed undivided rural facilities.

Trees and large shrubs shall not be planted within 30 feet of the edge of the traveled way on clear zone graded sections. Low maintenance flowers, ground covers and other plants 18 inches or less in height at maturity may be located within this setback area as long as adequate sight distance is provided. See LDM, Volume One, Figure 307-3 for Clear Zone Grading.

Trees and other plants taller than 18 inches may be located beyond this setback distance with the following restrictions:

- These plants shall not be located on foreslopes
- These plants shall not be located within a ditch or on a backslope within 10 feet of the ditch flowline

5.1.3 Common Graded Sections

Common grading is the shaping of the roadside using 3:1 or flatter foreslopes and normal ditches. It is used primarily on undivided facilities where the conditions for using clear zone or safety grading do not exist.

Plantings shall be located at least 4 feet behind the ditch line in cut sections and 2 feet outside the shoulder break in fill sections. See LDM, Volume One, Figure 307-4 for Common Grading.

5.1.4 Barrier Graded Sections

Barrier grading typically utilizes 2:1 foreslopes and normal ditches. It is usually provided when barrier is required for slope protection.

An ideal location for large trees and shrubs is behind existing longitudinal barriers, provided the landscape designer allows for a maintenance access. The lateral offset to these plants shall be 15 feet measured from the face of a w-beam barrier to allow the barrier to deflect to its design deflection in an accident, but to also allow maintenance vehicles to navigate on the back side of the barrier. Other types of barriers have different deflection limits. Barriers shall not be installed solely to permit the use of large trees or other potentially hazardous landscaping elements along the roadside. See LDM, Volume One, Figure 307-4 for Barrier Grading.

5.1.5 Gating End Terminals

Advances in the performance of guardrail end terminals and impact attenuators (crash cushions) have dramatically increased the safety of the traveling motorist. Many of these systems are designed to be "gating" (or "non-redirective") in certain types of impacts. Gating terminals function successfully by allowing approaching vehicles to pass through (or "gate") the very end of the end terminal. Impacting vehicles are only slightly impeded by the interaction with the terminal, and possibly still are traveling at a high speed. Thus, no fixed objects are allowed in a runout area that is defined by FHWA to be a minimum of 20 feet wide behind and perpendicular to the rail and 75 feet long beyond the terminal parallel to the rail. Figure 1 shows the permitted landscaping offset needed to protect this runout area behind gating terminals.

Roadside Safety Landscaping Guidelines

If the landscaping designer does not know which treatment is used at the end of a guardrail run, for the purpose of the landscaping plan it will be considered to be gating. All associated runout areas will remain free of fixed objects.

5.2 URBAN DESIGN

Roadside Grading section (5.1) generally deals with high speed rural roadways. Municipalities may desire to landscape gateways into their communities, which is often a state highway or an interchange that leads to an arterial. The highway facilities in these gateways are often roadways with lower speeds than found on the rural state system. These roads may be lower speed, divided or not, or curbed or not. The following discussion gives highway engineers and landscape designer's additional guidelines for placement of large trees, small trees and foliage in urban areas. Other landscaping features, such as lighting, stones, boulders, bollards, or water ponds, etc. are to meet guidelines listed elsewhere.

Refer to the Figures 2 through 4 for treatment in curb sections and/or medians. Curbing is considered mountable, a vertical 4-inch curb (or even 6 inches or more) is not going to stop a vehicle. Large trees are considered to be non-frangible and have a final (mature) trunk diameter of 4 inches or greater. The sum of the individual trunk dimensions of multi-stemmed tree are considered as one object over a 6-foot vehicle width. Setbacks in curbed sections are from the front face of the curb unless bike lanes or full-time parking lanes are present. Since urban tree locations have considerably less offset than high speed facilities, vertical clearance becomes an issue. All trees, especially those planted close to a curb will have their canopies clipped by trucks in the lane adjacent to the trees. Plant trees to ensure their mature canopy will not infringe on this area.

See Figures 2a-2b, 600-3, 600-4 for these design conditions (valid only in urban type areas):

5.3 HIGHWAY DESIGN ELEMENTS

Certain highway features provide a special opportunity for communities to express themselves through landscaping. Interchanges and intersections are ideal locations, although they do require special attention by designers.

5.3.1 Interchanges

Interchanges provide an opportunity for establishing and/or preserving attractive landscapes along our highways. Because an interchange often serves as a major focal point, both from the highway and from the cross road, the major components should be coordinated to achieve an overall design that is aesthetically pleasing. Major components of an interchange include: structural design, texture and detailing, railings, lighting, contour grading and plant material.

Generally, a minimum 50-foot setback (from the edge of traveled way) within a loop ramp is considered an appropriate sight distance setback for trees and shrubs with mature heights above 18 inches. Figures 5 and 6 provides details for landscape plantings at cloverleaf and diamond interchanges. For interchanges, all plantings shall provide ramp and collector-distributor road sight distances equal to or greater than those required by the design speed criteria in the LDM, Volume One, and Section 201.

5.3.2 Intersections

A driver attempting to enter a through road must be able to see traffic at a distance along the intersecting road in order to safely enter the intersection. The required intersection sight distance varies with the speed of the traffic on the main highway. LDM, Volume One, Section 201.3 provides standards for various intersection sight distance conditions. The triangular setback areas shown in Figure 7 are based

Roadside Safety Landscaping Guidelines

on these principles. No plantings above 18 inches shall be permitted within these setback areas. This figure shows a tangent condition; a graphical solution is required when the through road is curved.

In general, an offset of 50 feet on the inside of a curve with a degree of curvature of 2 degrees or greater should be provided to ensure adequate horizontal sight distances.

5.4 ADDITIONAL PLANTING CONSTRAINTS

Accident Locations - Offset distances greater than the minimum setbacks should be considered at locations with a history of run-off-the-road crashes.

Agriculture - Plants shall not obstruct, shade, or cause harm to crops planted in adjacent farm fields. When wind breaks and living snow fences are proposed adjacent to agricultural use properties, permission to plant should be obtained from the property owner.

Billboards - Plants shall not obstruct the view of billboards. However, naturalized trees blocking billboards should be cut only with permission of the district. This work shall be done by permit using a certified arborist.

Businesses - Trees, shrubs and wildflowers should be planted to blend in with the natural environment.

Canopy Obstruction - Trees and shrubs shall be offset far enough from the edge of the traveled way to prevent damage to vehicle windshields or interference with overhead utilities and signals.

Ditches - No planting other than seeding shall occur within ditches.

Irrigation Systems - Irrigation systems should be designed to minimize overspray onto the traveled way. The systems should be located so that the potential for damage to and from vehicles is prevented.

Scenic Views - Materials should be selected and placed to preserve desirable scenic views along the roadside.

Sight Distance - Proposed plants shall not restrict the horizontal and vertical sight distance of the roadway. Although the minimum setbacks provided in these guidelines were selected to ensure adequate sight distances, this should be field-verified and the setbacks shall be increased where necessary. In cases where an existing facility does not already provide adequate sight distance because of geometric restrictions, no further reduction of the sight distance shall be allowed.

Slopes - Evergreen and deciduous seedlings are the preferred vegetation; mature trees may be used when required for mitigation. Wildflower and native grasses (Construction and Material Specification (CMS) 870, Seed Mixtures Table) may be used with District Deputy Director approval.

Snow Fence - Only evergreens may be planted as living snow fence. Multiple rows shall be staggered. A general rule of thumb is that snow will be deposited on the leeward side of a snow fence over a distance approximately equal to the height of the snow fence. Care should be taken to ensure that the snow fence is planted far enough from the edge of the pavement to prevent snow from being deposited onto the roadway. (Also see Windbreak.)

Windbreak - Use the Ohio Windbreak Guide, published by the Ohio Department of Natural Resources as a source for design and species selection. An excellent source of information is found on-line at www.ohiodnr.com/forestry/publications/pdf/windbreaks.pdf.

6 PLANT MATERIAL

Roadside Safety Landscaping Guidelines

Designers who desire to obtain a list of acceptable plants, several planting lists are available through ODOT Central Office, or certain ODOT District Offices.

6.1 NATIVE OR NON-INVASIVE PLANTS

All plant material shall be disease and pest free. A copy of the nursery inspection should be made available upon request.

6.1.1 Wildflowers

Wildflower sites should be composed of Ohio native perennial forbs and grasses. Other mixtures should be approved by the District Deputy Director, or designated employee. Wildflower areas should be designated as _No Mow._ See CMS Item 659.09 for available species acceptable for planting on the Right-of-Way.

6.1.2 Seedlings

Both Deciduous and Evergreen Seedlings should be salt tolerant and planted area should be signed as "No Mow."

Evergreen Seedlings may be used to create living snow fences and screenings. Locations include but are not limited to:

- slopes
- erosion prone areas
- interchanges (see Figures 5 and 6)

6.1.3 Trees and Shrubs

Site design should use plant materials in a way that is low maintenance, has multi-seasonal interest and looks natural. Approval of locations should be based on safety, aesthetics and maintenance concerns. Typically trees and shrubs may be planted in the spring and fall. However, for optimum growth, trees shall be planted during the months recommended for the individual species.

6.1.4 Species

An acceptable list of tree and shrub species is available in the Ohio section of The Roadside Use of Native Plants, FHWA ep-99-014 or the Ohio State University Extension Office's _The Native Plants of Ohio_ (Bulletin 865, 1998), <http://ohioline.osu.edu/b865/>. It is preferable that noninvasive species be used. Hybrids and cultivars may be substituted only with permission from the District Deputy Director, or designated employee, when native species are not available.

6.2 ZONES

All trees shall be suitable for growth in Ohio Zone 5a or lower (USDA Hardiness Zones). Trees should be from Ohio growers whenever practical.

6.3 EMERALD ASH BORER INSECT

Landscape designers should be aware of the infestation of ash trees throughout Northwest Ohio and the efforts of Ohio Department of Agriculture (ODA) to combat this insect, which kill ash trees within three to five years from infestation.

It is recommended to refrain from planting ash trees for the next several years. If a landscaping project is utilizing existing ash trees in the design, then trees should be monitored for Emerald Ash Borer signs,

Roadside Safety Landscaping Guidelines

which can be found at the ODA website at www.ohioagriculture.gov/eab. (Some of the signs are "D" shaped exit holes, "S" shaped tunnels beneath the bark, dieback at the tops of the trees, sprouting around the trunk, woodpecker damage, or bark splits.) For more information about the pest, its current status, or ways to assist in early detection, calls the Emerald Ash Borer hotline at 1-888-OHIO-EAB.

7 PLANTING

Planting and bracing details are shown on Roadway Standard Construction Drawing LA-1.2.

Planting trees and shrubs too deeply is a persistent problem. To address this problem, the Ohio Nursery and Landscape Association and the ODNR Division of Forestry developed a set of tree planting specifications. This effort, called "Sample Tree Planting Specifications" is included as Appendix B at the end of this Guideline.

8 MAINTENANCE

8.1 GENERAL

Unless otherwise specified, all maintenance of all plants shall begin upon installation and be arranged by the project sponsor. Plants shall be maintained by the permit holder for at least five years. The Department should inspect the landscape during this time and require maintenance as needed.

Refer to the CMS 651 thru 673 for detailed roadside installation and maintenance requirements. See M&R 632 for mowing specifications.

Maintenance shall include but not be limited to:

- watering, pruning, mowing, and replacement
- weeding, fertilization, mulching
- removal
- litter pick up
- insect control (by a licensed applicator, when required)
- herbicides (by a licensed applicator)

8.2 WATERING, PRUNING, MOWING, AND REPLACEMENT

Watering - watering of the new plant material is essential for their survivability, and is the responsibility of the project sponsor.

Pruning - All trees and shrubs shall be maintained and only pruned as necessary to retain their natural shape or remove deadwood. For example, water sprouts (suckers) shall be removed from the base of each species as needed.

Mowing - Trees should be spaced sufficiently far apart and shrubs should be grouped and mulched in beds shaped to avoid excessive mower maneuvering and the need for hand trimming.

Replacement - All dead, dying or diseased plants shall be removed and disposed of in an appropriated manner. Replacement shall be left up to the project sponsor.

8.3 PLANTING STAKES

Roadside Safety Landscaping Guidelines

Trees planted with support stakes and guy wires shall have all such appurtenances removed no less than 12 months and no more than 18 months after installation.

8.4 WINTER HAZARDS

Landscaping shall not reduce safety for the traveling public or maintenance crews. Trees and shrubs should be placed in locations and trimmed to a size that does not hinder snow and ice removal. Removal or thinning of trees that shade the pavement creating icy spots should be considered. Some sections of the roadside should be kept open to allow sunlight to aid new tree growth.


8.5 MAINTANCE OF "NO MOW" AREAS

Naturalized (No Mow) areas can have a "neat" appearance without the removal of trees or shrubs. These areas within ODOT Right-of-Ways are frequently maintained by municipalities. If a community desires to maintain ODOT's Right-of-Way, an M&R 505 permit is required. Districts offices should also receive a maintenance plan from the community. If maintenance of Right-of-Way areas is done without obtaining the permit, communities can be held liable and be made to perform restitution.

Roadside Safety Landscaping Guidelines

Figures



Figure	Description	Reference Section
1	Gating guardrail end terminals offsets	5.1.5
2a-2b	Urban Setbacks, 45 mph or less	5.2
3	Cloverleaf Interchange, with loop ramps (Directional ramps)	5.3.1, 6.1.2
4	Diamond Interchange (Stop or yield conditions on ramp terminals)	5.3.1, 6.1.2
5	Intersection Setbacks	5.3.2

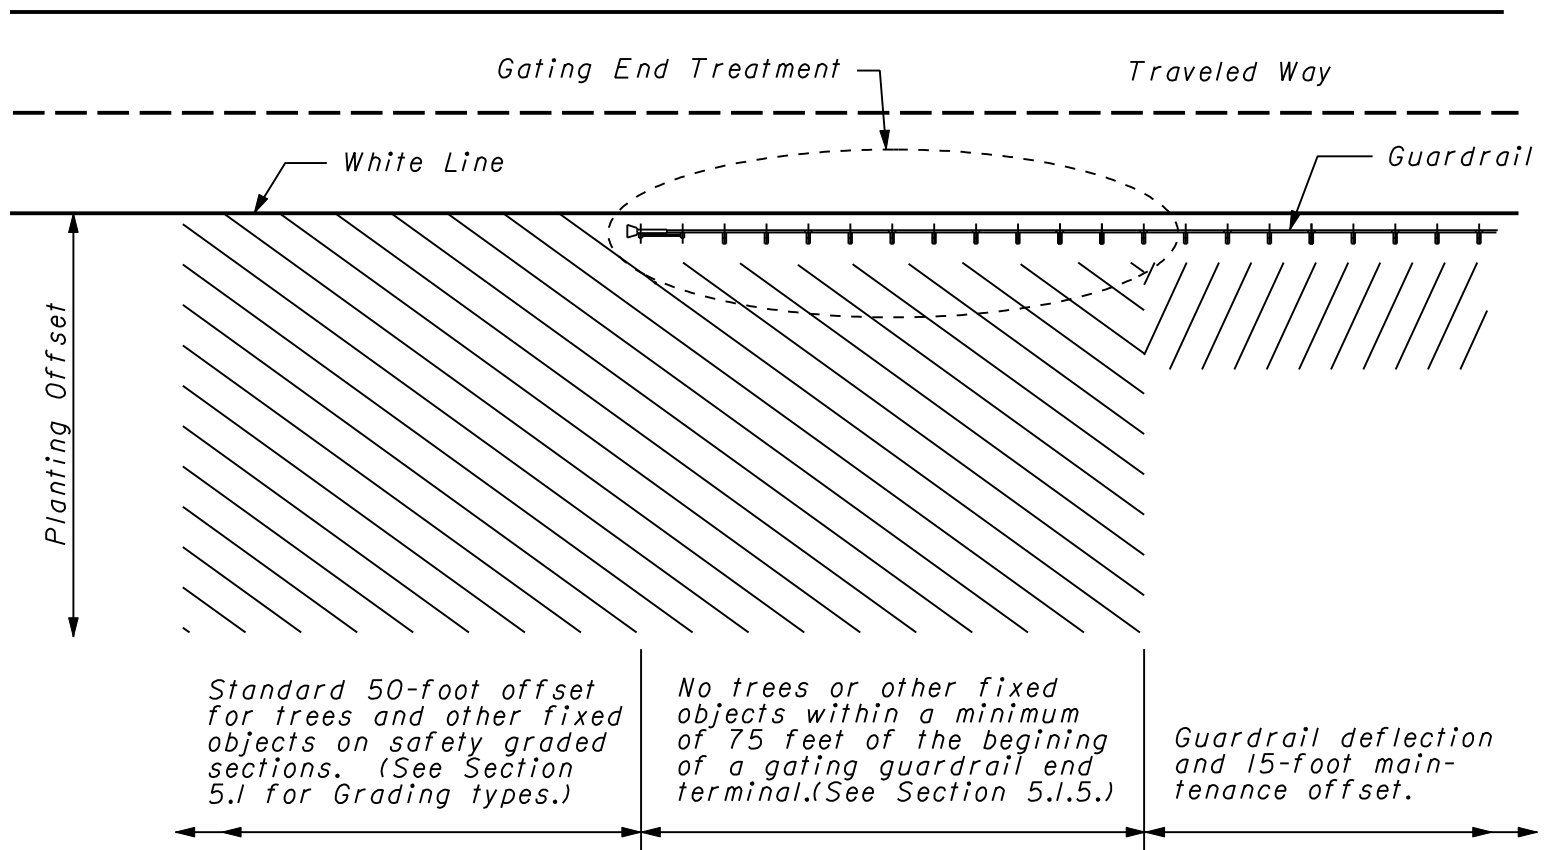

GATING GUARDRAIL END TERMINALS OFFSETS


FIGURE 1

FIGURE 2a Urban Landscaping
Typical Curbed Section 45 mph or less

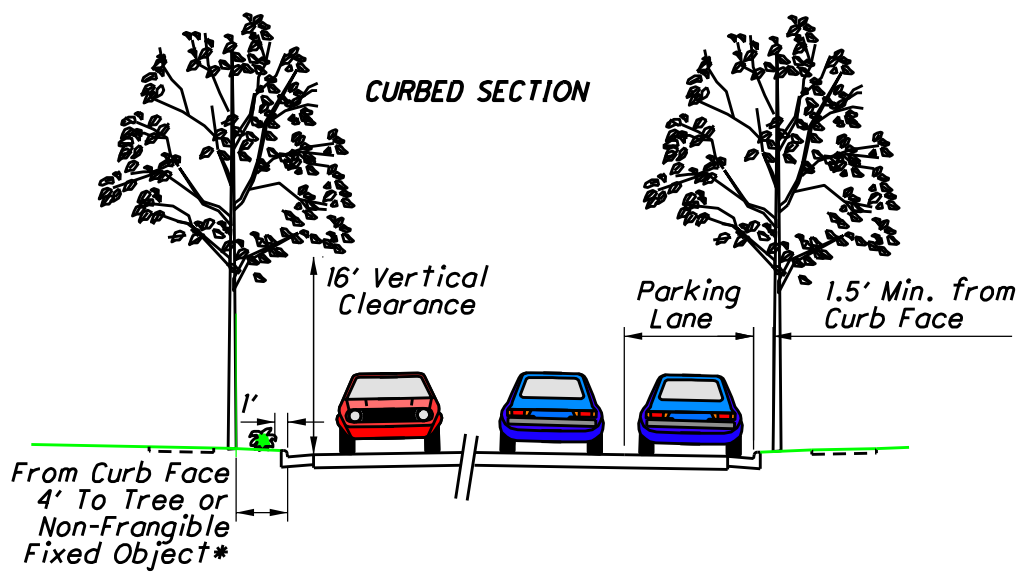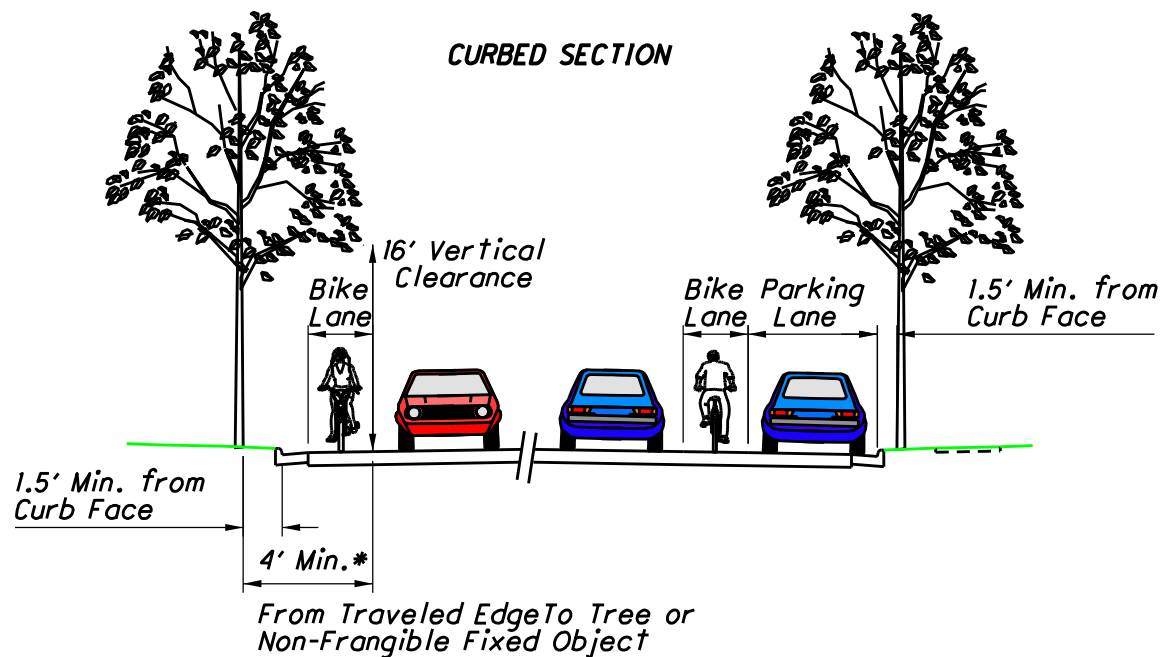


*6' Min. in high risk areas such as outside of curves

*FIGURE 2b Urban Landscaping
Typical Uncurbed Section 45 mph or less*

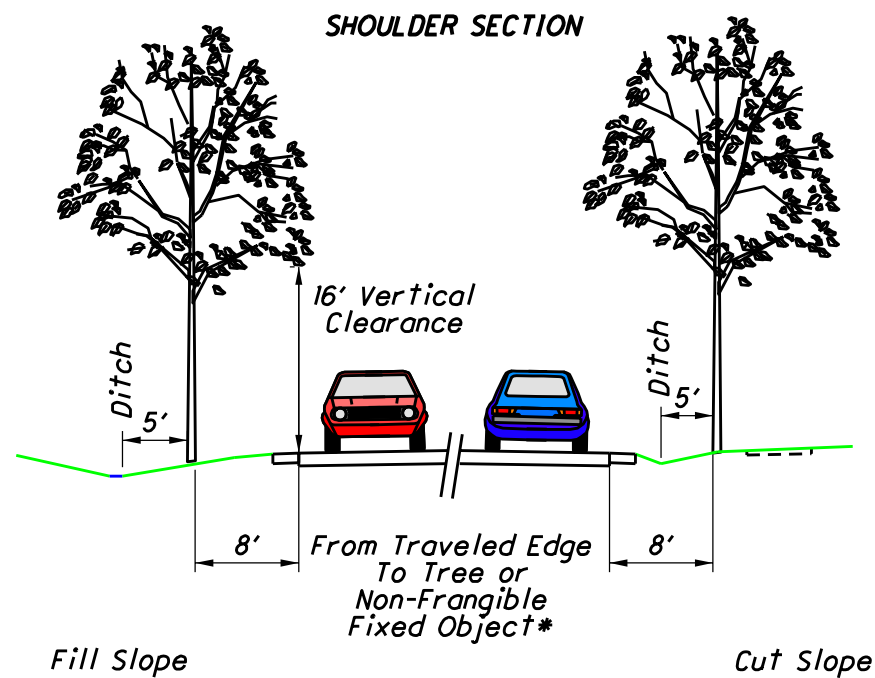


NOTE:
WHEN THE WIDTHS OF THE SHOULDERS AND DITCHES DO NOT CONFORM WITH THESE TYPICAL SECTIONS,
THE 2' MIN. DISTANCE BEHIND THE DITCH AND 2' MIN. DISTANCE OUTSIDE THE SHOULDER BREAK SHALL GOVERN.

*12' Min. in high risk areas such as outside of curves

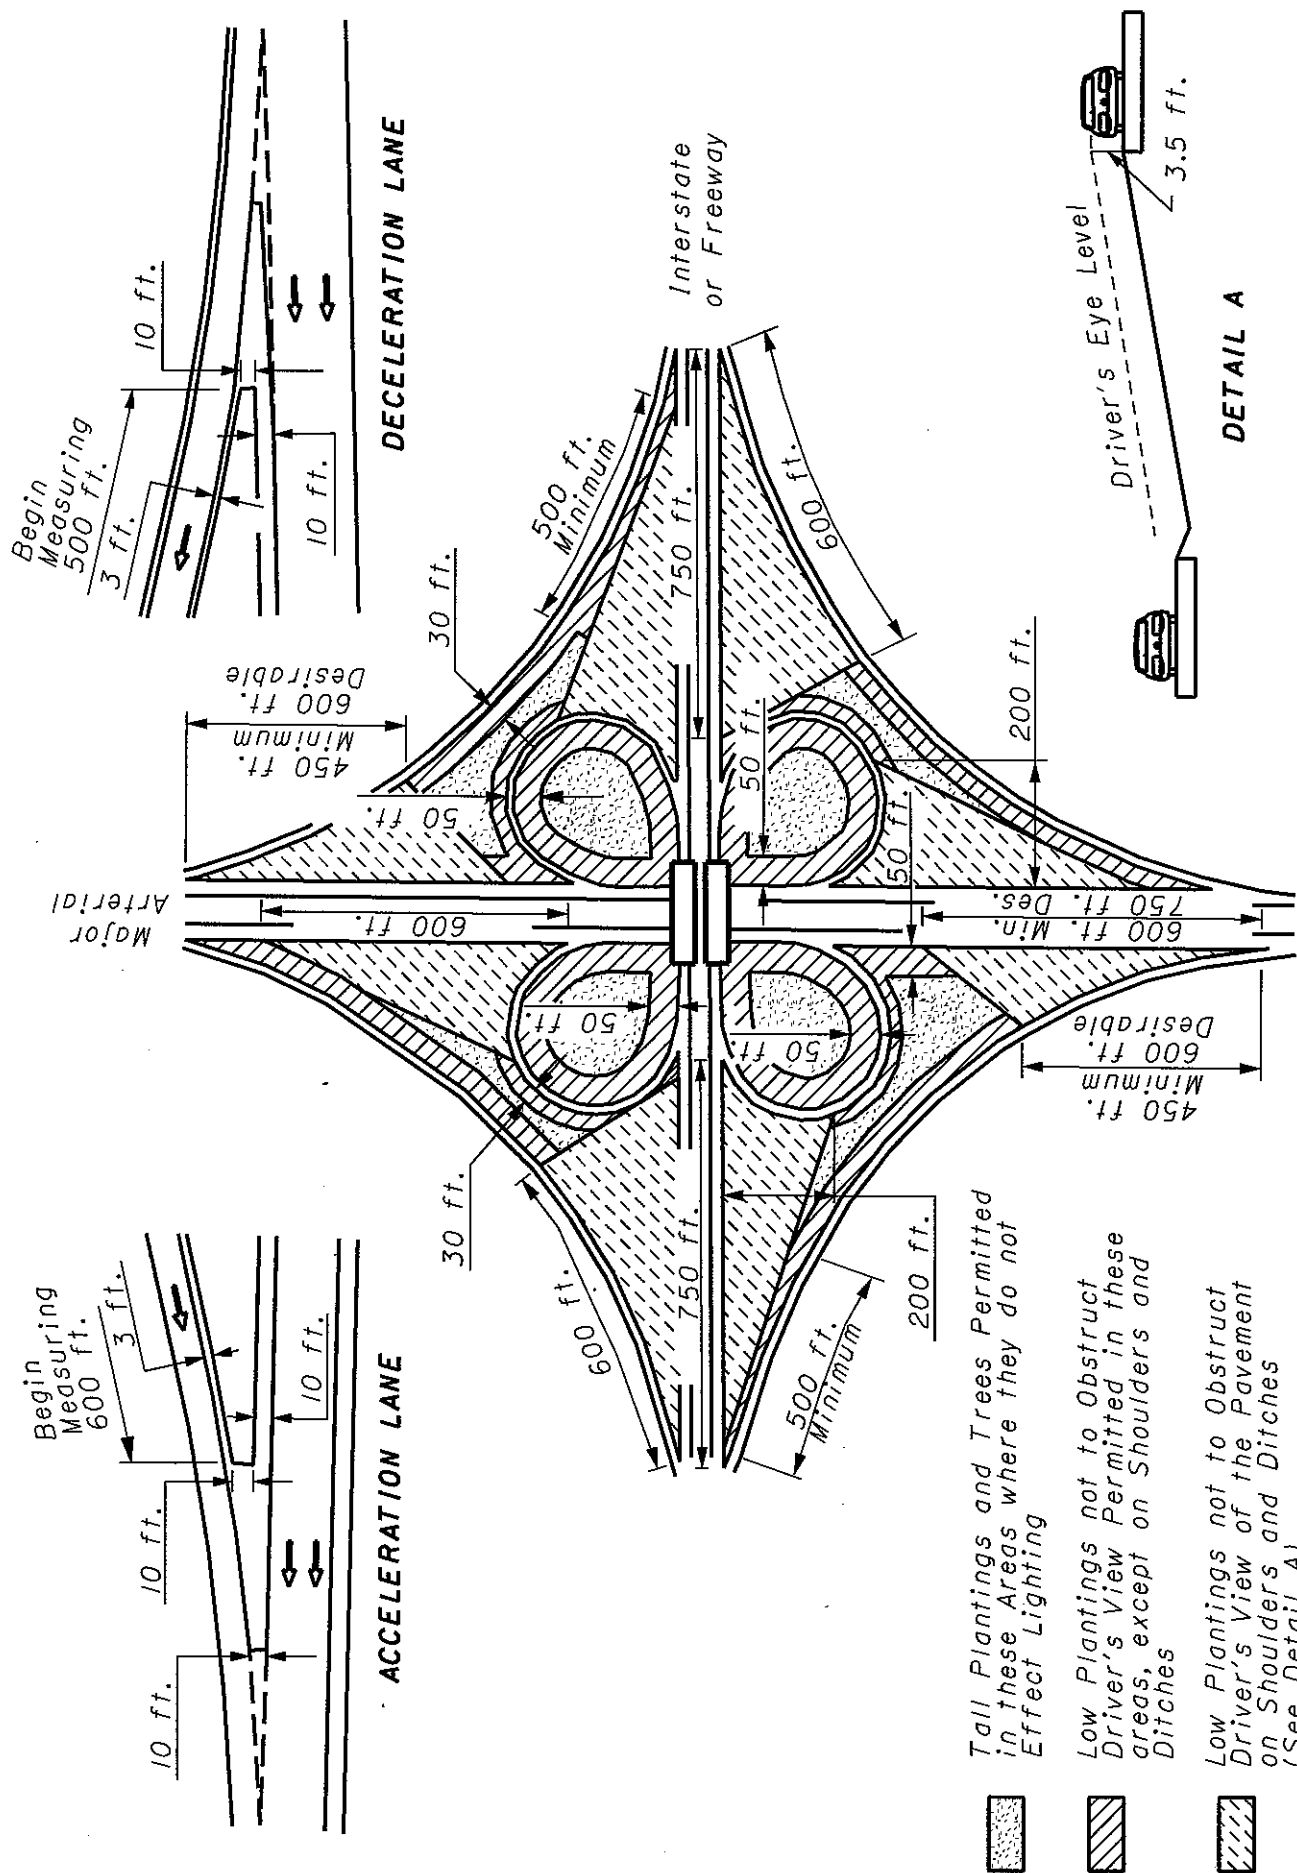


GUIDE FOR LANDSCAPE PLANTING AT CLOVERLEAF INTERCHANGES

FIGURE 3

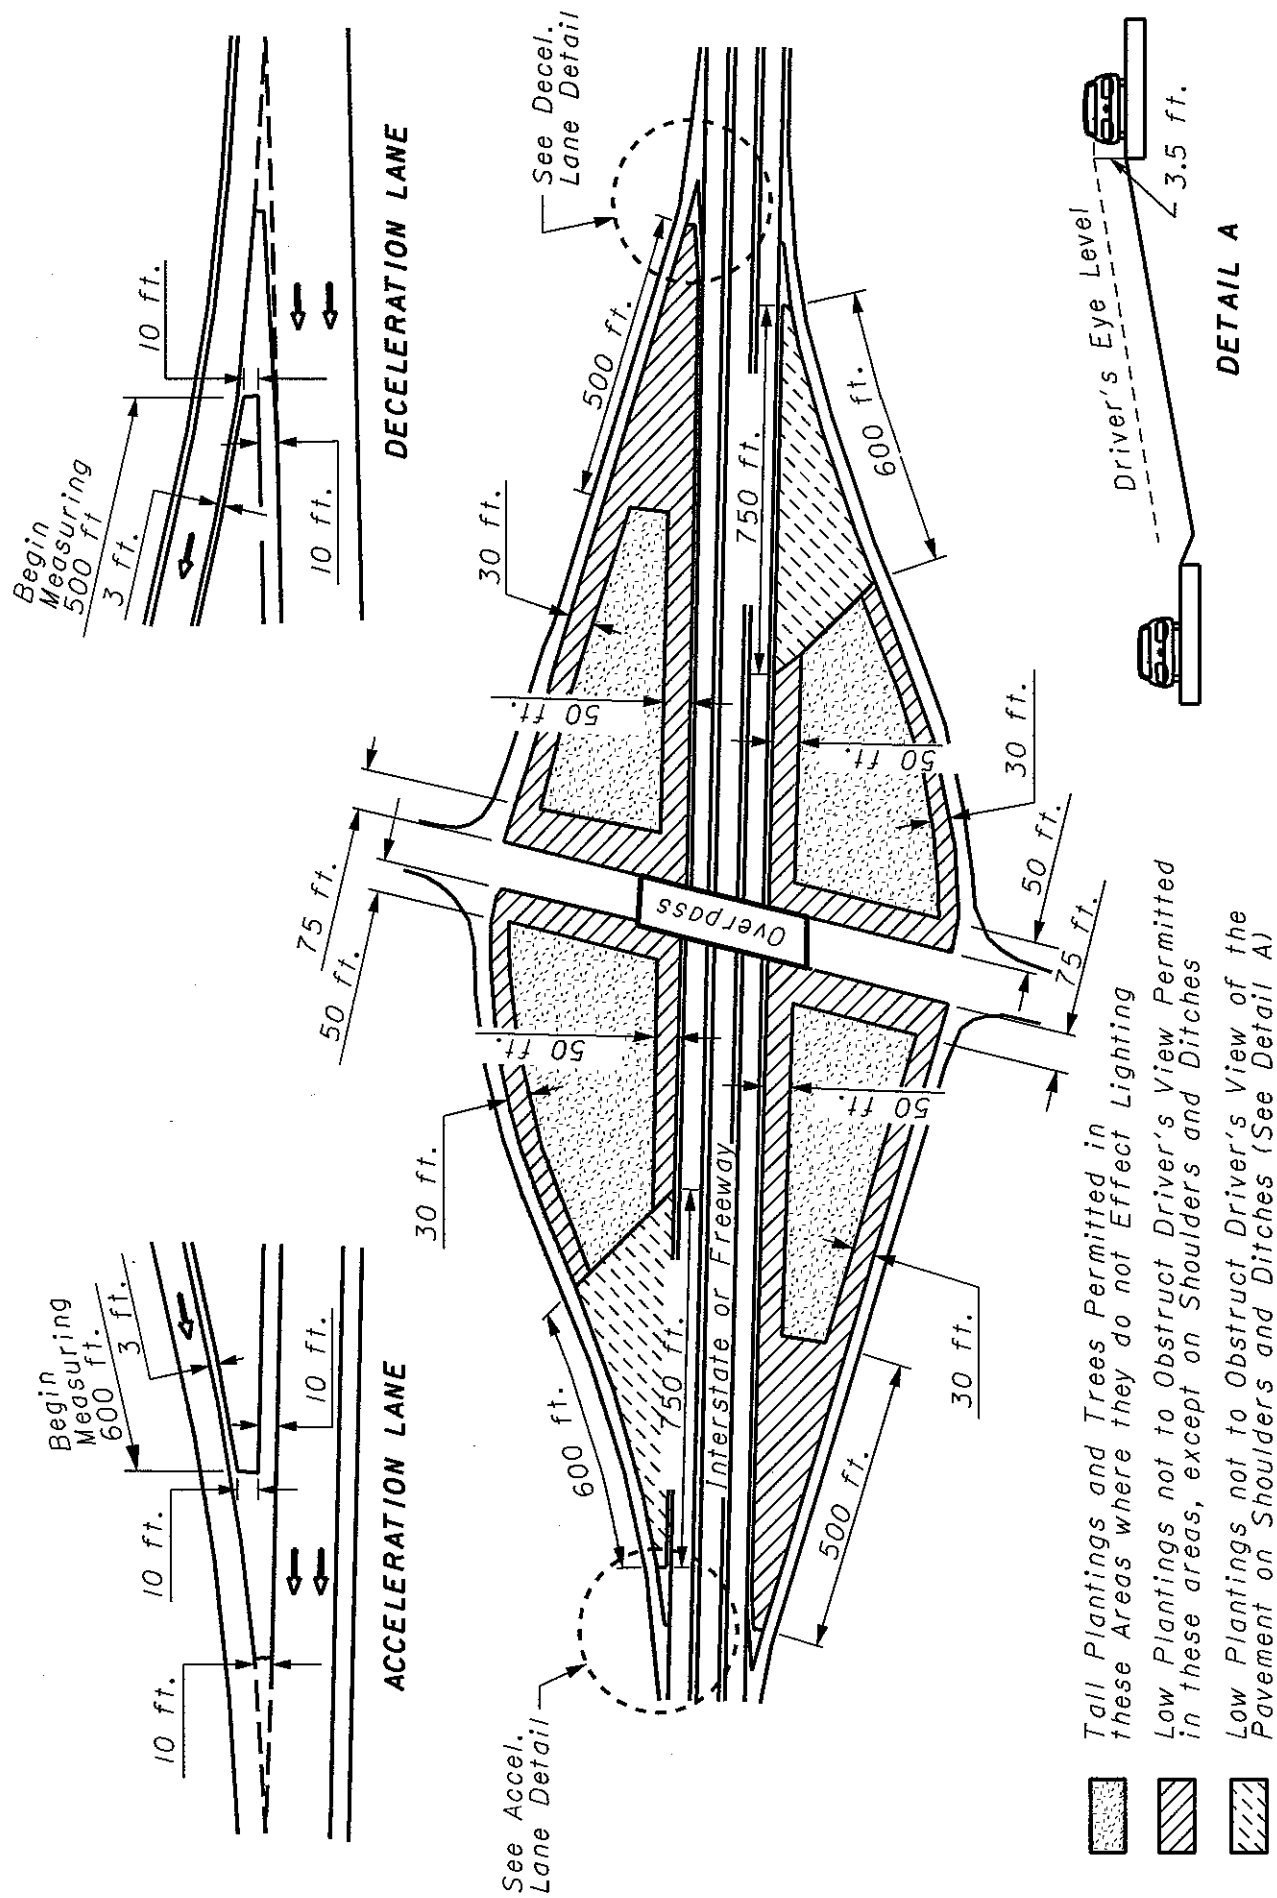

GUIDE FOR LANDSCAPE PLANTING AT DIAMOND INTERCHANGES

FIGURE 4

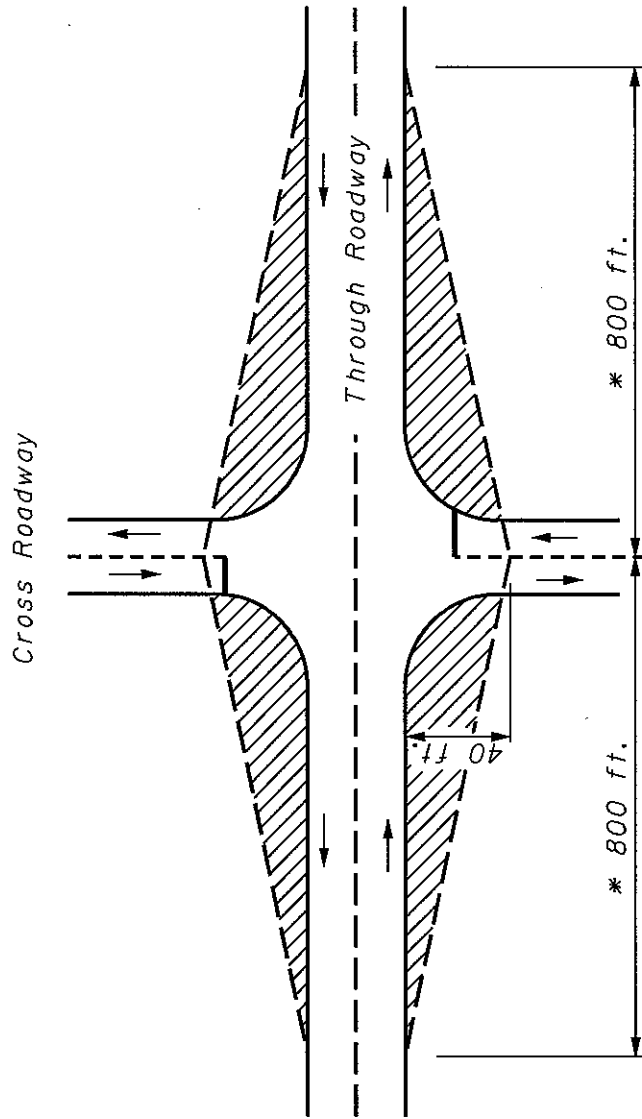

* These distances apply where speeds do not exceed 55 MPH



Low Plantings not to Obstruct Driver's View Permitted in these areas, except on Shoulders and Ditches

LANDSCAPING SETBACKS AT INTERSECTIONS


FIGURE 5

Roadside Safety Landscaping Guidelines

Appendices

Appendix	Description	Reference Section
A	Vegetative Screening in lieu of noise barrier	4.1
B	Sample Tree Planting Specifications	7

Appendix A

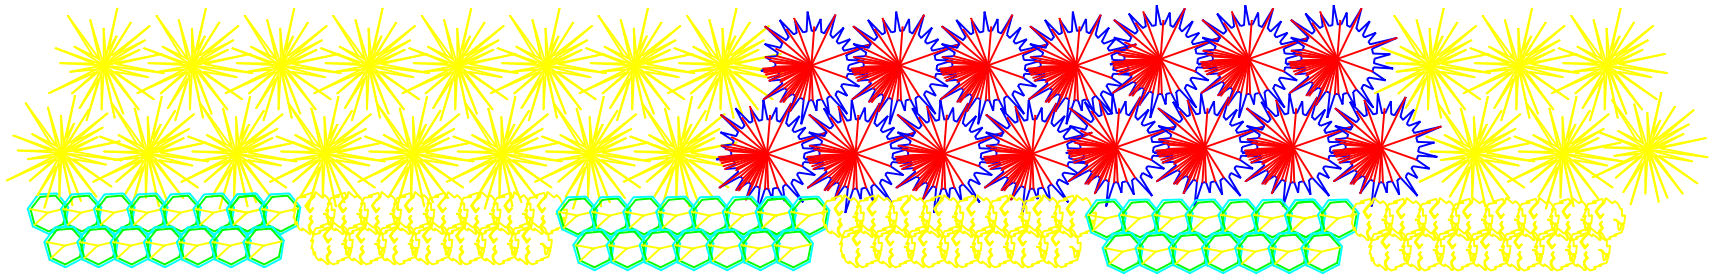

VEGETATIVE SCREENING IN LIEU OF NOISE BARRIER

NOTE: VEGETATION IN LIEU OF A NOISE BARRIER IS INTENDED TO PROVIDE PSYCHOLOGICAL RELIEF AND IS NOT INTENDED AS A NOISE ABATEMENT MEASURE. THE PROVIDED DRAWING IS AN EXAMPLE. ALTERNATIVE PLANTING DESIGNS MAY BE SUBMITTED FOR APPROVAL FROM THE ODOT NOISE COORDINATOR. ALL PLANTINGS MUST PROVIDE 100% OPACITY YEAR ROUND TO A HEIGHT OF 6' WITHIN 3 YEARS OF INSTALLATION.

PLACE EVERGREEN TREES IN AN OFFSET PATTERN WITH ROWS 8' APART AND 8' ON CENTER. PLANT TREES IN SINGLE SPECIES MASSES OF AT LEAST 15 TREES. PLANT MINIMUM 5' TALL EVERGREEN TREES FROM THE FOLLOWING LIST: CHAMAECYPARIS THYOIDES - ATLANTIC WHITE CEDAR, JUNIPERUS VIRGINIANA - EASTERN RED CEDAR, PICEA ABIES - NORWAY SPRUCE, PICEA PUNGENS - COLORADO SPRUCE, PINUS NIGRA - AUSTRIAN PINE.

PLACE SHRUBS IN STAGGERED ALTERNATING ROWS WITH PLANTS 3' ON CENTER. PLANT SHRUBS IN SINGLE SPECIES MASSES OF A MINIMUM 25 PLANTS. ALTERNATE EVERGREEN AND DECIDUOUS SHRUB MASSES. PLANT MINIMUM 3' TALL SHRUBS FROM THE FOLLOWING LIST: VIBURNUM PRUNIFOLIUM - BLACKHAW VIBURNUM, ARONIA MELANOCARPA - BLACK CHOKEBERRY, CEANOTHUS AMERICANUS - NEW JERSEY TEA, JUNIPERUS COMMUNIS - COMMON JUNIPER (CULTIVARS - "COMPRESSA", "DEPRESSA", "HILLS VASEYI" AND OTHERS WITH A SIMILAR HABIT).

Roadside Safety Landscaping Guidelines

Appendix B

SAMPLE TREE PLANTING SPECIFICATIONS

Endorsed by
Ohio Nursery and Landscape Association and ODNR Division of Forestry

Purpose: To increase transplanting success by providing municipalities with the most current and acceptable tree planting procedures. This information, prepared in specification format, will enable communities to convey specific requirements to contractors, developers, and/or volunteers. It contains the fundamental elements necessary to ensure transplanting success, and is intended to be a template that can be expanded to address other project issues.

Endorsement: This information is approved and endorsed by the Ohio Nursery and Landscape Association, and the Ohio Department of Natural Resources Division of Forestry.

Assumptions: All plant material complies with American Standard for Nursery Stock ANZI Z60.1. All plant material has been selected based on site conditions and constraints.

Planting Balled and Burlapped Trees:

- If not readily apparent, locate root flare by removing twine, burlap, and excess soil.
- Dig tree hole at least two times wider than the tree ball, with sides sloped to an unexcavated or firm base. Dig hole to a depth so the located root flare, at the first order lateral root, will be at finished grade.
- Lifting only from the bottom of the root ball, position tree on firm pad so that it is straight and top of root flare is level with the surrounding soil.
- Remove all twine from the root ball. If present, remove and discard at least the top one half of the wire basket. Burlap shall be removed from the top to a point halfway down the root ball and discarded.
- With clean, sharp pruning tools, prune off any secondary/adventitious, girdling, and potential girdling roots.
- Backfill planting hole with existing unamended soil, and thoroughly water.
- Mulch the entire planting surface with composted bark applied no less than two inches (2") deep and no more than three inches (3") deep, leaving three inches (3") adjacent to the tree trunk free of mulch.

Planting Containerized or Grow Bag Trees:

- If not readily apparent, locate root flare by removing excess soil.
- Dig tree hole at least two times wider than the tree ball with sloping sides. Dig hole to a depth so the located root flare, at the first order lateral root, will be at finished grade.
- Create a firm soil mound at the bottom of the planting hole.
- Remove tree from container or grow bag and completely tease apart root system, repositioning any girdling or potentially girdling roots.
- Spread roots over soil mound so that root flare is at finished grade and the tree is straight.
- With clean, sharp pruning tools, prune off any secondary/adventitious, girdling, and potential girdling roots.
- Backfill planting hole with existing unamended soil and thoroughly water.
- Mulch the entire planting surface with composted bark applied no less than two inches (2") deep and no more than three inches (3") deep, leaving three inches (3") adjacent to the tree trunk free of mulch.

Planting Bare Root Trees:

- Dig tree hole at least two times wider than the tree ball with sloping sides. Dig hole to a depth so the located root flare, at the first order lateral root, will be at finished grade.
- Create a firm soil mound at the bottom of the planting hole.

Roadside Safety Landscaping Guidelines

- Spread roots over soil mound so that root flare is at finished grade and the tree is straight.
- With clean, sharp pruning tools, prune off any secondary/adventitious, girdling, and potential girdling roots.
- Backfill planting hole with existing unamended soil and thoroughly water.
- Mulch the entire planting surface with composted bark applied no less than two inches (2") deep and no more than three inches (3") deep, leaving three inches (3") adjacent to the tree trunk free of mulch.

