



B-001-0-23




Run #	Depth (ft)		Recovery		RQD	
NQ2-1	30.5	40.0	114 in. / 114 in.	100%	73 in. / 114 in.	64%

ATH-144-12.08 PID 116165



B-001-0-23

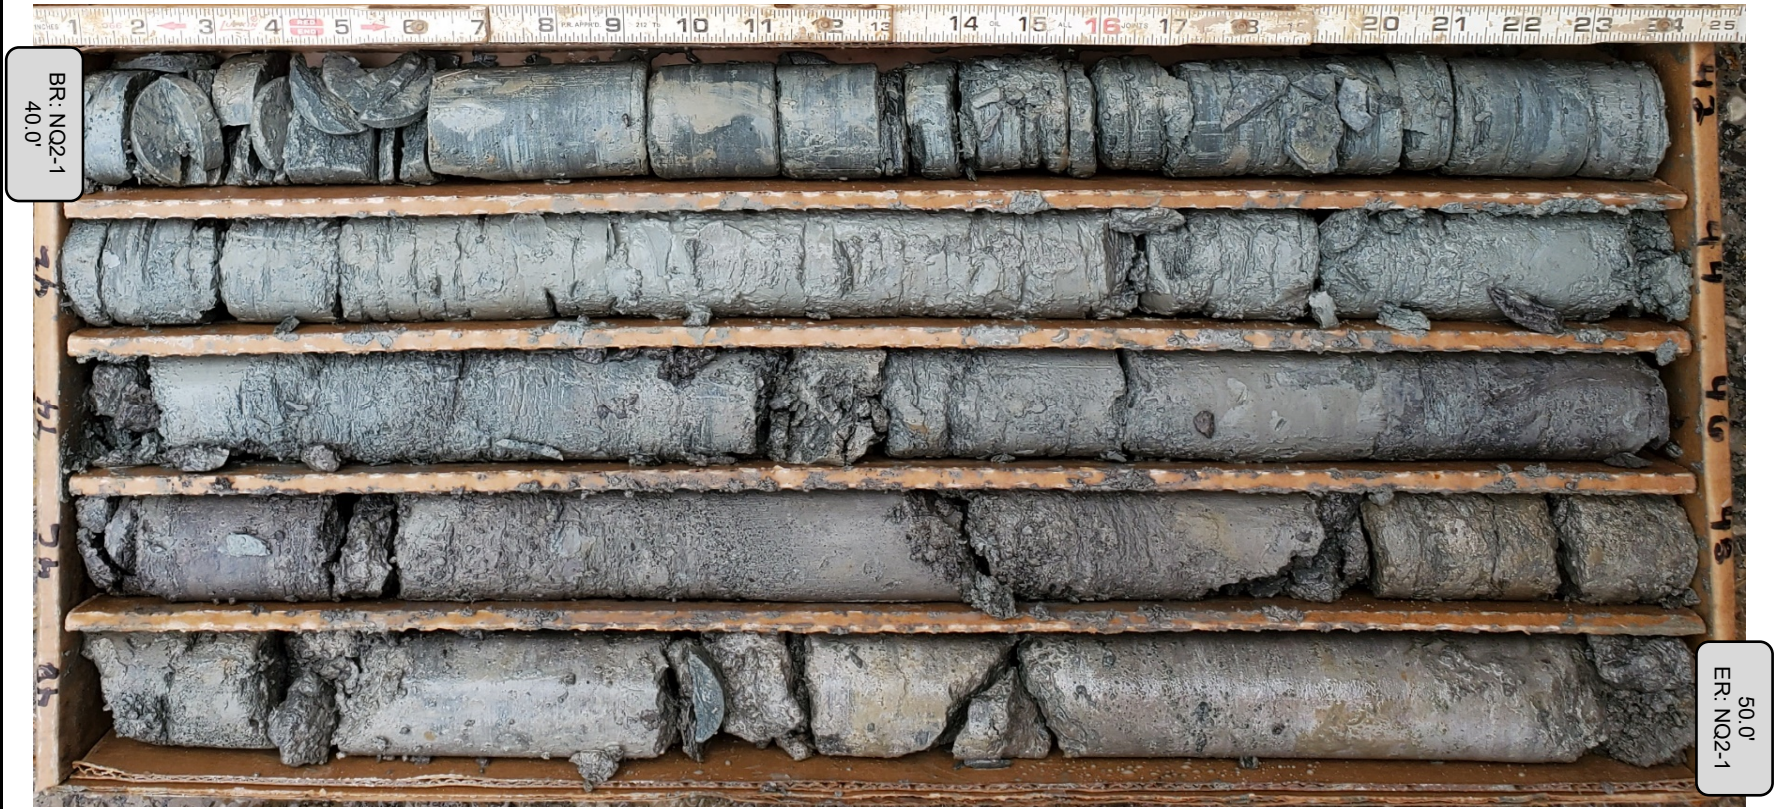

Run #	Depth (ft)		Recovery		RQD	
NQ2-2	40.0	50.0	120 in. / 120 in.	100%	42 in. / 120 in.	35%

ATH-144-12.08 PID 116165



B-002-0-23



Run #	Depth (ft)		Recovery		RQD	
	Start	End	Recovery	Percentage	Recovery	Percentage
NQ2-1	24.0	29.0	60 in. / 60 in.	100%	11 in. / 60 in.	18%
NQ2-2	29.0	34.0	60 in. / 60 in.	100%	43 in. / 60 in.	72%

ATH-144-12.08 PID 116165



B-002-0-23



Run #	Depth (ft)		Recovery		RQD	
NQ2-3	34.0	39.0	60 in. / 60 in.	100%	16 in. / 60 in.	27%
NQ2-4	39.0	44.0	60 in. / 60 in.	100%	37 in. / 60 in.	62%

ATH-144-12.08 PID 116165



B-003-0-23



Run #	Depth (ft)		Recovery		RQD	
	Start	End	Length	Percentage	Length	Percentage
NQ2-1	24.5	34.0	108 in. / 114 in.	95%	66 in. / 114 in.	58%

ATH-144-12.08 PID 116165



B-003-0-23



Run #	Depth (ft)		Recovery		RQD	
	34.0	44.0	120 in. / 120 in.	100%	66 in. / 120 in.	55%
NQ2-2						

ATH-144-12.08 PID 116165