Design Exception Request

CUY-90-6.83

PID: 76779; Request 16

Letting Type: ODOT-Let

Design Designation			
I-90; 6.84-14.94			
Current ADT (2025)	163,000	Td	0
Design Year ADT (2045)	217,000	Design Speed	60
Design Hourly Volume (2045)	21,500	Legal Speed	60
Directional Distribution	58	Design Functional Class	1 - Interstates
Trucks (24hr B&C)	6	Functional Class Area Type	Urban
		NHS Project	Yes

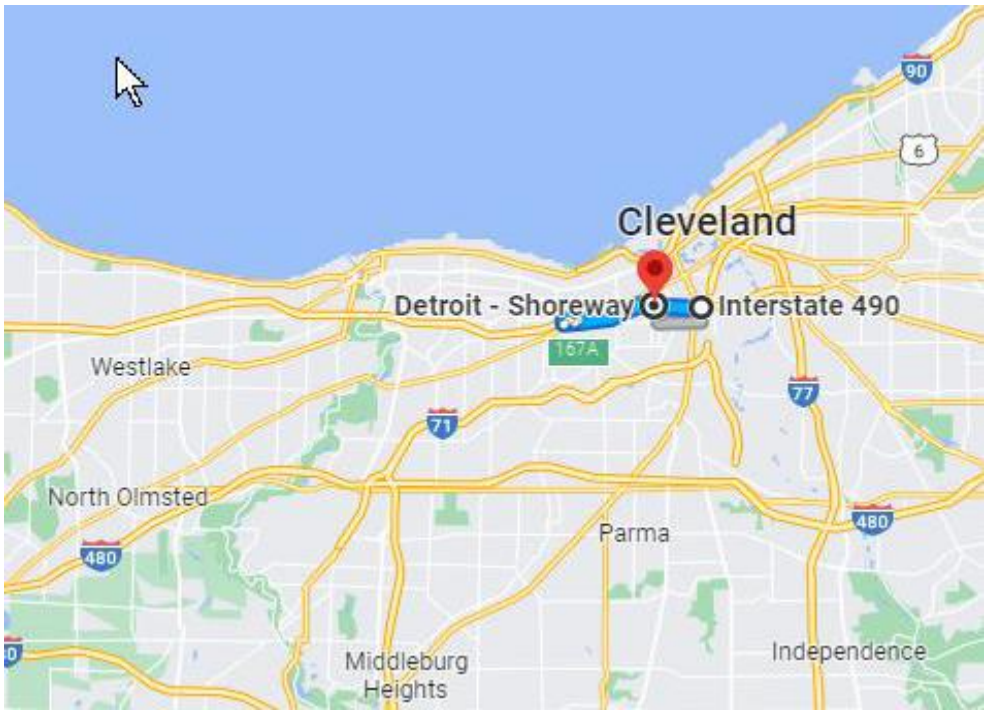

Submitted By:

E-SIGNED by Jim Sima
on 2023-06-01 12:21:41 EST

Jim Sima
(Engineer of Record)

J.S.

Engineer of Record Seal

Approved by:

E-SIGNED by Adam Koenig
on 2023-06-01 13:51:40 EST

Adam Koenig

Approval Date: 6/17/2022

Design Exception Request

CUY-90-6.83

PID: 76779; Request 16

Controlling Criteria Identification			
Section: I-90; 6.84-14.94			
Controlling Criteria	**Standard**	**Existing (a.)**	**Proposed**
Lane Width			
Shoulder Width	10 feet	8 feet	8 feet
Horizontal Curve Radius			
Maximum Grade			
SSD (Horizontal & Crest Vertical)			
Pavement Cross Slope			
Superelevation Rate			
Vertical Clearance			
Design Loading Structural Capacity			
(a.) "Existing" may be N/A (i.e. New alignment or new ramp)			

Project Description

Full depth pavement reconstruction of Interstate 90 from the Hilliard Blvd to I-490 in the cities of Rocky River, Lakewood and Cleveland, OH. Project includes full depth ashpalt concrete pavement for mainline I-90, and full depth concrete pavement for service interchange ramps. Project also includes drainage upgrades including replacement of portions of storm sewer trunk line and laterals, signing, pavement marking and ITS upgrades.

Section Description

For IR 90 WB at Sta. 797+92 to Sta. 799+76, the required shoulder width per L&D Volume 1 Figure 301-4 is 10 feet. Proposed shoulder width at Lorain Avenue bridge underpass is approximately 7'-7" due to the barrier transition required for the existing piers.

Proposed Mitigation

none

Support for Deviation (Benefit-cost, R/W, Environmental, Constructability, Coordination with Other Projects, Relationship between any crash patterns and proposed design exception, etc.):

The existing and proposed barrier protecting a pier of the Lorain Ave. overpass reduces the inside shoulder width. The structure is not being replaced as part of this project and will remain. The proposed shoulder width will match the existing width.

Does the requested Design Exception location fall within a Safety Integrated Project (SIP) Map Location?

Yes, Blue Location

Does the crash analysis (GCAT and CAM Tool) show any patterns that would be adversely impacted by the proposed Design Exception?

No