


STATE OF OHIO
DEPARTMENT OF TRANSPORTATION


LIC-CR134-02.06

CITY OF HEATH
LICKING COUNTY

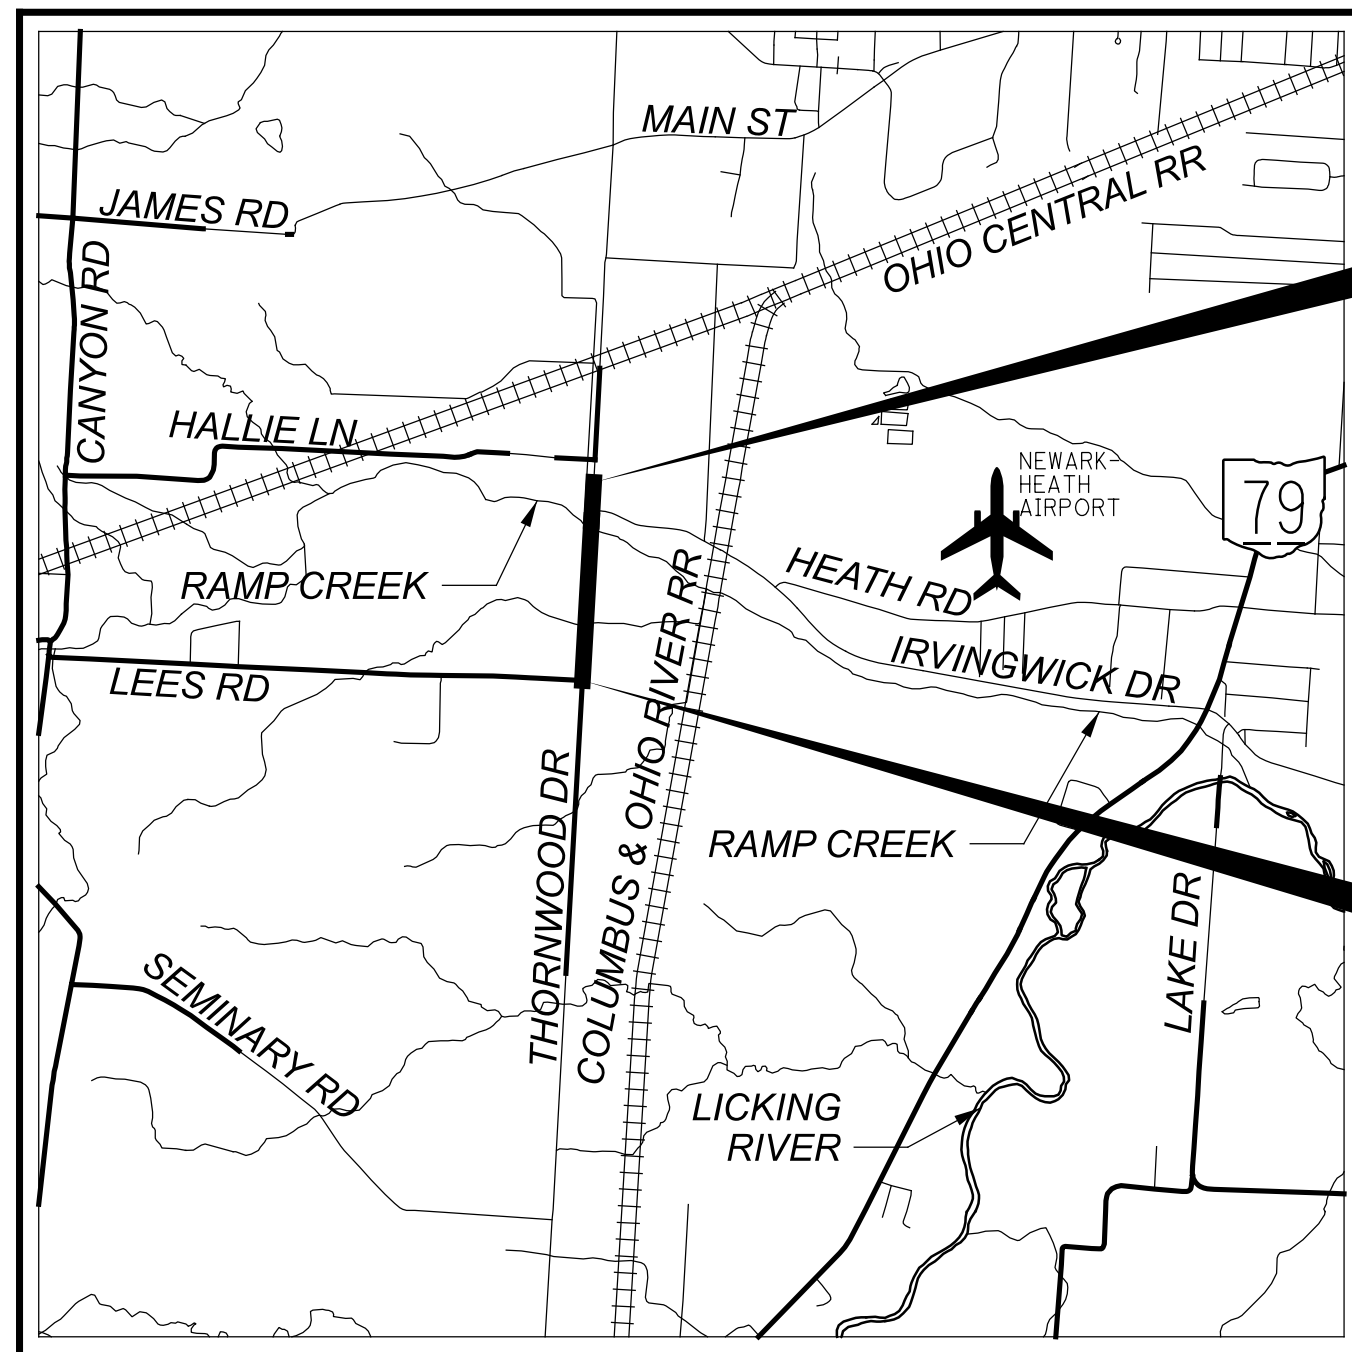

LOCATION MAP

LATITUDE: 40°01'23" LONGITUDE: 82°28'49"



END PROJECT
STA 232+08.25
S.L.M. = 2.52

E191 (277)

BEGIN PROJECT
STA 207+65.36
S.L.M. = 2.06

E191 (277)

PORTION TO BE IMPROVED	-----	=====
INTERSTATE HIGHWAY	-----	=====
FEDERAL ROUTES	-----	=====
STATE ROUTES	-----	=====
COUNTY & TOWNSHIP ROADS	-----	=====
OTHER ROADS	-----	=====

DESIGN DESIGNATION

CURRENT ADT (2020)	-----	7,349
DESIGN YEAR ADT (20_)	-----	-----
DESIGN HOURLY VOLUME (20_)	-----	-----
DIRECTIONAL DISTRIBUTION	-----	-----
TRUCKS (24 HOUR B&C)	-----	-----
DESIGN SPEED	-----	45
LEGAL SPEED	-----	45
DESIGN FUNCTIONAL CLASSIFICATION:	-----	
URBAN MAJOR COLLECTOR	-----	
NHS PROJECT	-----	N/A

DESIGN EXCEPTIONS

SHOULDER WIDTHS

ADA DESIGN WAIVERS

NONE

INDEX OF SHEETS:

TITLE SHEET	P.01
SIGNATURE SHEET	
SCHEMATIC PLAN	P.02
TYPICAL SECTIONS	P.03
GENERAL NOTES	P.04 - P.07
MAINTENANCE OF TRAFFIC	P.08 - P.21
GENERAL SUMMARY	P.22 - P.23
SUBSUMMARIES AND CALCULATIONS	P.24 - P.31
PROJECT SITE PLAN	P.32
PLAN AND PROFILE	P.33 - P.38
CROSS SECTIONS	P.39 - P.57
INTERSECTION DETAILS	P.58 - P.60
DRIVE PROFILES	P.61 - P.64
DRIVE DETAILS	P.65 - P.68
WATER WORKS	P.69 - P.75
TRAFFIC CONTROL	P.76 - P.80
SOIL PROFILE SHEETS	P.81 - P.91
RIGHT OF WAY	

FEDERAL PROJECT NUMBER

E191(277)

RAILROAD INVOLVEMENT

NONE

PROJECT DESCRIPTION

FULL DEPTH REPLACEMENT AND WIDENING OF THORNWOOD DRIVE (CR 134) BETWEEN LEES ROAD (CR 135) AND IRVING WICK DR. PROJECT INCLUDES DRAINAGE IMPROVEMENTS, SIGNAGE, PAVEMENT MARKINGS AND RELATED WORK.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA:	3.17 ACRES
ESTIMATED CONTRACTOR EARTH DISTURBED AREA:	0.25 ACRES
NOTICE OF INTENT EARTH DISTURBED AREA:	3.42 ACRES

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY EXCEPT AS NOTED ON SHEET 08, AND THAT DETOURS WILL BE PROVIDED AS INDICATED ON THE PLANS.

2023 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS, CHANGES LISTED IN THE PROPOSAL, AND THE SUPPLEMENTAL SPECIFICATION 800 VERSION INDICATED ON THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

Jason L. Sturgeon
Jason L. Sturgeon, P.E.
District 05 Deputy Director

Pamela Boratyn
Pamela Boratyn
Director, Department of Transportation

UNDERGROUND UTILITIES
Contact Two Working Days Before You Dig

OHIO811.org
Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764
(Non-members must be called directly)

ODOT STANDARD CONSTRUCTION DRAWINGS						HEATH STD CONST DWGS	SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
BP-3.1	1/19/24	MGS-4.3	1/18/13	TC-41.30	4/21/23	SA-1	10/17	800-2023 7/19/24
BP-4.1	7/19/13	MGS-5.3	7/15/16	TC-42.10	10/18/13	SA-2	10/17	832 7/21/23
BP-5.1	7/15/22			TC-42.20	10/18/13	ST-1	10/17	
		MH-3	7/19/24	TC-71.10	4/21/23	ST-2	10/17	
CB-2-2A, 2B, 2C	7/19/24					WA-0	03/22	
CB-2-3, 2-4	7/19/24	RM-4.2	4/17/20			WA-1	05/97	
						WA-2	05/97	
DM-1.1	7/17/20	HW-2.1	7/15/22			WA-3	10/17	
DM-1.2	7/16/21	HW-2.2	7/20/18			WA-5	02/12	
DM-4.1	7/17/20					WA-6	03/22	
DM-4.3	1/15/16	MT-101.60	4/21/23			WA-7	03/22	
DM-4.4	1/15/16	MT-101.70	7/19/24			WA-13	02/15	
		MT-101.90	7/17/20			WA-14	02/15	
MGS-1.1	7/16/21	MT-105.10	1/17/20					
MGS-2.1	1/19/18							
MGS-4.2	7/19/13	TC-41.20	10/18/13					

ENGINEER'S SEAL
ROADWAY

LIC-CR134-02.06

MODEL: Sheet PAPER: 34x22 (in.) DATE: 1/15/2025 TIME: 9:56:47 AM USER: morr F:\Clients\Active\HTH\104792\400-Engineering\Roadway\Sheets\104792_GT001.dgn

TITLE SHEET

DESIGN AGENCY	verdantas
DESIGNER	MRO
REVIEWER	SRH 09/16/24
PROJECT ID	104792
SHEET	TOTAL
P.01	P.91