


MED - US-US 42-01.89
 210531 PID - 79761
 Dist 3 11/18/2021

Contract Proposal available @
 www.contracts.dot.state.oh.us

(5701)(529)-727-DEW/681-24-DEW
 MODEL: Sheet PAPER: SIZE: 17x11 (in.) DATE: 7/12/2021 TIME: 12:50:51 PM USER: jlowery
 pw:\ohiodot-pw-bentley.com\ohiodot-pw-02\Documents\01 Active Projects\District 03\Medina\9761400-Engineering\Roadway\Sheets\9761_G1001.dgn

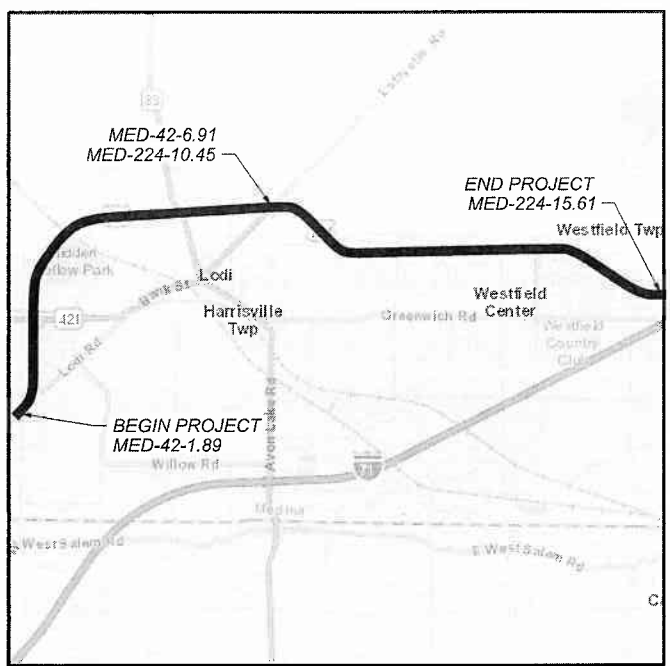

LOCATION MAP

LATITUDE: 41°2'48" LONGITUDE: 81°59'38"



STATE OF OHIO
 DEPARTMENT OF TRANSPORTATION

MED-42-1.89
 MED-224-(6.25)(10.45)

VILLAGE OF WESTFIELD CENTER
 HARRISVILLE TOWNSHIP
 WESTFIELD TOWNSHIP
 MEDINA COUNTY

FEDERAL PROJECT NUMBER

E170083

RAILROAD INVOLVEMENT

CSX, WHEELING & LAKE ERIE

PROJECT DESCRIPTION

THIS PROJECT INCLUDES PAVEMENT REPAIRS, PLANING AND PAVING WITH ASPHALT CONCRETE, BRIDGE MAINTENANCE, GUARDRAIL REPAIR, AND REPLACING PAVEMENT MARKINGS.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA: N/A ACRES*
 ESTIMATED CONTRACTOR EARTH DISTURBED AREA: N/A ACRES*
 NOTICE OF INTENT EARTH DISTURBED AREA: N/A ACRES*
 * = MAINTENANCE PROJECT


LIMITED ACCESS

THIS IMPROVEMENT IS ESPECIALLY DESIGNED FOR THROUGH TRAFFIC AND HAS BEEN DECLARED A LIMITED ACCESS HIGHWAY OR FREEWAY BY ACTION OF THE DIRECTOR IN ACCORDANCE WITH THE PROVISIONS OF SECTION 5511.02 OF THE OHIO REVISED CODE.

2019 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS AND CHANGES LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

PLANS PREPARED BY:



TITLE SHEET

PORTION TO BE IMPROVED

DESIGN DESIGNATIONS: SEE SHEET 2

DESIGN EXCEPTIONS

NONE REQUIRED

ADA DESIGN WAIVERS

NONE REQUIRED

INDEX OF SHEETS:

TITLE SHEET	1	STRUCTURE NOTES	54-55
SCHEMATIC PLAN	2-6	STRUCTURE SUMMARY	56
TYPICAL SECTIONS	7-9	STRUCTURE DETAILS	
GENERAL NOTES	10-12	GENERAL DETAILS	57-59
GUARDRAIL NOTES	13	MED-42-2.61	60-61, 61A
MAINTENANCE OF TRAFFIC NOTES	14-16	MED-42-3.10 (L/R)	62-63
MAINTENANCE OF TRAFFIC DETOUR PLAN	17, 17A, 17B, 17C, 18-22, 22A, 22B	MED-42-4.60 (L/R)	64-65
GENERAL SUMMARY	23-28	MED-42-5.39 (L/R)	66-67
PAVEMENT & SHOULDER DATA	29-31	MED-42-5.89 (L/R)	68
GUARDRAIL/CONCRETE REPAIR SUB-SUMMARY	32	MED-42-7.14	69-70
MED-224/LAKE RD CONCRETE REPAIRS	33	MED-83-4.36	71
GUARDRAIL DETAILS	34-49, 49A, 50	MED-224-12.76 (L/R)	72-73
PAVEMENT MARKING/RPM SUB-SUMMARY	51-53	PLAN INSERT SHEETS	
		GR-1.1	74-76
		GR-2.1	77-78
		GR-3.4	79

UNDERGROUND UTILITIES
 Contact Two Working Days Before You Dig

 OHIO811, 8-1-1, or 1-800-362-2764
 (Non members must be called directly)

ENGINEER'S SEAL:

 SIGNED: Karla R. Bohmer
 DATE: 6/30/21

STANDARD CONSTRUCTION DRAWINGS										SUPPLEMENTAL SPECIFICATIONS	
AS-1-15	7/17/15	MGS-1.1	1/19/18	MT-95.30	7/19/19	MT-101.60	1/17/20	TC-41.20	10/18/13	800	7/16/21
DBR-2-73	7/19/02	MGS-2.1	1/19/18	MT-95.40	1/17/20	MT-101.70	1/17/20	TC-42.20	10/18/13	807	7/17/20
DBR-3-11	7/15/11	MGS-3.1	1/19/18	MT-95.45	1/17/20	MT-101.75	1/17/20	TC-52.10	10/18/13	808	1/18/19
EXJ-4-87	1/19/18	MGS-3.2	1/18/13	MT-95.50	7/21/17	MT-101.90	7/17/20	TC-52.20	1/15/21	821	4/20/12
BP-2.1	7/17/15	MGS-4.2	7/19/13	MT-96.11	4/16/21	MT-102.20	4/19/19	TC-61.30	7/19/19	830	7/19/19
BP-2.2	1/15/21	MGS-4.3	1/18/13	MT-96.20	7/15/16	MT-104.10	10/16/15	TC-64.10	1/17/20	832	10/19/18
BP-2.5	7/19/13	MGS-6.2	7/19/19	MT-97.12	1/20/17			TC-65.11	7/21/17	850	4/16/21
BP-3.1	1/17/20			MT-98.10	1/17/20			TC-71.10	1/19/18	872	4/17/20
BP-3.2	1/18/19	RM-4.6	7/19/13	MT-98.11	1/17/20			TC-72.20	7/20/18	873	4/16/21
BP-6.1	7/19/13			MT-98.20	4/19/19			TC-73.20	1/17/20	874	4/17/20
BP-9.1	1/18/19			MT-98.22	1/17/20					875	1/18/19
				MT-98.28	1/17/20					861	1/15/21
DM-4.1	7/17/20			MT-98.29	1/17/20						
DM-4.3	1/15/16			MT-99.20	4/19/19						
DM-4.4	1/15/16			MT-99.50	1/17/20						

SPECIAL PROVISIONS

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY AND THAT DETOURS WILL BE PROVIDED AS INDICATED ON SHEETS 17-22.

APPROVED:
 DATE: 6/30/21 DISTRICT DEPUTY DIRECTOR

APPROVED:
 DATE: 8/17/21 DIRECTOR, DEPARTMENT OF TRANSPORTATION

DESIGN AGENCY
 DISTRICT 3


 ENGINEERING TEAM TWO
 DESIGNER
 ACM
 REVIEWER
 KRB 6-30-21
 PROJECT ID
 79761
 SHEET TOTAL
 1 79

EXISTING LEGEND


- (A) 5"± ASPHALT CONCRETE
- (B) 7"± ASPHALT CONCRETE
- (C) 9"± ASPHALT CONCRETE
- (D) 9"± REINFORCED CONCRETE PAVEMENT
- (E) AGGREGATE BASE

PROPOSED LEGEND


- (1) ITEM 254 - PAVEMENT PLANING, ASPHALT CONCRETE (3.25")
- (2) ITEM 407 - TACK COAT (0.08 GAL/SY 1ST LIFT, 0.05 GAL/SY 2ND LIFT)
- (3) ITEM 861 - ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446) (1.75")
- (4) ITEM 442 - ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (1.50")
- (5) ITEM 408 - PRIME COAT, AS PER PLAN (0.40 GAL/SY)
- (6) ITEM 617 - COMPACTED AGGREGATE (2.0")

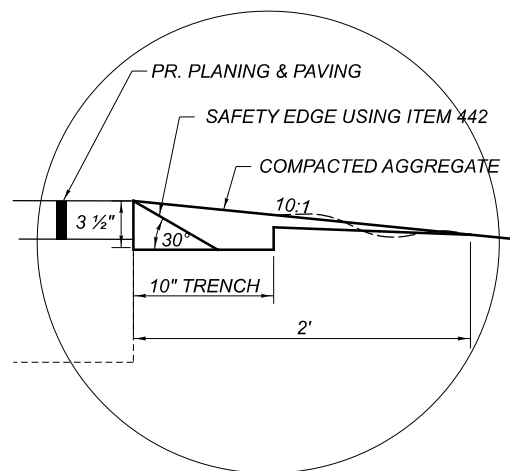


**DETAIL A
SAFETY EDGE**

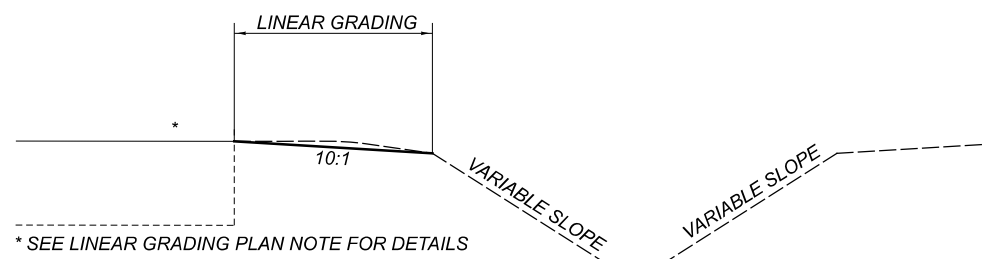


LINEAR GRADING DETAIL

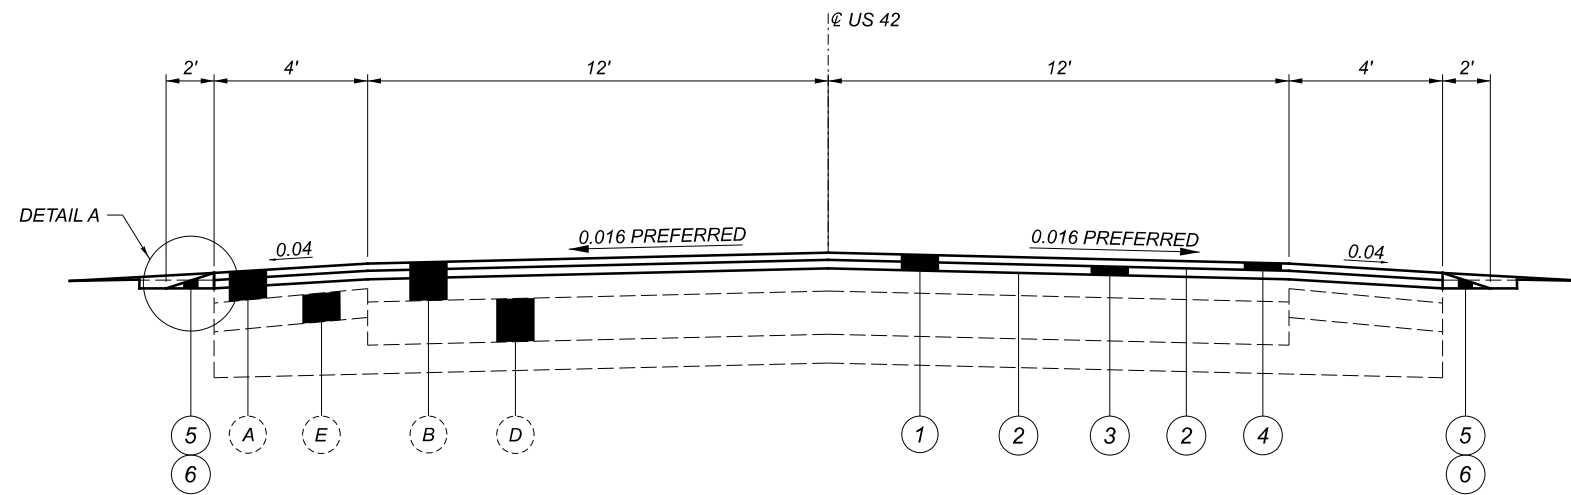

NORMAL SECTION - TWO-LANE
MED-42-1.89 TO 2.78

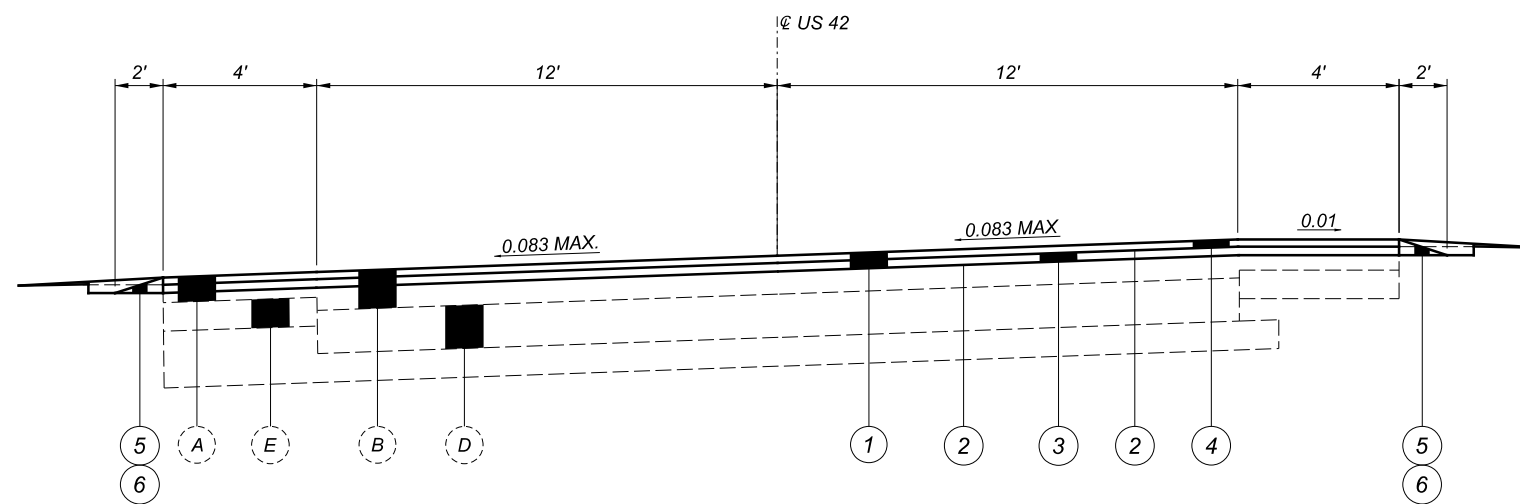

SUPERELEVATED SECTION - TWO-LANE
MED-42-1.89 TO 2.78

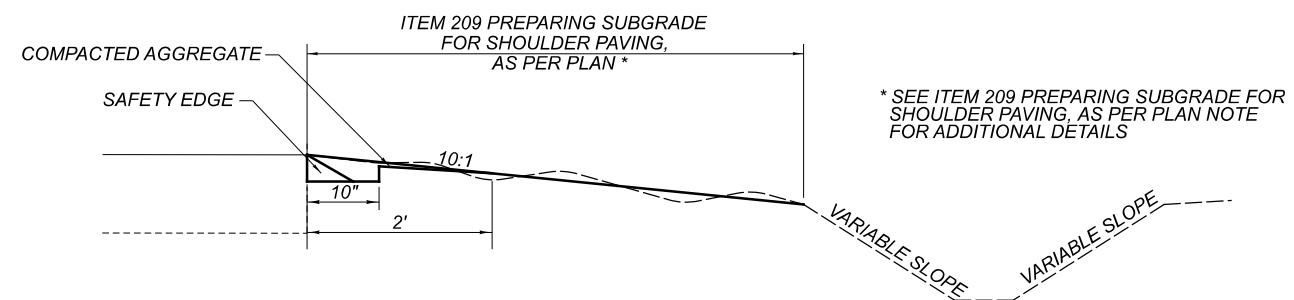


**ITEM 209 PREPARING SUBGRADE
FOR SHOULDER PAVING, AS PER PLAN**

NOTE: ALL CROSS SLOPES SHALL MATCH THE EXISTING CROSS SLOPES.


TYPICAL SECTIONS

DESIGN AGENCY	DISTRICT 3
ENGINEERING TEAM TWO	
DESIGNER	JLL
REVIEWER	ACM
PROJECT ID	6-29-21
SHEET	79761
TOTAL	79

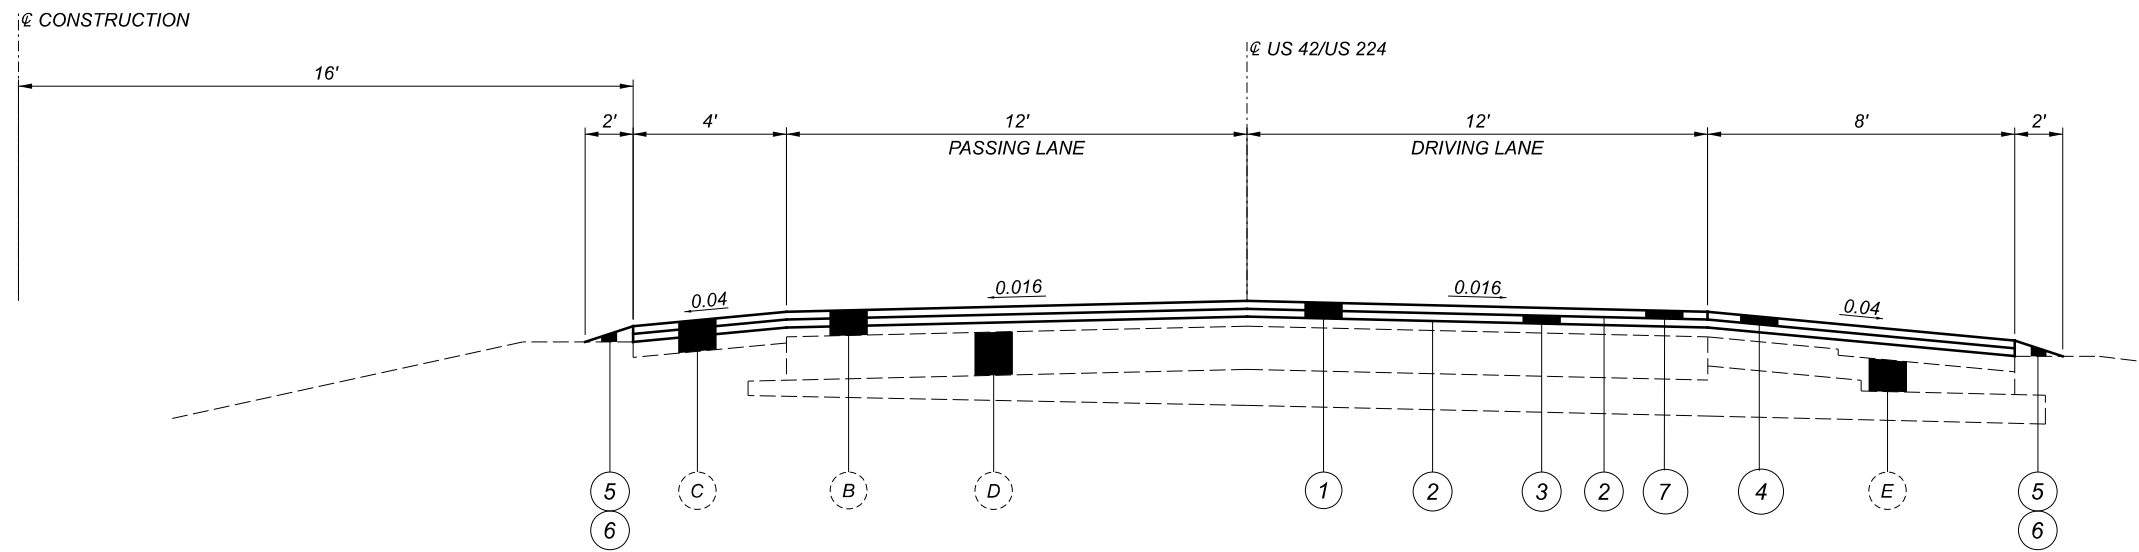

NORMAL SECTION - FOUR-LANE

IN DIRECTION OF TRAVEL
 MED-42-2.78 TO 6.91
 MED-224-10.45 TO 15.30 (EASTBOUND)
 10.45 TO 15.40 (WESTBOUND)

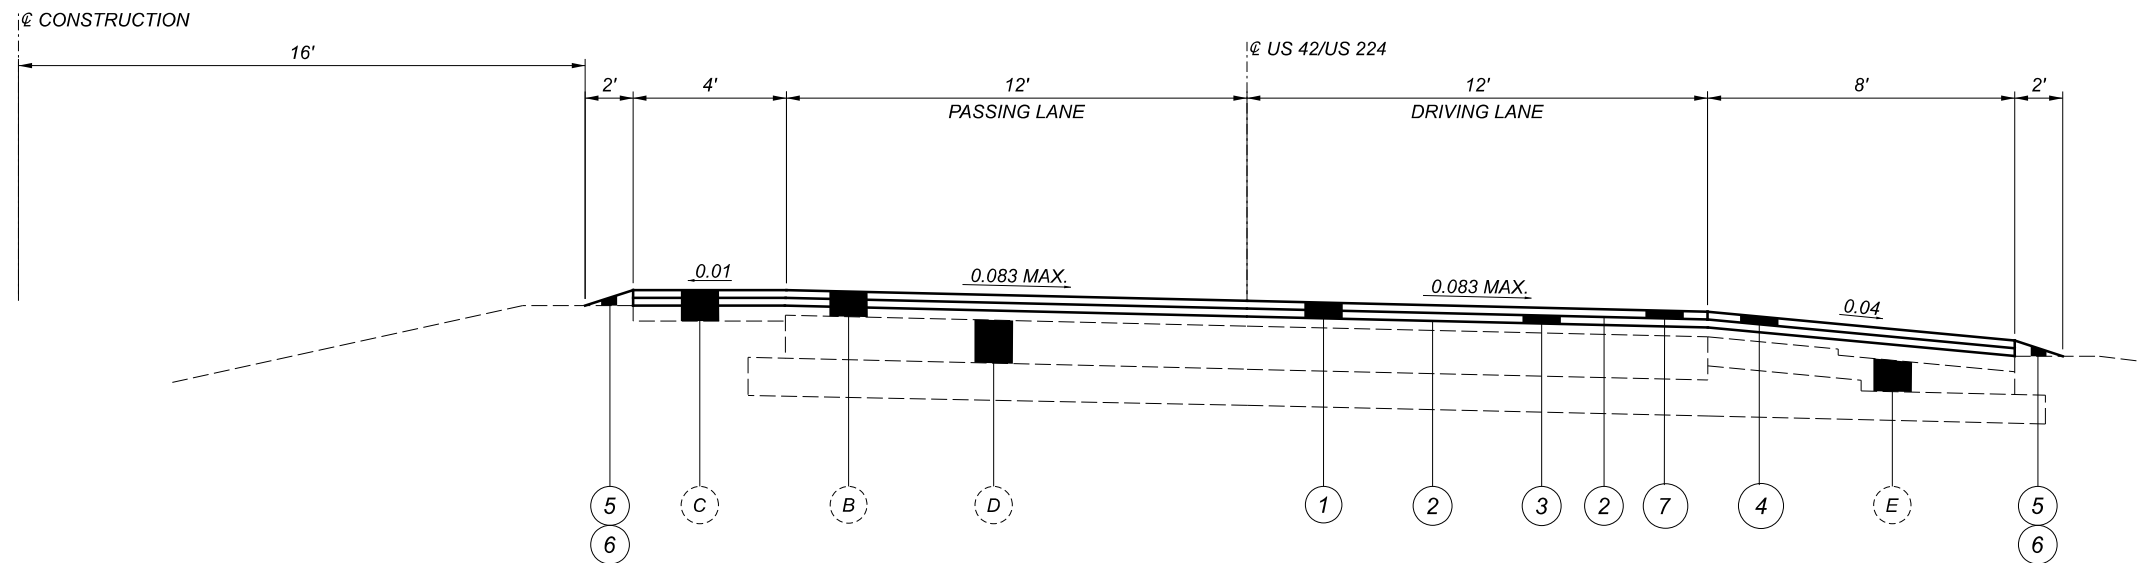

SUPERELEVATED SECTION - FOUR-LANE

IN DIRECTION OF TRAVEL
 MED-42-2.78 TO 6.91
 MED-224-10.45 TO 15.30 (EASTBOUND)
 10.45 TO 15.40 (WESTBOUND)

EXISTING LEGEND

- (A) 5"± ASPHALT CONCRETE
- (B) 7"± ASPHALT CONCRETE
- (C) 9"± ASPHALT CONCRETE
- (D) 9"± REINFORCED CONCRETE PAVEMENT
- (E) AGGREGATE BASE

PROPOSED LEGEND


- (1) ITEM 254 - PAVEMENT PLANING, ASPHALT CONCRETE (3.25")
- (2) ITEM 407 - TACK COAT (0.08 GAL/SY 1ST LIFT, 0.05 GAL/SY 2ND LIFT)
- (3) ITEM 861 - ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446) (1.75")
- (4) ITEM 442 - ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (1.50")
- (5) ITEM 408 - PRIME COAT, AS PER PLAN (0.40 GAL/SY)
- (6) ITEM 617 - COMPACTED AGGREGATE (2.0")
- (7) ITEM 442 - ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN (1.50")

NOTE: ALL CROSS SLOPES SHALL MATCH THE EXISTING CROSS SLOPES.




MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: Sheet3 PAPER SIZE: 17x11 (in.) DATE: 11/23/2021 TIME: 3:05:36 PM USER: ksalby
 p:\v\hobbs-pw-bentley.com\shahid-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GY001.dgn

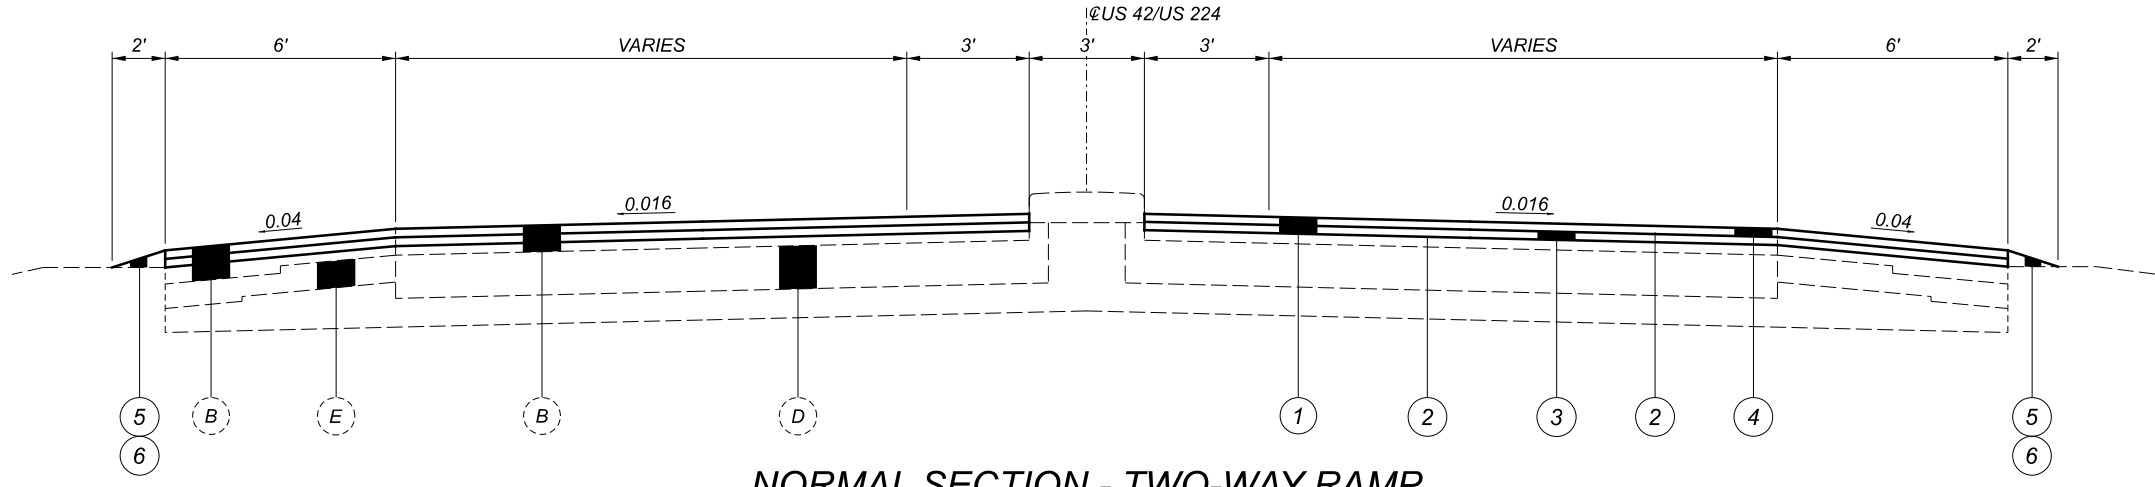


NORMAL SECTION - TWO-WAY RAMP

MED-42/224
 RAMP D1 RAMP B1
 RAMP C2 RAMP B2

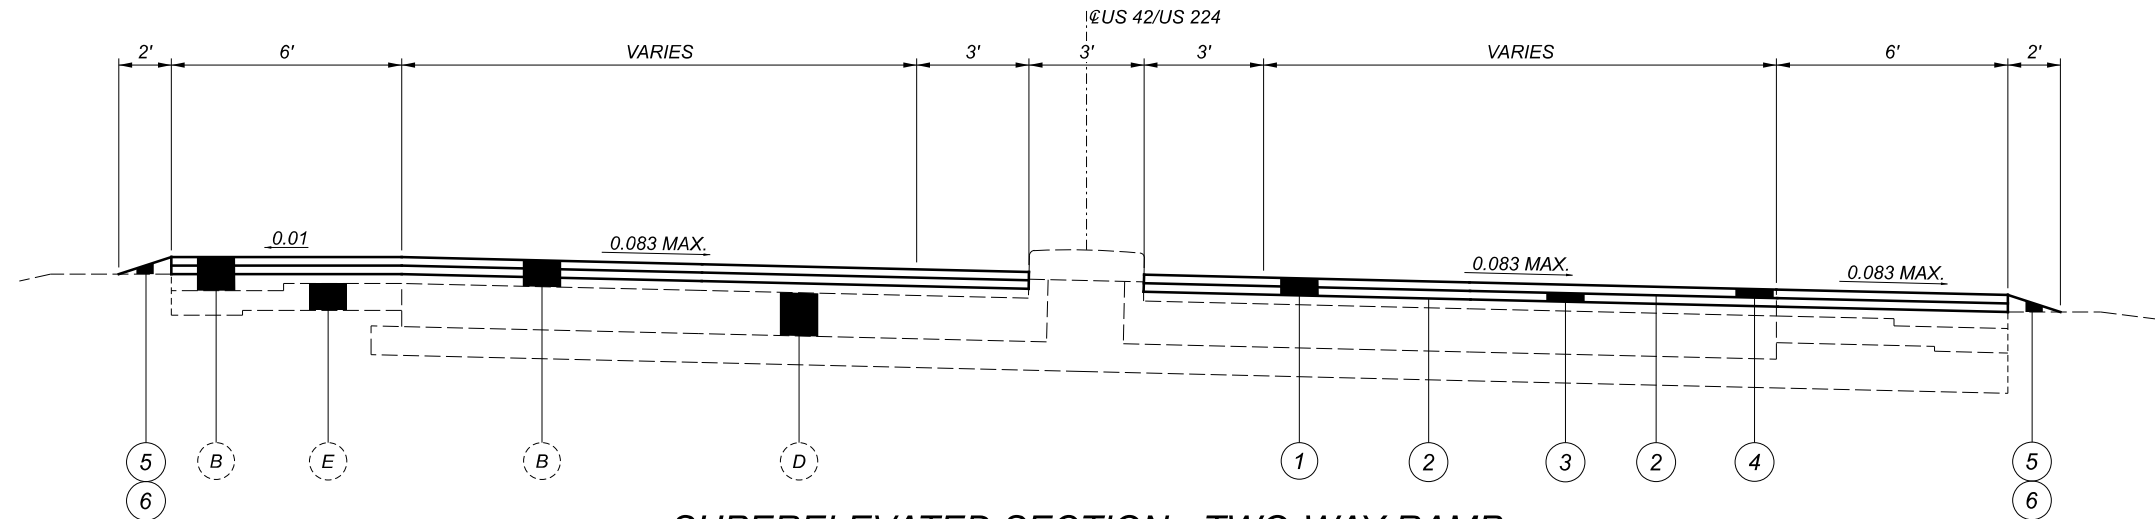

SUPERELEVATED SECTION - TWO-WAY RAMP

MED-42/224
 RAMP D1 RAMP B1
 RAMP C2 RAMP B2

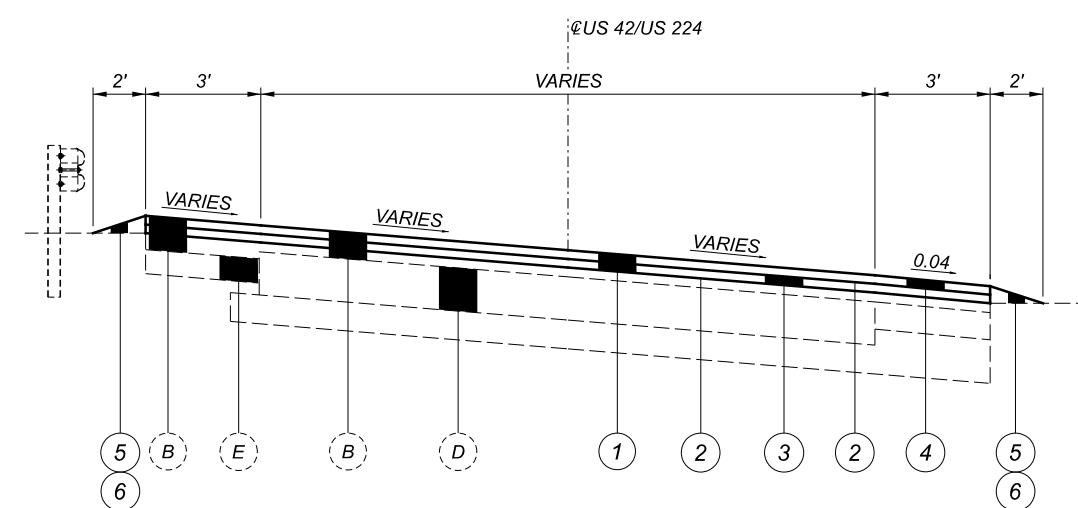

SUPERELEVATED SECTION - ONE-WAY RAMP

MED-42/224
 RAMP D1 RAMP D2
 RAMP B1 RAMP B2
 RAMP C1 RAMP C2
 RAMP A1 RAMP A2
 RAMP E2

EXISTING LEGEND

- (A) 5"± ASPHALT CONCRETE
- (B) 7"± ASPHALT CONCRETE
- (C) 9"± ASPHALT CONCRETE
- (D) 9"± REINFORCED CONCRETE PAVEMENT
- (E) AGGREGATE BASE

PROPOSED LEGEND

- (1) ITEM 254 - PAVEMENT PLANING, ASPHALT CONCRETE (3.25")
- (2) ITEM 407 - TACK COAT (0.08 GAL/SY 1ST LIFT, 0.05 GAL/SY 2ND LIFT)
- (3) ITEM 861 - ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446) (1.75")
- (4) ITEM 442 - ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (1.50")
- (5) ITEM 408 - PRIME COAT, AS PER PLAN (0.40 GAL/SY)
- (6) ITEM 617 - COMPACTED AGGREGATE (2.0")

NOTE: ALL CROSS SLOPES SHALL MATCH THE EXISTING CROSS SLOPES.

TYPICAL SECTIONS

DESIGN AGENCY	DISTRICT 3
ENGINEERING TEAM TWO	
DESIGNER	JLL
REVIEWER	ACM
PROJECT ID	79761
SHEET	TOTAL
9	79

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: GEN NOTES 3, PAPER SIZE: 17x11 (in.), DATE: 11/24/2021, TIME: 10:56:33 AM, USER: ksalay, pwc:\hobdod-pw-bentley.com\shhdod-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Eng\Engineering\Roadway\Sheets\79761_GN001.dgn

ITEM 255 – FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN, (13.0" CONCRETE)

ITEM 255 – FULL DEPTH PAVEMENT SAWING

THE EXISTING PAVEMENT BUILDUP SHALL BE REMOVED AS PART OF THIS PAY ITEM. PLACE THE CONCRETE BASE IN ACCORDANCE WITH THE SPEC AND PLACED TO BE FLUSH WITH THE PLANED SURFACE. IN FULL DEPTH CONCRETE SECTIONS, THE CONCRETE REPAIRS SHALL BE PLACED FLUSH TO THE EXISTING SURFACE.

THE CONCRETE SHALL BE PLACED IN THE REPAIR AREA THE SAME DAY THAT THE EXISTING PAVEMENT IS REMOVED FROM THE REPAIR AREA.

PAYMENT FOR ALL OF THE ABOVE SHALL BE AT THE UNIT PRICE BID PER SQUARE YARD FOR ITEM 255 – FULL DEPTH REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN, WHICH SHALL INCLUDE ALL LABOR, EQUIPMENT, MATERIALS AND INCIDENTALS NECESSARY TO COMPLETE THE ABOVE WORK.

IN ADDITION TO THE QUANTITIES PROVIDED ON SHEET 32, THE FOLLOWING ADDITIONAL ESTIMATED QUANTITIES ARE PROVIDED IN THE GENERAL SUMMARY TO BE USED AS DIRECTED BY THE ENGINEER OVER THE ENTIRE PROJECT LIMITS.

01/NHS/PV:

ITEM 255 – FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN	14,000 SY
ITEM 255 – FULL DEPTH PAVEMENT SAWING	56,000 FT

02/STR/PV:

ITEM 255 – FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN	1,700 SY
ITEM 255 – FULL DEPTH PAVEMENT SAWING	6,800 FT

ITEM 203 – EXCAVATION, AS PER PLAN

ITEM 304 – AGGREGATE BASE, AS PER PLAN

THIS WORK SHALL BE PERFORMED AT FULL DEPTH CONCRETE REPAIR AREAS TO REPLACE DISTURBED OR DETERIORATED BASE MATERIAL UNDERNEATH THE EXISTING CONCRETE PAVEMENT. EXACT LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER.

PAYMENT SHALL INCLUDE ALL LABOR, EQUIPMENT, AND MATERIALS NECESSARY TO COMPLETE THE ABOVE WORK. PAYMENT WILL BE MADE AT THE UNIT BID PRICE PER CUBIC YARD FOR ITEM 203 – EXCAVATION, AS PER PLAN, AND ITEM 304 – AGGREGATE BASE, AS PER PLAN.

01/NHS/PV:

ITEM 203 – EXCAVATION, AS PER PLAN	40 CY
ITEM 304 – AGGREGATE BASE, AS PER PLAN	40 CY

02/STR/PV:

ITEM 203 – EXCAVATION, AS PER PLAN	10 CY
ITEM 304 – AGGREGATE BASE, AS PER PLAN	10 CY

ITEM 408 – PRIME COAT, AS PER PLAN

THE CONTRACTOR SHALL APPLY ONE COAT OF MC-70 (AS PER SECTION 702) AT A RATE OF 0.40 GAL/SY TO THE COMPLETED AGGREGATE SHOULDER (ITEM 617) AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL PROVIDE A SHIELD TO PREVENT THE SPRAYING OR DRIFTING OF LIQUID BITUMINOUS MATERIAL ONTO THE EDGE OF PAVEMENT OR EDGE LINE. THE ATTENTION OF THE CONTRACTOR IS DIRECTED TO 107.10 OF THE SPECIFICATIONS.

ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446)

ALL OPEN TRANSVERSE JOINTS SHALL BE TAPERED TO MEET EXISTING PAVEMENT BEFORE INTRODUCING TRAFFIC. A "BUMP" SIGN (W-8-1-36) SHALL BE ERECTED AT ANY TRANSVERSE JOINT LEFT OPEN OVER NIGHT, INCLUDING A SPEED ADVISORY SIGN. THESE SIGNS SHALL BE REMOVED IMMEDIATELY AFTER JOINT HAS BEEN CLOSED. PLACEMENT OF SIGNS SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM 614 MAINTAINING TRAFFIC.

CARE SHALL BE TAKEN TO MATCH EXISTING PAVEMENT ELEVATIONS AT EXISTING PAVED BERMS, DRIVES, INTERSECTIONS, ETC.

ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446), (SAFETY EDGE)

THE SAFETY EDGE SHALL BE INSTALLED AT THE SAME TIME AS THE SURFACE COURSE IS TO BE PLACED. THE SAFETY EDGE WILL NOT REQUIRE ANY DENSITY TESTING.

ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN

ALL OPEN TRANSVERSE JOINTS SHALL BE TAPERED TO MEET EXISTING PAVEMENT BEFORE INTRODUCING TRAFFIC. A "BUMP" SIGN (W-8-1-36) SHALL BE ERECTED AT ANY TRANSVERSE JOINT LEFT OPEN OVER NIGHT, INCLUDING A SPEED ADVISORY SIGN. THESE SIGNS SHALL BE REMOVED IMMEDIATELY AFTER JOINT HAS BEEN CLOSED. PLACEMENT OF SIGNS SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM 614 MAINTAINING TRAFFIC.

CARE SHALL BE TAKEN TO MATCH EXISTING PAVEMENT ELEVATIONS AT EXISTING PAVED BERMS, DRIVES, INTERSECTIONS, ETC.

REQUIREMENTS OF 447 APPLY EXCEPT AS FOLLOWS: THE JOINT BETWEEN THE RIGHT LANE AND THE OUTSIDE SHOULDER WILL BE EXCLUDED FROM THE 447.06 JOINT DENSITY ACCEPTANCE.

ADDITIONAL QUANTITIES FOR PAVING THE RIGHT LANE (FOUR LANE SECTION)

THE FOLLOWING QUANTITIES ARE TO BE USED AS DIRECTED BY THE ENGINEER WHEN PAVING THE RIGHT LANE TO CORRECT ANY DAMAGED AREAS ON THE PREVIOUSLY OVERLAID OUTSIDE SHOULDERS.

01/NHS/PV:

ITEM 254 – PAVEMENT PLANING, ASPHALT CONCRETE (1.5 INCH)	5,080 SY
ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN	212 CY

02/STR/PV:

ITEM 254 – PAVEMENT PLANING, ASPHALT CONCRETE (1.5 INCH)	164 SY
ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN	7 CY

ITEM 605 – AGGREGATE DRAINS, AS PER PLAN

AGGREGATE DRAINS SHALL BE PLACED AT FULL DEPTH CONCRETE REPAIR AREAS TO IMPROVE EXISTING DRAINAGE. EXACT LOCATIONS ARE TO BE DETERMINED BY THE ENGINEER. THE AGGREGATE DRAINS SHOULD BE PLACED ADJACENT TO THE FULL DEPTH CONCRETE REPAIRS AND EXTEND UNDERNEATH THE PAVED SHOULDERS AND OUTLET BEYOND THE PAVED SHOULDERS.

IN ADDITION TO THE REQUIREMENTS OF 605.07, THIS ITEM SHALL INCLUDE THE PLACEMENT OF 6" OF ITEM 301 OVER THE EMBANKMENT MATERIAL AND 1.5" OF ITEM 442 – ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) PLACED AND COMPACTED TO FINISH FLUSH WITH THE ADJACENT PAVEMENT SURFACE ON THE PAVED SHOULDERS.

PAYMENT FOR THE ABOVE SHALL BE AT THE UNIT PRICE BID PER FOOT FOR THE ABOVE ITEM, WHICH SHALL INCLUDE ALL LABOR, EQUIPMENT, MATERIALS AND INCIDENTALS NECESSARY TO COMPLETE THE ABOVE WORK.

01/NHS/PV:

ITEM 605 – AGGREGATE DRAINS, AS PER PLAN	100 FT
--	--------

02/STR/PV:

ITEM 605 – AGGREGATE DRAINS, AS PER PLAN	20 FT
--	-------

ITEM 618 – RUMBLE STRIPS, TRANSVERSE (ASPHALT CONCRETE), AS PER PLAN

REPLACE EXISTING TRANSVERSE RUMBLE STRIPS IN THE SOUTHBOUND LANES ON MED-42. THE REPLACEMENT RUMBLE STRIPS SHALL MATCH THE LOCATIONS, GROOVE DIMENSIONS AND GROOVE SPACING OF THE EXISTING RUMBLE STRIPS TO BE REPLACED.

SEE STANDARD CONSTRUCTION DRAWING BP-9.2 FOR ADDITIONAL DETAILS.

MED-42 (SB RT LANE):

3.29
3.35
3.42

ITEM 618 – RUMBLE STRIPS, TRANSVERSE (ASPHALT CONCRETE), AS PER PLAN


01/NHS/PV – 3 EACH

PAVING AT WESTFIELD RD RCUT AND LEROY RD LEFT TURN LANES

MAINLINE PAVING OF MED-224 SHALL OVERLAP 1 FT INTO THE EXISTING PAVEMENT AREAS AT THE WESTFIELD RD (SLM 13.47) RCUT AND LEROY RD (SLM 13.92) LEFT TURN LANES. THE REMAINING EXISTING PAVEMENT AREAS AT BOTH LOCATIONS SHALL BE UNDISTURBED.

STOP BAR PLACEMENT

AT NORMAL STOP CONTROLLED RURAL INTERSECTIONS WITHOUT CROSSWALK, THE STOP BAR SHOULD BE PLACED FOUR FEET FROM THE EDGE LINE OF THE INTERSECTING ROADWAY IN ORDER TO ACHIEVE MAXIMUM INTERSECTION SIGHT DISTANCE.

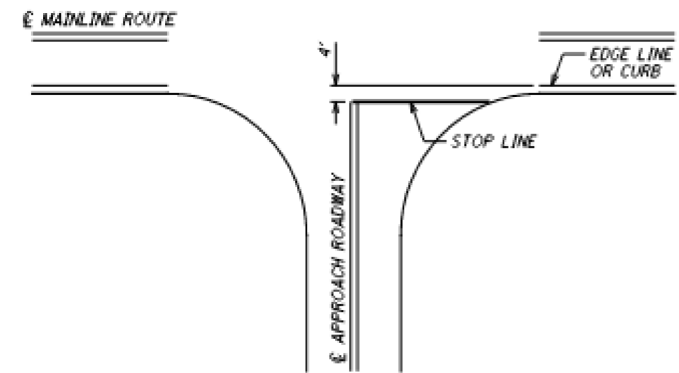

DETECTION MAINTENANCE

IF VEHICLE DETECTION BECOMES UNEXPECTEDLY DISABLED, REQUIRES MODIFICATION, OR IS SCHEDULED TO BE TEMPORARILY REMOVED DURING THE CONSTRUCTION PROJECT, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE PROJECT ENGINEER AND DISTRICT TRAFFIC ENGINEER.

IF THE LOSS OF VEHICLE DETECTION IS KNOWN PRIOR TO THE START OF CONSTRUCTION, IT SHALL BE DISCUSSED AT THE PRECONSTRUCTION MEETING. AT SUCH TIME, THE DISTRICT TRAFFIC ENGINEER SHALL ADVISE THE PROJECT ENGINEER AND CONTRACTOR ON THE APPROPRIATE ACTION TO RECTIFY ANY LOSS OF VEHICLE DETECTION. THIS MAY INCLUDE PLACING THE TRAFFIC SIGNAL ON MINIMUM OR MAXIMUM RECALL, MODIFYING THE MINIMUM GREEN TIMES, AND REMOVING THE MALFUNCTIONING DETECTION FROM SERVICE. WHERE NON-INTRUSIVE DETECTION (I.E., VIDEO, RADAR) ALREADY EXISTS, THE CONTRACTOR SHALL INSURE THAT DETECTION IS OPERATING AND MAINTAINED BY RECONFIGURING THE DETECTION UNITS ACCORDINGLY DURING ALL CONSTRUCTION PHASES. THIS IS TO AVOID THE SIGNAL FROM MAXING OUT THE EFFECTED SIGNAL PHASE AND CREATING UNNECESSARY DELAYS.

LOCATIONS WHERE NON-INTRUSIVE DETECTION IS PROPOSED AND THE EXISTING VEHICLE DETECTION IS TO BE ABANDONED, THE NON-INTRUSIVE VEHICLE DETECTION SHALL BE INSTALLED, CONFIGURED AND MADE FULLY FUNCTIONAL PRIOR TO THE EXISTING DETECTION BEING DISABLED. THE CONTRACTOR SHALL CONTINUE TO MAINTAIN AND MODIFY THE DETECTION UNTIL FINAL ACCEPTANCE OF THE TRAFFIC SIGNAL. THIS IS TO ENSURE VEHICLE DETECTION REMAINS FULLY FUNCTIONAL THROUGHOUT CONSTRUCTION.

PAYMENT FOR ALL LABOR, EQUIPMENT, MATERIALS, AND INCIDENTALS NEEDED TO PERFORM THE ABOVE LISTED WORK IS CONSIDERED INCIDENTAL TO MAINTAINING TRAFFIC ON THE PROJECT AND WILL BE INCLUDED IN THE LUMP SUM BID PRICE FOR ITEM 614 – MAINTAINING TRAFFIC.

MAINTENANCE OF LEFT TURN MOVEMENTS

ALL LEFT TURN LANES AND SIGNAL PHASES AT THE FRIENDSVILLE RD AND LAKE RD INTERSECTIONS SHALL BE MAINTAINED AT ALL TIMES EXCEPT AS NOTED BELOW.

LEFT TURN LANES AND SIGNAL PHASES SHALL BE MAINTAINED AT ALL TIMES, EXCEPT DURING SHORT INTERVALS WHEN THE LEFT TURN MOVEMENTS FROM US 224 SHALL BE FLAGGED WITH LEOS. THIS WORK SHALL NOT OCCUR BETWEEN 6 AM AND 9 PM. AT FRIENDSVILLE RD, HOWEVER, THIS WORK MAY OCCUR DURING WEEKDAYS WHEN CLOVERLEAF SCHOOLS ARE NOT IN SESSION AND ON WEEKENDS WHEN NO EVENTS ARE SCHEDULED TO TAKE PLACE AT THE CLOVERLEAF SCHOOLS COMPLEX. AT LAKE RD, WHERE DUAL LEFT TURN LANES EXIST, ONE OF THE TURN LANES MAY BE CLOSED AT A TIME COMMENSURATE WITH THE WORK IN PROGRESS. IF ANY LEFT TURN PHASES ARE REMOVED WHEN AN LEO IS NOT PRESENT, THE CORRESPONDING LEFT TURN SIGNAL HEADS SHALL BE FULLY COVERED SO THAT THE LEFT TURN SIGNAL INDICATION IS NOT VISIBLE TO TRAFFIC.

PAYMENT FOR ALL LABOR, EQUIPMENT, MATERIALS, AND INCIDENTALS NEEDED TO PERFORM THE ABOVE LISTED WORK IS CONSIDERED INCIDENTAL TO MAINTAINING TRAFFIC ON THE PROJECT AND WILL BE INCLUDED IN THE LUMP SUM BID PRICE FOR ITEM 614 – MAINTAINING TRAFFIC.

GENERAL NOTES

DESIGN AGENCY

DISTRICT 3



ENGINEERING TEAM TWO

DESIGNER

JLL

REVIEWER

KRB 6-30-21

PROJECT ID

79761

SHEET TOTAL

12 | 79

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: NOT NOTES 2 PAPER SIZE: 11x17 (in.) DATE: 11/16/2021 TIME: 12:53:56 PM USER: kselley
pvc:\hobdod-pw-bentley.com\shahid-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GN001.dgn

ITEM 614 – REPLACEMENT DRUM

DRUMS FURNISHED BY THE CONTRACTOR IN ACCORDANCE WITH THE REQUIREMENTS OF THE PLANS, SPECIFICATIONS AND PROPOSAL WHICH BECOME DAMAGED BY TRAFFIC FOR REASONS BEYOND THE CONTROL OF THE CONTRACTOR SHALL BE REPLACED IN KIND WHEN ORDERED BY THE ENGINEER. REPLACEMENT DRUMS SHALL BE NEW.

THIS ITEM IS TO BE CONSIDERED INCIDENTAL TO MAINTAINING TRAFFIC ON THE PROJECT AND WILL BE PAID FOR UNDER THE LUMP SUM CONTRACT BID PRICE FOR ITEM 614 – MAINTAINING TRAFFIC. IT SHALL INCLUDE THE COST OF REMOVING AND DISPOSING OF THE DAMAGED DRUM, AND PROVIDING AND MAINTAINING THE REPLACEMENT DRUM IN ACCORDANCE WITH THE CONTRACT REQUIREMENTS FOR THE ORIGINAL DRUM.

ITEM 614 – WORK ZONE IMPACT ATTENUATOR FOR 24" WIDE HAZARDS (UNIDIRECTIONAL)

THIS ITEM SHALL CONSIST OF FURNISHING AND INSTALLING A NON-GATING IMPACT ATTENUATOR. FURNISH AN IMPACT ATTENUATOR FROM THE OFFICE OF ROADWAY ENGINEERING'S APPROVED LIST FOR WORK ZONE IMPACT ATTENUATORS, FROM THE ROADWAY STANDARDS APPROVED PRODUCTS WEB PAGE. INSTALLATION SHALL BE AT THE LOCATIONS SPECIFIED IN THE PLANS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

THE CONTRACTOR SHALL REPAIR OR REPLACE A DAMAGED UNIT WITHIN 24 HOURS OF A DAMAGING IMPACT.

WHEN BIDIRECTIONAL DESIGNS ARE SPECIFIED, THE CONTRACTOR SHALL SUPPLY APPROPRIATE TRANSITIONS.

WHEN GATING IMPACT ATTENUATORS ARE DESIRED, THE CONTRACTOR SHALL SUBMIT DOCUMENTATION TO THE ENGINEER FOR ACCEPTANCE.

THE COST FOR THE ADDITIONAL BARRIER REQUIRED FOR A GATING IMPACT ATTENUATOR SHALL BE INCLUDED IN THE COST OF THE GATING IMPACT ATTENUATOR.

PAYMENT FOR THE ABOVE WORK SHALL BE MADE AT THE UNIT PRICE BID AND SHALL INCLUDE ALL LABOR, TOOLS, EQUIPMENT AND MATERIALS NECESSARY TO CONSTRUCT AND MAINTAIN A COMPLETE AND FUNCTIONAL IMPACT ATTENUATOR SYSTEM, INCLUDING ALL RELATED BACKUPS, TRANSITIONS, LEVELING PADS, HARDWARE AND GRADING, NOT SEPARATELY SPECIFIED, AS REQUIRED BY THE MANUFACTURER.

ITEM 614 – BARRIER REFLECTORS AND/OR OBJECT MARKERS

BARRIER REFLECTORS AND/OR OBJECT MARKERS SHALL BE INSTALLED ON ALL PORTABLE CONCRETE BARRIER USED FOR TRAFFIC CONTROL. BARRIER REFLECTORS, OBJECT MARKERS AND THEIR INSTALLATION SHALL CONFORM TO CMS 626, EXCEPT THAT THE SPACING SHALL BE 50 FEET.

ITEM 614 – MAINTAINING TRAFFIC FOR STRUCTURES (MED-42-3.10L&R) (MED-42-4.60L&R) (MED-224-12.76L&R)

ONE LANE OF TRAFFIC SHALL BE MAINTAINED AT ALL TIMES. LANE CLOSURES FOR WORK ON STRUCTURES MED-42-3.10L&R, MED-42-4.60L&R, MED-224-12.76L&R SHALL FOLLOW STANDARD CONSTRUCTION DRAWING MT-95.40. THE REMOVAL OF CONFLICTING EDGE LINES AND LANE LINES WILL BE INCIDENTAL TO ITEM 614 - MAINTAINING TRAFFIC. PLACING AND REMOVING WORK ZONE EDGE LINES WILL BE INCIDENTAL TO ITEM 614 – MAINTAINING TRAFFIC; WORK ZONE EDGE LINES ON STRUCTURES SHALL BE CLASS 1, 6", 873.

ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH CMS 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATIONS, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT BID PRICE FOR ITEM 614 - MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

THE FOLLOWING ESTIMATED QUANTITIES HAVE BEEN CARRIED TO THE GENERAL SUMMARY:

STRUCTURE MED-42-3.10L (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 770 FT

STRUCTURE MED-42-3.10R (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 770 FT

STRUCTURE MED-42-4.60L (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 750 FT

STRUCTURE MED-42-4.60R (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 750 FT

STRUCTURE MED-224-12.76L (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 760 FT

STRUCTURE MED-224-12.76R (03/NHS/BR):
ITEM 614 - WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS (UNIDIRECTIONAL): 4 EACH
ITEM 614 - BARRIER REFLECTOR, TYPE 1 (ONE-WAY): 16 EACH
ITEM 614 - OBJECT MARKER, ONE WAY: 16 EACH
ITEM 622 - PORTABLE BARRIER, 32" (UNANCHORED): 760 FT

ITEM 614 – PORTABLE CHANGEABLE MESSAGE SIGNS, AS PER PLAN

THE CONTRACTOR SHALL FURNISH, INSTALL, MAINTAIN AND REMOVE, WHEN NO LONGER NEEDED, A CHANGEABLE MESSAGE SIGN. THE SIGN SHALL BE OF A TYPE SHOWN ON A LIST OF APPROVED PCMS UNITS AVAILABLE ON THE OFFICE OF MATERIALS MANAGEMENT WEB PAGE. THE LIST CONTAINS CLASS A AND B UNITS WITH MINIMUM LEGIBILITY DISTANCES OF 800 FEET AND 650 FEET, RESPECTIVELY.

EACH SIGN SHALL BE TRAILER-MOUNTED AND EQUIPPED WITH A FUNCTIONAL DIMMING MECHANISM, TO DIM THE SIGN DURING DARKNESS, AND A TAMPER AND VANDAL PROOF ENCLOSURE. EACH SIGN SHALL BE PROVIDED WITH APPROPRIATE TRAINING AND OPERATION INSTRUCTIONS TO ENABLE ON-SITE PERSONNEL TO OPERATE AND TROUBLESHOOT THE UNIT. THE SIGN SHALL ALSO BE CAPABLE OF BEING POWERED BY AN ELECTRICAL SERVICE DROP FROM A LOCAL UTILITY COMPANY. THE PCMS SHALL BE DELINEATED IN ACCORDANCE WITH C&MS 614.03.

THE PROBABLE PCMS LOCATIONS AND WORK LIMITS FOR THOSE LOCATIONS ARE SHOWN ON SHEET(S) OF THE PLAN. PLACEMENT, OPERATION, MAINTENANCE AND ALL ACTIVATION OF THE SIGNS BY THE CONTRACTOR SHALL BE AS DIRECTED BY THE ENGINEER. THE PCMS SHALL BE LOCATED IN A HIGHLY VISIBLE POSITION YET PROTECTED FROM TRAFFIC. THE CONTRACTOR SHALL, AT THE DIRECTION OF THE ENGINEER, RELOCATE THE PCMS TO IMPROVE VISIBILITY OR ACCOMMODATE CHANGED CONDITIONS. WHEN NOT IN USE, THE PCMS SHALL BE TURNED OFF. ADDITIONALLY, WHEN NOT IN USE FOR EXTENDED PERIODS OF TIME, THE PCMS SHALL BE TURNED AWAY FROM ALL TRAFFIC.

THE ENGINEER SHALL BE PROVIDED ACCESS TO EACH SIGN UNIT AND SHALL BE PROVIDED WITH APPROPRIATE TRAINING AND OPERATION INSTRUCTIONS TO ENABLE ODOT PERSONNEL TO OPERATE AND TROUBLESHOOT THE UNIT, AND TO REVISE SIGN MESSAGES, IF NECESSARY.

ALL MESSAGES TO BE DISPLAYED ON THE SIGN WILL BE PROVIDED BY THE ENGINEER. A LIST OF ALL REQUIRED PRE-PROGRAMMED MESSAGES WILL BE GIVEN TO THE CONTRACTOR AT THE PROJECT PRECONSTRUCTION CONFERENCE. THE SIGN SHALL HAVE THE CAPABILITY TO STORE UP TO 99 MESSAGES. MESSAGE MEMORY OR PRE-PROGRAMMED DISPLAYS SHALL NOT BE LOST AS A RESULT OF POWER FAILURES TO THE ON-BOARD COMPUTER. THE SIGN LEGEND SHALL BE CAPABLE OF BEING CHANGED IN THE FIELD. THREE-LINE PRESENTATION FORMATS WITH UP TO SIX MESSAGE PHASES SHALL BE SUPPORTED. PCMS FORMAT SHALL PERMIT THE COMPLETE MESSAGE FOR EACH PHASE TO BE READ AT LEAST TWICE.

THE PCMS SHALL CONTAIN AN ACCURATE CLOCK AND PROGRAMMING LOGIC WHICH WILL ALLOW THE SIGN TO BE ACTIVATED, DEACTIVATED OR MESSAGES CHANGED AUTOMATICALLY AT DIFFERENT TIMES OF THE DAY FOR DIFFERENT DAYS OF THE WEEK.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR 24-HOUR-PER-DAY OPERATION AND MAINTENANCE OF THESE SIGNS ON THE PROJECT FOR THE DURATION OF THE PHASES WHEN THE PLAN REQUIRES THEIR USE.

PAYMENT FOR THE ABOVE DESCRIBED ITEM SHALL BE AT THE CONTRACT UNIT PRICE. PAYMENT SHALL INCLUDE ALL LABOR, MATERIALS, EQUIPMENT, FUELS, LUBRICATING OILS, SOFTWARE, HARDWARE AND INCIDENTALS TO PERFORM THE ABOVE DESCRIBED WORK.

ITEM 614 – PORTABLE CHANGEABLE MESSAGE SIGN, AS PER PLAN
01/NHS/PV - 36 SIGN MONTH
[ASSUMING 6 PCMS SIGNS FOR 6 MONTHS]

WORK ZONE SPEED ZONES (WZSZs)

THE FOLLOWING WORK ZONE SPEED ZONE (WZSZ) SPEED LIMIT REVISION(S) HAVE BEEN APPROVED FOR USE ON THIS PROJECT WHEN WORK ZONE CONDITIONS AND FACTORS ARE MET AS DESCRIBED BELOW:

WZSZ REVISION NUMBER(S)	COUNTY-ROUTE-SECTION(S)	DIRECTION(S)
WZ-20629	MED-42-2.79 TO 6.90	NB & SB
WZ-20630	MED-224-10.45 TO 15.61	EB & WB

POTENTIAL WZSZ LOCATIONS SHALL HAVE AN ORIGINAL (PRE-CONSTRUCTION) POSTED SPEED LIMIT OF 55 MPH OR GREATER, A QUALIFYING WORK ZONE CONDITION OF AT LEAST 0.5 MILE IN LENGTH, AN EXPECTED WORK DURATION OF AT LEAST THREE HOURS, AND A WORK ZONE CONDITION IN PLACE THAT REDUCES THE EXISTING FUNCTIONALITY OF THE TRAVEL LANES OR SHOULDERS (I.E., LANE CLOSURE, LANE SHIFT, CROSSOVER, CONTRAFLOW AND/OR SHOULDER CLOSURE). THE LENGTH OF THE WORK ZONE CONDITION IS MEASURED FROM THE BEGINNING OF THE TAPER FOR THE SUBJECT WORK ZONE CONDITION IMPACTING THE TRAVEL LANES AND/OR SHOULDER TO THE END OF THE DOWNSTREAM TAPER, WHERE DRIVERS ARE RETURNED TO TYPICAL ALIGNMENT. AN EXPECTED WORK DURATION OF AT LEAST THREE HOURS IS REQUIRED TO BALANCE THE ADDITIONAL EXPOSURE CREATED BY INSTALLING AND REMOVING WZSZ SIGNING WITH THE TIME NEEDED TO COMPLETE THE WORK.

IF THE WORK ZONE MEETS THESE MINIMUM CRITERIA, IT SHALL BE ANALYZED FURTHER USING TABLE 1 BELOW TO DETERMINE IF AND WHEN IT QUALIFIES FOR A SPEED LIMIT REDUCTION. DEPENDING ON THE ORIGINAL POSTED SPEED LIMIT, THE TYPE OF TEMPORARY TRAFFIC CONTROL USED, AND WHETHER OR NOT WORKERS ARE PRESENT, A WARRANTED WZSZ WILL VARY IN THE APPROVED SPEED LIMIT TO BE POSTED OVER TIME.

C&MS ITEM 614, PARAGRAPH 614.02(B), INDICATES THAT TWO DIRECTIONS OF A DIVIDED HIGHWAY ARE CONSIDERED SEPARATE HIGHWAY SECTIONS. THEREFORE, IF THE WORK ON A MULTI-LANE DIVIDED HIGHWAY IS LIMITED TO ONLY ONE DIRECTION, A SPEED LIMIT REDUCTION IN THE DIRECTION OF THE WORK DOES NOT AUTOMATICALLY CONSTITUTE A SPEED LIMIT REDUCTION IN THE OPPOSITE DIRECTION. EACH DIRECTION SHALL BE ANALYZED INDEPENDENTLY FROM EACH OTHER.

ALL WZSZS FLUCTUATE BETWEEN TWO APPROVED REDUCED SPEED LIMITS OR BETWEEN AN APPROVED REDUCED SPEED LIMIT AND THE ORIGINAL POSTED SPEED LIMIT. ONLY ONE OF TWO SIGNING STRATEGIES SHALL BE USED TO IMPLEMENT A WZSZ.

WZSZS USING DSL SIGN ASSEMBLIES SHALL BE IN ACCORDANCE WITH THIS NOTE, APPROVED LIST, SUPPLEMENTAL SPECIFICATIONS (SS) 808 AND 908, AND TRAFFIC SCD MT-104.10.

WZSZS USING TEMPORARY FLATSHEET SPEED LIMIT SIGNS SHALL BE IN ACCORDANCE WITH THIS NOTE AND SCD MT-104.10. ADDITIONALLY, PAYMENT MAY BE REMOVED, OR A DISINCENTIVE APPLIED, FOR WZSZS USING TEMPORARY FLATSHEET SPEED LIMIT SIGNS THE SAME AS DESCRIBED IN THE MOST RECENT PUBLICATION OF SS 808 IN REGARD TO WZSZS USING DSL SIGN ASSEMBLIES (SEE SS 808.06 PARAGRAPHS 4 THROUGH 7, INCLUDING TABLE 1).] ONLY ONE WARRANTED SPEED LIMIT APPLIES AT ANY ONE TIME; SPEED LIMIT REDUCTIONS ARE NOT CUMULATIVE. WZSZS SHALL NOT BE USED FOR MOVING/MOBILE ACTIVITIES, AS DEFINED IN ODOTCD PART 6.

WHEN LOOKING UP THE WARRANTED WORK ZONE SPEED LIMITS, ALWAYS USE THE ORIGINAL, PRECONSTRUCTION, POSTED SPEED LIMIT. DO NOT USE A PRIOR OR CURRENT WORK ZONE SPEED LIMIT AS A LOOK UP VALUE IN THE TABLE. POSITIVE PROTECTION IS GENERALLY REGARDED AS PORTABLE BARRIER OR OTHER RIGID BARRIER IN USE ALONG THE WORK AREA WITHIN THE SUBJECT WARRANTED WORK ZONE CONDITION. WITHOUT POSITIVE PROTECTION IS GENERALLY REGARDED AS USING DRUMS, CONES, SHADOW VEHICLE, ETC., ALONG THE WORK AREA WITHIN THE SUBJECT WARRANTED WORK ZONE CONDITION. WORKERS ARE CONSIDERED AS BEING PRESENT WHEN ON-SITE, WORKING WITHIN THE SUBJECT WARRANTED WORK ZONE CONDITION. WHEN THE WORK ZONE CONDITION REDUCING THE EXISTING FUNCTIONALITY OF THE TRAVEL LANES OR SHOULDERS IS REMOVED, THE SPEED LIMIT DISPLAYED SHALL RETURN TO THE ORIGINAL POSTED SPEED LIMIT.


TABLE 1: WARRANTED WORK ZONE SPEED LIMITS (MPH) FOR WORK ZONES ON HIGH-SPEED (55 MPH OR GREATER) MULTI-LANE HIGHWAYS:

ORIGINAL POSTED SPEED LIMIT	WITH POSITIVE PROTECTION		WITHOUT POSITIVE PROTECTION	
	WORKERS PRESENT	WORKERS NOT PRESENT	WORKERS PRESENT	WORKERS NOT PRESENT
70	60	65	55	65
65	55	60	50	60
60	55	60	50	60
55	50	55	45	55

THE FOLLOWING ESTIMATED QUANTITY HAS BEEN CARRIED TO THE GENERAL SUMMARY:

ITEM 808 - DIGITAL SPEED LIMIT (DSL) SIGN ASSEMBLY
[ASSUMING 22 DSL SIGN ASSEMBLIES FOR 6 MONTHS]
01/NHS/PV – 132 SIGN MONTHS

MAINTENANCE OF TRAFFIC NOTES

DESIGN AGENCY
DISTRICT 3

ENGINEERING TEAM TWO
DESIGNER
JLL
REVIEWER
SRO 7-6-21
PROJECT ID
79761
SHEET TOTAL
15 | 79

ITEM 614 - MAINTAINING TRAFFIC (TIME LIMITATION ON A DETOUR)

DETOUR LIMITATION:
 TRAFFIC SHALL BE MAINTAINED AT ALL TIMES, EXCEPT FOR A PERIOD NOT TO EXCEED THREE (3) CONSECUTIVE CALENDAR DAYS. THROUGH TRAFFIC SHALL BE DETOURED AS SHOWN ON THIS SHEET.

THE CONTRACTOR WILL INSTALL, MAINTAIN, AND SUBSEQUENTLY REMOVE THE DETOUR SIGNING.



THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, MAINTAINING AND REMOVING THE GATES AND BARRICADES AT THE APPROXIMATE WORK LIMITS OF THE PROJECT, AND THE ADVANCE WARNING SIGNS AS SHOWN ON STANDARD CONSTRUCTION DRAWING MT-101.60.

INTERIM COMPLETION DATE:

THE THREE (3) CONSECUTIVE CALENDAR DAYS SHALL BE CONSIDERED AN INTERIM COMPLETION DATE, AND FOR EACH CALENDAR DAY BEYOND THE THREE (3) CONSECUTIVE CALENDAR DAYS THAT THE ROADWAY REMAINS CLOSED TO TRAFFIC, THE CONTRACTOR SHALL BE ASSESSED A DISINCENTIVE FEE OF \$8,400 PER DAY.

ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES, AS PER SECTION 614.02(A).



ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATION, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE FOR ITEM 614 - MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

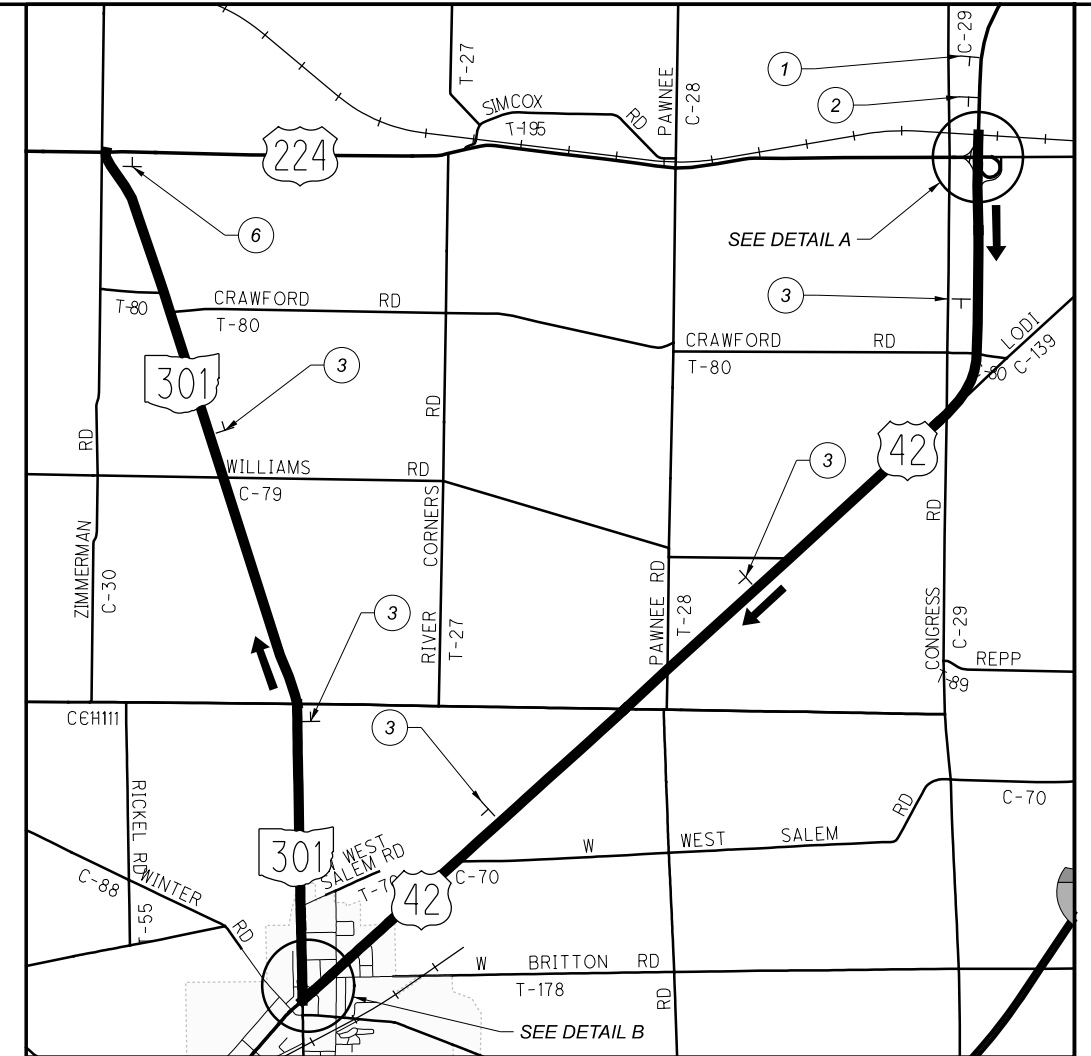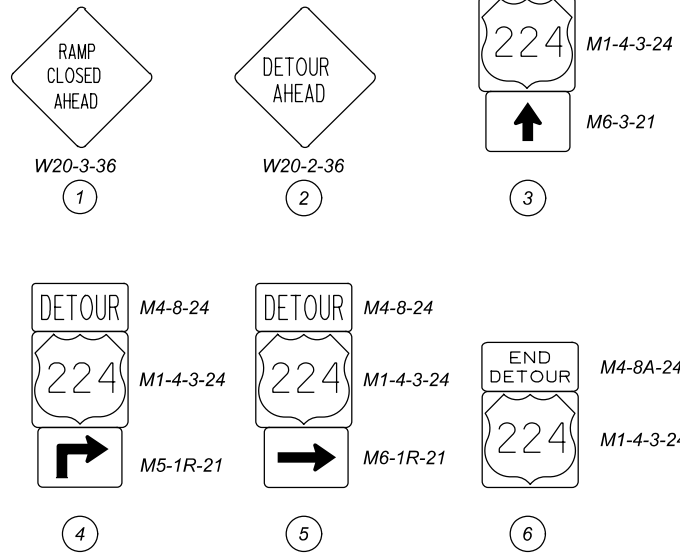


MAP LEGEND

- PROJECT LOCATION
- OFFICIAL STATE SIGNED DETOUR
- GATES AND BARRICADES, AS PER MT-101.60

SCALE IN FEET

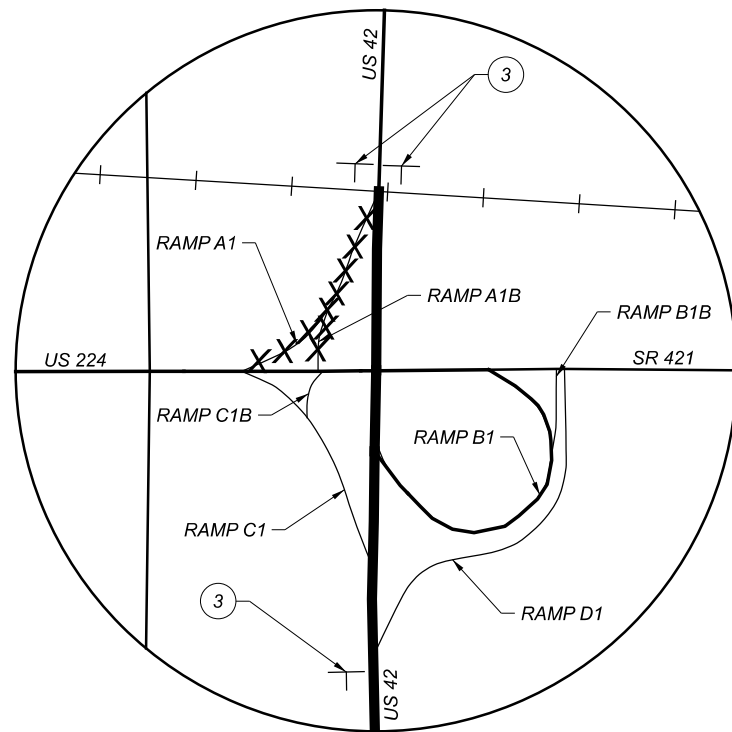

DETAIL A

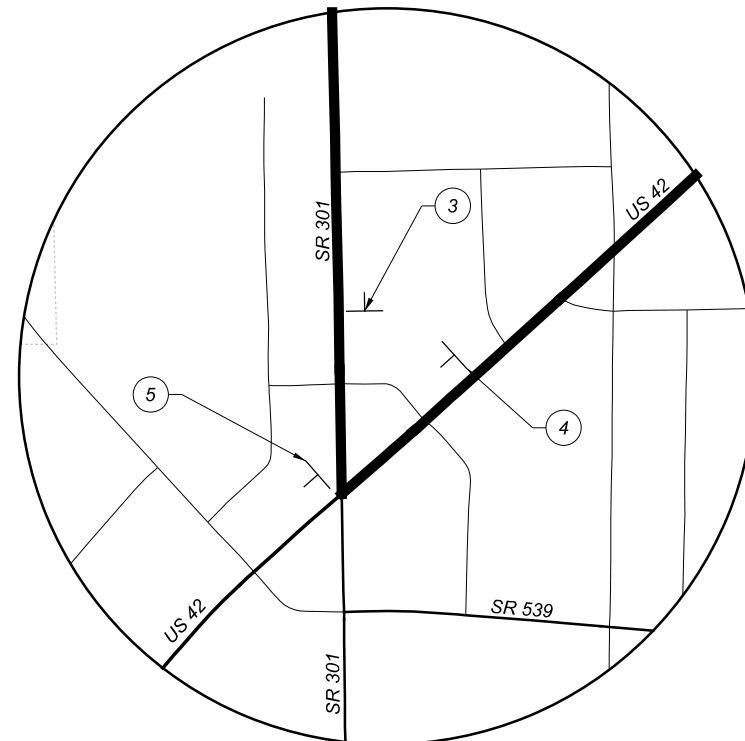

DETAIL B

ITEM 614 - MAINTAINING TRAFFIC (TIME LIMITATION ON A DETOUR)

DETOUR LIMITATION:





TRAFFIC SHALL BE MAINTAINED AT ALL TIMES, EXCEPT FOR A PERIOD NOT TO EXCEED THREE (3) CONSECUTIVE CALENDAR DAYS. THROUGH TRAFFIC SHALL BE DETOURED AS SHOWN ON THIS SHEET.

THE CONTRACTOR WILL INSTALL, MAINTAIN, AND SUBSEQUENTLY REMOVE THE DETOUR SIGNING.


THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, MAINTAINING AND REMOVING THE GATES AND BARRICADES AT THE APPROXIMATE WORK LIMITS OF THE PROJECT, AND THE ADVANCE WARNING SIGNS AS SHOWN ON STANDARD CONSTRUCTION DRAWING MT-101.60.

ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES, AS PER SECTION 614.02(A).

ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATION, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE FOR ITEM 614 - MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

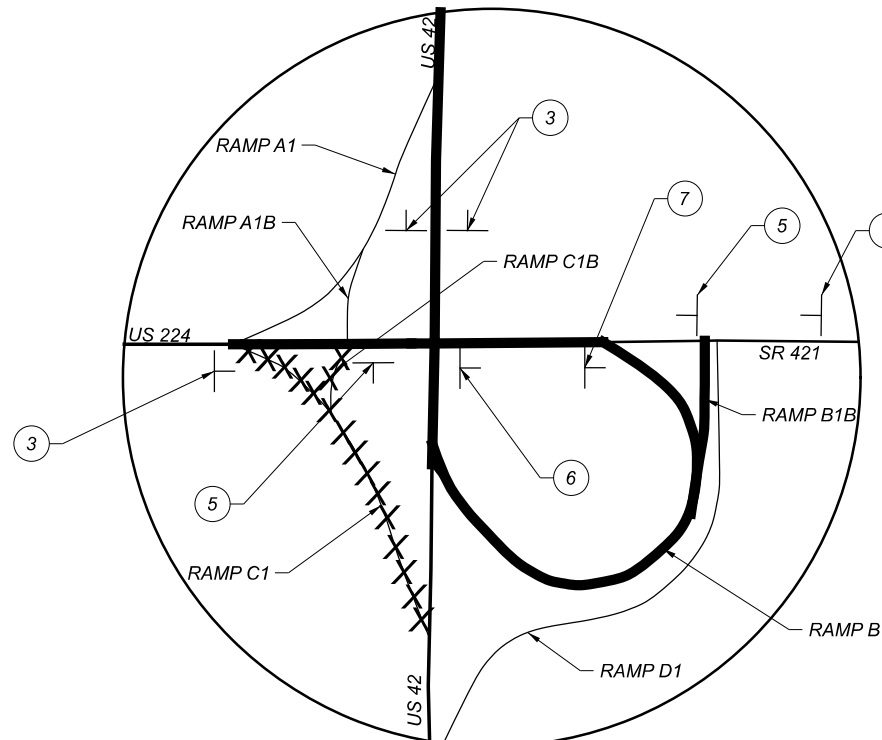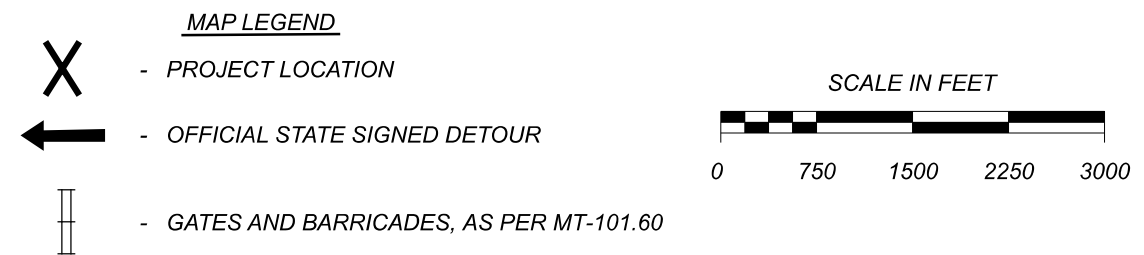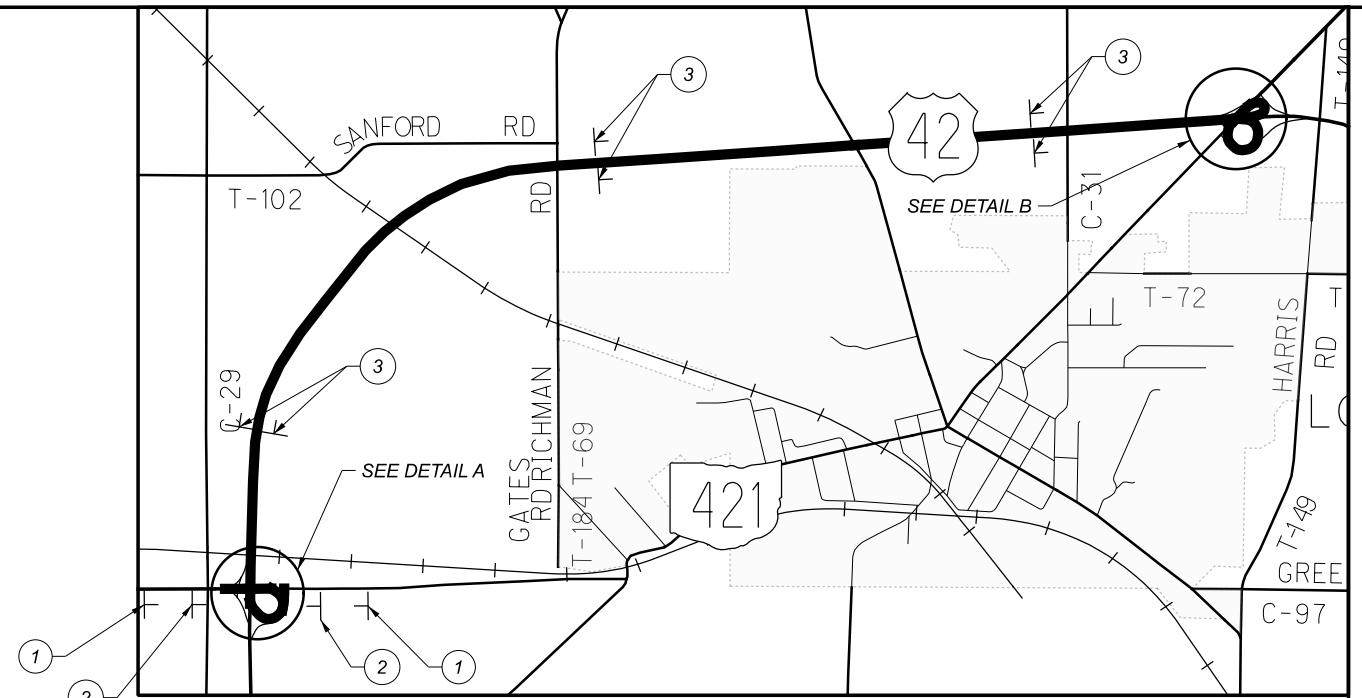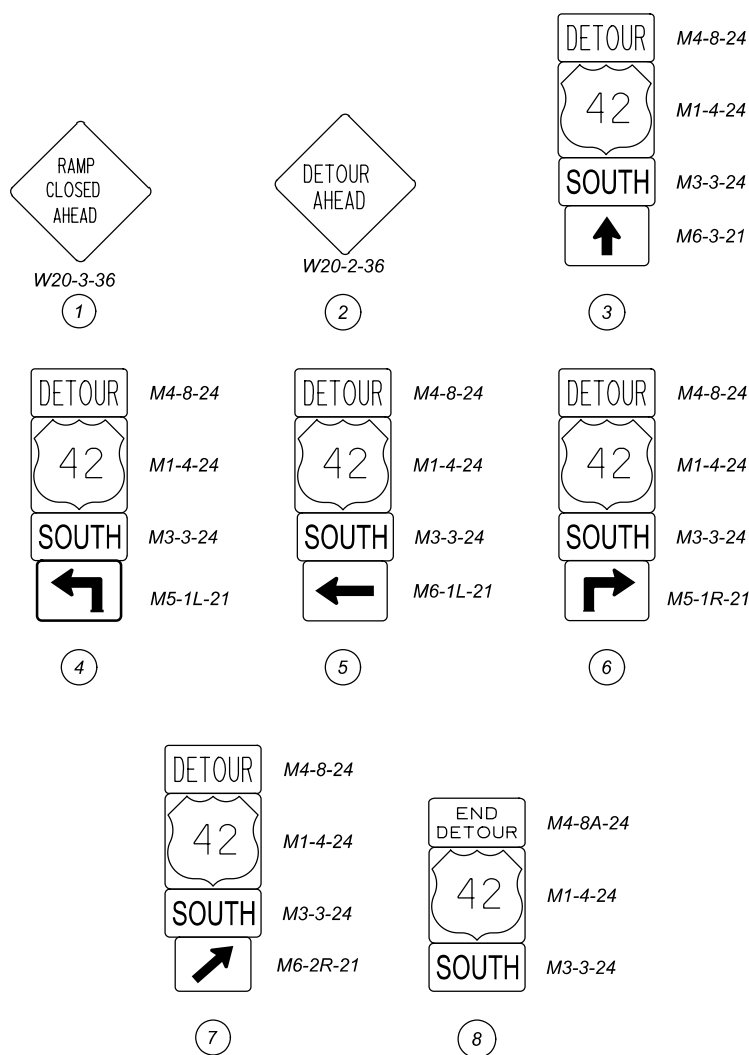

DETAIL A

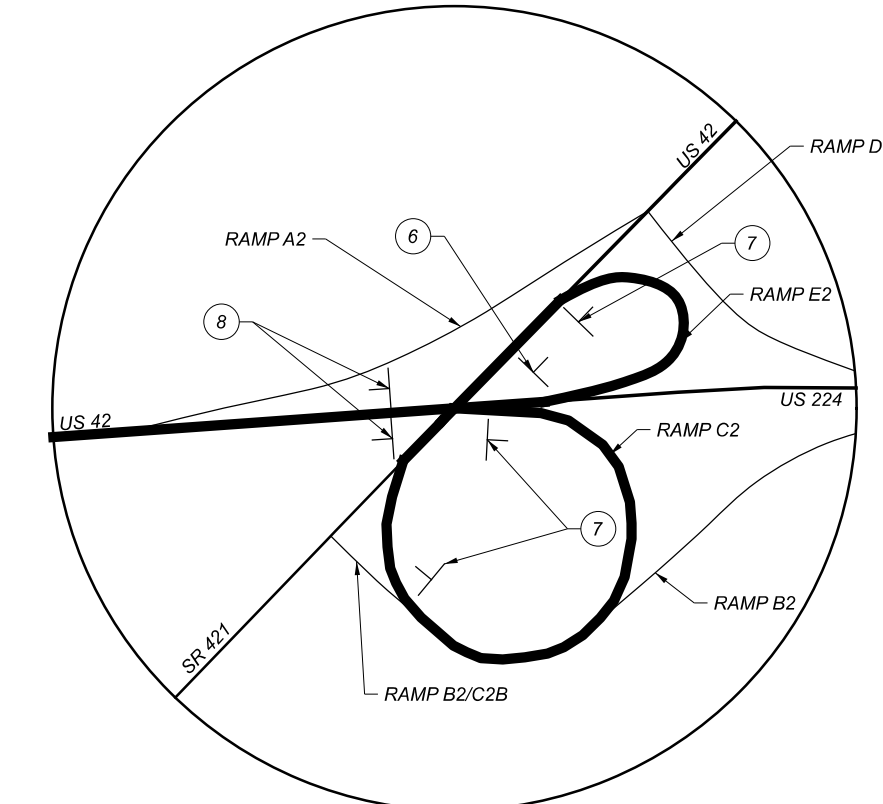

DETAIL B

MAINTENANCE OF TRAFFIC DETOUR PLAN
 US 42/224 - RAMP C1

DESIGN AGENCY	DISTRICT 3
ENGINEERING TEAM TWO	
DESIGNER	JLL
REVIEWER	XXX MM-DD-YY
PROJECT ID	79761
SHEET	TOTAL
17B	79

ITEM 614 - MAINTAINING TRAFFIC (TIME LIMITATION ON A DETOUR)





DETOUR LIMITATION:
 TRAFFIC SHALL BE MAINTAINED AT ALL TIMES, EXCEPT FOR A PERIOD NOT TO EXCEED THREE (3) CONSECUTIVE CALENDAR DAYS. THROUGH TRAFFIC SHALL BE DETOURED AS SHOWN ON THIS SHEET.

THE CONTRACTOR WILL INSTALL, MAINTAIN, AND SUBSEQUENTLY REMOVE THE DETOUR SIGNING.


THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, MAINTAINING AND REMOVING THE GATES AND BARRICADES AT THE APPROXIMATE WORK LIMITS OF THE PROJECT, AND THE ADVANCE WARNING SIGNS AS SHOWN ON STANDARD CONSTRUCTION DRAWING MT-101.60.

ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES, AS PER SECTION 614.02(A).

ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATION, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE FOR ITEM 614 - MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

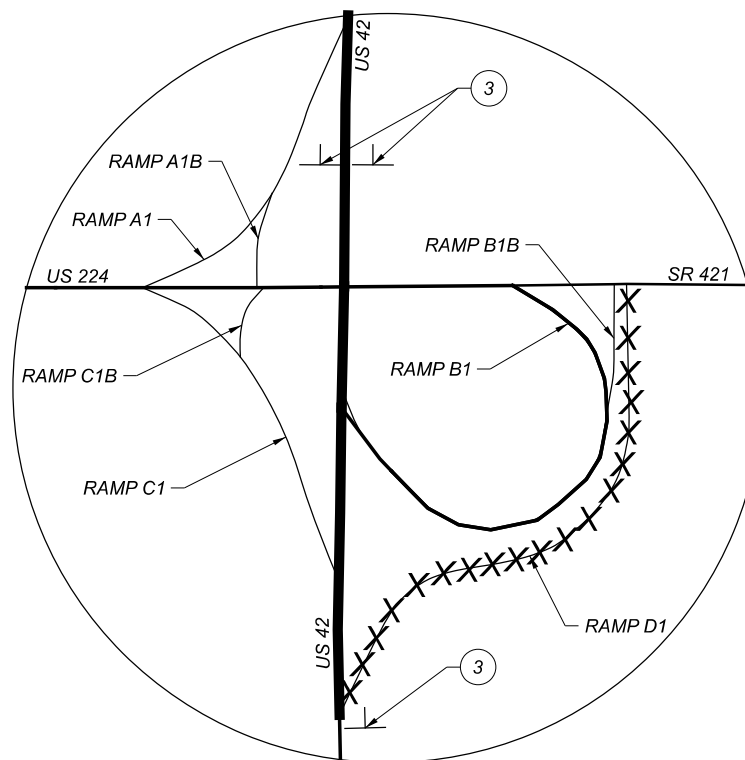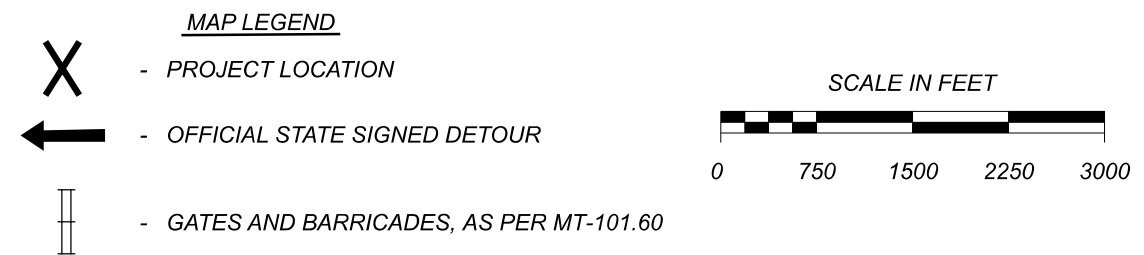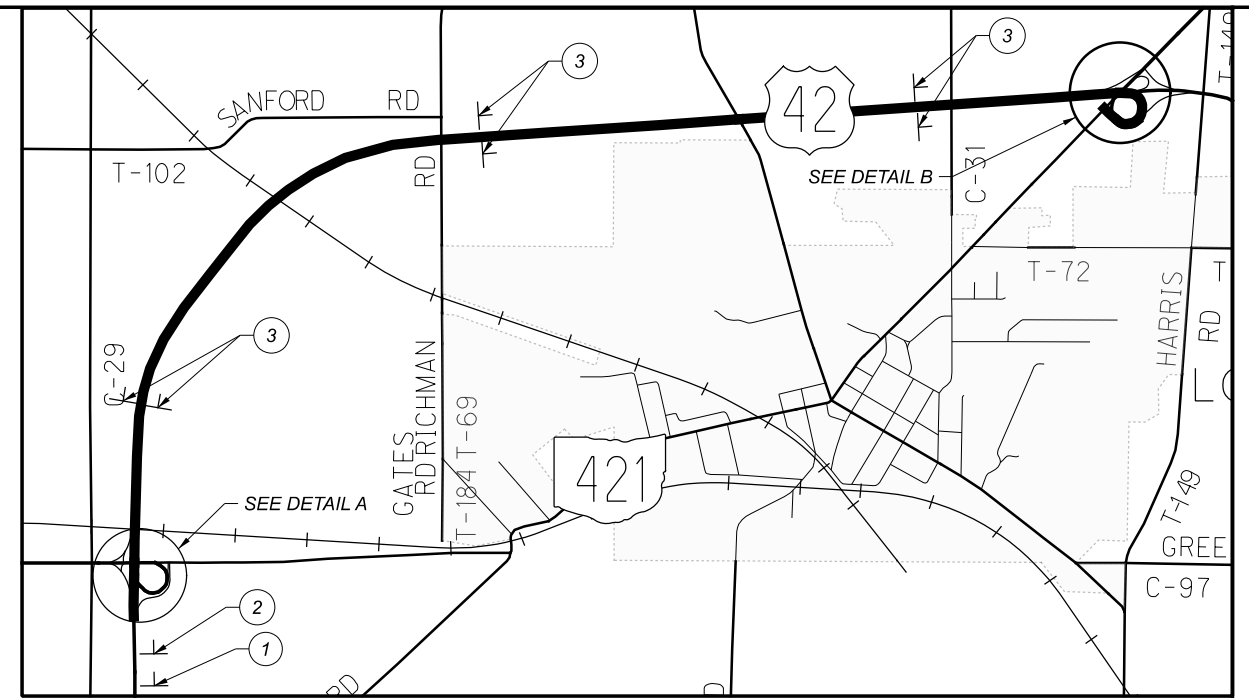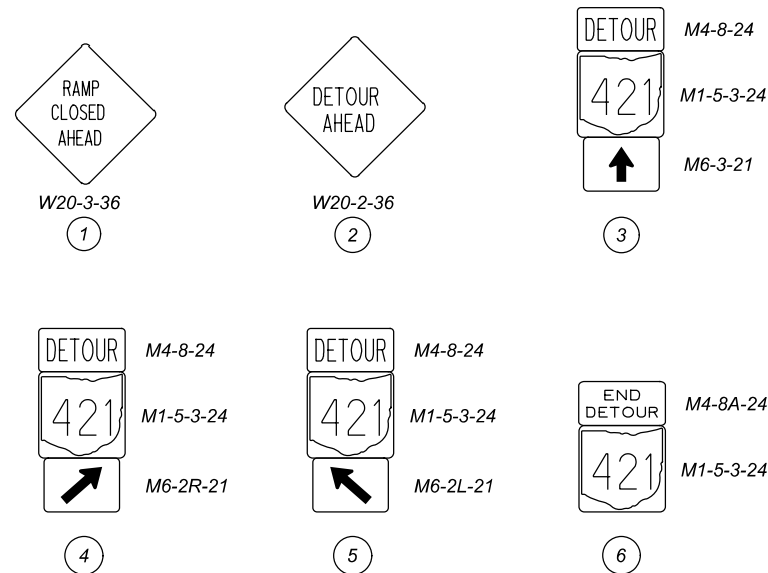

DETAIL A

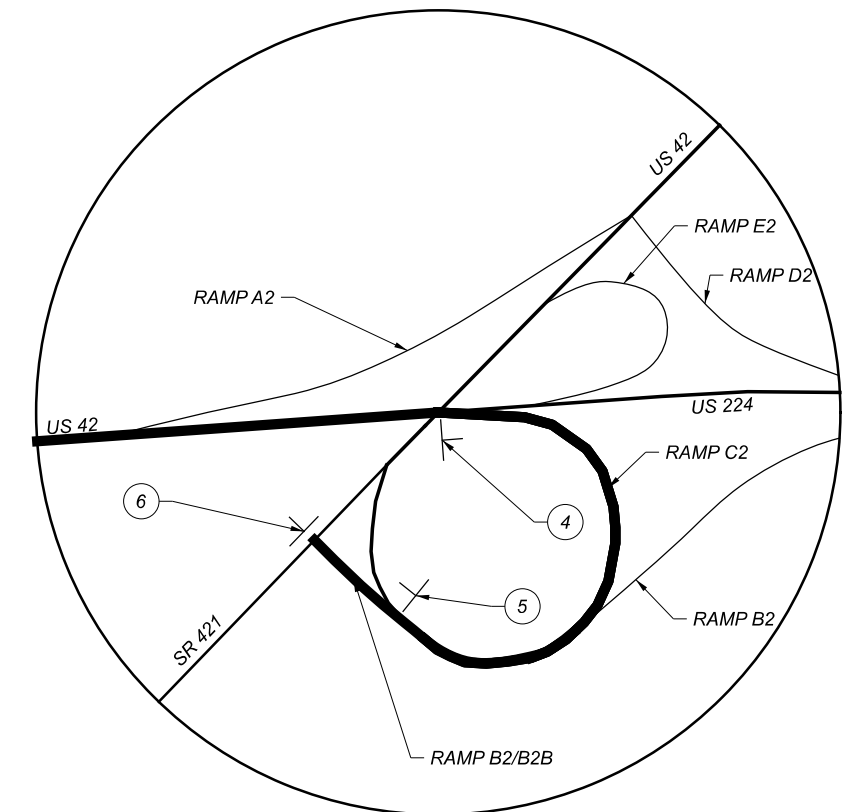

DETAIL B

ITEM 614 – MAINTAINING TRAFFIC (TIME LIMITATION ON A DETOUR)

DETOUR LIMITATION:

TRAFFIC SHALL BE MAINTAINED AT ALL TIMES, EXCEPT FOR A PERIOD NOT TO EXCEED THREE (3) CONSECUTIVE CALENDAR DAYS. THROUGH TRAFFIC SHALL BE DETOURED AS SHOWN ON THIS SHEET.

THE CONTRACTOR WILL INSTALL, MAINTAIN, AND SUBSEQUENTLY REMOVE THE DETOUR SIGNING.


THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, MAINTAINING AND REMOVING THE GATES AND BARRICADES AT THE APPROXIMATE WORK LIMITS OF THE PROJECT, AND THE ADVANCE WARNING SIGNS AS SHOWN ON STANDARD CONSTRUCTION DRAWING MT-101.60.

INTERIM COMPLETION DATE:

THE THREE (3) CONSECUTIVE CALENDAR DAYS SHALL BE CONSIDERED AN INTERIM COMPLETION DATE, AND FOR EACH CALENDAR DAY BEYOND THE THREE (3) CONSECUTIVE CALENDAR DAYS THAT THE ROADWAY REMAINS CLOSED TO TRAFFIC, THE CONTRACTOR SHALL BE ASSESSED A DISINCENTIVE FEE OF \$2,400 PER DAY.

ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES, AS PER SECTION 614.02(A).




ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATION, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE FOR ITEM 614 – MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

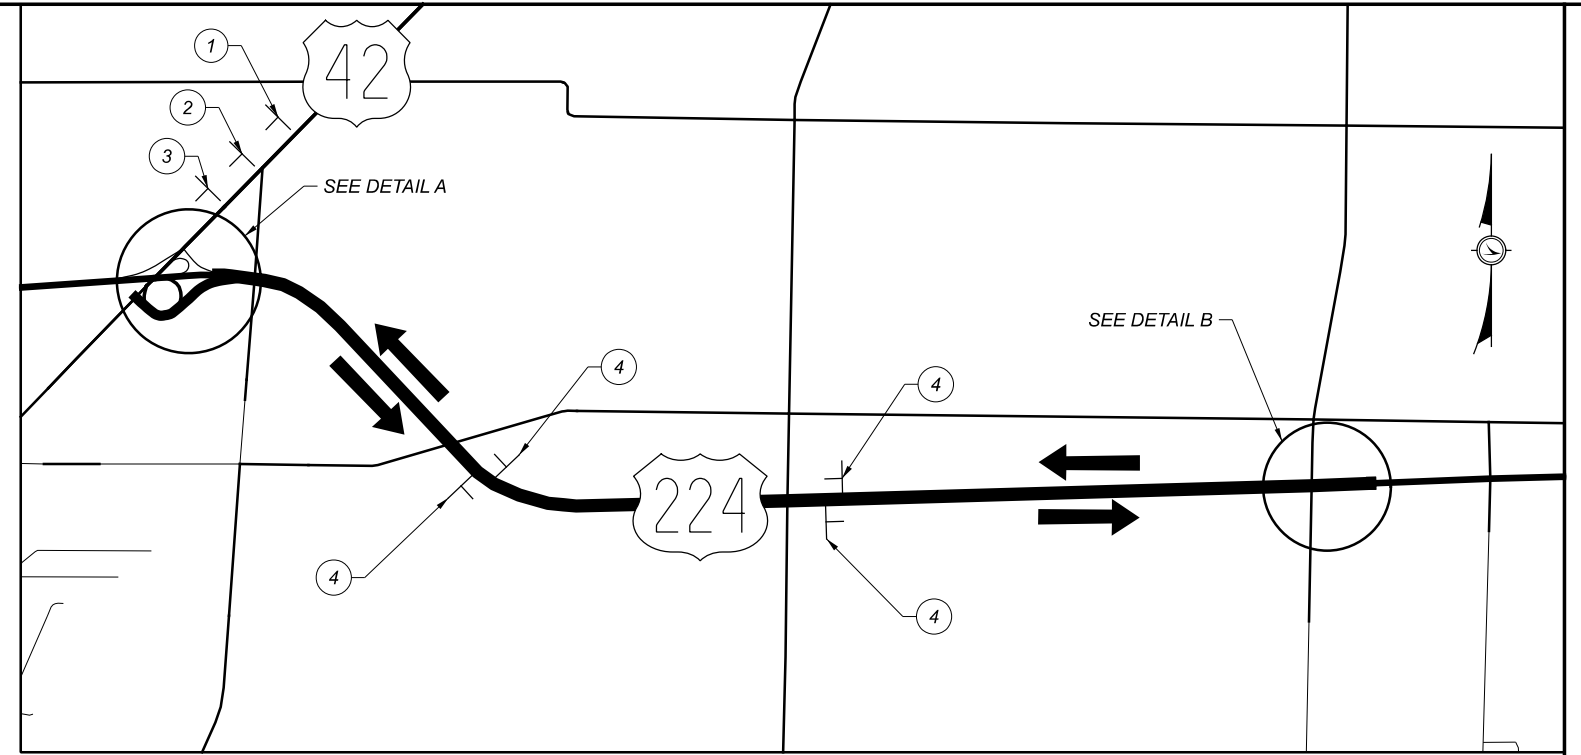


MAP LEGEND

- PROJECT LOCATION
- OFFICIAL STATE SIGNED DETOUR
- GATES AND BARRICADES, AS PER MT-101.60

SCALE IN FEET

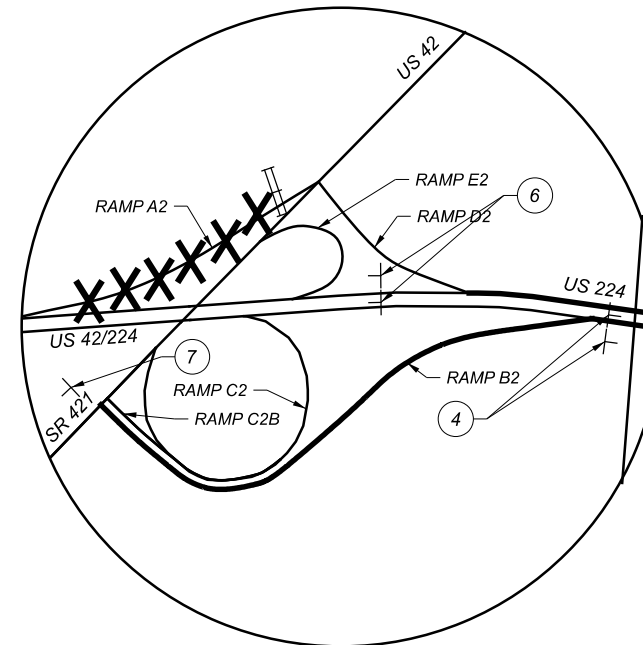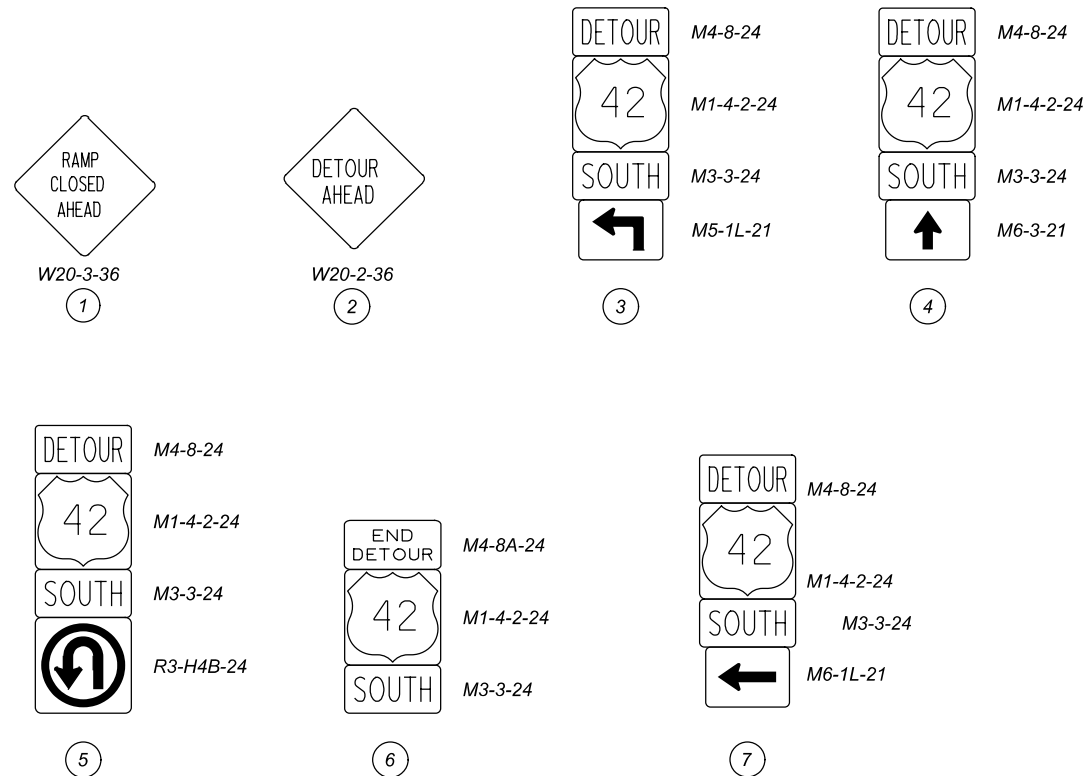

DETAIL A

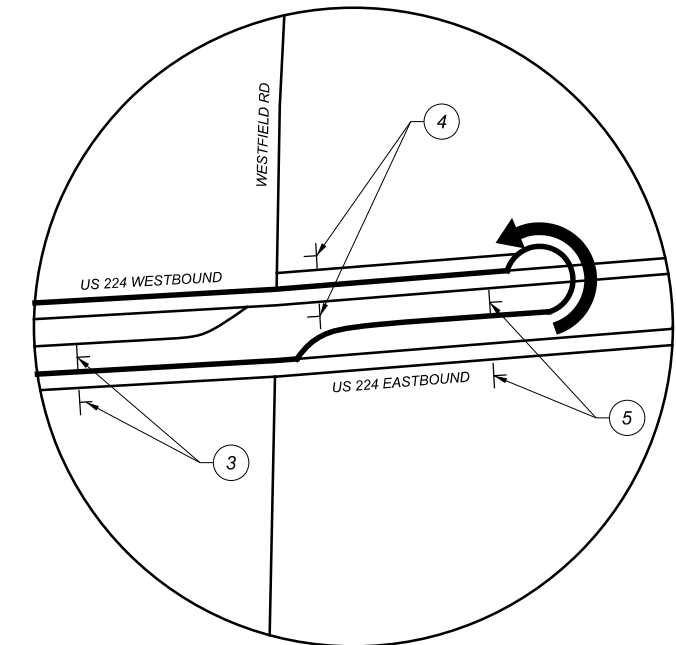

DETAIL B

DESIGN AGENCY

DISTRICT 3



ENGINEERING TEAM TWO

DESIGNER

KRB

REVIEWER

XXX 11-2021

PROJECT ID

79761

SHEET TOTAL

22A | 79

ITEM 614 – MAINTAINING TRAFFIC (TIME LIMITATION ON A DETOUR)

DETOUR LIMITATION:

TRAFFIC SHALL BE MAINTAINED AT ALL TIMES, EXCEPT FOR A PERIOD NOT TO EXCEED THREE (3) CONSECUTIVE CALENDAR DAYS. THROUGH TRAFFIC SHALL BE DETOURED AS SHOWN ON THIS SHEET.

THE CONTRACTOR WILL INSTALL, MAINTAIN, AND SUBSEQUENTLY REMOVE THE DETOUR SIGNING.


THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, MAINTAINING AND REMOVING THE GATES AND BARRICADES AT THE APPROXIMATE WORK LIMITS OF THE PROJECT, AND THE ADVANCE WARNING SIGNS AS SHOWN ON STANDARD CONSTRUCTION DRAWING MT-101.60.

INTERIM COMPLETION DATE:

THE THREE (3) CONSECUTIVE CALENDAR DAYS SHALL BE CONSIDERED AN INTERIM COMPLETION DATE, AND FOR EACH CALENDAR DAY BEYOND THE THREE (3) CONSECUTIVE CALENDAR DAYS THAT THE ROADWAY REMAINS CLOSED TO TRAFFIC, THE CONTRACTOR SHALL BE ASSESSED A DISINCENTIVE FEE OF \$2,400 PER DAY.




ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES, AS PER SECTION 614.02(A).

ALL WORK AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH 614 AND OTHER APPLICABLE PORTIONS OF THE SPECIFICATION, AS WELL AS THE OHIO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES. PAYMENT FOR ALL LABOR, EQUIPMENT AND MATERIALS SHALL BE INCLUDED IN THE LUMP SUM CONTRACT PRICE FOR ITEM 614 – MAINTAINING TRAFFIC, UNLESS SEPARATELY ITEMIZED IN THE PLAN.

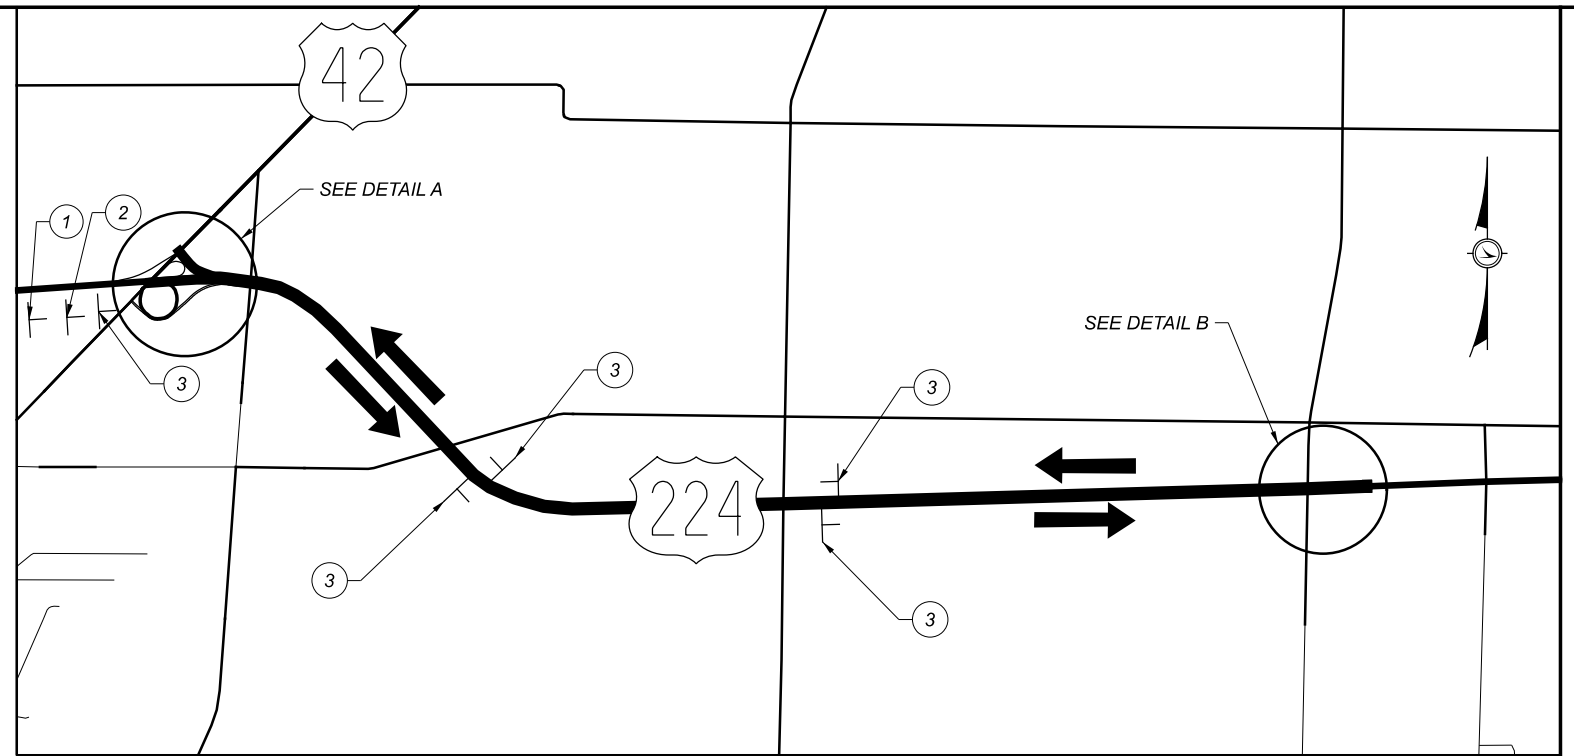


MAP LEGEND

- PROJECT LOCATION
- OFFICIAL STATE SIGNED DETOUR
- GATES AND BARRICADES, AS PER MT-101.60

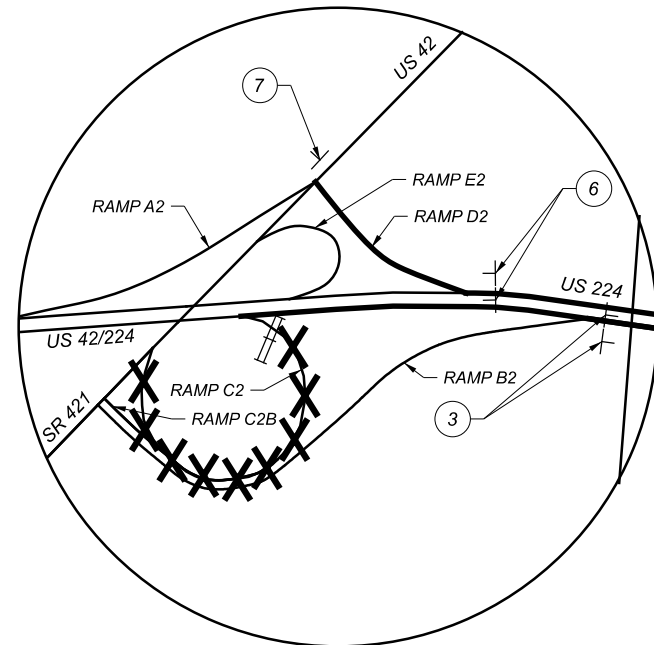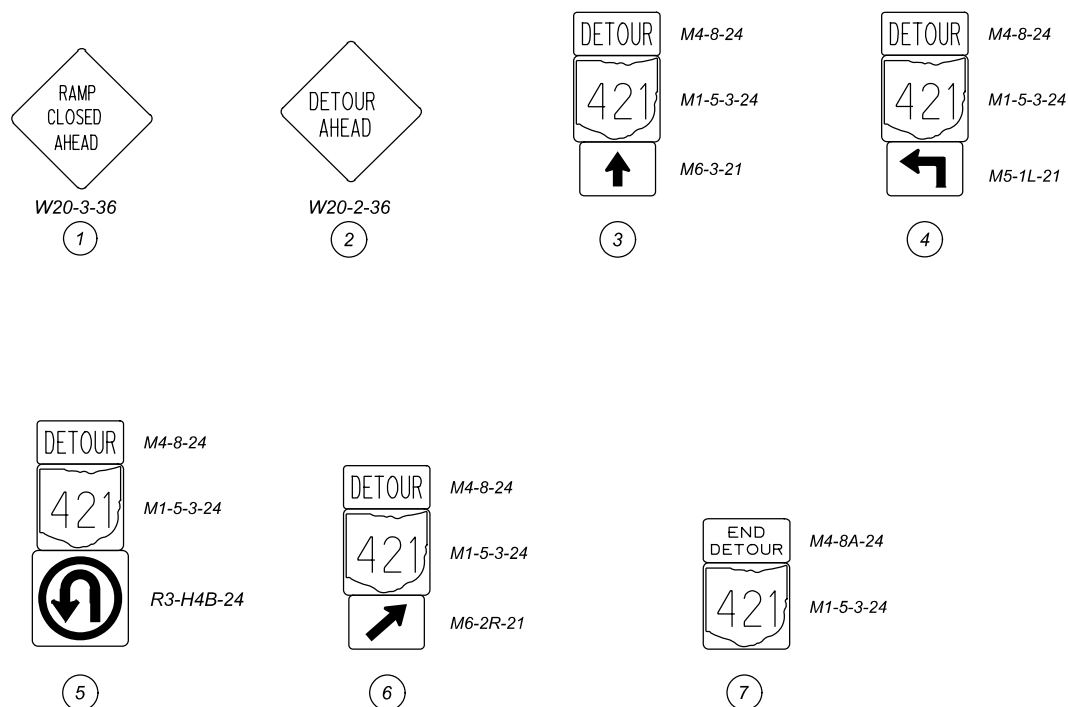

DETAIL A

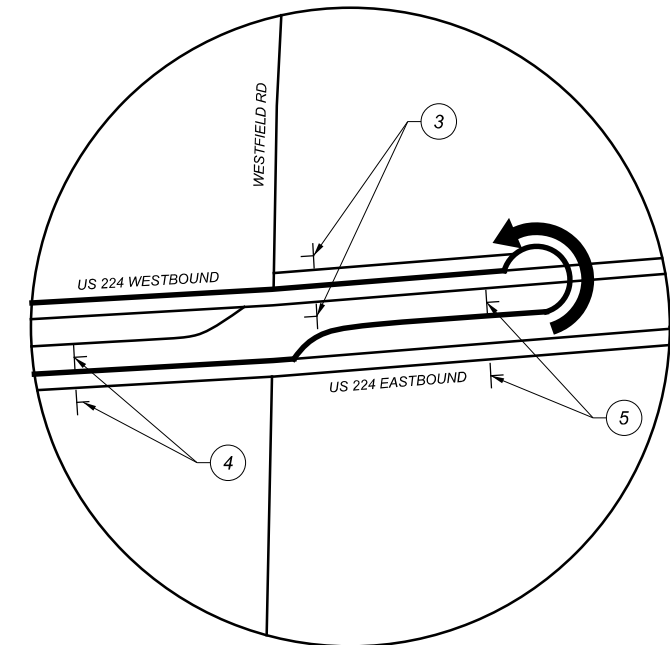


DETAIL B

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: GENSUM1 PAPER: 17x11 (in.) DATE: 11/23/2021 TIME: 4:31:28 PM USER: ksalay p:\vohodoc-pw-bentley.com\shahidoc-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GG001.dgn

SHEET NUM.						PART.						ITEM	ITEM EXT	GRAND TOTAL	UNIT	DESCRIPTION	SEE SHEET NO.
11	12	29	30	31	32	01/NHS/PV	02/STR/PV	03/NHS/BR	04/STR/BR	05/SAF/OT	06/SAF/OT						
					22,325.5	21,338	987.5					202	38000	22,325.5	FT	ROADWAY	
					2,772.5	2,522.5	250					202	38300	2,772.5	FT	GUARDRAIL REMOVED, BARRIER DESIGN	
					3	3						202	42000	3	EACH	ANCHOR ASSEMBLY REMOVED, TYPE A	
					45	40	5					202	42010	45	EACH	ANCHOR ASSEMBLY REMOVED, TYPE E	
					50	47	3					202	42040	50	EACH	ANCHOR ASSEMBLY REMOVED, TYPE T	
					58	54	4					202	47000	58	EACH	BRIDGE TERMINAL ASSEMBLY REMOVED	
					20	18	2					202	47800	20	EACH	IMPACT ATTENUATOR REMOVED	
	50					40	10					203	10001	50	CY	EXCAVATION, AS PER PLAN	12
					310	295	15					203	20001	310	CY	EMBANKMENT, AS PER PLAN	13
					285.76	269.88	15.88					209	15000	285.76	STA	RESHAPING UNDER GUARDRAIL	
		8.37	8.62	20.7		35.87	1.82					209	60500	37.69	MILE	LINEAR GRADING	
		1.66					1.66					209	72051	1.66	MILE	PREPARING SUBGRADE FOR SHOULDER PAVING, AS PER PLAN	11
					837.5	737.5	100					606	13000	837.5	FT	GUARDRAIL, TYPE 5	
					8,169.25	7,656.75	512.5					606	15050	8,169.25	FT	GUARDRAIL, TYPE MGS	
					12,781.3	12,406.3	375					606	15100	12,781.3	FT	GUARDRAIL, TYPE MGS WITH LONG POSTS	
					500	500						606	15150	500	FT	GUARDRAIL, TYPE MGS HALF POST SPACING	
					2,745	2,495	250					606	15550	2,745	FT	GUARDRAIL, BARRIER DESIGN, TYPE MGS	
					46	41	5					606	26150	46	EACH	ANCHOR ASSEMBLY, MGS TYPE E, MASH 2016	
					51	48	3					606	26550	51	EACH	ANCHOR ASSEMBLY, MGS TYPE T	
					20	20						606	35002	20	EACH	MGS BRIDGE TERMINAL ASSEMBLY, TYPE 1	
					2	2						606	35102	2	EACH	MGS BRIDGE TERMINAL ASSEMBLY, TYPE 2	
					36	32	4					606	35140	36	EACH	BRIDGE TERMINAL ASSEMBLY, TYPE 4	
					20	18	2					606	60012	20	EACH	IMPACT ATTENUATOR, TYPE 1 (BIDIRECTIONAL)	
					8	8						622	25001	8	EACH	CONCRETE BARRIER END SECTION, TYPE D, AS PER PLAN	13
						1,535	130	205	55	70	5	832	30000	2,000	EACH	EROSION CONTROL	
	120					100	20					605	31101	120	FT	AGGREGATE DRAINS, AS PER PLAN	12
1,400						1,210	190					251	01042	1,400	CY	PARTIAL DEPTH PAVEMENT REPAIR (ASPHALT CONCRETE BASE) (LONGITUDINAL)	
595						515	80					251	01042	595	CY	PARTIAL DEPTH PAVEMENT REPAIR (ASPHALT CONCRETE BASE) (TRANSVERSE)	
	5,244					5,080	164					254	01000	5,244	SY	PAVEMENT PLANING, ASPHALT CONCRETE (1.5 INCH)	
		109,283	94,726	224,268		390,628	37,649					254	01000	428,277	SY	PAVEMENT PLANING, ASPHALT CONCRETE (3.25 INCH)	
		178					178					254	01000	178	SY	PAVEMENT PLANING, ASPHALT CONCRETE (TAPER 3.25" TO 2.0")	
		356					356					254	01000	356	SY	PAVEMENT PLANING, ASPHALT CONCRETE (TAPER 3.25" TO 1.5")	
		547	474	1,122		1,955	188					254	01600	2,143	SY	PATCHING PLANED SURFACE	
	15,700				670	14,670	1,700					255	10161	16,370	SY	FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN	12
					235	235						255	10161	235	SY	FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN (LONGITUDINAL CRACK)	11
	62,800				5,325	61,325	6,800					255	20000	68,125	FT	FULL DEPTH PAVEMENT SAWING	
					17,392	17,392						257	10000	17,392	SY	DIAMOND GRINDING PORTLAND CEMENT CONCRETE PAVEMENT	
	50					40	10					304	20001	50	CY	AGGREGATE BASE, AS PER PLAN	12
		14,233	12,315	29,154		50,778	4,924					407	10000	55,702	GAL	TACK COAT	
		4,709	4,043	9,715		16,834	1,633					408	10001	18,467	GAL	PRIME COAT, AS PER PLAN	12
		6,797	5,833	13,967		24,125	2,472					442	00100	26,597	CY	ANTI-SEGREGATION EQUIPMENT	
		1,732	1,026	2,357		3,980	1,135					442	10000	5,115	CY	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446), PG70-22	
		23					23					442	10000	23	CY	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446), PG70-22, (SAFETY EDGE)	
	219	2,839	2,922	6,991		12,516	455					442	10301	12,971	CY	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN, PG70-22	12
		5,313	4,607	10,902		18,990	1,832					861	11100	20,822	CY	ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446)	
		654	560	1,350		2,338	226					617	10100	2,564	CY	COMPACTED AGGREGATE	
		9,820	10,107	24,284		42,075	2,136					617	20000	44,211	SY	SHOULDER PREPARATION	
	3					3						618	39001	3	EACH	RUMBLE STRIPS, TRANSVERSE (ASPHALT CONCRETE), AS PER PLAN	12
		7.97	7.97	19.47		34.29	1.12					618	40600	35.41	MILE	RUMBLE STRIPS, SHOULDER (ASPHALT CONCRETE)	
		1.66					1.66					618	41000	1.66	MILE	RUMBLE STRIPES, EDGE LINE (ASPHALT CONCRETE)	
		0.89												0.89	MILE	RUMBLE STRIPES, CENTER LINE (ASPHALT CONCRETE)	
														4,699	FT	LONGITUDINAL JOINT PREPARATION	

GENERAL SUMMARY

DESIGN AGENCY
DISTRICT 3

ENGINEERING
TEAM TWO

DESIGNER
JLL
REVIEWER
KRB 7-7-21
PROJECT ID
79761
SHEET TOTAL
23 79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: GENSUM2 PAPER SIZE: 17x11 (in.) DATE: 11/24/2021 TIME: 12:26:01 PM USER: ksalay p:\vohodoc-pw-bentley.com\shahidoc-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GG001.dgn

SHEET NUM.					PART.						ITEM	ITEM EXT	GRAND TOTAL	UNIT	DESCRIPTION	SEE SHEET NO.
32	51	52	53	56	01/NHS/PV	02/STR/PV	03/NHS/BR	04/STR/BR	05/SAF/OT	06/SAF/OT						
TRAFFIC CONTROL																
			1,732		1,396	336					621	00100	1,732	EACH	RPM	
			1,755		1,414	341					621	54000	1,755	EACH	RAISED PAVEMENT MARKER REMOVED	
306					288	18					626	00110	306	EACH	BARRIER REFLECTOR, TYPE 2, BIDIRECTIONAL	
	16.52	19.4			34.8	1.12					642	30030	35.92	MILE	REMOVAL OF PAVEMENT MARKING (EXISTING EDGE LINE)	
	250	358			530	78					644	00500	608	FT	STOP LINE	
	685	216			488	413					644	00700	901	FT	TRANSVERSE/DIAGONAL LINE	
	10	32			40	2					644	01300	42	EACH	LANE ARROW	
	6	2			8						644	01360	8	EACH	WRONG WAY ARROW	
	108	320			428						644	30000	428	FT	REMOVAL OF PAVEMENT MARKING (EXISTING STOP LINE)	
	8	32			40						644	30020	40	EACH	REMOVAL OF PAVEMENT MARKING (EXISTING LANE ARROW)	
	2				2						644	40000	2	EACH	SPEED MEASUREMENT MARKING	
		113			113						646	10400	113	FT	STOP LINE	
		24			24						646	10800	24	SF	ISLAND MARKING	
		25			25						646	20300	25	EACH	LANE ARROW	
	0.67	1.38							2.05		807	12010	2.05	MILE	WET REFLECTIVE EPOXY PAVEMENT MARKING, EDGE LINE, 6"	
	0.33	0.66							0.99		807	12110	0.99	MILE	WET REFLECTIVE EPOXY PAVEMENT MARKING, LANE LINE, 6"	
	0.04								0.04		807	12200	0.04	MILE	WET REFLECTIVE EPOXY PAVEMENT MARKING, CENTER LINE	
		2,552							2,552		807	12300	2,552	FT	WET REFLECTIVE EPOXY PAVEMENT MARKING, CHANNELIZING LINE, 8"	
	19.09	20.63							39.72		807	14010	39.72	MILE	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, EDGE LINE, 6"	
	8.11	9.8							17.91		807	14110	17.91	MILE	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, LANE LINE, 6"	
	0.85								0.85		807	14200	0.85	MILE	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, CENTER LINE	
	1,918	3,448							5,366		807	14300	5,366	FT	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, CHANNELIZING LINE, 8"	
		1,455							1,455		807	14410	1,455	FT	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, DOTTED LINE, 6"	
	1.7								1.7		850	10000	1.7	MILE	GROOVING FOR 4" RECESSED PAVEMENT MARKING, (ASPHALT)	
	27.2	30.43							57.63		850	10010	57.63	MILE	GROOVING FOR 6" RECESSED PAVEMENT MARKING, (ASPHALT)	
		1,455							1,455		850	10110	1,455	FT	GROOVING FOR 6" RECESSED PAVEMENT MARKING, (ASPHALT)	
	1,918	3,448							5,366		850	10120	5,366	FT	GROOVING FOR 8" RECESSED PAVEMENT MARKING, (ASPHALT)	
	0.08								0.08		850	20000	0.08	MILE	GROOVING FOR 4" RECESSED PAVEMENT MARKING, (CONCRETE)	
	1	2.04							3.04		850	20010	3.04	MILE	GROOVING FOR 6" RECESSED PAVEMENT MARKING, (CONCRETE)	
		2,552							2,552		850	20120	2,552	FT	GROOVING FOR 8" RECESSED PAVEMENT MARKING, (CONCRETE)	
STRUCTURE REPAIR (MED-42-2.61)																
				32				32			512	10300	32	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN	
				5				5			516	45305	5	EACH	REFURBISH BEARING DEVICE, AS PER PLAN	55
				LS				LS			516	47001	LS		JACKING AND TEMPORARY SUPPORT OF SUPERSTRUCTURE, AS PER PLAN	55
				300				300			517	75600	300	FT	DEEP BEAM BRIDGE RETROFIT RAILING	
				300				300			517	76300	300	FT	RAILING, MISC.:DEEP BEAM RAILING PANELS	55
				709				709			848	10001	709	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (2.25 INCH THICK)	55
				709				709			848	20000	709	SY	SURFACE PREPARATION USING HYDRODEMOLITION	
				22				22			848	30001	22	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN	55
				40				40			848	50000	40	SY	HAND CHIPPING	
				LS				LS			848	50100	LS		TEST SLAB	
				709				709			848	50320	709	SY	EXISTING CONCRETE OVERLAY REMOVED (2 INCH NOMINAL THICKNESS)	
				398				398			848	50340	398	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY	
STRUCTURE REPAIR (MED-42-3.10 L)																
				52				52			202	32000	52	FT	CURB REMOVED	
				100				100			202	32600	100	FT	GUTTER REMOVED	
				256				256			202	98200	256	FT	REMOVAL MISC.: DECK OVERHANG	54
				66				66			202	98200	66	FT	REMOVAL MISC.: JOINT SEALER	54
				1,157				1,157			509	10001	1,157	LB	EPOXY COATED REINFORCING STEEL, AS PER PLAN	55
				100				100			509	20001	100	LB	REINFORCING STEEL, REPLACEMENT OF EXISTING REINFORCING STEEL, AS PER PLAN	54
				256				256			511	81100	256	FT	CONCRETE, MISC.: CLASS QC SCC CONCRETE, BRIDGE DECK, DECK OVERHANG	55
				138				138			512	10100	138	SY	SEALING OF CONCRETE SURFACES (EPOXY-URETHANE)	
				28				28			512	10300	28	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN	
				66				66			516	31000	66	FT	JOINT SEALER	
				4				4			516	45305	4	EACH	REFURBISH BEARING DEVICE, AS PER PLAN	55
				LS				LS			516	47001	LS		JACKING AND TEMPORARY SUPPORT OF SUPERSTRUCTURE, AS PER PLAN	55

GENERAL SUMMARY

DESIGN AGENCY
DISTRICT 3



ENGINEERING TEAM TWO

DESIGNER
JLL

REVIEWER
KRB 7-7-21

PROJECT ID
79761


SHEET TOTAL
24 79

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: GENSUM3 PAPER: 17x11 (in.) DATE: 11/24/2021 TIME: 12:36:27 PM USER: ksalay
 p:\v\hoboc-pw-bentley.com\shahoc-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GG001.dgn

SHEET NUM.						PART.						ITEM	ITEM EXT	GRAND TOTAL	UNIT	DESCRIPTION	SEE SHEET NO.
31	32	51	52	53	56	01/NHS/PV	02/STR/PV	03/NHS/BR	04/STR/BR	05/SAF/OT	06/SAF/OT						
					33			33				519	11100	33	SF	PATCHING CONCRETE STRUCTURE	
					12			12				SPECIAL	51912510	12	SY	PATCHING CONCRETE BRIDGE DECK, TYPE B	55
					25			25				601	27000	25	CY	DUMPED ROCK FILL, TYPE C	
					474			474				848	10001	474	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (1.75 INCH THICK)	55
					474			474				848	20000	474	SY	SURFACE PREPARATION USING HYDRODEMOLITION	
					9			9				848	30001	9	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN	55
					27			27				848	50000	27	SY	HAND CHIPPING	
					LS			LS				848	50100	LS		TEST SLAB	
					2			2				848	50200	2	CY	FULL-DEPTH REPAIR	
					474			474				848	50320	474	SY	EXISTING CONCRETE OVERLAY REMOVED (1.25 INCH NOMINAL THICKNESS)	
					266			266				848	50340	266	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY	
					240			240				SPECIAL	51900100	240	SF	COMPOSITE FIBER WRAP SYSTEM	55
																STRUCTURE REPAIR (MED-42-3.10 R)	
					52			52				202	32000	52	FT	CURB REMOVED	
					100			100				202	32600	100	FT	GUTTER REMOVED	
					256			256				202	98200	256	FT	REMOVAL MISC.: DECK OVERHANG	54
					90			90				202	98200	90	FT	REMOVAL MISC.: JOINT SEALER	54
					1,157			1,157				509	10001	1,157	LB	EPOXY COATED REINFORCING STEEL, AS PER PLAN	55
					100			100				509	20001	100	LB	REINFORCING STEEL, REPLACEMENT OF EXISTING REINFORCING STEEL, AS PER PLAN	54
					256			256				511	81100	256	FT	CONCRETE, MISC.: CLASS QC SCC CONCRETE, BRIDGE DECK, DECK OVERHANG	55
					138			138				512	10100	138	SY	SEALING OF CONCRETE SURFACES (EPOXY-URETHANE)	
					28			28				512	10300	28	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN	
					90			90				516	31000	90	FT	JOINT SEALER	
					3			3				516	45305	3	EACH	REFURBISH BEARING DEVICE, AS PER PLAN	55
					LS			LS				516	47001	LS		JACKING AND TEMPORARY SUPPORT OF SUPERSTRUCTURE, AS PER PLAN	55
					38			38				519	11100	38	SF	PATCHING CONCRETE STRUCTURE	
					18			18				601	21060	18	SY	TIED CONCRETE BLOCK MAT WITH TYPE 2 UNDERLAYMENT	
					25			25				601	27000	25	CY	DUMPED ROCK FILL, TYPE C	
					644			644				848	10001	644	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (1.75 INCH THICK)	55
					644			644				848	20000	644	SY	SURFACE PREPARATION USING HYDRODEMOLITION	
					13			13				848	30001	13	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN	55
					36			36				848	50000	36	SY	HAND CHIPPING	
					LS			LS				848	50100	LS		TEST SLAB	
					4			4				848	50200	4	CY	FULL-DEPTH REPAIR	
					644			644				848	50320	644	SY	EXISTING CONCRETE OVERLAY REMOVED (1.25 INCH NOMINAL THICKNESS)	
					361			361				848	50340	361	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY	
					240			240				SPECIAL	51900100	240	SF	COMPOSITE FIBER WRAP SYSTEM	55
																STRUCTURE REPAIR (MED-42-4.60 L)	
					1			1				202	11301	1	CY	PORTIONS OF STRUCTURE REMOVED, AS PER PLAN	54
					94			94				202	98200	94	FT	REMOVAL MISC.: JOINT SEALER	54
					1			1				511	46010	1	CY	CLASS QC1 CONCRETE, RETAINING/WINGWALL NOT INCLUDING FOOTING	
					26			26				512	10300	26	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN	
					94			94				516	31000	94	FT	JOINT SEALER	
					238			238				517	75600	238	FT	DEEP BEAM BRIDGE RETROFIT RAILING	
					238			238				517	76300	238	FT	RAILING, MISC.: DEEP BEAM RAILING PANELS	55
					6			6				519	11100	6	SF	PATCHING CONCRETE STRUCTURE	
					2			2				SPECIAL	51912510	2	SY	PATCHING CONCRETE BRIDGE DECK, TYPE B	55
					574			574				848	10001	574	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (1.75 INCH THICK)	55
					574			574				848	20000	574	SY	SURFACE PREPARATION USING HYDRODEMOLITION	
					11			11				848	30001	11	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN	55
					32			32				848	50000	32	SY	HAND CHIPPING	
					LS			LS				848	50100	LS		TEST SLAB	
					12			12				848	50200	12	CY	FULL-DEPTH REPAIR	
					574			574				848	50320	574	SY	EXISTING CONCRETE OVERLAY REMOVED (1.25 INCH NOMINAL THICKNESS)	
					322			322				848	50340	322	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY	

GENERAL SUMMARY

DESIGN AGENCY	DISTRICT 3
	
ENGINEERING TEAM TWO	
DESIGNER	JLL
REVIEWER	KRB 7-7-21
PROJECT ID	79761
SHEET	TOTAL
25	79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: GENSUM6 PAPER: 17x11 (in.) DATE: 11/24/2021 TIME: 12:56:54 PM USER: ksalay pwc:\hoboc-pw-bentley.com\shoboc-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_GG001.dgn

SHEET NUM.						PART.						ITEM	ITEM EXT	GRAND TOTAL	UNIT	DESCRIPTION	SEE SHEET NO.	
14	15	16	51	52	61	01/NHS/PV	02/STR/PV	03/NHS/BR	04/STR/BR	05/SAF/OT	06/SAF/OT							
		500				500						614	11110	500	hour	MAINTENANCE OF TRAFFIC		
	24				4			24	4			614	12380	28	EACH	LAW ENFORCEMENT OFFICER WITH PATROL CAR FOR ASSISTANCE		
LS						LS		LS	LS			614	12420	LS		WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL)		
13							13					614	12460	13	EACH	DETOUR SIGNING		
50						40	10					614	13000	50	CY	WORK ZONE MARKING SIGN		
	96				22			96	22			614	13310	118	EACH	ASPHALT CONCRETE FOR MAINTAINING TRAFFIC		
	96				22			96	22			614	13350	118	EACH	BARRIER REFLECTOR, TYPE 1 (ONE-WAY)		
	36					36						614	18601	36	SNMT	OBJECT MARKER, ONE WAY		
		25.32	29.91		0.19	53.19	2.04					614	20560	55.23	MILE	PORTABLE CHANGEABLE MESSAGE SIGN, AS PER PLAN		15
									0.19			614	21200	0.19	MILE	WORK ZONE LANE LINE, CLASS III, 6", 642 PAINT		
		2.67					2.67					614	21550	2.67	MILE	WORK ZONE CENTER LINE, CLASS I, 740.06, TYPE I		
					0.42				0.42			614	22210	0.42	MILE	WORK ZONE CENTER LINE, CLASS III, 642 PAINT		
		53.94	62.91			112.02	4.83					614	22360	116.85	MILE	WORK ZONE EDGE LINE, CLASS I, 6", 740.06, TYPE I		
		5,754	11,544			15,711	1,587					614	23680	17,298	FT	WORK ZONE EDGE LINE, CLASS III, 6", 642 PAINT		
					24				24			614	26400	24	FT	WORK ZONE CHANNELIZING LINE, CLASS III, 8", 642 PAINT		
		345	693			993	45					614	26610	1,038	FT	WORK ZONE STOP LINE, CLASS I, 740.06, TYPE I		
	4,560				1,100			4,560	1,100			622	41100	5,660	FT	WORK ZONE STOP LINE, CLASS III, 642 PAINT		
	132					132						808	18700	132	SNMT	PORTABLE BARRIER, UNANCHORED		
																DIGITAL SPEED LIMIT (DSL) SIGN ASSEMBLY		
																INCIDENTALS		
						LS	LS	LS	LS	LS	LS	614	11000	LS		MAINTAINING TRAFFIC		
						8	1					619	16020	9	MNTH	FIELD OFFICE, TYPE C		
						LS	LS	LS	LS	LS	LS	623	10000	LS		CONSTRUCTION LAYOUT STAKES AND SURVEYING		
						LS	LS	LS	LS	LS	LS	624	10000	LS		MOBILIZATION		

GENERAL SUMMARY

DESIGN AGENCY
DISTRICT 3



ENGINEERING TEAM TWO

DESIGNER
JLL

REVIEWER
KRB 7-7-21

PROJECT ID
79761

SHEET 28 TOTAL 79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: MED-42 NB PAPER SIZE: 11x17 (in.) DATE: 11/23/2021 TIME: 4:00:49 PM USER: kscday
 pw:\ehlodot-pw\beniley.com\hlotdot-pw-02\Documents\01 Active Projects\District\03 Medina\79761\400-Engineering\Roadway\Sheets\79761_G0001.dgn

PLAN SPLIT	COUNTY	ROUTE	LOG POINT TO LOG POINT		DIRECTION	LENGTH		AVERAGE WIDTH	AVERAGE PAVED SHOULDER WIDTH		PAVEMENT AREA	254				407		442			861	618			874	AGGREGATE SHOULDER PROPOSED WIDTH		AGGREGATE SHOULDER AREA	209 LINEAR GRADING	209 PREPARING SUBGRADE FOR SHOULDER PAVING, AS PER PLAN	408 PRIME COAT, AS PER PLAN (@ 0.40 GAL/SY)	617 COMPACTED AGGREGATE 2 INCHES	617 SHOULDER PREPARATION												
						MILE	FEET		SL	SR		PAVEMENT PLANING, ASPHALT CONCRETE (3.25")	PAVEMENT PLANING, ASPHALT CONCRETE (TAPER 3.25" TO 2.0")	PAVEMENT PLANING, ASPHALT CONCRETE (TAPER 3.25" TO 1.50")	PATCHING PLANED SURFACE	TACK COAT (@ 0.08 GAL/SY)	TACK COAT (@ 0.05 GAL/SY)	ANTI- SEGREGATION EQUIPMENT	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN (1.50")	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (SAFETY EDGE)	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (1.50")	ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446) (1.75")	RUMBLE STRIPS, SHOULDER (ASPHALT CONCRETE)	RUMBLE STRIPES, EDGE LINE (ASPHALT CONCRETE)	RUMBLE STRIPES, CENTER LINE (ASPHALT CONCRETE)	LONGITUDINAL JOINT PREPARATION	SL							SR											
			FT	FT		FT	FT		SY	SY		SY	SY	GAL	GAL	CY	CY	CY	CY	CY	MILE	MILE	MILE	FT	FT	FT	SY							MILE	MILE	GAL	CY	SY							
02/STR/PV	MED	42	1.89	2.15	NB/SB	0.26	1,373	24.0	4.0	4.0	4,882	4,882	178	24	391	244	331	7	203	237							2.0	2.0	610		0.52	244	34												
02/STR/PV	MED	42	2.15	2.28	NB/SB	0.13	686	31.0	4.0	4.0	2,973	2,973		15	238	149	213	4	124	145						2.0	2.0	305		0.26	122	17													
02/STR/PV	MED	42	2.28	2.47	NB/SB	0.19	1,003	24.0	4.0	4.0	3,566	3,566		18	285	178	241	5	149	173						2.0	2.0	446		0.38	178	25													
CONCRETE STRUCTURE MED-42-2.47						0.021	113																																						
02/STR/PV	MED	42	2.49	2.61	NB/SB	0.12	626	24.0	4.0	4.0	2,226	2,226		11	178	111	151	3	93	108						2.0	2.0	278		0.24	111	15													
APPROACH SLAB PAVING						0.005	25	24.0	4.0	4.0	89		178	14				3		7																									
CONCRETE STRUCTURE MED-42-2.61						0.028	146																																						
APPROACH SLAB PAVING						0.005	25	24.0	4.0	4.0	89		178	14				3		7																									
02/STR/PV	MED	42	2.65	2.72	NB/SB	0.07	365	24.0	4.0	4.0	1,369	1,369		7	110	68	93		2	57	67					2.0	2.0	171		0.15	68	10													
02/STR/PV	MED	42	2.72	2.78	NB/SB	0.06	317	45.5	4.0	4.0	1,884	1,884		9	151	94	145		2	79	92					2.0	2.0	141		0.12	56	8													
02/STR/PV	MED	42	2.78	2.88	NB	0.10	528	24.0	4.0	8.0	2,112	2,112		11	169	106	127			20	103					2.0	2.0	235	0.20		94	13	235												
02/STR/PV	MED	42	2.88	2.98	NB	0.10	528	37.5	4.0	8.0	2,904	2,904		15	232	145	199			20	141					2.0	2.0	235	0.20		94	13	235												
02/STR/PV	MED	42	2.98	3.06	NB	0.08	422	24.0	4.0	8.0	1,688	1,688		8	135	84	102			16	82					2.0	2.0	188	0.16		75	10	188												
01/NHS/PV	MED	42	3.06	3.10	NB	0.04	211	35.5	4.0	8.0	1,114	1,114		6	89	56	75			8	54					2.0	2.0	94	0.08		38	5	94												
CONCRETE STRUCTURE MED-42-3.10R						0.034	178																																						
01/NHS/PV	MED	42	3.13	3.30	NB	0.17	878	32.5	4.0	8.0	4,341	4,341		22	347	217	286			33	211					2.0	2.0	390	0.33		156	22	390												
01/NHS/PV	MED	42	3.30	4.59	NB	1.29	6,811	24.0	4.0	8.0	27,244	27,244		136	2,180	1,362	1,640			252	1,324					2.0	2.0	3,027	2.58		1,211	168	3,027												
CONCRETE STRUCTURE MED-42-4.60R						0.032	169																																						
01/NHS/PV	MED	42	4.62	4.82	NB	0.20	1,045	24.0	4.0	8.0	4,180	4,180		21	334	209	252			39	203					2.0	2.0	464	0.40		186	26	464												
01/NHS/PV	MED	42	4.82	4.87	NB	0.05	264	28.4	4.0	8.0	1,185	1,185		6	95	59	75			10	58					2.0	2.0	117	0.10		47	7	117												
01/NHS/PV	MED	42	4.87	5.38	NB	0.51	2,693	24.0	4.0	8.0	10,772	10,772		54	862	539	648			100	524					2.0	2.0	1,197	1.02		479	66	1,197												
CONCRETE STRUCTURE MED-42-5.39R						0.047	250																																						
01/NHS/PV	MED	42	5.43	5.88	NB	0.45	2,390	24.0	4.0	8.0	9,560	9,560		48	765	478	575			89	465					2.0	2.0	1,062	0.91		425	59	1,062												
CONCRETE STRUCTURE MED-42-5.89R						0.033	173																																						
01/NHS/PV	MED	42	5.91	6.32	NB	0.41	2,150	24.0	4.0	8.0	8,600	8,600		43	688	430	518			80	418					2.0	2.0	956	0.81		382	53	956												
01/NHS/PV	MED	42	6.32	6.39	NB	0.07	370	30.0	4.0	8.0	1,727	1,727		9	138	86	111			14	84					2.0	2.0	164	0.14		66	9	164												
01/NHS/PV	MED	42	6.39	6.82	NB	0.43	2,270	24.0	4.0	8.0	9,080	9,080		45	726	454	546			84	441					2.0	2.0	1,009	0.86		404	56	1,009												
01/NHS/PV	MED	42	6.82	6.91	NB	0.09	475	32.5	4.0	8.0	2,349	2,349		12	188	117	155			18	114					2.0	2.0	211	0.18		84	12	211												
01/NHS/PV	RAMP D1 (US 42 NB TO US 224/SR 421)					0.17	897	15.5	3.0	6.0	2,443	2,443		12	195	122	140				102	119				2.0	199	0.17		80	11	199													
02/STR/PV	RAMP C2 (US 42 NB TO US 42 NB)					0.21	1,091	14.0	3.0	6.0	2,789	2,789		14	223	139	153				116	136				2.0	242	0.21		97	13	242													
02/STR/PV	RAMP C2B (US 42 NB TO SR 421)					0.03	133	11.0	3.0	6.0	295	295		1	24	15	15				12	14				2.0	30	0.03		12	2	30													
06/SAF/OT	MED	42	1.89	2.78	NB/SB	0.89	4,699																																						
NORTHBOUND SUBTOTAL (01/NHS/PV)												82,595			414	6,607	4,129	5,021	2,615		829	4,015	7.41																						
NORTHBOUND SUBTOTAL (02/STR/PV)												26,688	178	356	133	2,164	1,333	1,776	224	23	903	1,298	0.56	1.66																					
NORTHBOUND SUBTOTAL (06/SAF/OT)																							0.89	4,699																					
TOTALS CARRIED TO THE GENERAL SUMMARY												109,283	178	356	547	8,771	5,462	6,797	2,839	23	1,732	5,313	7.97	1.66	0.89	4,699										8.37	1.66	4,709	654	9,820					

PAVEMENT & SHOULDER DATA
MED-42 NORTHBOUND

DESIGN AGENCY
DISTRICT 3



ENGINEERING
TEAM TWO
DESIGNER
JLL
REVIEWER
KRB 6-30-21
PROJECT ID
79761
SHEET TOTAL
29 | 79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: MED-42 SB PAPER SIZE: 11x17 (in.) DATE: 11/23/2021 TIME: 4:00:35 PM USER: ksalay
 p:\ohiodot-pw\benhley\comphodot-pw-02\Documents\01Active Projects\District\03\Medina\7976\400-Engineering\Roadway\Sheets\7976L_G000.dgn

PLAN SPLIT	COUNTY	ROUTE	LOG POINT TO LOG POINT		DIRECTION	LENGTH		AVERAGE WIDTH	AVERAGE PAVED SHOULDER WIDTH		PAVEMENT AREA	254		407		442			861	618	AGGREGATE SHOULDER PROPOSED WIDTH		AGGREGATE SHOULDER AREA	209	408	617	617				
			MILE	FEET		SL	SR		PAVEMENT PLANING, ASPHALT CONCRETE (3.25")	PATCHING PLANED SURFACE		TACK COAT (@ 0.08 GAL/SY)	TACK COAT (@ 0.05 GAL/SY)	ANTI-SEGREGATION EQUIPMENT	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (447), AS PER PLAN (1.50")	ASPHALT CONCRETE SURFACE COURSE, 12.5 MM, TYPE A (446) (1.50")	ASPHALT CONCRETE INTERMEDIATE COURSE, 12.5 MM, TYPE A (446) (1.75")	RUMBLE STRIPS, SHOULDER (ASPHALT CONCRETE)	SL	SR	LINEAR GRADING	PRIME COAT, AS PER PLAN (@ 0.40 GAL/SY)		COMPACTED AGGREGATE	SHOULDER PREPARATION						
			STRAIGHT LINE MILEAGE			FT	FT		FT	SY		SY	SY	GAL	GAL	CY	CY	CY	CY	MILE	FT	FT		SY	MILE	GAL	CY	SY			
02/STR/PV	MED	42	2.78	2.89	SB	0.11	581	24.0	4.0	8.0	2,324	2,324	12	186	116	140	75	22	113	0.22	2.0	2.0	258	0.22	103	14	258				
02/STR/PV	MED	42	2.89	3.03	SB	0.14	739	33.0	4.0	8.0	3,695	3,695	18	296	185	245	127	27	180	0.28	2.0	2.0	328	0.28	131	18	328				
02/STR/PV	MED	42	3.03	3.06	SB	0.03	158	24.0	4.0	8.0	632	632	3	51	32	38	20	6	31	0.06	2.0	2.0	70	0.06	28	4	70				
01/NHS/PV	MED	42	3.06	3.10	SB	0.04	211	24.0	4.0	8.0	844	844	4	68	42	51	27	8	41	0.08	2.0	2.0	94	0.08	38	5	94				
CONCRETE STRUCTURE MED-42-3.10L						0.034	178																								
01/NHS/PV	MED	42	3.13	3.19	SB	0.06	297	24.0	4.0	8.0	1,188	1,188	6	95	59	72	39	11	58	0.11	2.0	2.0	132	0.11	53	7	132				
01/NHS/PV	MED	42	3.19	3.29	SB	0.10	528	36.5	4.0	8.0	2,845	2,845	14	228	142	193	99	20	138	0.20	2.0	2.0	235	0.20	94	13	235				
01/NHS/PV	MED	42	3.29	4.59	SB	1.30	6,864	24.0	4.0	8.0	27,456	27,456	137	2,196	1,373	1,652	890	254	1,335	2.60	2.0	2.0	3,051	2.60	1,220	169	3,051				
CONCRETE STRUCTURE MED-42-4.60L						0.032	169																								
01/NHS/PV	MED	42	4.62	4.83	SB	0.21	1,098	24.0	4.0	8.0	4,392	4,392	22	351	220	264	142	41	214	0.42	2.0	2.0	488	0.42	195	27	488				
01/NHS/PV	MED	42	4.83	4.88	SB	0.05	264	29.7	4.0	8.0	1,223	1,223	6	98	61	79	41	10	59	0.10	2.0	2.0	117	0.10	47	7	117				
01/NHS/PV	MED	42	4.88	5.37	SB	0.49	2,587	24.0	4.0	8.0	10,348	10,348	52	828	517	623	335	96	503	0.98	2.0	2.0	1,150	0.98	460	64	1,150				
CONCRETE STRUCTURE MED-42-5.39L						0.047	250																								
01/NHS/PV	MED	42	5.42	5.87	SB	0.45	2,390	24.0	4.0	8.0	9,560	9,560	48	765	478	575	310	89	465	0.91	2.0	2.0	1,062	0.91	425	59	1,062				
CONCRETE STRUCTURE MED-42-5.89L						0.033	173																								
01/NHS/PV	MED	42	5.90	6.34	SB	0.44	2,309	24.0	4.0	8.0	9,236	9,236	46	739	462	556	299	86	449	0.87	2.0	2.0	1,026	0.87	410	57	1,026				
01/NHS/PV	MED	42	6.34	6.41	SB	0.07	370	29.7	4.0	8.0	1,714	1,714	9	137	86	110	58	14	83	0.14	2.0	2.0	164	0.14	66	9	164				
01/NHS/PV	MED	42	6.41	6.64	SB	0.23	1,214	24.0	4.0	8.0	4,856	4,856	24	388	243	292	157	45	236	0.46	2.0	2.0	540	0.46	216	30	540				
01/NHS/PV	MED	42	6.64	6.80	SB	0.16	845	35.7	4.0	8.0	4,479	4,479	22	358	224	303	155	31	218	0.32	2.0	2.0	376	0.32	150	21	376				
01/NHS/PV	MED	42	6.80	6.91	SB	0.11	581	33.0	4.0	8.0	2,905	2,905	15	232	145	192	100	22	141	0.22	2.0	2.0	258	0.22	103	14	258				
01/NHS/PV	RAMP A1 (US 42 SB TO US 224 WB)					0.08	403	23.1	3.0	6.0	1,438	1,438	7	115	72	93		60	70		2.0	2.0	179	0.15	72	10	179				
01/NHS/PV	RAMP A1B (US 42 SB TO SR 421)					0.01	65	15.8	3.0	6.0	178	178	1	14	9	10		7	9		2.0	2.0	29	0.02	12	2	29				
02/STR/PV	RAMP A2 (US 42 SB TO US 42 SB)					0.16	858	13.0	3.0	6.0	2,098	2,098	10	168	105	112		87	102		2.0	2.0	381	0.33	153	21	381				
02/STR/PV	RAMP E2 (US 42 NB TO US 42 SB)					0.07	380	13.9	3.0	6.0	966	966	5	77	48	53		40	47		2.0	2.0	169	0.14	67	9	169				
01/NHS/PV	EXTRA AREA FOR INTERSECTIONS										798	798	4	64	40	72	33		39												
01/NHS/PV	EXTRA AREA FOR MEDIAN CROSSOVERS										305	305	2	24	15		13		15												
02/STR/PV	EXTRA AREA FOR INTERSECTIONS										1,194	1,194	6	96	60	108		50	58												
02/STR/PV	EXTRA AREA FOR MEDIAN CROSSOVERS										52	52	1	4	3		2		3												
SOUTHBOUND SUBTOTAL (01/NHS/PV)												83,765	419	6,700	4,188	5,137	2,698	794	4,073	7.41								7.59	3,561	494	8,901
SOUTHBOUND SUBTOTAL (02/STR/PV)												10,961	55	878	549	696	224	232	534	0.56								1.03	482	66	1,206
TOTALS CARRIED TO THE GENERAL SUMMARY												94,726	474	7,578	4,737	5,833	2,922	1,026	4,607	7.97								8.62	4,043	560	10,107

PAVEMENT & SHOULDER DATA
MED-42 SOUTHBOUND

DESIGN AGENCY
DISTRICT 3



ENGINEERING TEAM TWO

DESIGNER
JLL

REVIEWER
KRB 6-30-21

PROJECT ID
79761

SHEET TOTAL
30 79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: MED-224 PAPER SIZE: 17x11 (in.) DATE: 11/23/2021 TIME: 4:00:57 PM USER: Ksalczy
 pw:\ohio\dot-pw\benlley.com\ohio\dot-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_G0001.dgn

PLAN SPLIT	COUNTY	ROUTE	LOG POINT TO LOG POINT		DIRECTION	LENGTH		AVERAGE WIDTH	AVERAGE PAVED SHOULDER WIDTH		PAVEMENT AREA	254		407	407	442			861	618	AGGREGATE SHOULDER PROPOSED WIDTH		AGGREGATE SHOULDER AREA	209	408	617	617												
			STRAIGHT LINE MILEAGE	MILE		FEET	SL		SR	SY		SY	GAL	GAL	CY	CY	CY	CY	MILE	FT	SR	SY		MILE	GAL	CY	SY	MILE	GAL	CY	SY								
																																FT	FT	FT	SY	SY	SY	SY	SY
																																FT	FT	FT	SY	SY	SY	SY	SY
01/NHS/PV	MED	224	6.23	6.31	EB/WB	0.08	422	42.0	4.0	10.0	2,626	2,626	13	210	131	178		109	128		2.0	2.0	188	0.16	75	10	188												
01/NHS/PV	MED	224	6.31	6.37	EB/WB	0.06	317	24.0	4.0	10.0	1,338	1,338	7	107	67	76		56	65		2.0	2.0	141	0.12	56	8	141												
01/NHS/PV	MED	224	6.37	6.41	EB/WB	0.04	211	36.5	4.0	6.0	1,090	1,090	5	87	55	77		45	53		2.0	2.0	94	0.08	38	5	94												
01/NHS/PV	MED	224	10.45	10.46	EB	0.01	53	48.0	4.0	8.0	353	353	2	28	18	26		13	2	17	0.02	2.0	2.0	24	0.02	9	1	24											
01/NHS/PV	MED	224	10.46	10.59	EB	0.13	686	24.0	4.0	8.0	2,744	2,744	14	220	137	165		89	25	133	0.26	2.0	2.0	305	0.26	122	17	305											
01/NHS/PV	MED	224	10.59	10.74	EB	0.15	792	35.5	4.0	8.0	4,180	4,180	21	334	209	282		145	29	203	0.30	2.0	2.0	352	0.30	141	20	352											
01/NHS/PV	MED	224	10.74	11.26	EB	0.52	2,746	24.0	4.0	8.0	10,984	10,984	55	879	549	661		356	102	534	1.04	2.0	2.0	1,220	1.04	488	68	1,220											
01/NHS/PV	MED	224	11.26	11.33	EB	0.07	370	29.4	4.0	8.0	1,702	1,702	9	136	85	109		57	14	83	0.14	2.0	2.0	164	0.14	66	9	164											
01/NHS/PV	MED	224	11.33	12.11	EB	0.78	4,118	24.0	4.0	8.0	16,472	16,472	82	1,318	824	991		534	153	801	1.56	2.0	2.0	1,830	1.56	732	102	1,830											
01/NHS/PV	MED	224	12.11	12.21	EB	0.10	528	31.4	4.0	8.0	2,546	2,546	13	204	127	166		87	20	124	0.20	2.0	2.0	235	0.20	94	13	235											
01/NHS/PV	MED	224	12.21	12.75	EB	0.54	2,851	24.0	4.0	8.0	11,404	11,404	57	912	570	686		370	106	554	1.08	2.0	2.0	1,267	1.08	507	70	1,267											
CONCRETE STRUCTURE MED-224-12.76R						0.034	178																																
01/NHS/PV	MED	224	12.78	13.34	EB	0.56	2,937	24.0	4.0	8.0	11,748	11,748	59	940	587	707		381	109	571	1.11	2.0	2.0	1,305	1.11	522	73	1,305											
01/NHS/PV	MED	224	13.34	13.59	EB	0.25	1,320	31.8			4,664	4,664	23	373	233	421		194		227	0.50	2.0	2.0	587	0.50	235	33	587											
01/NHS/PV	MED	224	13.59	13.81	EB	0.22	1,162	24.0	4.0	8.0	4,648	4,648	23	372	232	280		151	43	226	0.44	2.0	2.0	516	0.44	207	29	516											
01/NHS/PV	MED	224	13.81	13.93	EB	0.12	634	30.0			2,113	2,113	11	169	106	191		88		103	0.24	2.0	2.0	282	0.24	113	16	282											
01/NHS/PV	MED	224	13.93	15.30	EB	1.37	7,234	24.0	4.0	8.0	28,936	28,936	145	2,315	1,447	1,742		938	268	1,407	2.74	2.0	2.0	3,215	2.74	1,286	179	3,215											
RAMP B1 (US 224 EB TO US 42 NB)						0.17	914	15.6	3.0	6.0	2,497	2,497	12	200	125	143				104	121		2.0	2.0	203	0.17	81	11	203										
RAMP C1 (US 224 EB TO US 42 SB)						0.09	497	13.2	3.0	6.0	1,226	1,226	6	98	61	66				51	60		2.0	2.0	221	0.19	88	12	221										
RAMP B2 (SR 421 NB TO US 224 EB)						0.26	1,384	14.3	3.0	6.0	3,584	3,584	18	287	179	199				149	174		2.0	2.0	308	0.26	123	17	308										
EASTBOUND SUBTOTAL												114,855	575	9,189	5,742	7,166	3,403	1,385	5,584	9.63															10.62	4,983	693	12,457	
01/NHS/PV	MED	224	10.45	10.51	WB	0.06	317	35.5	4.0	8.0	1,673	1,673	8	134	84	113		58	12	81	0.12	2.0	2.0	141	0.12	56	8	141											
01/NHS/PV	MED	224	10.51	10.57	WB	0.06	317	24.0	4.0	8.0	1,268	1,268	6	101	63	76		41	12	62	0.12	2.0	2.0	141	0.12	56	8	141											
01/NHS/PV	MED	224	10.57	10.66	WB	0.09	475	36.5	4.0	8.0	2,560	2,560	13	205	128	174		89	18	124	0.18	2.0	2.0	211	0.18	84	12	211											
01/NHS/PV	MED	224	10.66	11.29	WB	0.63	3,326	24.0	4.0	8.0	13,304	13,304	67	1,064	665	801		431	123	647	1.26	2.0	2.0	1,478	1.26	591	82	1,478											
01/NHS/PV	MED	224	11.29	11.36	WB	0.07	370	28.8	4.0	8.0	1,677	1,677	8	134	84	107		56	14	82	0.14	2.0	2.0	164	0.14	66	9	164											
01/NHS/PV	MED	224	11.36	12.16	WB	0.80	4,224	24.0	4.0	8.0	16,896	16,896	84	1,352	845	1,017		548	156	821	1.60	2.0	2.0	1,877	1.60	751	104	1,877											
01/NHS/PV	MED	224	12.16	12.26	WB	0.10	528	33.1	4.0	8.0	2,646	2,646	13	212	132	175		91	20	129	0.20	2.0	2.0	235	0.20	94	13	235											
01/NHS/PV	MED	224	12.26	12.75	WB	0.49	2,587	24.0	4.0	8.0	10,348	10,348	52	828	517	623		335	96	503	0.98	2.0	2.0	1,150	0.98	460	64	1,150											
CONCRETE STRUCTURE MED-224-12.76L						0.034	178																																
01/NHS/PV	MED	224	12.78	13.35	WB	0.57	2,990	24.0	4.0	8.0	11,960	11,960	60	957	598	720		388	111	581	1.13	2.0	2.0	1,329	1.13	532	74	1,329											
01/NHS/PV	MED	224	13.35	13.60	WB	0.25	1,320	30.0			4,400	4,400	22	352	220	397		183		214	0.50	2.0	2.0	587	0.50	235	33	587											
01/NHS/PV	MED	224	13.60	13.90	WB	0.30	1,584	24.0	4.0	8.0	6,336	6,336	32	507	317	381		205	59	308	0.60	2.0	2.0	704	0.60	282	39	704											
01/NHS/PV	MED	224	13.90	14.01	WB	0.11	581	32.0			2,066	2,066	10	165	103	186		86		100	0.22	2.0	2.0	258	0.22	103	14	258											
01/NHS/PV	MED	224	14.01	15.40	WB	1.39	7,339	24.0	4.0	8.0	29,356	29,356	147	2,348	1,468	1,767		951	272	1,427	2.78	2.0	2.0	3,262	2.78	1,305	181	3,262											
RAMP B1B (SR 421 WB TO US 42 NB)						0.03	168	11.8	3.0	6.0	389	389	2	31	19	20				16	19		2.0	2.0	37	0.03	15	2	37										
RAMP C1B (US 224/SR 421 WB TO US 42 SB)						0.02	111	16.4	3.0	6.0	313	313	2	25	16	18				13	15		2.0	2.0	49	0.04	20	3	49										
RAMP D2 (US 224 WB TO US 42/SR 421)						0.09	459	14.7	3.0	6.0	1,209	1,209	6	97	60	68				50	59		2.0	2.0	204	0.17	82	11	204										
EXTRA AREA FOR INTERSECTIONS											1,752	1,752	9	140	88	158				73	85																		
EXTRA AREA FOR MEDIAN CROSSEVERS											1,260	1,260	6	101	63				53	61																			
WESTBOUND SUBTOTAL												109,413	547	8,753	5,470	6,801	3,588	972	5,318	9.83																10.08	4,732	657	11,827
TOTALS CARRIED TO THE GENERAL SUMMARY (01/NHS/PV)												224,268	1,122	17,942	11,212	13,967	6,991	2,357	10,902	19.47																20.70	9,715	1,350	24,284

PAVEMENT & SHOULDER DATA
 MED-224

DESIGN AGENCY
DISTRICT 3



ENGINEERING
TEAM TWO

DESIGNER
JLL

REVIEWER
KRB 6-30-21

PROJECT ID
79761

SHEET
31

TOTAL
79

GUARDRAIL SUB-SUMMARY

LABEL	ITEM	EXTENSION	QUANTITY FROM GUARDRAIL AT SLM:														01/NHS/PV	02/STR/PV	TOTAL QUANTITY	UNIT	DESCRIPTION
			2.61	3.05	3.15/6.35	3.50/4.32	4.60	5.39	5.75/5.89	6.42	6.86	11.92	12.76	14.43	14.70	15.44					
R1	202	38000	850	755.5	1,326.25	1,775	2,968.75	2,643.75	2,662.5	1,437.5	1,162.5	975	1,893.75	2,200	787.5	887.5	21,338	987.5	22,325.5	FT	GUARDRAIL REMOVED
R4	202	38300		375	547.5	175	300	225	475		400		275				2,522.5	250	2,772.5	FT	GUARDRAIL REMOVED, BARRIER DESIGN
R8	202	42000									1					2	3		3	EACH	ANCHOR ASSEMBLY REMOVED, TYPE A
R9	202	42010	4	2	6	4	3	2	5	1	8	2	2	2	2	2	40	5	45	EACH	ANCHOR ASSEMBLY REMOVED, TYPE E
R10	202	42040		4	3	4	5	4	7	3	5	2	4	2	2	5	47	3	50	EACH	ANCHOR ASSEMBLY REMOVED, TYPE T
R24	202	47000	4	3	9	2	8	8	10		6		8				54	4	58	EACH	BRIDGE TERMINAL ASSEMBLY REMOVED
R27	202	47800		3	1	2	2	2	4		4		2				18	2	20	EACH	IMPACT ATTENUATOR REMOVED
E2-A	203	20001	10	15	25	30	35	35	35	15	25	10	25	25	10	15	295	15	310	CY	EMBANKMENT, AS PER PLAN
E3	209	15000	10.500	13.300	21.978	22.625	35.455	30.818	36.010	15.250	21.635	11.000	23.818	23.250	9.125	11.000	269.883	15.880	285.763	STA	RESHAPING UNDER GUARDRAIL
G4	606	13000	100				187.5	187.5	175				187.5				737.5	100	837.5	FT	GUARDRAIL, TYPE 5
G13	606	15050	375	710.5	1,158.75	262.5	356.25	43.75	1,725	25	700	975	137.5		787.5	912.5	7,656.75	512.5	8,169.25	FT	GUARDRAIL, TYPE MGS
G14	606	15100	375			1,437.5	2,425	2,412.5	637.5	1,412.5	312.5		1,568.75	2,200			12,406.25	375	12,781.25	FT	GUARDRAIL, TYPE MGS WITH LONG POSTS
G15	606	15150			150	75			125		150						500		500	FT	GUARDRAIL, TYPE MGS HALF POST SPACING
G22	606	15550		375	520	175	300	225	475		400		275				2,495	250	2,745	FT	GUARDRAIL, BARRIER DESIGN, TYPE MGS
A9	606	26150	4	2	6	4	3	2	5	1	8	2	2	2	2	3	41	5	46	EACH	ANCHOR ASSEMBLY, MGS TYPE E, MASH 2016
A13	606	26550		4	3	4	5	4	7	3	6	2	4	2	2	5	48	3	51	EACH	ANCHOR ASSEMBLY, MGS TYPE T
B18	606	35002		2	8	2			2		6						20		20	EACH	MGS BRIDGE TERMINAL ASSEMBLY, TYPE 1
B26	606	35102		1	1												2		2	EACH	MGS BRIDGE TERMINAL ASSEMBLY, TYPE 2
B31	606	35140	4				8	8	8				8				32	4	36	EACH	BRIDGE TERMINAL ASSEMBLY, TYPE 4
I2	606	60012		3	1	2	2	2	4		4		2				18	2	20	EACH	IMPACT ATTENUATOR, TYPE 1 (BIDIRECTIONAL)
L1	622	25001		4	4												8		8	EACH	CONCRETE BARRIER END SECTION, TYPE D, AS PER PLAN
M4	626	00110	12	15	25	24	37	32	36	17	24	12	26	24	10	12	288	18	306	EACH	BARRIER REFLECTOR, TYPE 2, BIDIRECTIONAL

CONCRETE REPAIR SUB-SUMMARY

EASTBOUND PAVEMENT REPAIRS (01/NHS/PV)											
SLM	LANE	WIDTH	LENGTH	INDIVIDUAL REPAIR AREA	TYPE OF REPAIR	NUMBER OF REPAIRS	255		257		
							FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN (13.0" CONCRETE)	FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN (LONGITUDINAL CRACK)	FULL DEPTH PAVEMENT SAWING	DIAMOND GRINDING PORTLAND CEMENT CONCRETE PAVEMENT	
BEGIN	END	FT	FT	SY			SY	SY	FT	SY	
15.30	15.40	LT	12	6	8.00	TRANS	14	112		504	9,838
		RT	12	6	8.00	TRANS	3	24		108	
		LANE LINE	2	20	4.44	LONG	1			44	
15.40	15.50	LT	12	6	8.00	TRANS	6	48		216	
		RT	12	6	8.00	TRANS	8	64		288	
		LANE LINE	2	20	4.44	LONG	2			88	
15.50	15.61	LT	12	6	8.00	TRANS	1	8		36	
		RT	12	6	8.00	TRANS	9	72		324	
		LANE LINE	2	20	4.44	LONG	6			264	
		EDGE LINE	2	20	4.44	LONG	6			264	
EASTBOUND SUB-TOTAL								328	67	2,136	9,838


WESTBOUND PAVEMENT REPAIRS (01/NHS/PV)												
SLM	LANE	WIDTH	LENGTH	INDIVIDUAL REPAIR AREA	TYPE OF REPAIR	NUMBER OF REPAIRS	255		257			
							FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN (13.0" CONCRETE)	FULL DEPTH PAVEMENT REMOVAL AND RIGID REPLACEMENT, CLASS QC MS, AS PER PLAN (LONGITUDINAL CRACK)	FULL DEPTH PAVEMENT SAWING	DIAMOND GRINDING PORTLAND CEMENT CONCRETE PAVEMENT		
BEGIN	END	FT	FT	SY			SY	SY	FT	SY		
15.40	15.50	LT	12	6	8.00	TRANS	6	48		216	7,554	
		RT	12	6	8.00	TRANS	3	24		108		
		LANE LINE	2	20	4.44	LONG	9			396		
		EDGE LINE	2	20	4.44	LONG	6			264		
15.50	15.61	LT	12	6	8.00	TRANS	11	88		396		
		RT	12	6	8.00	TRANS	6	48		216		
		LANE LINE	2	20	4.44	LONG	8			352		
		EDGE LINE	2	20	4.44	LONG	4			176		
WESTBOUND SUB-TOTAL								208	121	2,124		7,554
CONTINGENCY								134	47	1,065		
TOTALS CARRIED TO THE GENERAL SUMMARY (01/NHS/PV)								670	235	5,325	17,392	

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: Sheet PAPER: 17x11 (in.) DATE: 11/23/2021 TIME: 2:55:54 PM USER: ksalay p:\v\hobol-pw-bentley.com\shahid-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_05001.dgn

GUARDRAIL/CONCRETE REPAIR SUB-SUMMARY

DESIGN AGENCY
DISTRICT 3






ENGINEERING TEAM TWO

DESIGNER
JLL

REVIEWER
ACM 6-24-21

PROJECT ID
79761


SHEET TOTAL
32 | 79

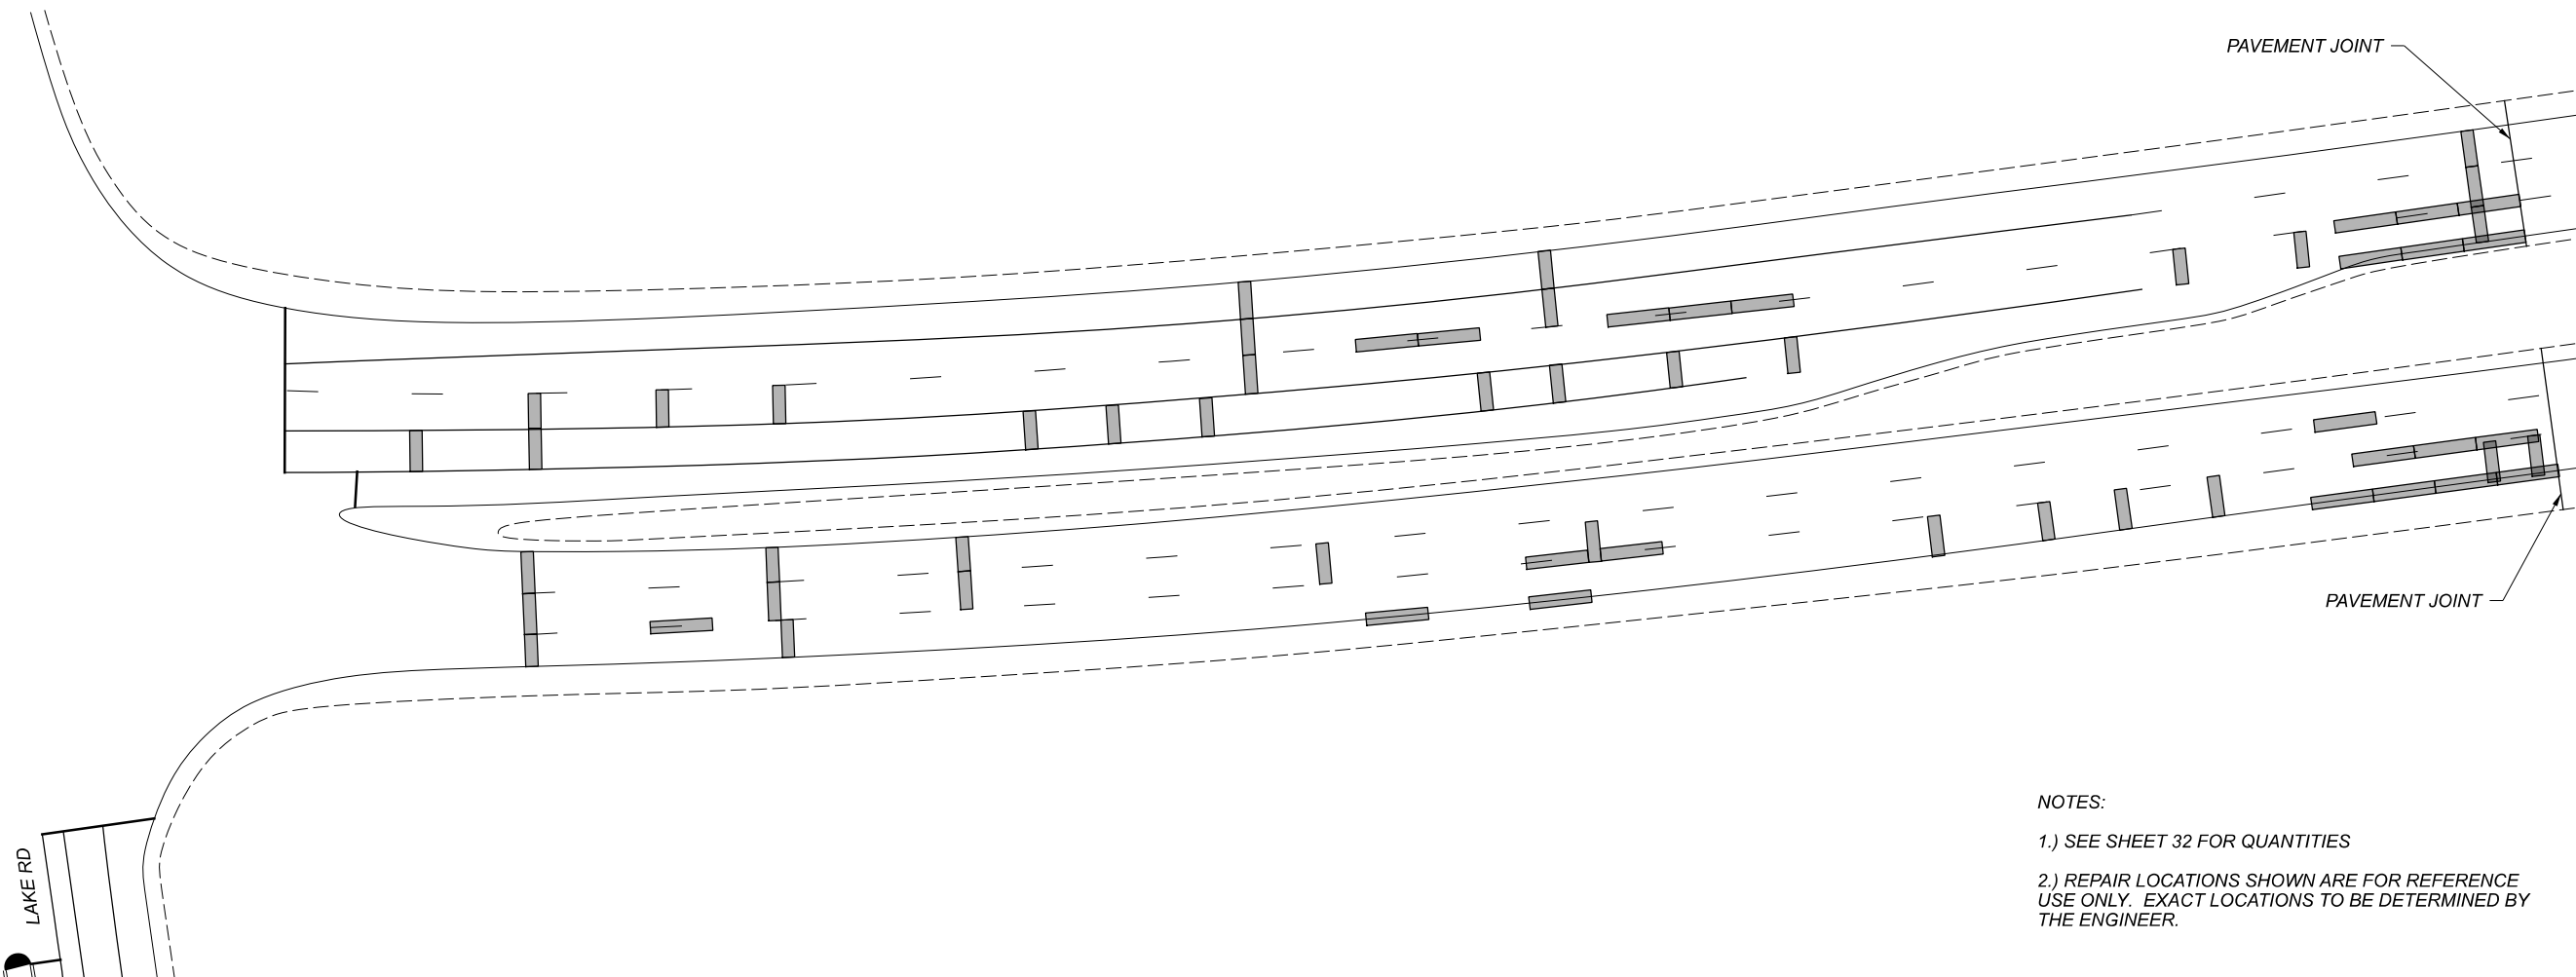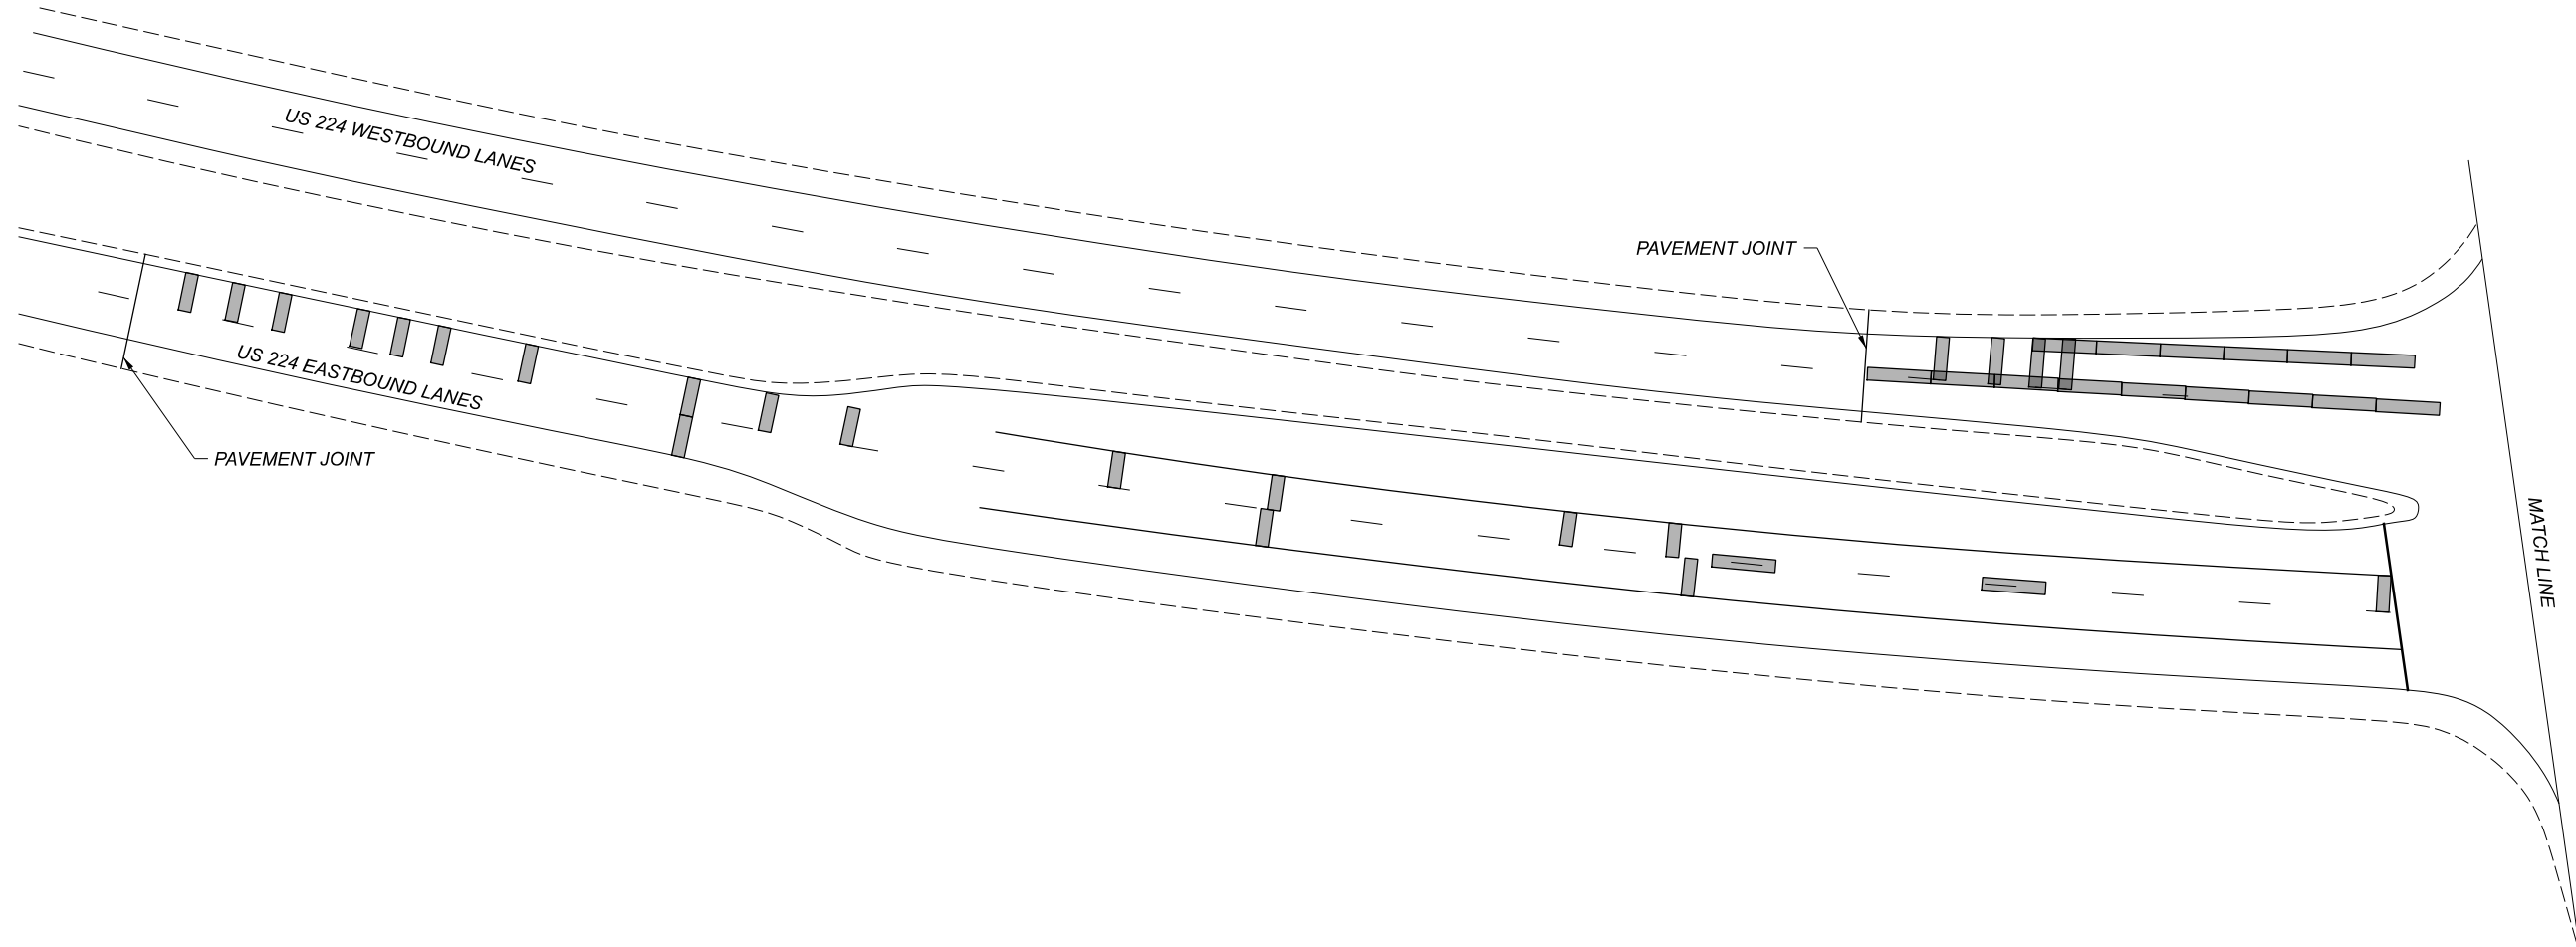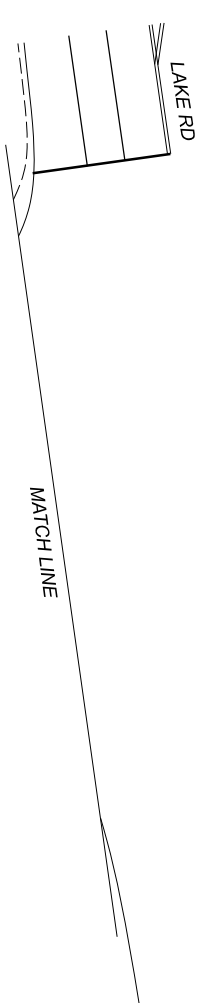

NOTES:

1.) SEE SHEET 32 FOR QUANTITIES

2.) REPAIR LOCATIONS SHOWN ARE FOR REFERENCE.
USE ONLY. EXACT LOCATIONS TO BE DETERMINED BY
THE ENGINEER.



PLAN VIEW
MED-224/LAKE RD CONCRETE REPAIRS

DESIGN AGENCY

DISTRICT 3



ENGINEERING
TEAM TWO

DESIGNER

JLL

REVIEWER

ACM 6-24-21

PROJECT ID

79761

SHEET TOTAL

33 79

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: MED-42-PM PAPER SIZE: ITXII (IN.) DATE: 11/24/2021 TIME: 11:28:26 AM USER: ksadley
pw:\\ohiodot-pw-bentley.com\ohiodot-pw-02\Documents\01Active Projects\District 03\Medina\7976\400-Engineering\Traffic\Sheets\7976_1500.dgn

AUXILIARY & LONG LINE MARKINGS

PLAN SPLIT	COUNTY	ROUTE	STATION / SLM			HIGHWAY MILES	DESCRIPTION	614			642	644	644	807			850			644						807				850					
			FROM	TO	MILE			WORK ZONE LANE LINE, CLASS III, 6", 642 PAINT	WORK ZONE CENTER LINE, CLASS III, 642 PAINT	WORK ZONE EDGE LINE, CLASS III, 6", 642 PAINT	WORK ZONE CHANNELIZING LINE, CLASS III, 642 PAINT	WORK ZONE STOP LINE, CLASS III, 642 PAINT	REMOVAL OF PAVEMENT MARKING (EXISTING EDGE LINE)	REMOVAL OF PAVEMENT MARKING (EXISTING STOP LINE)	REMOVAL OF PAVEMENT MARKING (EXISTING LANE ARROW)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, EDGE LINE, 6" (WHITE)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, EDGE LINE, 6" (YELLOW)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, LANE LINE, 6"	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, CENTER LINE	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, CHANNELIZING LINE, 8"	GROOVING FOR 4" RECESSED PAVEMENT MARKINGS, ASPHALT	GROOVING FOR 6" RECESSED PAVEMENT MARKINGS, ASPHALT	GROOVING FOR 8" RECESSED PAVEMENT MARKINGS, ASPHALT	AUXILIARY MARKINGS (740.04)						WET REFLECTIVE EPOXY PAVEMENT MARKING, EDGE LINE, 6" (WHITE)	WET REFLECTIVE EPOXY PAVEMENT MARKING, EDGE LINE, 6" (YELLOW)	WET REFLECTIVE EPOXY PAVEMENT MARKING, LANE LINE, 6"	WET REFLECTIVE EPOXY PAVEMENT MARKING, CENTER LINE	GROOVING FOR 4" RECESSED PAVEMENT MARKINGS, CONCRETE	GROOVING FOR 6" RECESSED PAVEMENT MARKINGS, CONCRETE
																								STOP LINE	TRANSVERSE/DIAGONAL LINE (WHITE)	TRANSVERSE/DIAGONAL LINE (YELLOW)	LANE ARROW	WRONG WAY ARROW	SPEED MEASUREMENT MARKING						

02/STR/PV 05/SAF/OT	MED	42	1.89	2.78	0.89	TWO-LANE PAVEMENT MARKINGS																		63	159	254		2									
02/STR/PV 01/NHS/PV 05/SAF/OT			2.78	3.06	0.28	NORTHBOUND LONG LINE MARKINGS						0.84																									
05/SAF/OT			3.06	6.91	3.85							11.55																									
02/STR/PV 01/NHS/PV 05/SAF/OT	MED	42	2.78	6.91	4.13	SOUTHBOUND LONG LINE MARKINGS						0.84																									
05/SAF/OT			3.06	6.91	3.85							11.55																									
01/NHS/PV			2.78	3.06	0.28	FOUR-LANE AUXILIARY MARKINGS																															
05/SAF/OT			3.06	6.91	3.85																																
01/NHS/PV 05/SAF/OT	MED	42	3.11	3.29	0.18	SB EXIT RAMP AT US 224 (RAMP A1)								0.54		2,367																					
05/SAF/OT																																					
01/NHS/PV 05/SAF/OT	MED	42	3.11	3.14	0.03	SB EXIT RAMP AT SR 421 (RAMP A1B)								0.12		90																					
05/SAF/OT																																					
01/NHS/PV 05/SAF/OT	MED	42	2.88	3.11	0.23	NB EXIT RAMP AT US 224/SR 421 (RAMP D1)								0.09		1.02		555		102																	
05/SAF/OT																																					
02/STR/PV 05/SAF/OT	MED	42	6.80	6.88	0.08	SB ENTRANCE RAMP AT US 42 (RAMP A2)								0.18		0.93		300																			
05/SAF/OT																																					
01/NHS/PV 05/SAF/OT	MED	42	6.82	7.12	0.30	NB EXIT RAMP AT US 42 (RAMP C2)								0.09		1.23		627																			
05/SAF/OT																																					
02/STR/PV 05/SAF/OT	MED	42	7.08	7.12	0.04	NB EXIT RAMP AT SR 421 (RAMP C2B)								0.12		45																					
05/SAF/OT																																					
02/STR/PV 05/SAF/OT	MED	42	6.88	7.24	0.36	SB ENTRANCE RAMP AT US 42 (RAMP E2)								0.18		0.42		342																			
05/SAF/OT																																					
05/SAF/OT			CONCRETE BRIDGE DECKS																																		

SUBTOTAL (01/NHS/PV)						23.28	49.11	4,167	300	15.40	108	8									172	272	8	6	2											
SUBTOTAL (02/STR/PV)						2.04	2.67	4.83	1,587	45	1.12												78	159	254	2										
SUBTOTAL (05/SAF/OT)													10.39	8.70	8.11	0.85	1,918	1.70	27.20	1,918									0.38	0.29	0.33	0.04	0.08	1.00		
TOTALS TO GENERAL SUMMARY						25.32	2.67	53.94	5,754	345	16.52	108	8	10.39	8.70	8.11	0.85	1,918	1.70	27.20	1,918	250	431	254	8	2	6	2	0.38	0.29	0.33	0.04	0.08	1.00		

DESIGN AGENCY
DISTRICT 3

ENGINEERING
TEAM TWO

DESIGNER
JLL

REVIEWER
KRB 6-30-21

PROJECT ID
79761

SHEET TOTAL
51 79

PAVEMENT MARKING SUB-SUMMARY
MED-42

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: MED-224.PW PAPER(S)/E: I7x11(rn.) DATE: 11/24/2021 TIME: 11:28:56 AM USER: ksalay
 pw:\\ehlodot-pw\benley.com\hlotdot-pw-02\Documents\01Active Projects\District 03\Medina\79761\400-Engineering\Traffic\Sheets\79761_1500.dgn

AUXILIARY & LONG LINE MARKINGS

PLAN SPLIT	COUNTY	ROUTE	STATION / SLIM		HIGHWAY MILES	DESCRIPTION	614			642	644	644	807					850			644					646			807				850											
			FROM	TO			MILE	WORK ZONE LANE LINE, CLASS III, 6", 642 PAINT	WORK ZONE EDGE LINE, CLASS III, 6", 642 PAINT	WORK ZONE CHANNELIZING LINE, CLASS III, 642 PAINT	WORK ZONE STOP LINE, CLASS III, 642 PAINT	REMOVAL OF PAVEMENT MARKING (EXISTING EDGE LINE)	REMOVAL OF PAVEMENT MARKING (EXISTING STOP LINE)	REMOVAL OF PAVEMENT MARKING (EXISTING LANE ARROW)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, EDGE LINE, 6" (WHITE)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, EDGE LINE, 6" (YELLOW)	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, LANE LINE, 6"	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, CHANNELIZING LINE, 8"	WET REFLECTIVE THERMOPLASTIC PAVEMENT MARKING, DOTTED LINE, 6"	GROOVING FOR 6" RECESSED PAVEMENT MARKINGS, ASPHALT	GROOVING FOR 8" RECESSED PAVEMENT MARKINGS, ASPHALT	GROOVING FOR 6" RECESSED PAVEMENT MARKINGS, ASPHALT	AUXILIARY MARKINGS (740.04)			AUXILIARY MARKINGS (740.07)			WET REFLECTIVE EPOXY PAVEMENT MARKING, EDGE LINE, 6" (WHITE)	WET REFLECTIVE EPOXY PAVEMENT MARKING, EDGE LINE, 6" (YELLOW)	WET REFLECTIVE EPOXY PAVEMENT MARKING, LANE LINE, 6"	WET REFLECTIVE EPOXY PAVEMENT MARKING, CHANNELIZING LINE, 8"	GROOVING FOR 6" RECESSED PAVEMENT MARKINGS, CONCRETE	GROOVING FOR 8" RECESSED PAVEMENT MARKINGS, CONCRETE										
								MILE	MILE	FT	FT	MILE	FT	EACH	MILE	MILE	MILE	FT	FT	MILE	FT	FT	STOP LINE	TRANSVERSE/DIAGONAL LINE (WHITE)	TRANSVERSE/DIAGONAL LINE (YELLOW)	LANE ARROW	WRONG WAY ARROW	STOP LINE	ISLAND MARKING	LANE ARROW	MILE	MILE	MILE	FT	MILE	FT								
01/NHS/PV	MED	224	10.45	15.30	4.85	EASTBOUND LONG LINE MARKINGS	14.55	29.10	3,975	9.70																																		
05/SAF/OT																																												
01/NHS/PV																																												
05/SAF/OT																																												
01/NHS/PV	MED	224	15.30	15.61	0.31	EASTBOUND MARKINGS (CONCRETE SECTION)	0.20	0.30	400	25														51	24	5	5																	
05/SAF/OT																																												
01/NHS/PV																																												
05/SAF/OT																																												
01/NHS/PV	MED	224	6.37	6.60	0.23	EB RAMP TO US 42 NB (RAMP B1)	0.36	1.05	576																																			
05/SAF/OT																																												
01/NHS/PV	MED	224	6.42	6.45	0.03	WB RAMP TO US 42 NB (RAMP B1B)		0.21																																				
05/SAF/OT																																												
01/NHS/PV	MED	224	6.25	6.34	0.09	EB RAMP TO US 42 SB (RAMP C1)	0.06	0.54	894																																			
05/SAF/OT																																												
01/NHS/PV	MED	224	6.32	6.33	0.01	WB RAMP TO US 42 SB (RAMP C1B)		0.15																																				
05/SAF/OT																																												
01/NHS/PV	MED	224	10.45	10.74	0.29	EB ENTRANCE RAMP AT SR 421 (RAMP B2)	0.06	1.62	138																																			
05/SAF/OT																																												
01/NHS/PV	MED	224	10.45	10.66	0.21	WB EXIT RAMP AT US 42 (RAMP D2)	0.03	0.54	774	114																																		
05/SAF/OT																																												
05/SAF/OT						CONCRETE BRIDGE DECKS																																						
SUBTOTAL (01/NHS/PV)							29.91	62.91	11,544	693	19.40	320	32																															
SUBTOTAL (05/SAF/OT)														10.30	10.33	9.80	3,448	1,455	30.43	3,448	1,455																							
TOTALS TO GENERAL SUMMARY							29.91	62.91	11,544	693	19.40	320	32	10.30	10.33	9.80	3,448	1,455	30.43	3,448	1,455	358	196	20	23	9	2	113	24	15	10	0.69	0.69	0.66	2,552	2.04	2,552							


DESIGN AGENCY: DISTRICT 3
 ENGINEERING TEAM TWO
 DESIGNER: JLL
 REVIEWER: KRB
 PROJECT ID: 79761
 SHEET TOTAL: 52 / 79


MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: Sheet PAPER: 17x11 (in.) DATE: 11/17/2021 TIME: 12:15:06 PM USER: ksabay
 p:\vohobol-pw-bentley.com\shahid-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Roadway\Sheets\79761_SC0001.dgn

ITEM	EXTENSION	QUANTITY										TOTAL	UNIT	DESCRIPTION	REFERENCE SHEET			
		MED-42-2.61	MED-42-3.10		MED-42-4.60		MED-42-5.39		MED-42-5.89		MED-42-7.14					MED-83-4.36	MED-224-12.76	
			LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT							LEFT	RIGHT
202	11301				1	1					12			8	22	CY	PORTIONS OF STRUCTURE REMOVED, AS PER PLAN	54
202	32000		52	52											104	FT	CURB REMOVED	
202	32600		100	100							76				276	FT	GUTTER REMOVED	
202	98200		256	256											512	FT	REMOVAL, MISC.: DECK OVERHANG	54
202	98200		66	90	94	94	80	80	94	141			80	88	907	FT	REMOVAL, MISC.: JOINT SEALER	54
509	10001		1,157	1,157											2,314	LB	EPOXY COATED REINFORCING STEEL, AS PER PLAN	55
509	20001		100	100											200	LB	REINFORCING STEEL, REPLACEMENT OF EXISTING REINFORCEMENT STEEL, AS PER PLAN	54
511	21521									7				2	9	CY	CLASS QC2 CONCRETE, SUPERSTRUCTURE, AS PER PLAN (RECONSTRUCTION)	55
511	45711									5				3	8	CY	CLASS QC1 CONCRETE, ABUTMENT, AS PER PLAN (RECONSTRUCTION)	55
511	46010				1	1								3	5	CY	CLASS QC1 CONCRETE, RETAINING/WINGWALL NOT INCLUDING FOOTING	
511	81100		256	256											512	FT	CONCRETE, MISC.: CLASS QC SCC CONCRETE, BRIDGE DECK, DECK OVERHANG	55
512	10100		138	138						8					284	SY	SEALING OF CONCRETE SURFACES (EPOXY-URETHANE)	
512	10300	32	28	28	26	26	800	800	605	605			28	40	3,018	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN	
513	21000														10	EACH	TRIMMING OF BEAM END	
516	10000									47					47	FT	PREFORMED ELASTOMERIC COMPRESSION JOINT SEAL	
516	11211										104			44	148	FT	STRUCTURAL EXPANSION JOINT INCLUDING ELASTOMERIC STRIP SEAL, AS PER PLAN	55
516	31000		66	90	94	94	80	80	94	94	72		80	88	932	FT	JOINT SEALER	
516	45305	5	4	3					2	2	4		1	5	26	EACH	REFURBISH BEARING DEVICE, AS PER PLAN	55
516	47001	LS	LS	LS					LS	LS	LS		LS	LS	LS		JACKING AND TEMPORARY SUPPORT OF SUPERSTRUCTURE, AS PER PLAN	55
517	75600	300			238	238	425	425	250	250			262.5	262.5	2,651	FT	DEEP BEAM BRIDGE RETROFIT RAILING	
517	76300	300			238	238	425	425	250	250			262.5	262.5	2,651	FT	RAILING, MISC.: DEEP BEAM RAILING PANELS	55
SPECIAL	519E00100		240	240											480	SF	COMPOSITE FIBER WRAP SYSTEM	55
519	11100		33	38	6	24	28	10		3	141		12	21	316	SF	PATCHING CONCRETE STRUCTURE	
601	21060			18											18	SY	TIED CONCRETE BLOCK MAT WITH TYPE 2 UNDERLAYMENT	
601	27000		25	25									21		71	CY	DUMPED ROCK FILL, TYPE C	
848	10001	709	474	644	574	574							558	858	4,391	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (VARIABLE THICKNESS)	55
848	20000	709	474	644	574	574							558	858	4,391	SY	SURFACE PREPARATION USING HYDRODEMOLITION	
848	30001	22	9	13	11	11							17	27	110	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN	55
848	50000	40	27	36	32	32							31	48	246	SY	HAND CHIPPING	
848	50100	LS	LS	LS	LS	LS							LS	LS	LS		TEST SLAB	
848	50200		2	4	12	8							2	5	33	CY	FULL DEPTH REPAIR	
848	50320	709	474	644	574	574							558	858	4,391	SY	EXISTING CONCRETE OVERLAY REMOVED (VARIABLE THICKNESS)	
848	50340	398	266	361	322	322							313	481	2,463	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY	
SPECIAL	519E12510		12		2	4	18	9					3	7	55	SY	PATCHING CONCRETE BRIDGE DECK, TYPE B	55


STRUCTURE SUMMARY
 STRUCTURE SUMMARY FOR ALL
 STRUCTURES ON THIS PROJECT

SFN
 VARIOUS
 DESIGN AGENCY
 DISTRICT 3

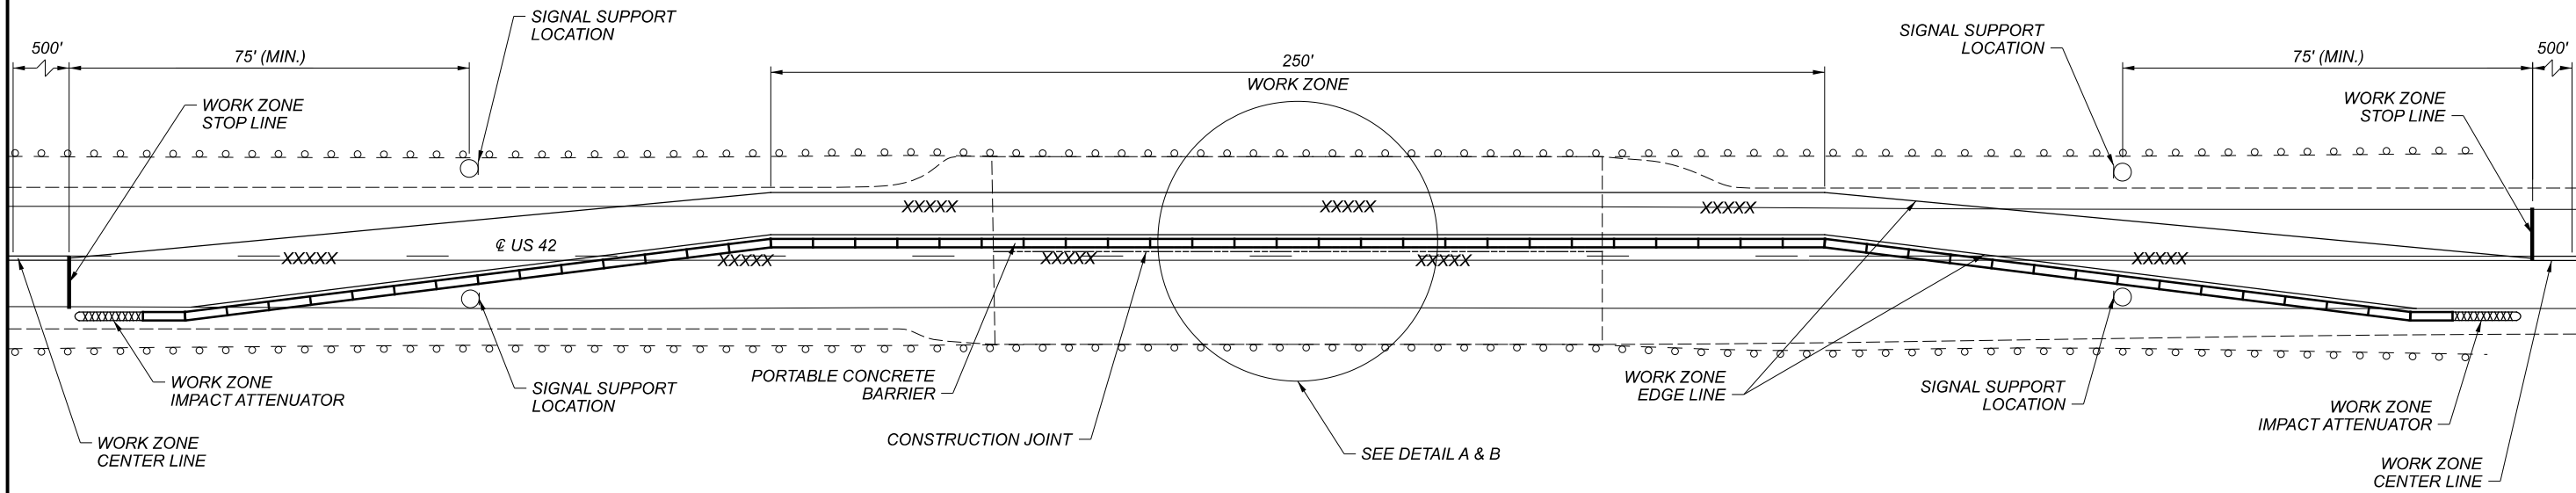 ENGINEERING
 TEAM TWO
 DESIGNER/CHECKER
 JLL KRB
 REVIEWER
 KAK 7-6-21
 PROJECT ID
 79761
 SUBSET TOTAL
 1 1
 SHEET TOTAL
 56 79



MOT DETAIL
PHASE A - SHOWN
PHASE B - SIMILAR

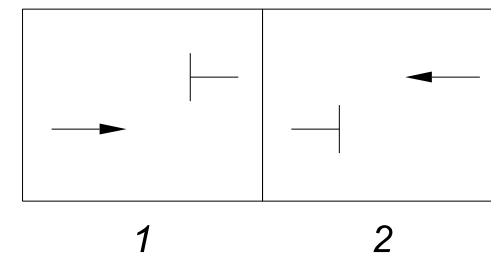SIGNAL PHASING DIAGRAM



FULLY-ACTUATED OPERATION OF WORK ZONE TRAFFIC SIGNAL

THE WORK ZONE SIGNAL CONTROL REQUIRED FOR THIS PROJECT AND SHOWN ON THIS SHEET AND TRAFFIC SCDS MT-96.11, 96.20 AND 96.26 SHALL BE FULLY TRAFFIC-ACTUATED AND OPERATE IN A MANNER SIMILAR TO THAT DESCRIBED IN SECTION 733.02 OF THE CONSTRUCTION AND MATERIAL SPECIFICATIONS. THE INITIAL CONTROLLER TIMING SHALL BE AS FOLLOWS:

	PHASE	
	1 MAINLINE (NORTHBOUND)	2 MAINLINE (SOUTHBOUND)
MIN. GREEN	27	27
EXTENSION	4	4
MAX. GREEN	30	30
YELLOW	5	5
ALL RED	13	13
RECALL	OFF	OFF

PROVIDE TIMING APPROPRIATE FOR THE SIGNAL LOCATION UNDER CONSIDERATION. TYPICAL FLOW RATES ARE DISPLAYED IN TABLE 697-2 IN THE ODOT TRAFFIC ENGINEERING MANUAL (TEM).


THE CONTRACTOR SHALL ALSO DESIGN, FURNISH, INSTALL AND MAINTAIN A TRAFFIC DETECTOR ON EACH TRAFFIC APPROACH WHICH WILL RELIABLY DETECT ALL LEGAL TRAFFIC APPROACHING (BUT NOT LEAVING) THE SIGNAL AS IT PASSES OR WAITS IN THE DESIGNATED DETECTOR ZONE SHOWN IN THE PLANS. DETECTOR DESIGNS WHICH DO NOT PROVIDE RELIABLE DETECTION, FREE FROM FALSE CALLS, SHALL BE IMMEDIATELY REPLACED BY THE CONTRACTOR.

ESTIMATED QUANTITIES (04/STR/BR)			
ITEM	QUANTITY	UNIT	DESCRIPTION
614	4	EACH	WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (UNIDIRECTIONAL)
614	22	EACH	BARRIER REFLECTOR, TYPE 1 (ONE-WAY)
614	22	EACH	OBJECT MARKER, ONE WAY
614	0.19	MILE	WORK ZONE CENTER LINE, CLASS I, 740.06, TYPE I
614	0.42	MILE	WORK ZONE EDGE LINE, CLASS I, 6", 740.06, TYPE I
614	24	FT	WORK ZONE STOP LINE, CLASS I, 740.06, TYPE I
622	1,100	FT	PORTABLE BARRIER, UNANCHORED


ALL QUANTITIES CARRIED TO THE GENERAL SUMMARY


- NOTES:
 1.) FOR ADDITIONAL DETAILS, SEE SCDS MT-96.11, MT-96.20, MT-96.26 AND ALSO SUPPLEMENTAL SPECIFICATION 961.
 2.) ACCESS TO ALL DRIVES SHALL BE MAINTAINED AT ALL TIMES.
 3.) SEE SHEET 51 FOR REPLACEMENT PAVEMENT MARKING ITEMS AND QUANTITIES.

DETAIL A

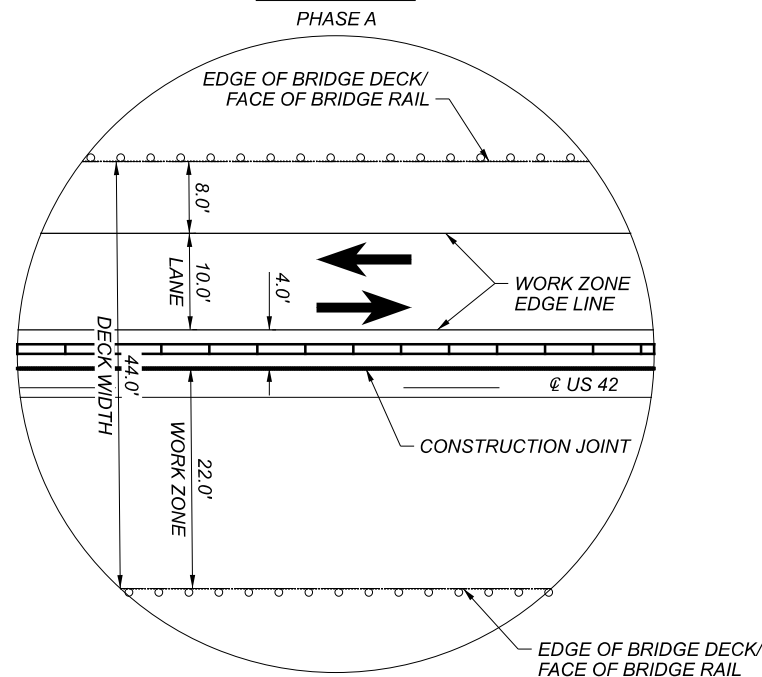

DETAIL B

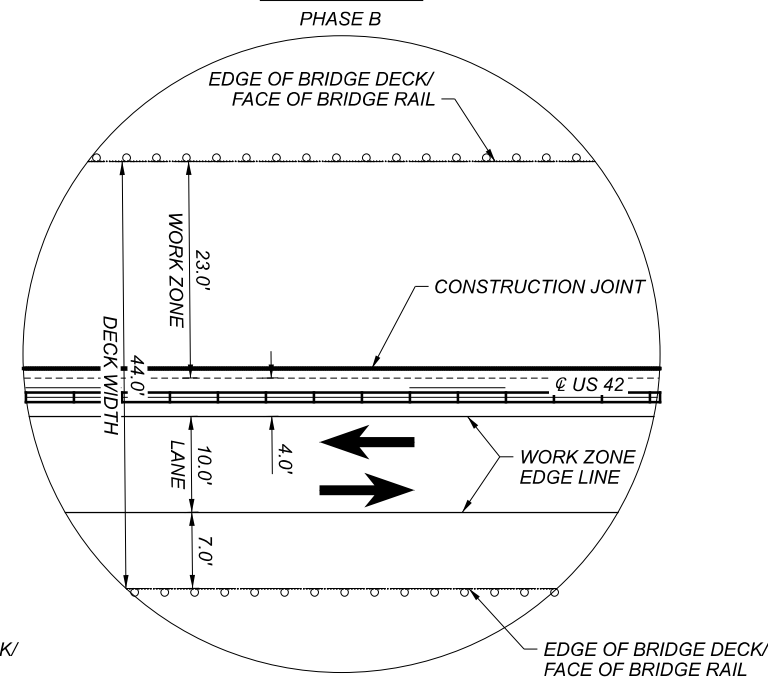

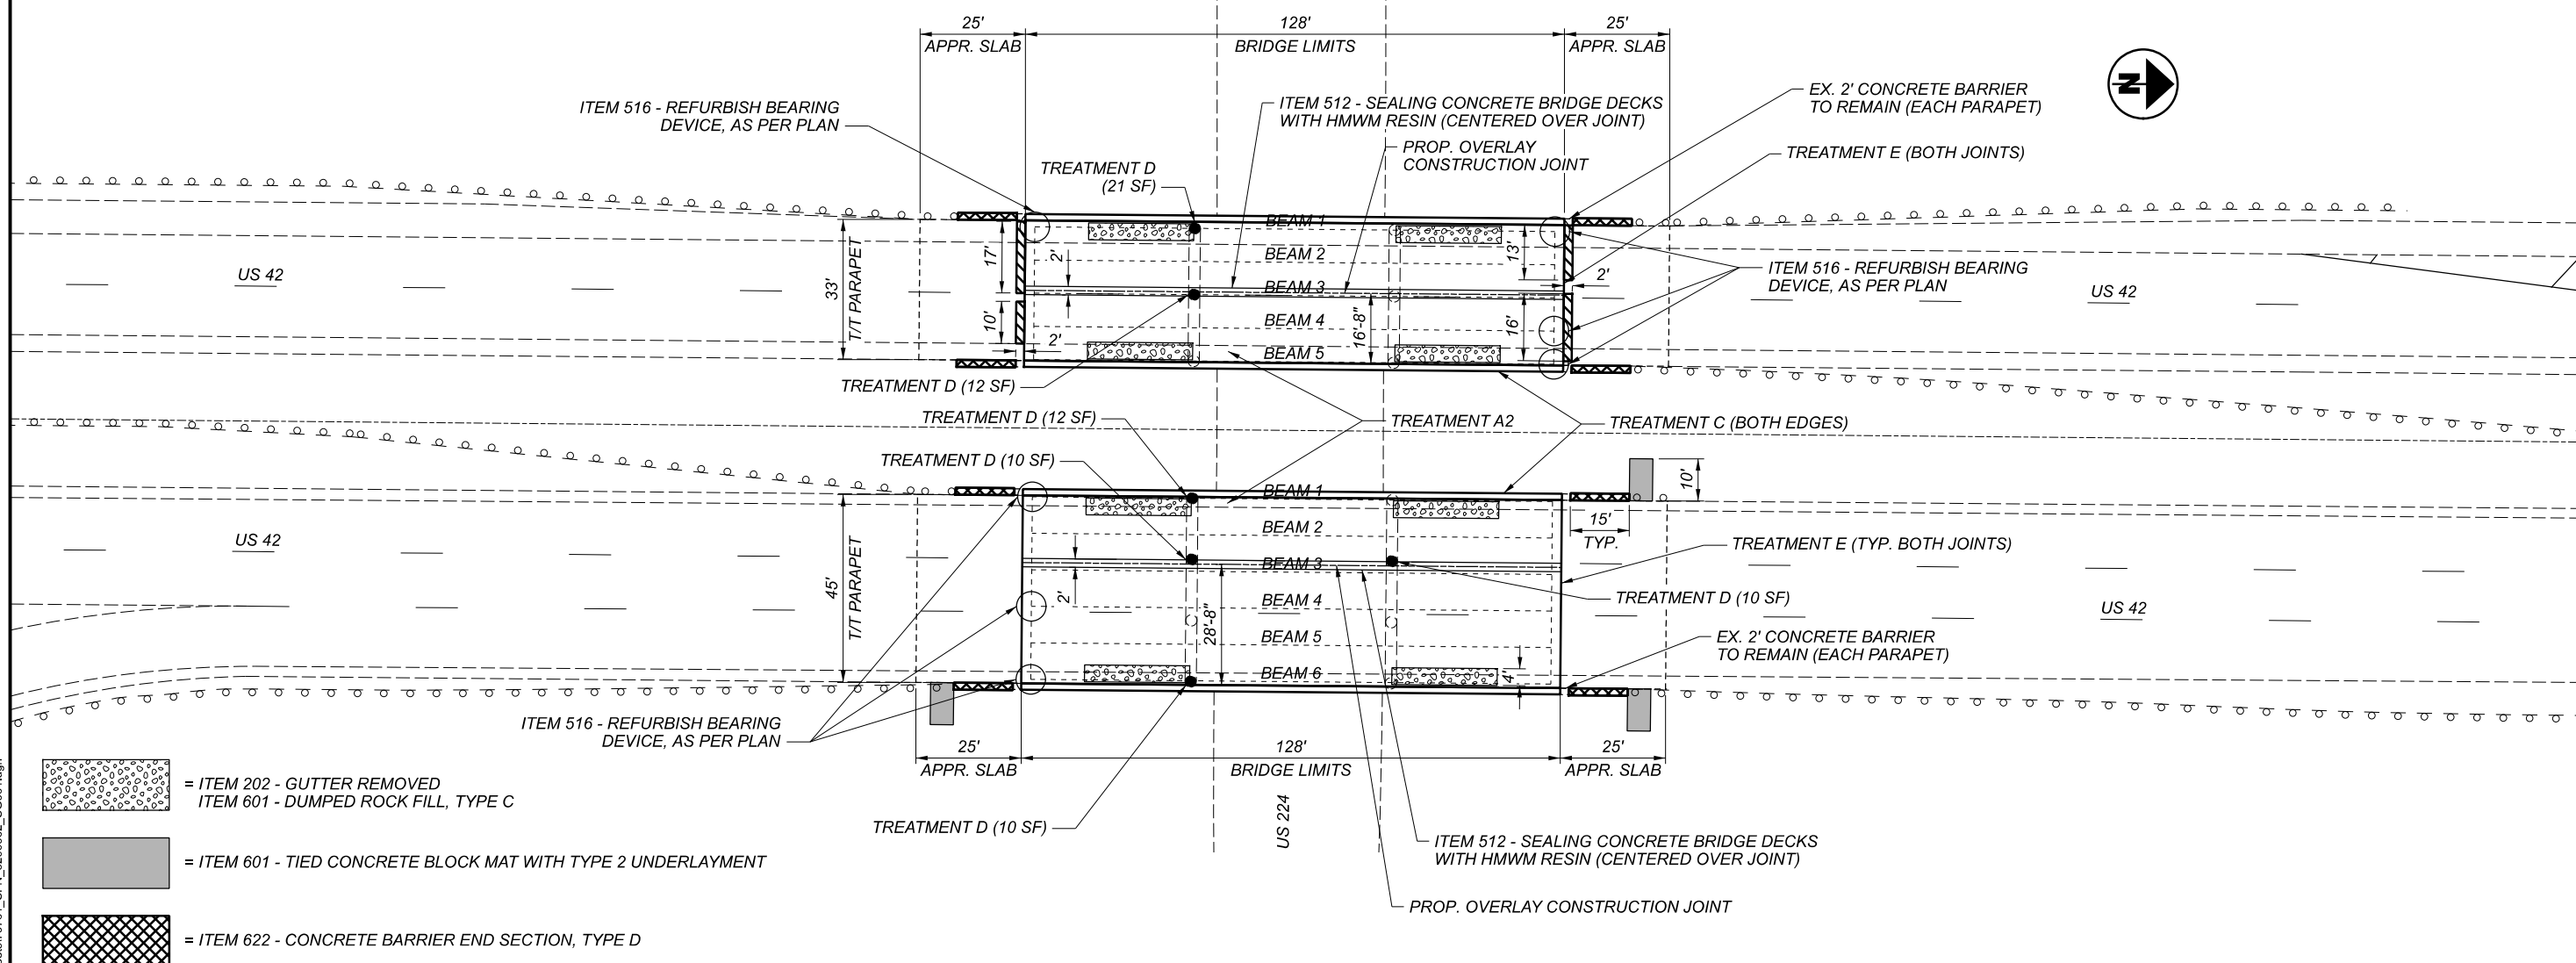

= ITEM 202 - GUTTER REMOVED
 = ITEM 601 - DUMPED ROCK FILL, TYPE C

= ITEM 601 - TIED CONCRETE BLOCK MAT WITH TYPE 2 UNDERLAYMENT

= ITEM 622 - CONCRETE BARRIER END SECTION, TYPE D

= ITEM SPECIAL - PATCHING CONCRETE BRIDGE DECK, TYPE B

ITEM	MED-42-3.10		TOTAL QUANTITY	UNIT	DESCRIPTION
	L	R			
202	52	52	104	FT	CURB REMOVED
202	100	100	200	FT	GUTTER REMOVED
202	256	256	512	FT	REMOVAL, MISC.: DECK OVERHANG
202	66	90	156	FT	REMOVAL, MISC.: JOINT SEALER
509	1,157	1,157	2,314	LB	EPOXY COATED REINFORCING STEEL, AS PER PLAN
509	100	100	200	LB	REINFORCING STEEL, REPLACEMENT OF EXISTING REINFORCEMENT STEEL, AS PER PLAN
511	256	256	512	FT	CONCRETE, MISC.: CLASS QC SCC CONCRETE, BRIDGE DECK, DECK OVERHANG
512	138	138	276	SY	SEALING OF CONCRETE SURFACES (EPOXY-URETHANE)
512	28	28	57	SY	SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN
516	66	90	156	FT	JOINT SEALER
516	4	3	7	EACH	REFURBISH BEARING DEVICE, AS PER PLAN
516	LS	LS	LS		JACKING AND TEMPORARY SUPPORT OF SUPERSTRUCTURE, AS PER PLAN
SPECIAL	240	240	480	SF	COMPOSITE FIBER WRAP SYSTEM
519	33	38	71	SF	PATCHING CONCRETE STRUCTURE
601		18	18	SY	TIED CONCRETE BLOCK MAT WITH TYPE 2 UNDERLAYMENT
601	25	25	50	CY	DUMPED ROCK FILL, TYPE C
848	474	644	1,118	SY	MICRO SILICA MODIFIED CONCRETE OVERLAY USING HYDRODEMOLITION, AS PER PLAN (1.75" THICK)
848	474	644	1,118	SY	SURFACE PREPARATION USING HYDRODEMOLITION
848	9	13	22	CY	MICRO SILICA MODIFIED CONCRETE OVERLAY (VARIABLE THICKNESS), MATERIAL ONLY, AS PER PLAN
848	27	36	63	SY	HAND CHIPPING
848	LS	LS	LS		TEST SLAB
848	2	4	6	CY	FULL DEPTH REPAIR
848	474	644	1,118	SY	EXISTING CONCRETE OVERLAY REMOVED (1.25" NOMINAL THICKNESS)
848	266	361	627	SY	REMOVAL OF DEBONDED OR DETERIORATED EXISTING VARIABLE THICKNESS CONCRETE OVERLAY
SPECIAL	12		12	SY	PATCHING CONCRETE BRIDGE DECK, TYPE B

ALL QUANTITIES CARRIED TO THE STRUCTURE SUMMARY


NOTES:

- MED-42-3.10L
REFURBISH BEARING #1 ON THE REAR ABUTMENT, AND BEARINGS #1, #4 AND #5 ON THE FORWARD ABUTMENT. JACK AND SHIM AS NECESSARY TO ALLOW ELEVATION OF EXPANSION JOINT ARMOR ON DECK SIDE TO MATCH ELEVATION OF JOINT ARMOR ON BACKWALL SIDE.
- MED-42-3.10R
REFURBISH BEARING #1 ON THE REAR ABUTMENT. SHIM AS NECESSARY TO ALLOW ELEVATION OF EXPANSION JOINT ARMOR ON DECK SIDE TO MATCH ELEVATION OF JOINT ARMOR ON BACKWALL SIDE.
- SEE SUPPLEMENTAL SPECIFICATION 848 FOR DETAILS ON THE OVERLAY PROCESS NOT SHOWN ON THIS SHEET.
- PERFORM ALL JOINT SEALING AFTER ALL REPAIR WORK HAS BEEN COMPLETED.
- USE EXTREME CARE WHEN PERFORMING ALL ITEMS THAT REQUIRE ANY REMOVAL OF THE EXISTING STRUCTURE AS TO NOT DAMAGE ANY EXISTING REINFORCING STEEL; THE REINFORCING STEEL IS TO REMAIN IN PLACE AND NOT BE REMOVED IN THE REMOVAL PROCESS. CLEAN EXPOSED REINFORCING STEEL AS PER ITEM 848 WHERE APPLICABLE AND DEEMED NECESSARY BY THE ENGINEER. SHOULD ANY REINFORCING STEEL BE DAMAGED AS A RESULT OF ANY WORK PERFORMED, REPAIR OR REPLACE THE DAMAGED AREA AS DIRECTED.
- ACCORDING TO CURRENT CORING DATA, THE TOP MAT OF THE EXISTING REINFORCING STEEL IS 3.25 INCHES BELOW THE CURRENT SURFACE.
- SEE ROADWAY SUB-SUMMARY FOR CONCRETE BARRIER END SECTION, TYPE D PAYMENT INFORMATION.
- PERFORM PIER COLUMN REPAIRS USING ITEM 519 - PATCHING CONCRETE STRUCTURE.
- ADDITIONAL QUANTITY OF 15 SQUARE YARDS (EACH STRUCTURE) OF ITEM 512 - SEALING OF CONCRETE SURFACES (EPOXY-URETHANE) HAS BEEN ADDED TO TOUCH UP DAMAGED AREAS OF THE EXISTING PARAPETS THAT HAVE PREVIOUSLY BEEN SEALED.
- PREPARE A SECTION 2 FEET WIDE OVER THE LENGTH OF THE BRIDGE DECK, CENTERED OVER THE PROPOSED CONSTRUCTION JOINT, AND SEAL USING ITEM 512 - SEALING CONCRETE BRIDGE DECKS WITH HMWM RESIN.




STRUCTURE DETAILS
 MED-42-3.10 (L/R)
 OVER US 224

SFN	5200962
SFN	5200997
DESIGN AGENCY	DISTRICT 3
ENGINEERING TEAM TWO	
DESIGNER/CHECKER	JLL / KRB
REVIEWER	KAK 7-6-21
PROJECT ID	79761
SUBSET	1 / 2
SHEET	62 / 79

REINFORCING STEEL						
STRUCTURE	BAR MARK	# OF BARS	LENGTH	TYPE	# OF SIDES	WEIGHT
MED-42-3.10L	S601	22	17'-6"	STR.	2	1,157
MED-42-3.10R	S601	22	17'-6"	STR.	2	1,157

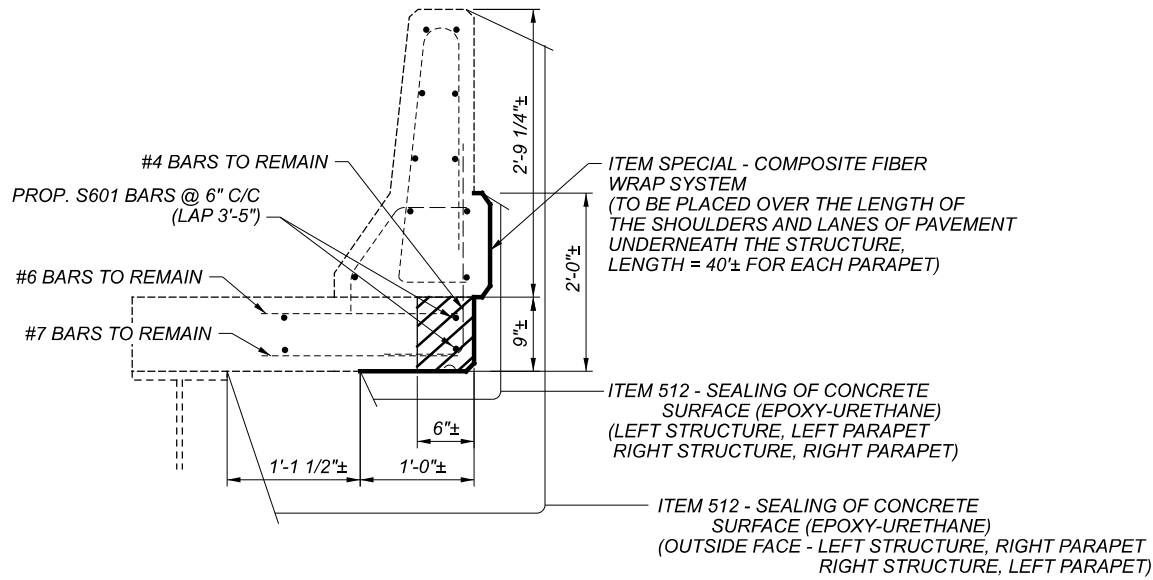

- ITEM 202 - REMOVAL MISC.: DECK OVERHANG
- ITEM 509 - EPOXY COATED REINFORCING STEEL, AS PER PLAN
- ITEM 509 - REINFORCING STEEL, REPLACEMENT OF EXISTING STEEL, AS PER PLAN
- ITEM 511 - CONCRETE, MISC.: CLASS QC SCC CONCRETE, BRIDGE DECK, DECK OVERHANG

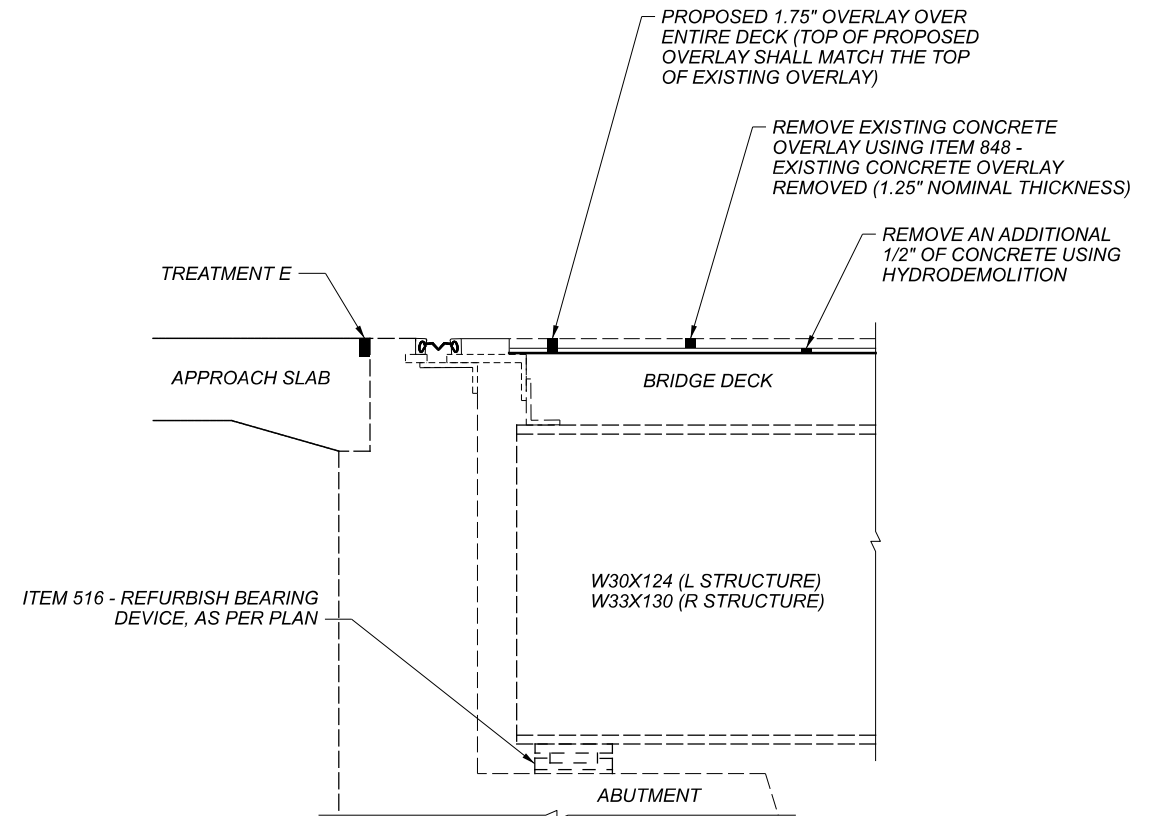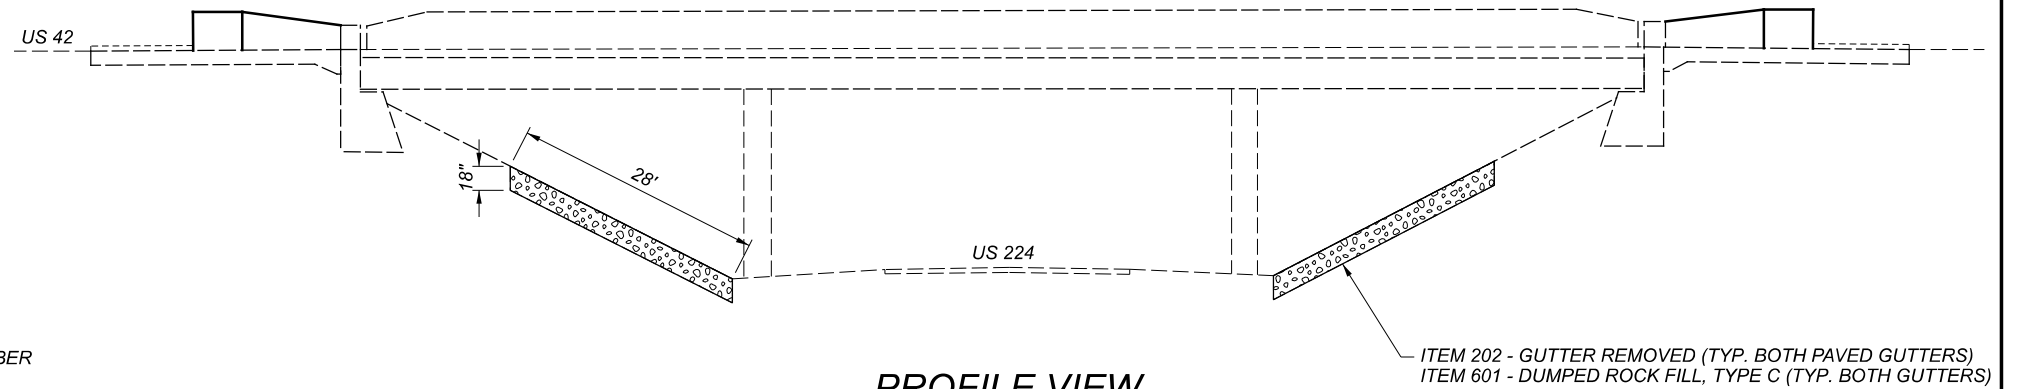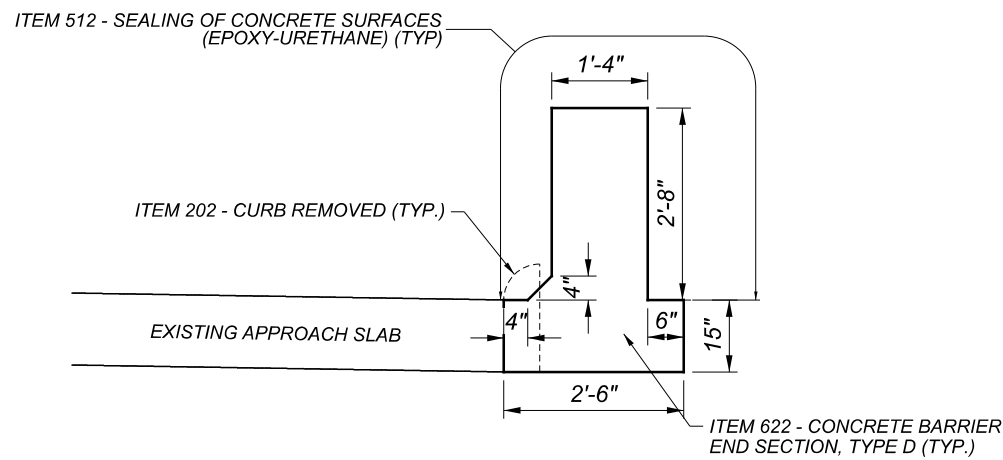

STRUCTURE DETAILS
MED-42-3.10 (L/R)
OVER US 224

SFN 5200962

SFN 5200997

DESIGN AGENCY
DISTRICT 3



ENGINEERING
TEAM TWO

DESIGNER/CHECKER
JLL KRB

REVIEWER
KAK 7-6-21

PROJECT ID
79761

SUBSET	TOTAL
2	2

SHEET	TOTAL
63	79

MED-42-1.89/MED-224-(6.25)(10.45)

MODEL: Details 2 PAPER: SIZE: 17x11 (in.) DATE: 11/17/2021 TIME: 1:06:24 PM USER: ksalay
pwc:\hobol-pw-bentley.com\shahid-pw-02\Documents\01 Active Projects\District 03\Medina\79761\400-Engineering\Structures\SFN_5200962\Sheets\79761_SFN_5200962_SG001.dgn