


# STATE OF OHIO DEPARTMENT OF TRANSPORTATION


## RIC-95-0.00

### WORTHINGTON TOWNSHIP RICHLAND COUNTY

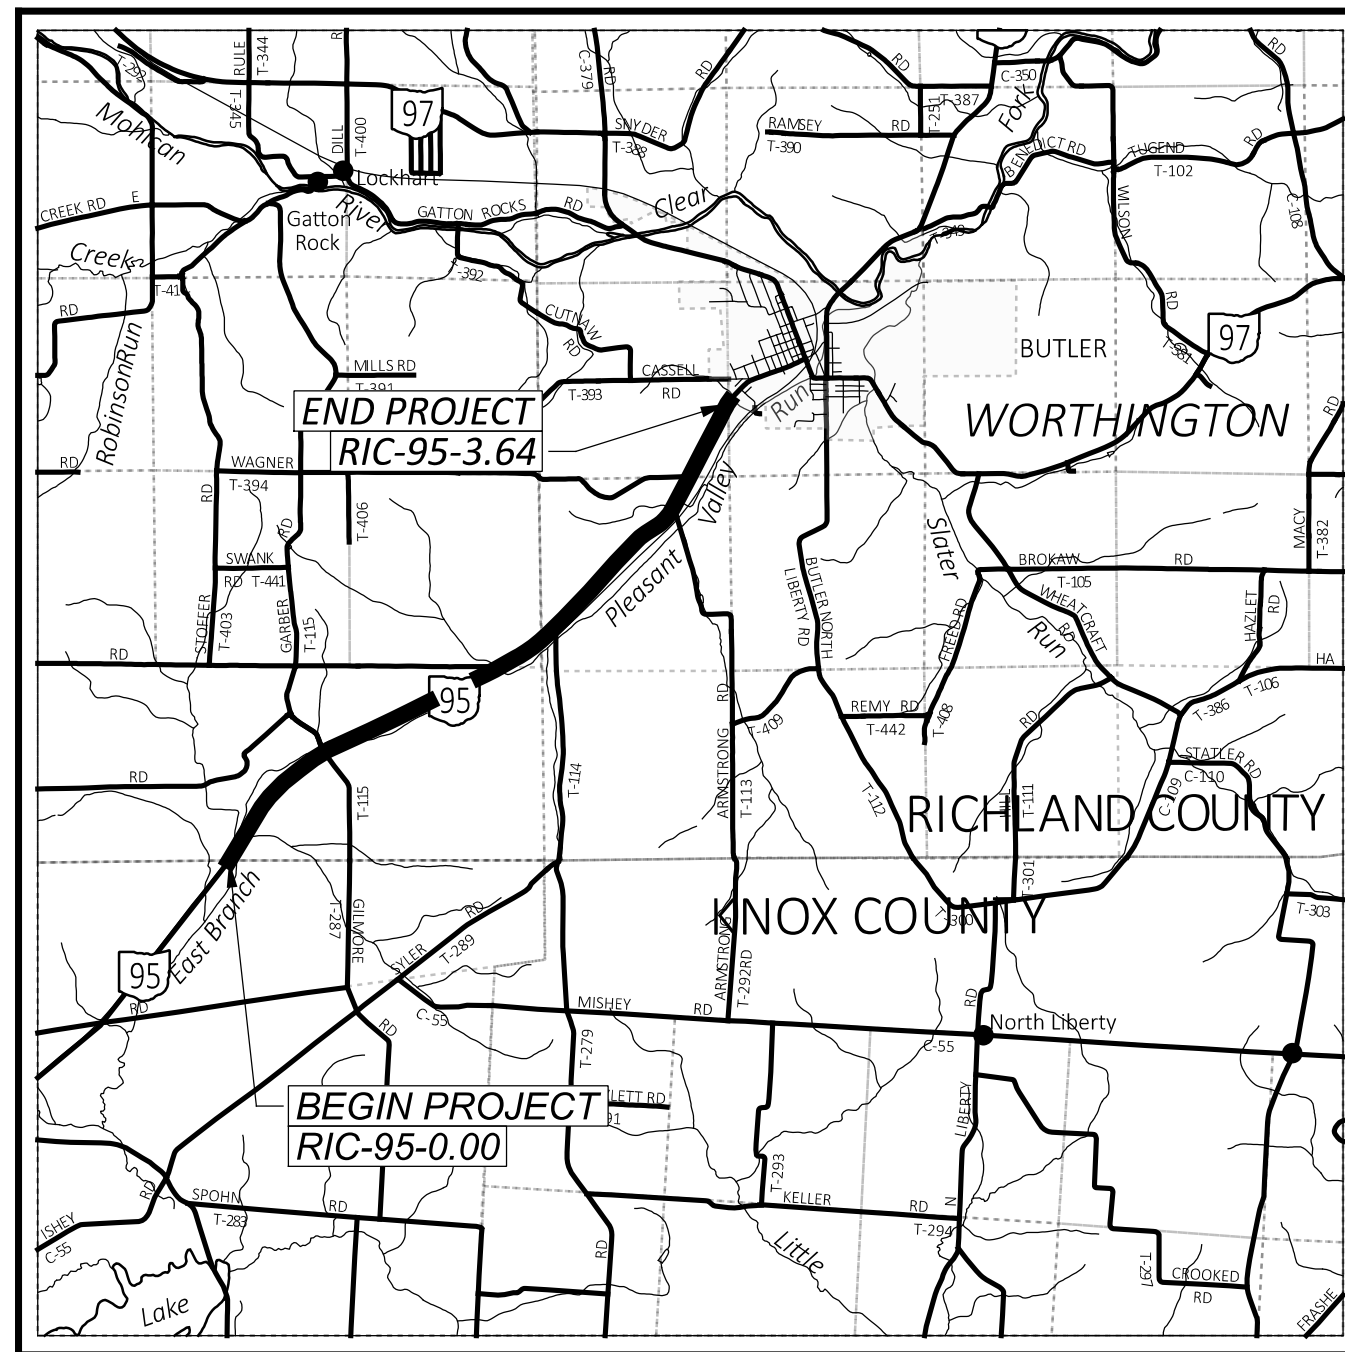

**LOCATION MAP**

LATITUDE: 40° 33' 56" N LONGITUDE: 82° 27' 18" W



PORTION TO BE IMPROVED	
INTERSTATE HIGHWAY	
FEDERAL ROUTES	
STATE ROUTES	
COUNTY & TOWNSHIP ROADS	
OTHER ROADS	

DESIGN DESIGNATION	RIC-95-0.00 TO 3.20	RIC-95-3.20 TO 3.64
CURRENT ADT (2024)	1300	2000
DESIGN YEAR ADT (2036)	1300	2300
DESIGN HOURLY VOLUME (2036)	150	250
DIRECTIONAL DISTRIBUTION	56%	54%
TRUCKS (24 HOUR B&C)	7%	10%
DESIGN SPEED	55 MPH	55 MPH
LEGAL SPEED	55 MPH	55 MPH
DESIGN FUNCTIONAL CLASSIFICATION:	MAJOR COLLECTOR	MAJOR COLLECTOR
NHS PROJECT	NO	NO

**DESIGN EXCEPTIONS**

NONE

**ADA DESIGN WAIVERS**

NONE

**INDEX OF SHEETS:**

TITLE SHEET	1
STRAIGHT LINE DIAGRAM	2
TYPICAL SECTIONS	3
GENERAL NOTES	4 - 7
MAINTENANCE OF TRAFFIC NOTES	8
GENERAL SUMMARY	9
PAVEMENT AND SHOULDER DATA SHEET	10
PAVEMENT MARKINGS AND RPM DATA SHEET	11
GUARDRAIL DETAILS	12
STRUCTURE DETAILS	
STRUCTURE NOTES & ESTIMATED QUANTITIES	13
RIC-95-050	14
MAILBOX FACILITY SHEET	15

**FEDERAL PROJECT NUMBER**

E220500

**RAILROAD INVOLVEMENT**

NONE

**PROJECT DESCRIPTION**

THIS PROJECT INCLUDES AN ASPHALT CONCRETE RESURFACING WITH PAVEMENT REPAIRS FOR STATE ROUTE 95 IN RICHLAND COUNTY. THERE WILL BE GUARDRAIL REPAIRS AND REPLACEMENT, MINOR BRIDGE WORK, PAVEMENT MARKINGS, & OTHER MISCELLANEOUS WORK.

**EARTH DISTURBED AREAS**

PROJECT EARTH DISTURBED AREA:	N/A*
ESTIMATED CONTRACTOR EARTH DISTURBED AREA:	N/A*
NOTICE OF INTENT EARTH DISTURBED AREA:	N/A*

\*MAINTENANCE PROJECT

**2023 SPECIFICATIONS**

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS, CHANGES LISTED IN THE PROPOSAL, AND THE SUPPLEMENTAL SPECIFICATION 800 VERSION INDICATED ON THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

**PLANS PREPARED BY:**



OHIO DEPARTMENT OF  
TRANSPORTATION

DISTRICT THREE ENGINEERING

**MAINTENANCE OF TRAFFIC ENDORSEMENT**

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL NOT REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY AND THAT PROVISIONS FOR THE MAINTENANCE AND SAFETY OF TRAFFIC WILL BE AS SET FORTH ON THE PLANS AND ESTIMATES.

ROBERT WEAVER  
DISTRICT 03 DEPUTY DIRECTOR

JACK MARCHBANKS, PHD  
DIRECTOR, DEPARTMENT OF TRANSPORTATION

STANDARD CONSTRUCTION DRAWINGS						SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
BP-3.1	1/21/22	TC-41.20	10/18/13	DBR-2-73	7/19/22	800-2023	SEE PROPOSAL
BP-3.2	1/18/19	TC-42.20	10/18/13	DBR-3-11	7/15/11	832	7/21/23
BP-4.1	7/19/13	TC-52.10	10/18/13	RM-1.1	1/20/23	843	10/18/19
		TC-52.20	1/15/21				
DM-4.3	1/15/16	TC-61.30	7/19/19				
DM-4.4	1/15/16	TC-65.10	1/17/14				
		TC-65.11	7/15/22				
MT-97.12	1/20/17						
MT-99.20	4/19/19						
MT-101.90	7/17/20						
MT-105.10	1/17/20						

**ENGINEER'S SEAL**

**UNDERGROUND UTILITIES**  
Contact Two Working Days  
Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764  
(Non members must be called directly)

TITLE SHEET

DESIGN AGENCY	DISTRICT 3
ENGINEERING TEAM FOUR	
DESIGNER	JEC
REVIEWER	NRF
PROJECT ID	08-24-23
SHEET	116944
TOTAL	15

RIC-95-0.00

MODEL: Sheet PAPER SIZE: 34x22 (in.) DATE: 10/30/2023 TIME: 10:12:44 AM USER: jcullen1  
pvc:\ohiodot-pw-bentley.com\ohiodot-pw-02\Documents\01 Active Projects\District 03\Richland\116944\400-Engineering\Roadway\Sheets\116944\_GT001.dgn