


CONSOLIDATION TEST REPORT

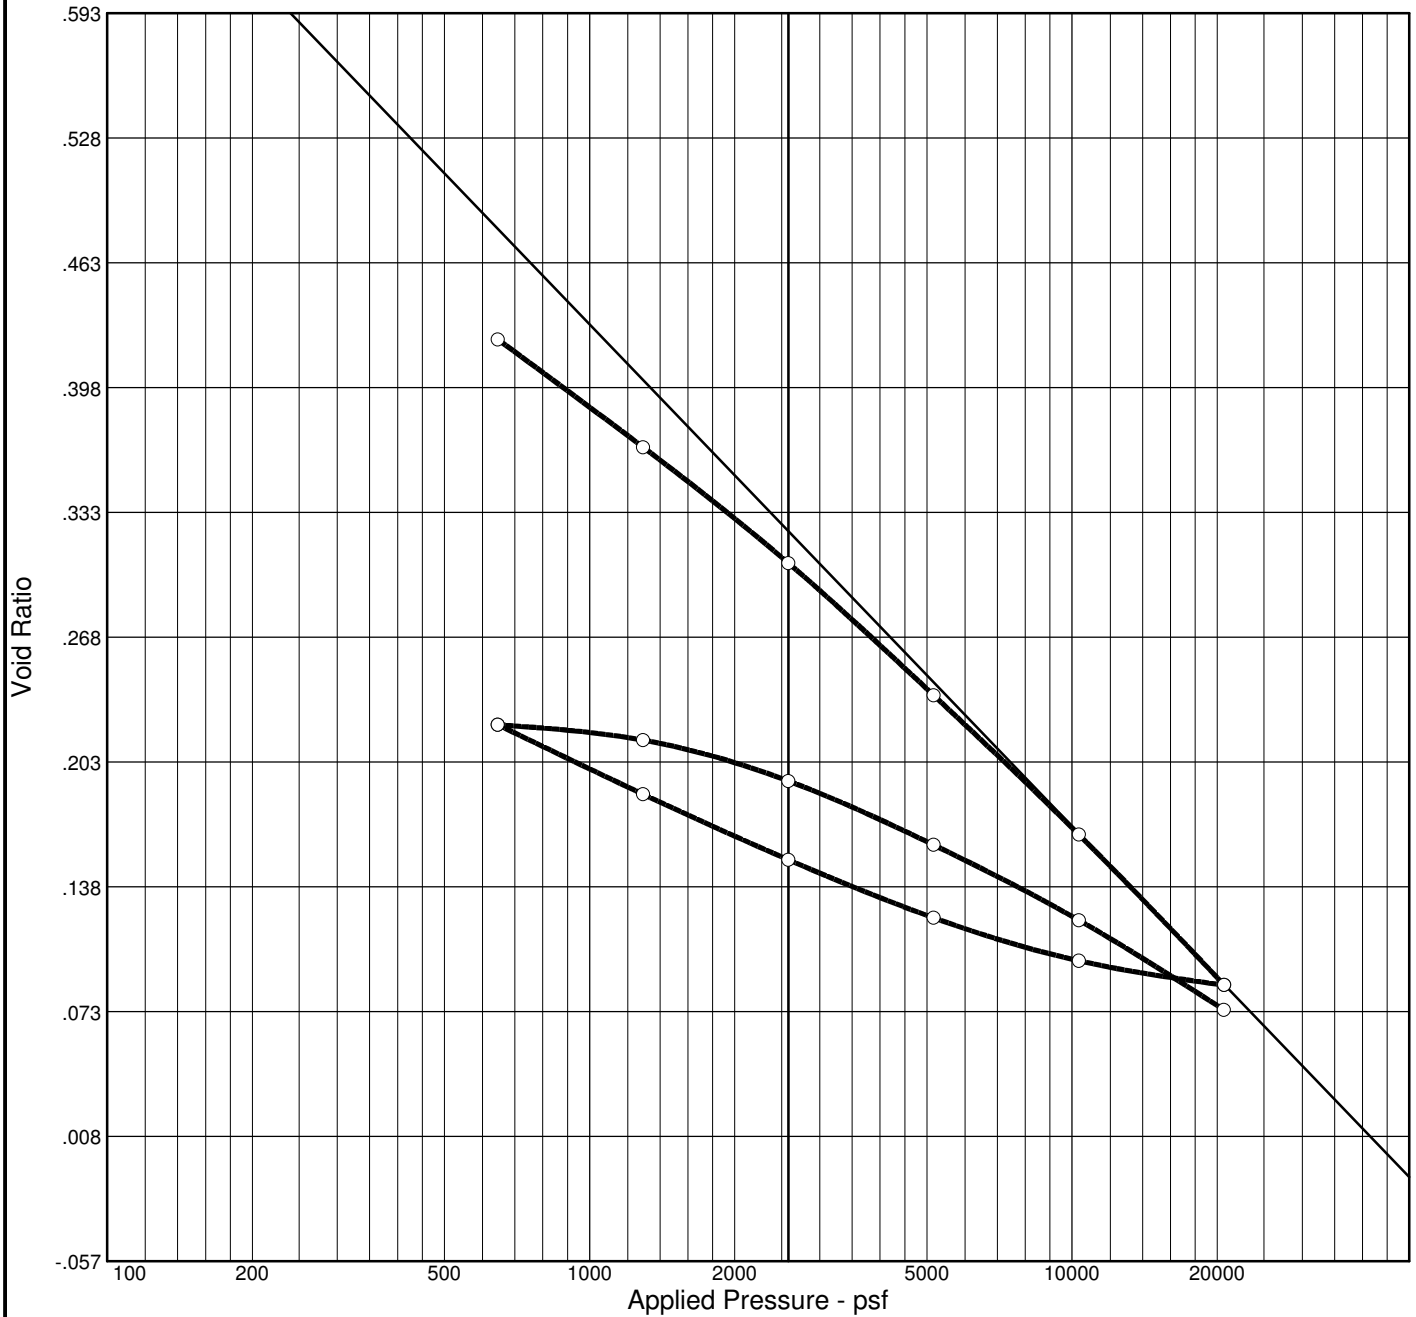

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
81.4 %	20.5 %	101.1	36	17	2.73	CL	A-6(13)	0.687

MATERIAL DESCRIPTION

Lean clay with sand

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:

Source: B-1220

Sample No.: P2

Elev./Depth: 18.0



Figure