


CONSOLIDATION TEST REPORT

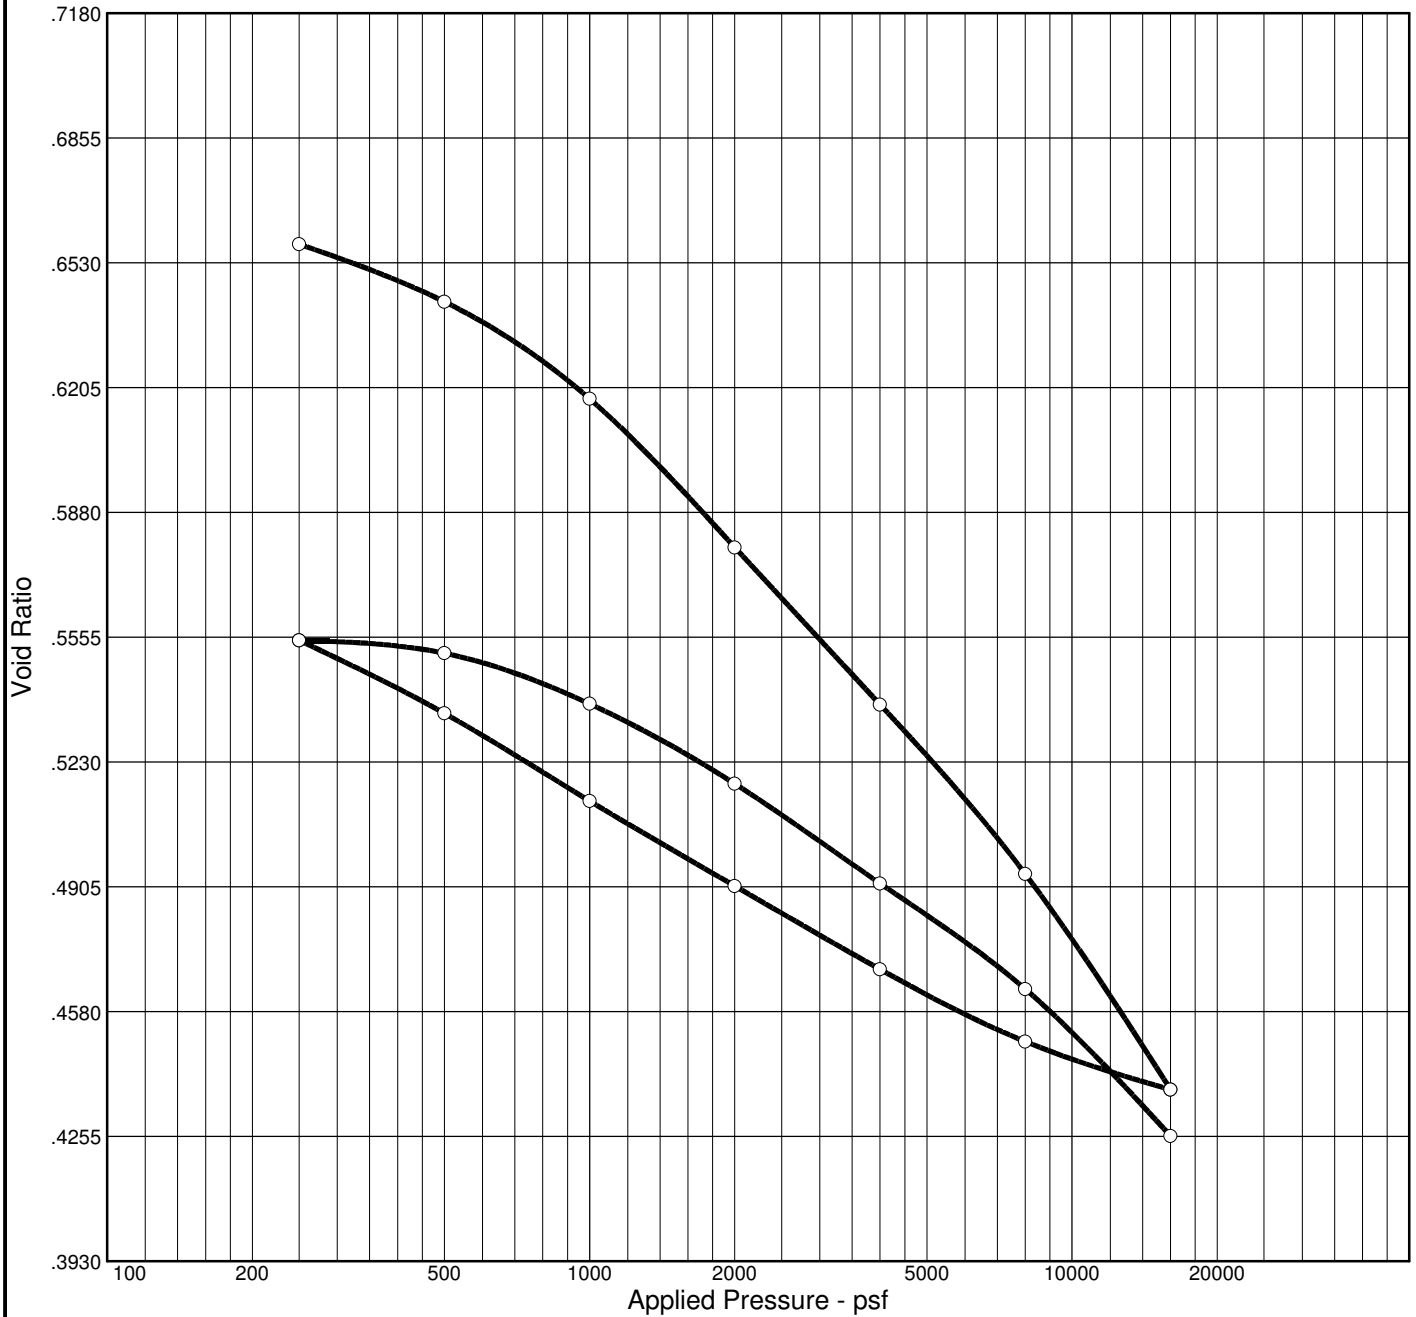

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
98.7 %	24.1 %	102.9	58	34	2.76	CH	A-7-6(39)	0.675

MATERIAL DESCRIPTION

Fat clay

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:

Source: B-1221

Sample No.: P-1

Elev./Depth: 10.0



Figure