


CONSOLIDATION TEST REPORT

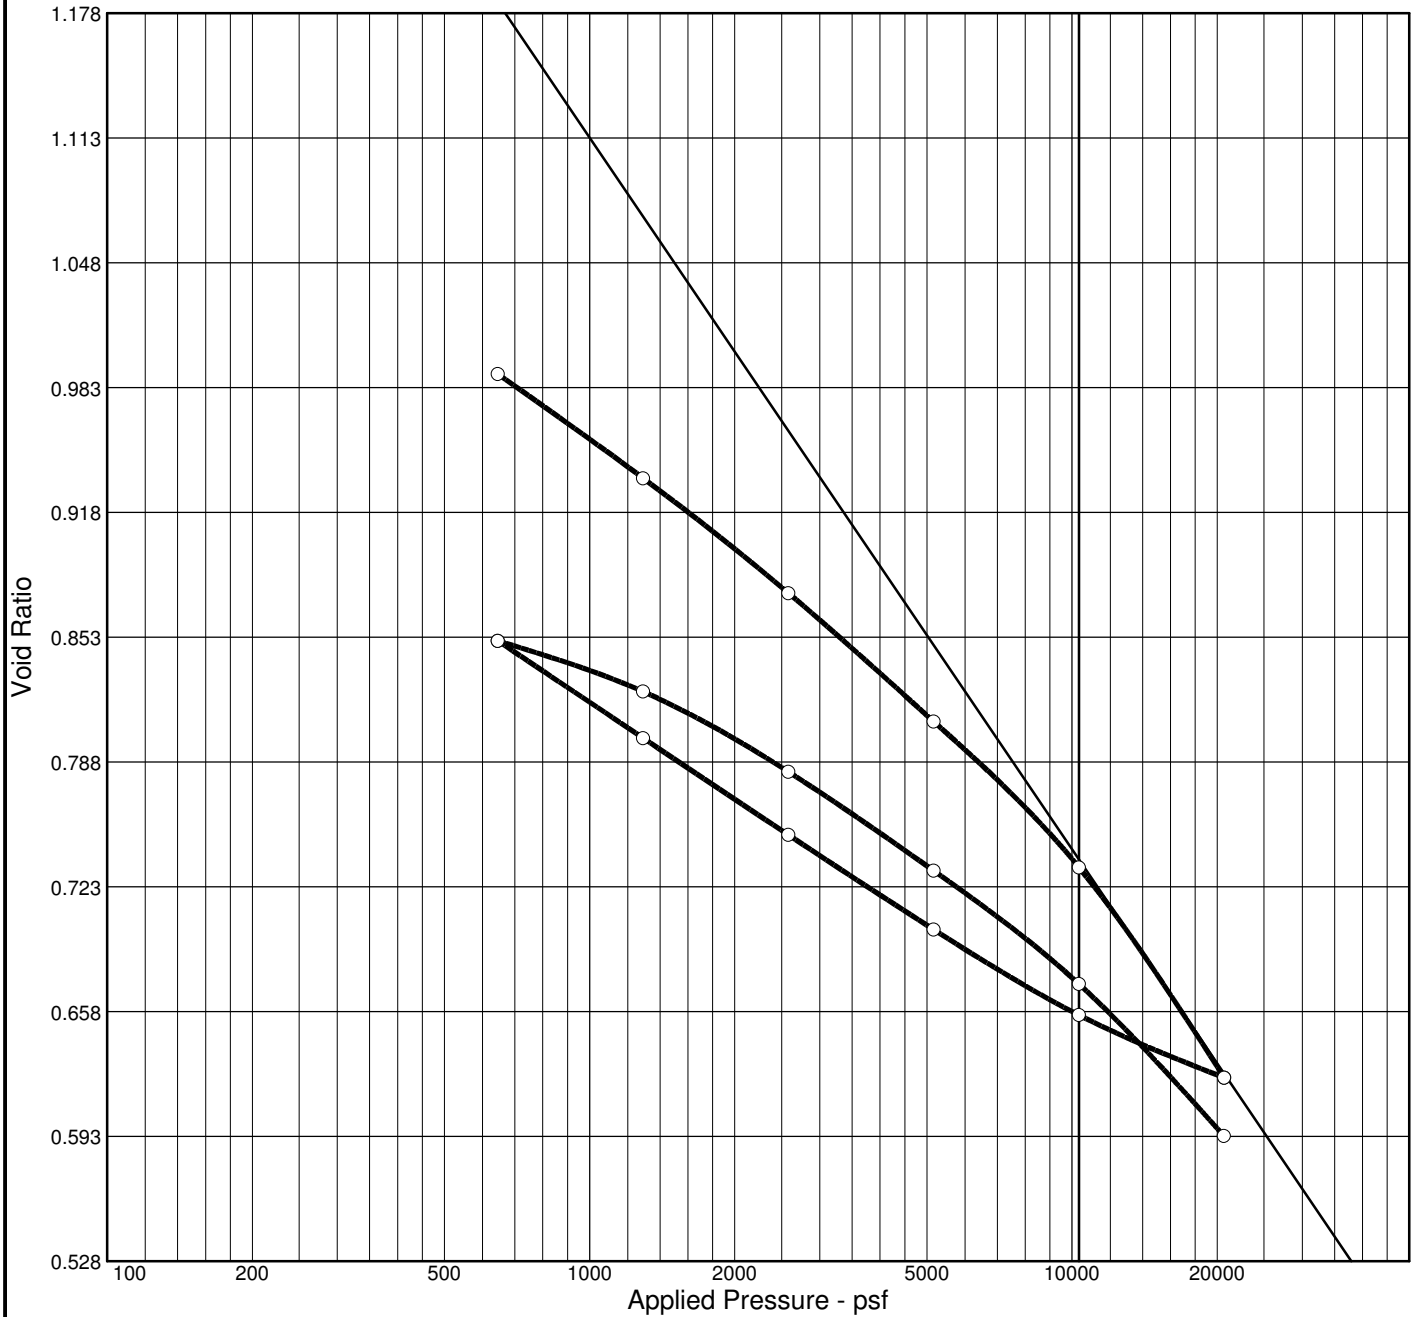

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
100.3 %	40.4 %	82.0	67	41	2.79	CH	A-7-6(48)	1.124

MATERIAL DESCRIPTION

Fat clay

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:

Source: B-1223

Sample No.: P2

Elev./Depth: 18.0



Figure