


CONSOLIDATION TEST REPORT

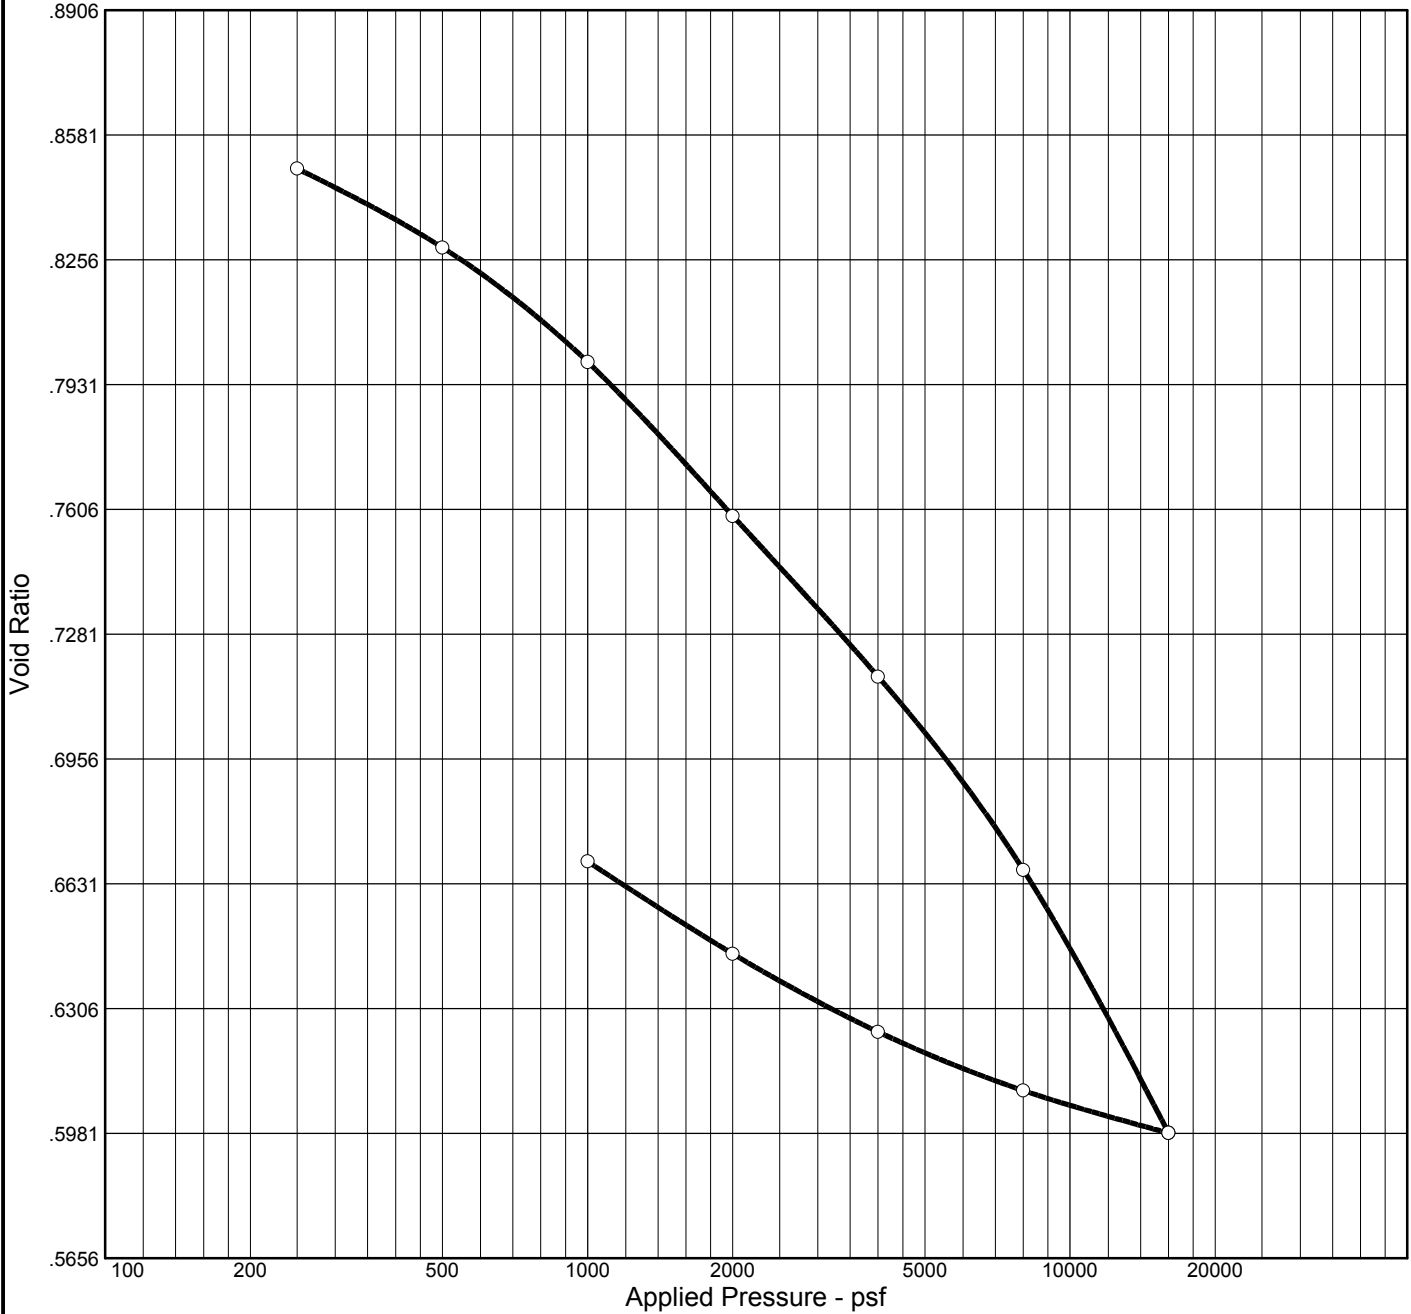

| Natural | | Dry Dens. (pcf) | LL | PI | Sp. Gr. | USCS | AASHTO | Initial Void Ratio |
|------------|----------|-----------------|----|----|---------|------|-----------|--------------------|
| Saturation | Moisture | | | | | | | |
| 93.5 % | 29.6 % | 92.3 | 45 | 21 | 2.78 | CL | A-7-6(19) | 0.880 |

MATERIAL DESCRIPTION

Lean clay

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:
Specific Gravity= 2.78

Source: C-19

Sample No.: P-1b

Elev./Depth: 17.0



Figure