


CONSOLIDATION TEST REPORT

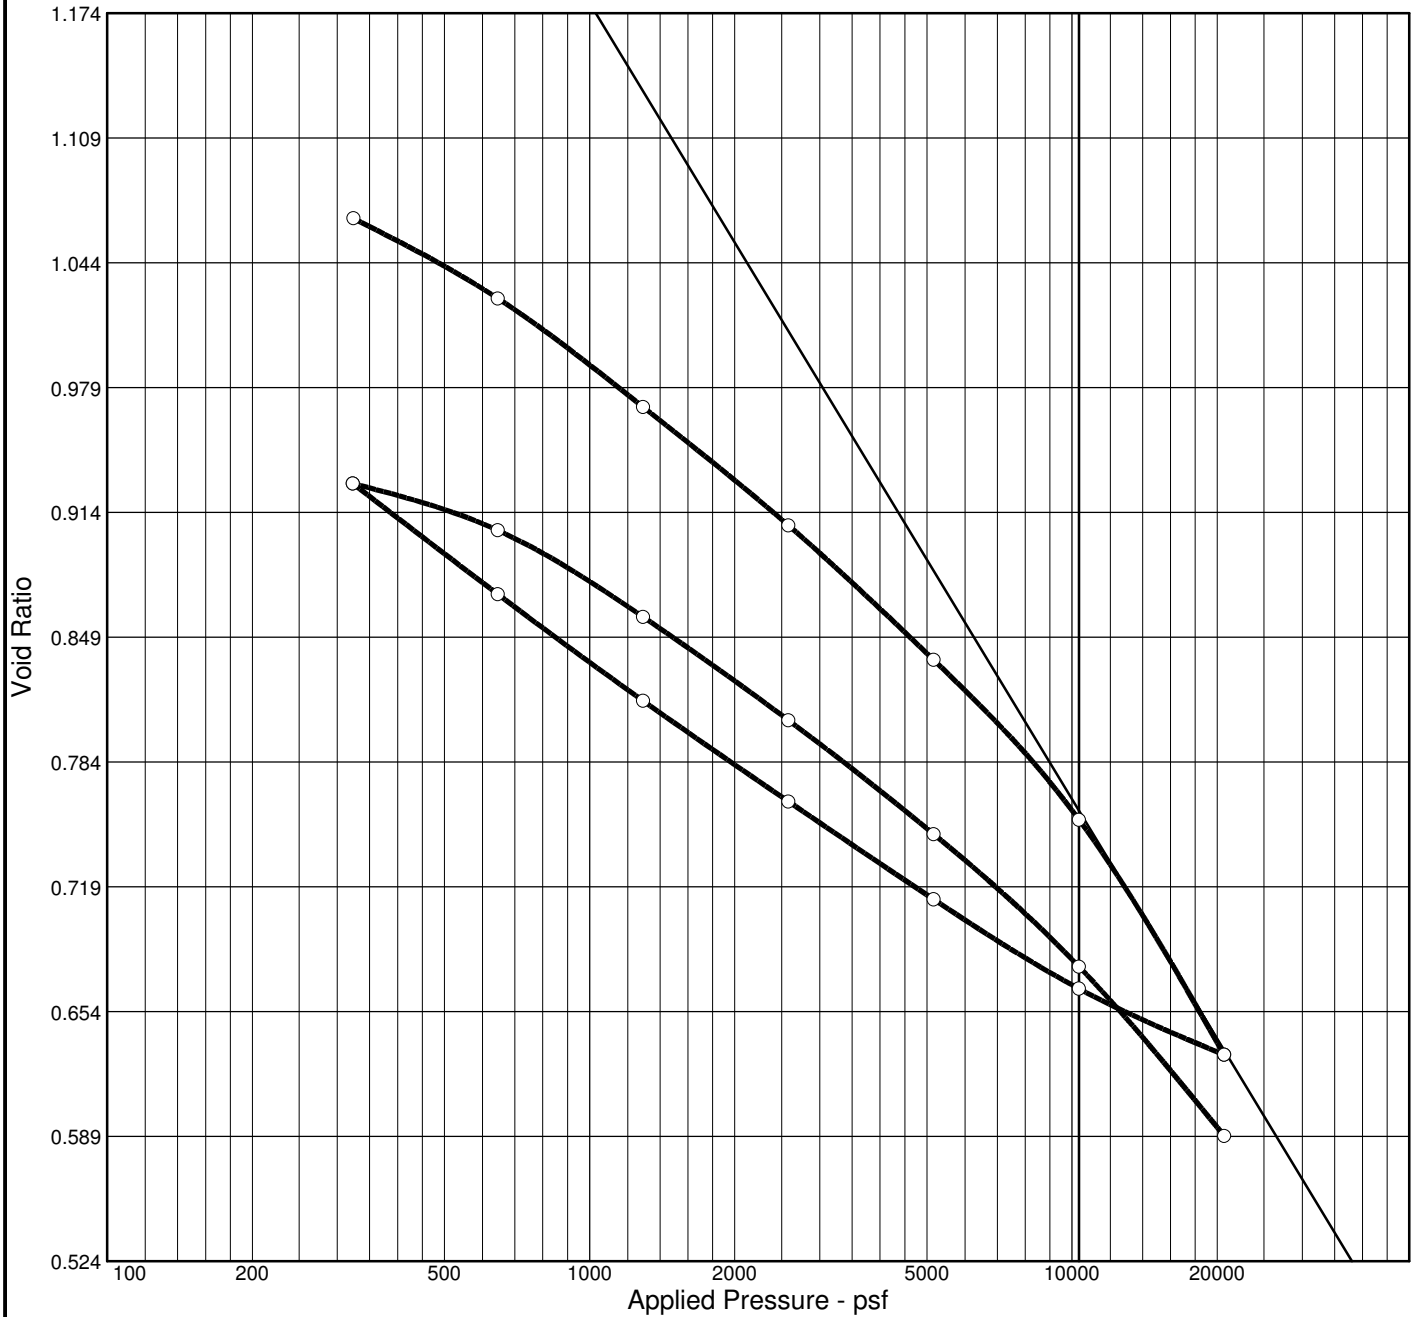

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
95.4 %	38.3 %	81.4	61	36	2.74	CH	A-7-6(41)	1.101

MATERIAL DESCRIPTION

Fat clay

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:

Source: R-351

Sample No.: P-2

Elev./Depth: 22.0



Figure