


CONSOLIDATION TEST REPORT

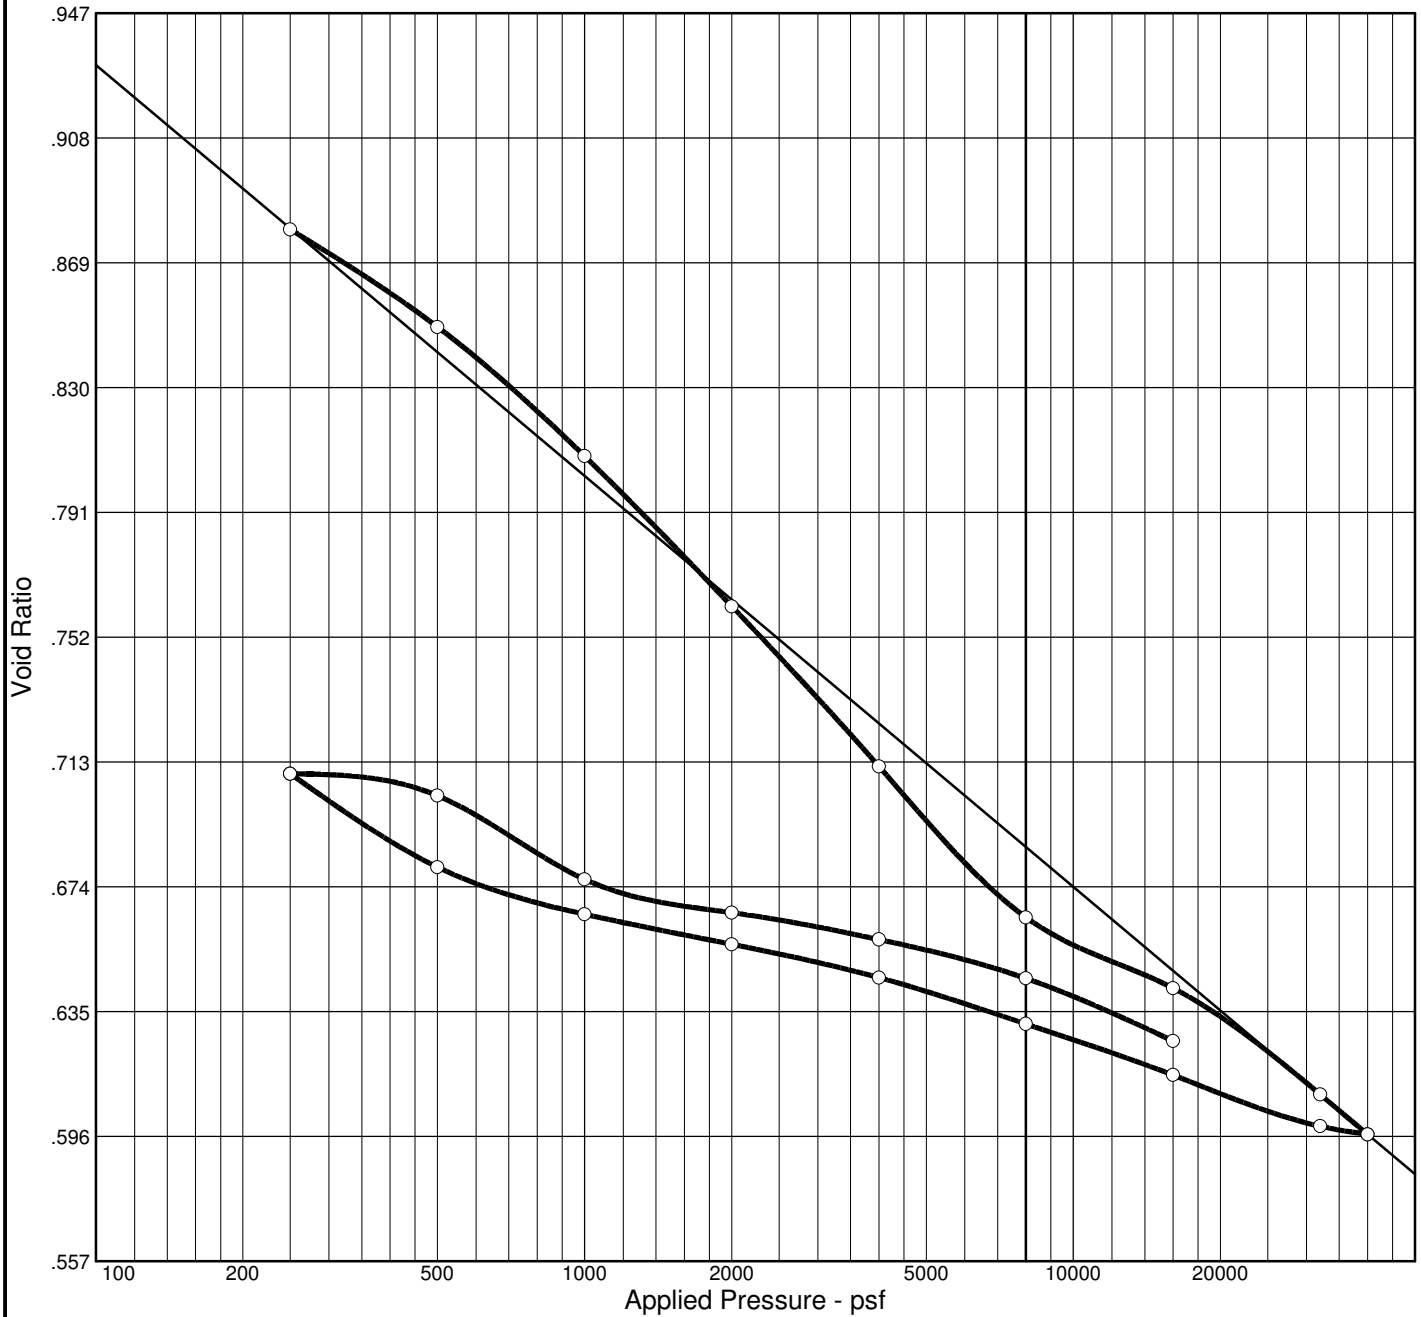

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
96.2 %	31.6 %	90.2	59	32	2.75	CH	A-7-6(37)	0.904

MATERIAL DESCRIPTION

Fat clay

Project No. 0121-
Project: SCI-823-0.00

Client: TranSystems, Inc.

Remarks:

Source: R-466

Sample No.: 8

Elev./Depth: 18.5



Figure