

PAVEMENT REPAIR TYPICAL

ITEM 253 - PAVEMENT REPAIR

THIS ITEM SHALL MEET THE REQUIREMENTS OF ITEM 253, PAVEMENT REPAIR AND THE ABOVE TYPICAL SECTION.

THE ESTIMATED QUANTITIES ARE TO BE CONSIDERED APPROXIMATE. A FINAL FIELD REVIEW WILL BE PERFORMED BY ODOT PRIOR TO CONSTRUCTION AND FINAL LOCATIONS WILL BE GIVEN TO THE CONTRACTOR PRIOR TO CONSTRUCTION.

IF NEEDED, AN AGGREGATE DRAIN SHALL BE INSTALLED IN ACCORDANCE WITH CMS 605.07.


ALL PAVEMENT REPAIRS ARE TO BE COMPLETED PRIOR TO THE PAVING OPERATIONS.

THE ESTIMATED QUANTITIES FROM THIS SHEET HAVE BEEN CARRIED TO THE GENERAL SUMMARY TO BE USED AS DIRECTED BY THE ENGINEER. THE ENGINEER WILL DETERMINE THE SIZE AND LOCATION OF EACH PAVEMENT REPAIR. FINAL PAYMENT FOR THESE ITEMS SHALL BE FOR THE ACCEPTED QUANTITY COMPLETED IN PLACE.

ESTIMATED QUANTITIES

(PART 1)
ITEM 253 - PAVEMENT REPAIR - 214 CU YD

(PART 1)
ITEM 605 - AGGREGATE DRAINS - 428 FT

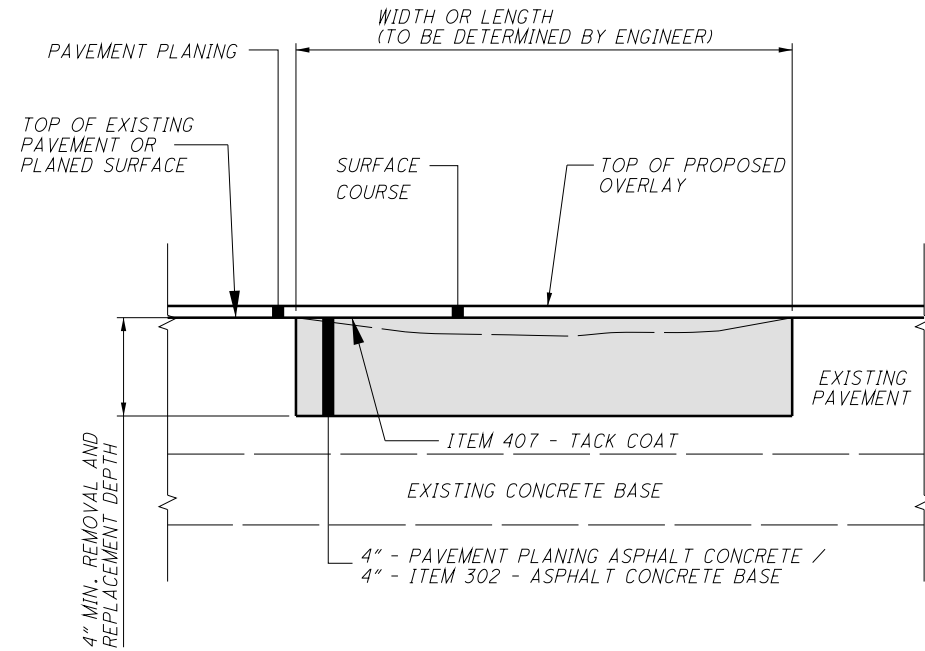

PARTIAL DEPTH PAVEMENT REPAIR TYPICAL

ITEM 251 - PARTIAL DEPTH PAVEMENT REPAIR

PARTIAL DEPTH PAVEMENT REPAIRS SHALL BE 4 INCHES DEEP AND FILLED WITH ITEM 302, ASPHALT CONCRETE BASE, PG64-22. THE ESTIMATED QUANTITY IS TO BE CONSIDERED APPROXIMATE. A FINAL FIELD REVIEW WILL BE PERFORMED BY ODOT AND FINAL LOCATIONS WILL BE GIVEN TO THE CONTRACTOR PRIOR TO CONSTRUCTION.

ALL PARTIAL DEPTH REPAIRS ARE TO BE COMPLETED PRIOR TO THE PAVING OPERATIONS.

THE ESTIMATED QUANTITY IS TO BE USED AS DIRECTED BY THE ENGINEER. THE ENGINEER WILL DETERMINE THE SIZE AND LOCATION OF EACH PAVEMENT REPAIR. FINAL PAYMENT FOR THE ABOVE ITEMS SHALL BE FOR THE ACCEPTED QUANTITY COMPLETED IN PLACE.

ESTIMATED QUANTITIES

(PART 1)
ITEM 251 - PARTIAL DEPTH PAVEMENT REPAIR - 184 CU YD

(TOTALS CARRIED TO GENERAL SUMMARY)