### **Asbestos Demolition Survey Report**

#### PREPARED FOR:

#### **Ohio Department of Transportation – District 6**

FOR THE BRIDGE:

FRA-70-7.95 Wilson Road over I-70 (SFN: 2504308) PID: 105464

**June 2025** 

Submitted by **TRANSYSTEMS CORPORATION** 

**TRANSYSTEMS** 

400 W Nationwide Boulevard, Suite 225 Columbus, Ohio 43215 Tel.: 614.433.7800

Fax: 614.846.2602

#### **EXECUTIVE SUMMARY**

On June 11, 2025, TranSystems' accredited Ohio Asbestos Hazard Evaluation Specialist, Brian Metz Certification # S33716, expires 9/12/2025) conducted an asbestos inspection for the bridge structure (SFN: 2504308) located on North Wilson Road over I-70, 1.04 miles East of I-270 in Columbus, Franklin County, Ohio on behalf of ODOT District 6 for the D06-BR-FY26 (PID: 105464) Bridge Project. The purpose of the survey was to determine the presence, amount, location and condition of friable and non-friable asbestos containing building materials (ACBM). During the survey, all accessible areas of the structure were inspected for suspect ACBM.

The bridge is located on North Wilson Road over I-70, 1.04 miles East of I-270 in Columbus, Franklin County, Ohio. The SFN number is 2504308 and the structure facilitates 2-way traffic on North Wilson Road which is carried over I-70. The structure was constructed in 1973 and saw major reconstruction in 2018. The structure has 4 main spans and is constructed of continuous steel with a concrete deck. The overall length of the structure is 367.7 ft., and the deck area is 29,048 square feet.

#### **Asbestos Sampling**

Laboratory analysis indicated that all the samples collected of suspect material were not asbestos containing.

No further investigation is warranted. In the event additional suspect ACBM is discovered after demolition activities have begun, the contractor should contact a certified asbestos hazard evaluation specialist to conduct bulk sampling of the suspect material and wait for analytical results prior to continuing demolition activities. A Notification of Demolition form should be completed and submitted to the Ohio Environmental Protection Agency at least ten working days prior to demolition activities. A Notification of Demolition form has been partially completed for the structure, and is included in Appendix E.

#### 1.0 INTRODUCTION

On June 11, 2025, TranSystems' accredited Ohio Asbestos Hazard Evaluation Specialist, Brian Metz Certification # S33716, expires 9/12/2025) conducted an asbestos inspection for the bridge structure (SFN: 2504308) located on North Wilson Road over I-70, 1.04 miles East of I-270 in Columbus, Franklin County, Ohio on behalf of ODOT District 6 for the D06-BR-FY26 (PID: 105464) Bridge Project. The purpose of the survey was to determine the presence, amount, location and condition of friable and non-friable ACBM. During the survey, all accessible areas of the structure were inspected for suspect ACBM.

#### 1.1 Limitations of Survey

This Inspection/Sampling Report meets the requirements of Subpart M of the National Emissions Standard for Hazardous Pollutants (NESHAP).

Please note that no asbestos survey can wholly eliminate uncertainty regarding the potential presence of asbestos within a structure. TranSystems has attempted to reduce those uncertainties using standard sampling and analytical procedures. The findings of the report, based on those procedures, do not guarantee that there is no other asbestos within the inspected structures.

#### 2.0 SAMPLING AND ANALYSIS METHODOLOGY

#### 2.1 Sampling Procedures

On June 11, 2025, TranSystems' accredited Ohio Asbestos Hazard Evaluation Specialist, Brian Metz Certification # S33716, expires 9/12/2025) conducted an asbestos inspection for the bridge structure (SFN: 2504308) located on North Wilson Road over I-70, 1.04 miles East of I-270 in Columbus, Franklin County, Ohio on behalf of ODOT District 6 for the D06-BR-FY26 (PID: 105464) Bridge Project. The purpose of the survey was to determine the presence, amount, location and condition of friable and non-friable ACBM. During the survey, all accessible areas of the structure were inspected for suspect ACBM.

Materials visually determined to be suspect were sampled according to the sampling protocol. The following is a summary of the materials noted:

#### **Thermal System Insulation**

No thermal system insulation was observed within the structure.

#### **Surfacing Materials**

No surfacing materials were observed within the structure.

#### **Miscellaneous Materials**

Samples included the following: concrete from the base and the deck and sealer from the deck of the structure.

Sampling was conducted in accordance with OSHA 29 CFR 1910.134, 1910.1001, 1926.58 and AHERA Protocols, as follows:

- A. For each homogeneous area, a minimum of two bulk samples were randomly collected.
- B. During sample collection, the following protocols were followed:
  - a. All non-essential personnel were restricted from the area where the sampling was performed.
  - b. Each sample was misted prior to sampling.
  - c. Each sample was placed in a clear plastic container, which was wet, wiped, sealed and labeled.
  - d. Each sample was identified with an individual sample number using a permanent marker on the sample container.

The location of each sample, with its individual sample number, was recorded on the sample log (Appendix B).

#### C. CHAIN-OF-CUSTODY

A chain-of-custody record accompanied all samples collected. The individually sealed and labeled samples were placed in 1-gallon zip-lock bags, which were then sealed prior to leaving the site. The double-bagged samples were then transported to the laboratory accompanied by a completed chain-of-custody record. A total of 9 bulk samples of suspect ACBM were collected. The samples were transported to SanAir Technologies Laboratory under a chain-of-custody. The chain-of-custody can be found in Appendix C.

#### 2.2 Laboratory Analysis

All samples were relinquished to SanAir Technologies Laboratory, NVLAP accredited (600227-0) laboratory, accompanied with a chain-of-custody record on June 16, 2025. All samples were analyzed by Polarized Light Microscopy (PLM) according to EPA/600/R-93/116 & EPA/600/M4-82/020 methods. The laboratory separated and analyzed the sample layers as necessary. Laboratory analytical results are presented in Appendix D.

#### 3.0 CONCLUSIONS AND RECOMMENDATIONS

#### **Conclusions**

Laboratory analysis indicated that all the samples collected of suspect material were not asbestos containing.

#### **Recommendations**

No further investigation is warranted. In the event additional suspect ACBM is discovered after demolition activities have begun, the contractor should contact a certified asbestos hazard evaluation specialist to conduct bulk sampling of the suspect material and wait for analytical results prior to continuing demolition activities. A Notification of Demolition form should be completed and submitted to the Ohio Environmental Protection Agency at least than working days prior to demolition activities. A Notification of Demolition form has been partially completed for the structure, and is included in Appendix E.

#### 4.0 QUALIFICATIONS OF ENVIRONMENTAL PROFESSIONALS

This section presents the signature of the Asbestos Hazard Evaluation Specialist responsible for the preparation of this asbestos survey.

Brian Metz

Asbestos Hazard Evaluation Specialist

73 n.G. 72

Certification #ES33716

## **Appendices**

# Appendix A: Site Plan, Photographic Log, Credentials

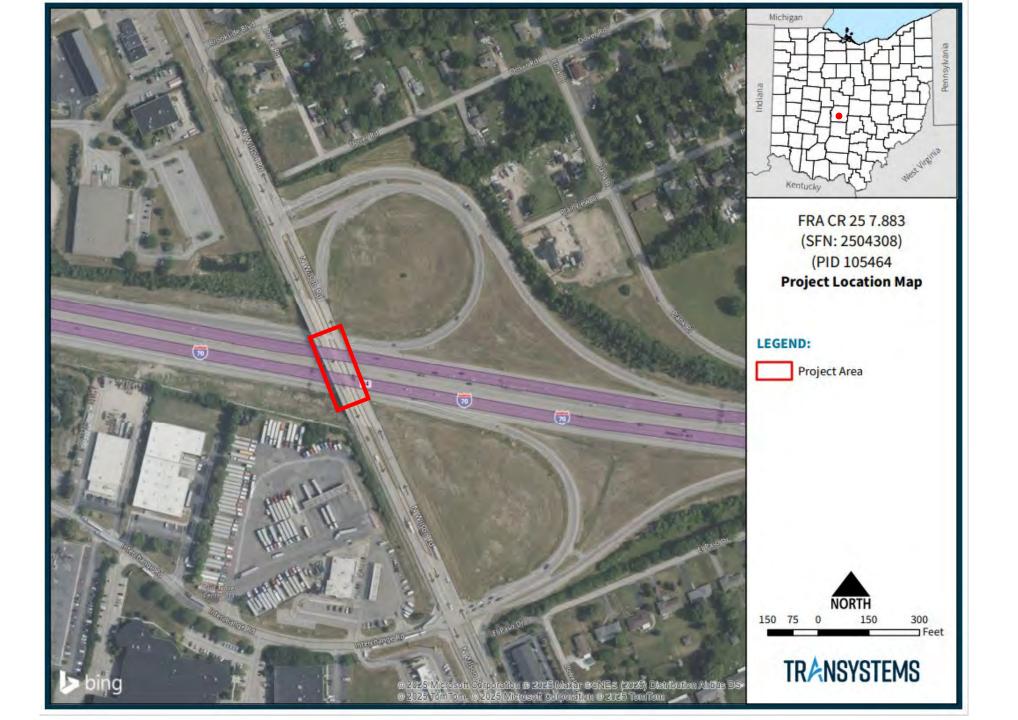




Photo 1:

Eastbound view of FRA CR 25 7.883



Photo 2:

Eastbound view of FRA CR 25 7.883

D06-BR-FY26
(PID: 105464)
Columbus, Franklin County, Ohio

PHOTO DOCUMENTATION

**TRANSYSTEMS** 

Photographer: Max Warech Date of Photograph: June 11, 2025



Photo 3:

Underside of FRA CR 25 7.883



Photo 4:

View of concrete piers

	D06-BR-FY26
	(PID: 105464)
(	Columbus, Franklin County, Ohio

PHOTO DOCUMENTATION

**TRANSYSTEMS** 

Photographer: Max Warech Date of Photograph: June 11, 2025



Photo 5:

Underside of FRA CR 25 7.883



Photo 6:

View of concrete base on underside of FRA CR 25 7.883

D06-BR-FY26
(PID: 105464)
Columbus, Franklin County, Ohio

PHOTO DOCUMENTATION

**TRANSYSTEMS** 

Photographer: Max Warech Date of Photograph: June 11, 2025



Photo 7:

Rocker plate pads



Photo 8:

View of concrete base on underside of FRA CR 25 7.883

(PID: 1	R-FY26 05464) klin County, Ohio	PHOTO DOCUMENTATION		
TRANSYSTEMS	Photographer: Max Warech	<b>Date of Photograph:</b> June 11, 2025	Project Number: P403250047	



Photo 9:

View of deck



Photo 10:

View of concrete barriers on deck

D06-BR-FY26
(PID: 105464)
Columbus, Franklin County, Ohio

PHOTO DOCUMENTATION

**TRANSYSTEMS** 

Photographer: Max Warech Date of Photograph: June 11, 2025



Photo 11:

View of deck



Photo 12:

View of North Wilson Road from Deck

(PID: 1	R-FY26 05464) klin County, Ohio	PHOTO DOCUMENTATION		
TRANSYSTEMS	Photographer: Max Warech	Date of Photograph: June 11, 2025	Project Number: P403250047	



Photo 13: Median on deck



Photo 14: View from median on deck

(PID: 1	R-FY26 05464) klin County, Ohio	PHOTO DOCUMENTATION		
TRANSYSTEMS	Photographer: Max Warech	<b>Date of Photograph:</b> June 11, 2025	Project Number: P403250047	



Photo 15:

Sealant on median and deck



Photo 16:

View of expansion joint from deck

D06-BR-FY26
(PID: 105464)
Columbus, Franklin County, Ohio

PHOTO DOCUMENTATION

**TRANSYSTEMS** 

Photographer: Max Warech Date of Photograph: June 11, 2025

# State of Ohio Environmental Protection Agency Asbestos Program

Asbestos Hazard Evaluation Specialist

Brian

TranSystems
Ohio Environmental
West Nationwide Blvd Suite 225
Columbus OH 43215

Certification Number Expiration Date ES33716 9/12/25



DOB: 10/15/73

Card not Valid
if Altered

# Appendix B: Bulk Sample Log

ASBESTOS BULK INSPECTION LOG D06-BR-FY26					
Client:	ODOT District 6/Stone	Date:	6/11/2025		
Project:	D06-BR-FY26	Collector:	B. Metz		
Address:	North Wilson Road, IR-70	Job #:	403250046		
City, State:	Columbus, Franklin County, Ohio	 Lab #:	25026833		

HA	FIELD ID	SAMPLE LOCATION	SAMPLE DESCRIPTION	FR	COND	AMOUNT	RESULTS	
	1-1	Concrete Base		Yes	Fair	8,456.32 Sq Ft		
1	1-2	Concrete Base	Concrete	Yes	Fair		Negative	
	1-3	Concrete Base		Yes	Fair			
	2-1	Deck Sealer		No	Fair	2,489.1 Ln Ft	Negative	
2	2-2	Deck Sealer	Sealant	No	Fair			
	2-3	Deck Sealer		No	Fair			
	3-1	Concrete Deck		Yes	Fair			
3	3-2	Concrete Deck	Concrete	Yes	Fair	29,048 Sq Ft	Negative	
	3-3	Concrete Deck		Yes	Fair			

# Appendix C: Chain of Custody



1551 Oakbridge Dr. STE B Powhatan, VA 23139 804.897.1177 / 888.895.1177 Fax 804.897.0070

Asbestos Chain of Custody Form 140, Rev 1, 1/20/2017

25 038805

SanAir ID Number

sanair.com Collect by: B. Metz TranSystems Corporation Project #: Company: Project Name: FRA 70-7.95 614-433-7800 400 W Nationwide Blvd Phone #: Address: Date Collected: 6/11/2025 614-583-3163 Columbus, OH 43215 City, St., Zip: Email: mbwarech@gftinc.com State of Collection: OH 3782 P.O. Number: Account#: Soil Bulk Air PCM NIOSH 7400 ABSE PLM EPA 600/R-93/116 (Qual.) PLM EPA 600/R-93/116 ABA ABB OSHA w/ TWA\* ABA-2 Vermiculite & Soil Positive Stop PLM CARB 435 (LOD <1%) ABSP **ABTEM** TEM AHERA PLM EPA 400 Point Count ABEPA PLM CARB 435 (LOD 0.25%) ABSP1 TEM NIOSH 7402 ABATN PLM EPA 1000 Point Count ABB1K PLM CARB 435 (LOD 0.1%) TEM Level II ABSP2 ABT2 PLM EPA NOB\*\* ABBEN Other: ABBCH TEM Chatfield\*\* Dust ABWA TEM Wipe ASTM D-6480 ABBTM TEM EPA NOB\*\* New York ELAP TEM Microvac ASTM D-5755 PLM EPA 600/M4-82-020 **ABDMV** PLM NY ABQ PLM Qualitative ABEPA2 NY ELAP 198.1 \*\* Available on 24-hr. to 5-day TAT NY ELAP 198.6 PLM NOB ABENY Other Matrix Water NY ELAP 198.4 TEM NOB **ABBNY** ABHE EPA 100.2 24 HR □ Turn Around 6 HR (8HR TEM) □ 12 HR □ 3 HR (4 HR TEM) □ Times ☐ 5 Days 3 Days ☐ 4 Days ☐ 2 Days

Sample #	Sample Identification/Location	Volume or Area	Sample Date	Flow Rate*	Start – Stop Time*
HA-1-1	Concrete Base		6/11/25		
HA-1-2	Concrete Base		6/11/25		1.
HA-1-3	Concrete Base		6/11/25		
HA-2-1	Deck Sealer		6/11/25		
HA-2-2	Deck Sealer		6/11/25		
HA-2-3	Deck Sealer		6/11/25		
HA-3-1	Concrete Deck		6/11/25		
HA-3-2	Concrete Deck		6/11/25		
HA-3-3	Concrete Deck		6/11/25		
	<u> </u>				

Relinquished by	Date	Time	Received by	Date	Time
Brian Metz	Dute		RMB	JUN 1 7 2025	10:35000

If no technician is provided, then the primary contact for your account will be selected. Unless scheduled, the turnaround time for all samples received after 3 pm EST Friday will begin at 8 am Monday morning. Weekend or holiday work must be scheduled ahead of time and is charged for rush turnaround time. SanAir covers Standard Overnight FedEx shipping. Shipments billed to SanAir with a faster shipping rate will result in additional charges.

Page 1 of 2

## Appendix D: Laboratory Analysis Results



# The Identification Specialists

Analysis Report prepared for TranSystems Corporation

Report Date: 6/18/2025

**Project Name: FRA 70-7.95** 

SanAir ID#: 25038805



NVLAP LAB CODE 600227-0

11709 Chesterdale Road, Cincinnati, Ohio 45246 888.895.1177 | 513.438.6066 | LabReports@SanAir.com | SanAir.com



SanAir ID Number
25038805
FINAL REPORT
6/18/2025 5:48:27 PM

Name: TranSystems Corporation Address: 400 W Nationwide Blvd

225

Columbus, OH 43215

Phone: 614-433-7800

Project Number: P.O. Number:

Project Name: FRA 70-7.95 Collected Date: 6/11/2025

Received Date: 6/17/2025 10:35:00 AM

Dear Brian Metz,

We at SanAir would like to thank you for the work you recently submitted. The 9 sample(s) were received on Tuesday, June 17, 2025 via FedEx. The final report(s) is enclosed for the following sample(s): HA-1-1, HA-1-2, HA-1-3, HA-2-1, HA-2-3, HA-3-1, HA-3-3.

These results only pertain to this job and should not be used in the interpretation of any other job. This report is only complete in its entirety. Refer to the listing below of the pages included in a complete final report.

Sincerely,

Maureen Y. Haley

Asbestos Laboratory Manager SanAir Technologies Laboratory

Marcan y. Skales

Final Report Includes:

- Cover Letter

- Analysis Pages

- Disclaimers and Additional Information

#### Sample conditions:

- 9 samples in Good condition.



SanAir ID Number
25038805
FINAL REPORT
6/18/2025 5:48:27 PM

Name: TranSystems Corporation Address: 400 W Nationwide Blvd

225

Columbus, OH 43215

Phone: 614-433-7800

Project Number: P.O. Number:

Project Name: FRA 70-7.95 Collected Date: 6/11/2025

Received Date: 6/17/2025 10:35:00 AM

Analyst: Pinkerton, Sid

#### Asbestos Bulk PLM EPA 600/R-93/116

	Stereoscopic	Con	ponents	
SanAir ID / Description	Appearance	% Fibrous	% Non-fibrous	Asbestos Fibers
HA-1-1 / 25038805-001 Concrete Base	Grey Non-Fibrous Homogeneous		100% Other	None Detected
HA-1-2 / 25038805-002 Concrete Base	Grey Non-Fibrous Homogeneous		100% Other	None Detected
HA-1-3 / 25038805-003 Concrete Base	Grey Non-Fibrous Homogeneous		100% Other	None Detected
HA-2-1 / 25038805-004 Deck Sealer	Black Non-Fibrous Homogeneous		100% Other	None Detected
HA-2-2 / 25038805-005 Deck Sealer	Black Non-Fibrous Homogeneous		100% Other	None Detected
HA-2-3 / 25038805-006 Deck Sealer	Black Non-Fibrous Homogeneous		100% Other	None Detected
HA-3-1 / 25038805-007 Concrete Deck	Grey Non-Fibrous Homogeneous		100% Other	None Detected
HA-3-2 / 25038805-008 Concrete Deck	Grey Non-Fibrous Homogeneous		100% Other	None Detected
HA-3-3 / 25038805-009 Concrete Deck	Grey Non-Fibrous Homogeneous		100% Other	None Detected

Analyst: Sidney Hirberton

Approved Signatory:

Analysis Date: 6/17/2025

Date: 6/18/2025

#### **Disclaimer and Additional Information**

This report is the sole property of the client named on the SanAir Technologies Laboratory, Inc. (SanAir) chain-of-custody (COC). Results in the report are confidential information intended only for the use by the client named on the COC. Neither results nor reports will be discussed with or released to any third party without our client's written permission to maintain client confidentiality. The final report cannot be reproduced, except in full, without written authorization from SanAir to assure that parts of the report are not taken out of context. This report and any information contained within shall not be edited, altered, or modified in any way by any persons or agencies receiving, viewing, distributing, or otherwise possessing a copy of this final report. The laboratory reserves the right to perform amendments to any finalized report, of which shall supersede and make obsolete any previous editions. Such changes, modifications, additions, or deletions shall be effective immediately upon notice thereof, which may be given by means including, but not limited to, posting on the SanAir client portal website, electronic or conventional mail, or by any other means. The information provided in this report applies only to the samples submitted in the condition they were received at the laboratory and is relevant only for the date, time, and location of sampling. Samples were received in good condition unless otherwise noted on the report. The accuracy of the results is dependent upon the client's sampling procedure and information provided to the laboratory by the client on the COC, which includes the project name, project number, P.O. number, sample collection dates, special instructions, samples collected by, sample numbers, sample identifications/location, sample type, selected analysis type, and total area or volume that may affect the validity of the results. SanAir assumes no responsibility for the sampling procedure and will provide evaluation reports based solely on the sample and information provided by the client. SanAir assumes no responsibility or liability for the manner in which results are used or interpreted. This report does not constitute and shall not be used to claim product, process, system, or person certification, approval, or endorsement by NVLAP, NIST, NELAC, AIHA LAP, LLC or any other agency of the U.S. government; all or some tests contained in this report may not be accredited by every local, state, and federal regulatory agency. Refer to the SanAir website at www.sanair.com for copies of current certificates and scopes of various accreditations, certifications, and licenses or contact the laboratory at iaq@sanair.com for inquiries regarding the status or scope of an accreditation or certification.

Fibers smaller than 5-microns cannot be seen with this method due to scope limitations. Polarized- light microscopy is not consistently reliable in detecting asbestos in floor covering and similar non-friable organically bound materials. Quantitative transmission electron microscopy is currently the only method that can be used to determine if this material can be considered or treated as non-asbestos containing. Samples are held for a period of 60 days.

Asbestos Accreditations, Certifications, and Licenses
National Voluntary Laboratory Accreditation Program (NVLAP) Lab Code 600227-0
State of Connecticut Department of Public Health Registration Number: PH-0817
State of Rhode Island Department of Health, Certification Number: PLM00144, TEM00144
State of West Virginia Bureau for Public Health, Analytical Laboratory Number: LT000637
Texas Department of State Health Services License Number: 300510



1551 Oakbridge Dr. STE B Powhatan, VA 23139 804.897.1177 / 888.895.1177 Fax 804.897.0070

Asbestos Chain of Custody Form 140, Rev 1, 1/20/2017

25 038805

SanAir ID Number

sanair.com Collect by: B. Metz TranSystems Corporation Project #: Company: Project Name: FRA 70-7.95 614-433-7800 400 W Nationwide Blvd Phone #: Address: Date Collected: 6/11/2025 614-583-3163 Columbus, OH 43215 City, St., Zip: Email: mbwarech@gftinc.com State of Collection: OH 3782 P.O. Number: Account#: Soil Bulk Air PCM NIOSH 7400 ABSE PLM EPA 600/R-93/116 (Qual.) PLM EPA 600/R-93/116 ABA ABB OSHA w/ TWA\* ABA-2 Vermiculite & Soil Positive Stop PLM CARB 435 (LOD <1%) ABSP **ABTEM** TEM AHERA PLM EPA 400 Point Count ABEPA PLM CARB 435 (LOD 0.25%) ABSP1 TEM NIOSH 7402 ABATN PLM EPA 1000 Point Count ABB1K PLM CARB 435 (LOD 0.1%) TEM Level II ABSP2 ABT2 PLM EPA NOB\*\* ABBEN Other: ABBCH TEM Chatfield\*\* Dust ABWA TEM Wipe ASTM D-6480 ABBTM TEM EPA NOB\*\* New York ELAP TEM Microvac ASTM D-5755 PLM EPA 600/M4-82-020 **ABDMV** PLM NY ABQ PLM Qualitative ABEPA2 NY ELAP 198.1 \*\* Available on 24-hr. to 5-day TAT NY ELAP 198.6 PLM NOB ABENY Other Matrix Water NY ELAP 198.4 TEM NOB **ABBNY** ABHE EPA 100.2 24 HR □ Turn Around 6 HR (8HR TEM) □ 12 HR □ 3 HR (4 HR TEM) □ Times ☐ 5 Days 3 Days ☐ 4 Days ☐ 2 Days

Sample #	Sample Identification/Location	Volume or Area	Sample Date	Flow Rate*	Start – Stop Time*		
HA-1-1	Concrete Base		6/11/25				
HA-1-2	Concrete Base		6/11/25		1.		
HA-1-3	Concrete Base		6/11/25				
HA-2-1	Deck Sealer		6/11/25				
HA-2-2	Deck Sealer		6/11/25				
HA-2-3	Deck Sealer		6/11/25				
HA-3-1	Concrete Deck		6/11/25				
HA-3-2	Concrete Deck		6/11/25				
HA-3-3	Concrete Deck		6/11/25				

Relinquished by	Date	Time	Received by	Date	Time		
Brian Metz	Dute		RMB	JUN 1 7 2025	10:35000		

If no technician is provided, then the primary contact for your account will be selected. Unless scheduled, the turnaround time for all samples received after 3 pm EST Friday will begin at 8 am Monday morning. Weekend or holiday work must be scheduled ahead of time and is charged for rush turnaround time. SanAir covers Standard Overnight FedEx shipping. Shipments billed to SanAir with a faster shipping rate will result in additional charges.

Page 1 of 2

# Appendix E: Ohio EPA Notification of Demolition Form



## Notification of Demolition and Renovation/Abatement Section 1: General Information

Division of Air Pollution Control

Work on projects cannot begin until 10 working days after a COMPLETE original notification form, <u>including payment</u>, is submitted to Ohio EPA. Instructions and a worksheet for fee calculation are available at *epa.ohio.gov/asbestos*. This form can be completed, and payment made, at *ebiz.epa.ohio.gov*. Questions? *asbestos@epa.ohio.gov* or (614) 466-0061.

Ohio EPA Use C	Only Notification #:		Postmark	ed:	/ /		Received	: /	/		□ на	nd-Delive	ed
1) Notification Information (Check all that apply)													
Original	ginal Revision # (count): Emergency Annual Cancellation Project County: Franklin												
☐ NESHAP Re	sidential Exemption												
2) Owner, As	bestos Abatement Contractor,	Billing and Fire D	epartment I	nformat	tion							Revi	sed?
Owner													
Name: Ohio	Department of Transpo	rtation - Dist	rict 6						Is t	nis a cor	npany?	Yes 🗌	No
Address: 400 E William Street Contact Person:													
city: Delawa	re			State: O	Н			z	zip: 43015 -				
Email:				Phone: ( 740 ) 833 - 8000 Fax					ax: ( ) -				
Asbestos Abate	ement Contractor (if applicable)												
Name:					Licer	se #: AC	:		E	xpiratio	n Date:	/ /	
Address:					Co	ntact Pe	rson:						
City:				State:				z	ip:	-			
Email:				Phone: (	( )	-	-	F	ax: (	)	-		
Billing Contact	(Entity paying for original notific	cation)											
Is this contact a	associated with the \( \square\) Owner,	Asbestos Ab	atement Co	ntractor,	, or 🔲	Demoliti	ion Contractor	r (if not	installa	tion)?			
Address:					Co	ntact Pe	rson:						
City:				State:				z	ip:	-			
Email:				Phone: (	( )	-	-	F	ax: (	)	-		
Fire Departmen	nt (if applicable)												
Name:													
Address:					Co	ntact Pe	rson:						
City:				State:				Z	ip:	-			
Email:				Phone: (	( )	-	-	F	ax: (	)	-		
3) Ohio Asbe	stos Hazard Evaluation Speciali	st and Evaluation	Procedure	1				ı				Revi	sed?
Evaluation Spe	cialist: Brian Metz			C	Certifica	ation #:	ES <b>3371</b> 6		Expirati	on Date	: 09 / 1	2 / 2025	)
	uding analytical methods, empl Category II non-friable asbestos			of and to	_		uantity of regu Count	_			ing mater d (Explain		) and
4) Procedure	s to be followed should unexpe	cted RACM be di	scovered (c	heck all t	that ap	ply)						Revi	sed?
Stop work	and keep wet	uate area	☐ De	emarcate	e area			Contact	t license	d abate	ment con	tractor	
☐ Contact dis	trict office/local air authority												
Other (Exp	ain):												
5) Planned D	emolition (check all that apply)											Revi	sed?
Describe demo Implosion	lition work to be performed and	I method(s) to be Nethods						_	er (Expla	nin):			

Mail completed form and payment to: Ohio EPA, DAPC – Asbestos P.O. Box 1049, Columbus, OH 43216-1049

## Notification of Demolition and Renovation/Abatement Section 1: General Information

Continued

Description of affected facility components (include attachment if necessary): Existing roadway bridge. 3 (Revised 4/19) Page 1 of 6) Asbestos Description and Engineering Controls (if asbestos is being abated) Revised? For the material listed in each project, describe the type(s) of ACM to be abated, engineering controls and work practices to be used to minimize emissions and ensure proper waste handling: Other Type of ACM to be abated: Surfacing Mechanical Wet Methods Glove Bag ☐ NPE AFD Other: **Engineering Controls:** Manual Mechanical Other: Work Practices: Intact Removal 7) Asbestos Waste Transporter (if applicable) Revised? Transporter #1 Name: Contact Person: Address: City: State: Zip: Phone: ( Email: Fax: ( ) Transporter #2 Name (if applicable): Address: Contact Person: City: State: Zip: Email: Phone: ( Fax: ( 8) Asbestos Waste Disposal Site (if applicable) Revised? Name: Contact Person: Address: City: State: Zip: Phone: ( Fax: ( 9) Emergency Demolition (complete if you checked "Emergency" above and "Demolition" for any project) Revised? A copy of the issued order, including the following information, must be attached to this notification. Government Official Issuing Order: Authority of Order (Citation of Code): Agency: Date of Order: Demolition Date: 10) Emergency Renovation/Abatement (complete if you checked "Emergency" above and "Renovation/Abatement" for any project) Revised? Date of Emergency: Time of Emergency: ☐ a.m. ☐ p.m. Description of Sudden, Unexpected Event: Explanation of how the event caused unsafe conditions or equipment damage: Revised? 11) Attestation In accordance with Ohio Administrative Code rule 3745-20-03(A)(4)(p), I certify that at least one person trained as required by paragraph (B) of rule 3745-20-04 of the Administrative Code will supervise the stripping and removal described by this notification. I acknowledge that the submission of false or misleading statements is prohibited by law and I certify that facts contained in this notification are true, accurate, and complete. Signature: Date: Title: Name: Organization:



#### Notification of Demolition and Renovation/Abatement Section 2: Project Address Specific Information

**Division of Air Pollution Control** 

Please complete Section 2 for the address included with this notification. If the project is an "Installation" per OAC 3745-20, complete a separate Section 2 page for each address associated with this notification.

Ohio EPA Use Only	Project ID #	<b>‡</b> :										
A. Facility Descr	ription										!	Revised?
Building Name (if a	pplicable): FR	A-70-7.95 Bridge		Site L	ocation	(specific): <b>V</b>	/ilson R	load ove	er I-70			
Address:												
city: Columbus	1			State		ОН	Z	ip: 4320	4 -			
Building Size (squa	re feet): 29,	000			No. of I	Floors:				Age: 52		
Present Use: Roa	ıdway Brid	ge			Prior U	se: Roadw	ay Bric	lge				
B. Type of Oper	ation (check a	ll that apply)			•						ľ	Revised?
□ Demolition	Reno	ovation/Abatement – Ty	pe: 🗌 Remova	ı 🗆	Repair	☐ Encaps	ulation	Enclos	ure			
C. Asbestos Pre	sent (check on	ie)									ı	Revised?
☐ Yes 🛛 No	[	No, previously abate	d Year A	bated	:							
D. Approximate	Amount of As	bestos-Containing Mat	erials (complete	table	below a	nd Section 1	#6 if asb	estos is pr	esent)		ı	Revised?
			Material to	be Rer	noved				Ма	terial NOT to be	Remove	ed
			Non-fria	ble As	bestos-C	Containing M	aterial	1	Non-friab	able Asbestos-Containing Material		
		RACM	Catego	ry I		Categ	gory II		Categ	ory I	Category II	
Pipes (linear feet)												
Surface area on ot components (ft <sup>2</sup> )	her facility											
Volume if length o be measured (ft³)	r area cannot											
E. Asbestos Aba	atement Sched	lule and Abatement Spo	ecialist (original i	otific	ation is	required 10	working c	lays prior	to the sta	art of work)	ſ	Revised?
Setup Date: /	/	Abatei	ment Date: /	/				Complete	Date:	/ /		
(Shift 1) Time start/end on site	Monday	, Tuesday	Wednes	day		Thursday		Friday		Saturday	S	Sunday
Abatement Special	list Name:			Cert	ification	n#: AS				Expiration Date	e: /	/
(Shift 2) Time	Monday	, Tuesday	Wednes	day		Thursday	ırsday Friday			Saturday		Sunday
start/end on site												
Abatement Special	list Name:	·		Cert	ification	n #: AS	•		•	Expiration Date	e: /	/
F. Demolition C	Contractor (if a	pplicable)									ľ	Revised? 🗌
Name:												
Address:						Contact Pe	erson:					
City:					State:				Zip:	Zip: -		
Email:				Phon	e: (	) -			Fax:	)	-	
G. Demolition S	chedule (origi	nal notification is requi	red 10 working d	ays pr	ior to th	e start of wo	ork)				<u> </u>	Revised?
Start Date: /	/			Comp	lete Dat	e: / /						
H. Project Hold											ľ	Revised?
Asbestos Abateme Offsite/On Hold as		/		Asbestos Abatement On Site/Off Hold, Work Resume Date: / /								
Demolition Offsite/On Hold as of Date: / /				Demolition On Site/Off Hold, Work Resume Date: / /								

(Revised 4/19) Page 3 of 3