




LOCATION MAP

LATITUDE: 39°56'30" LONGITUDE: 83°27'04"

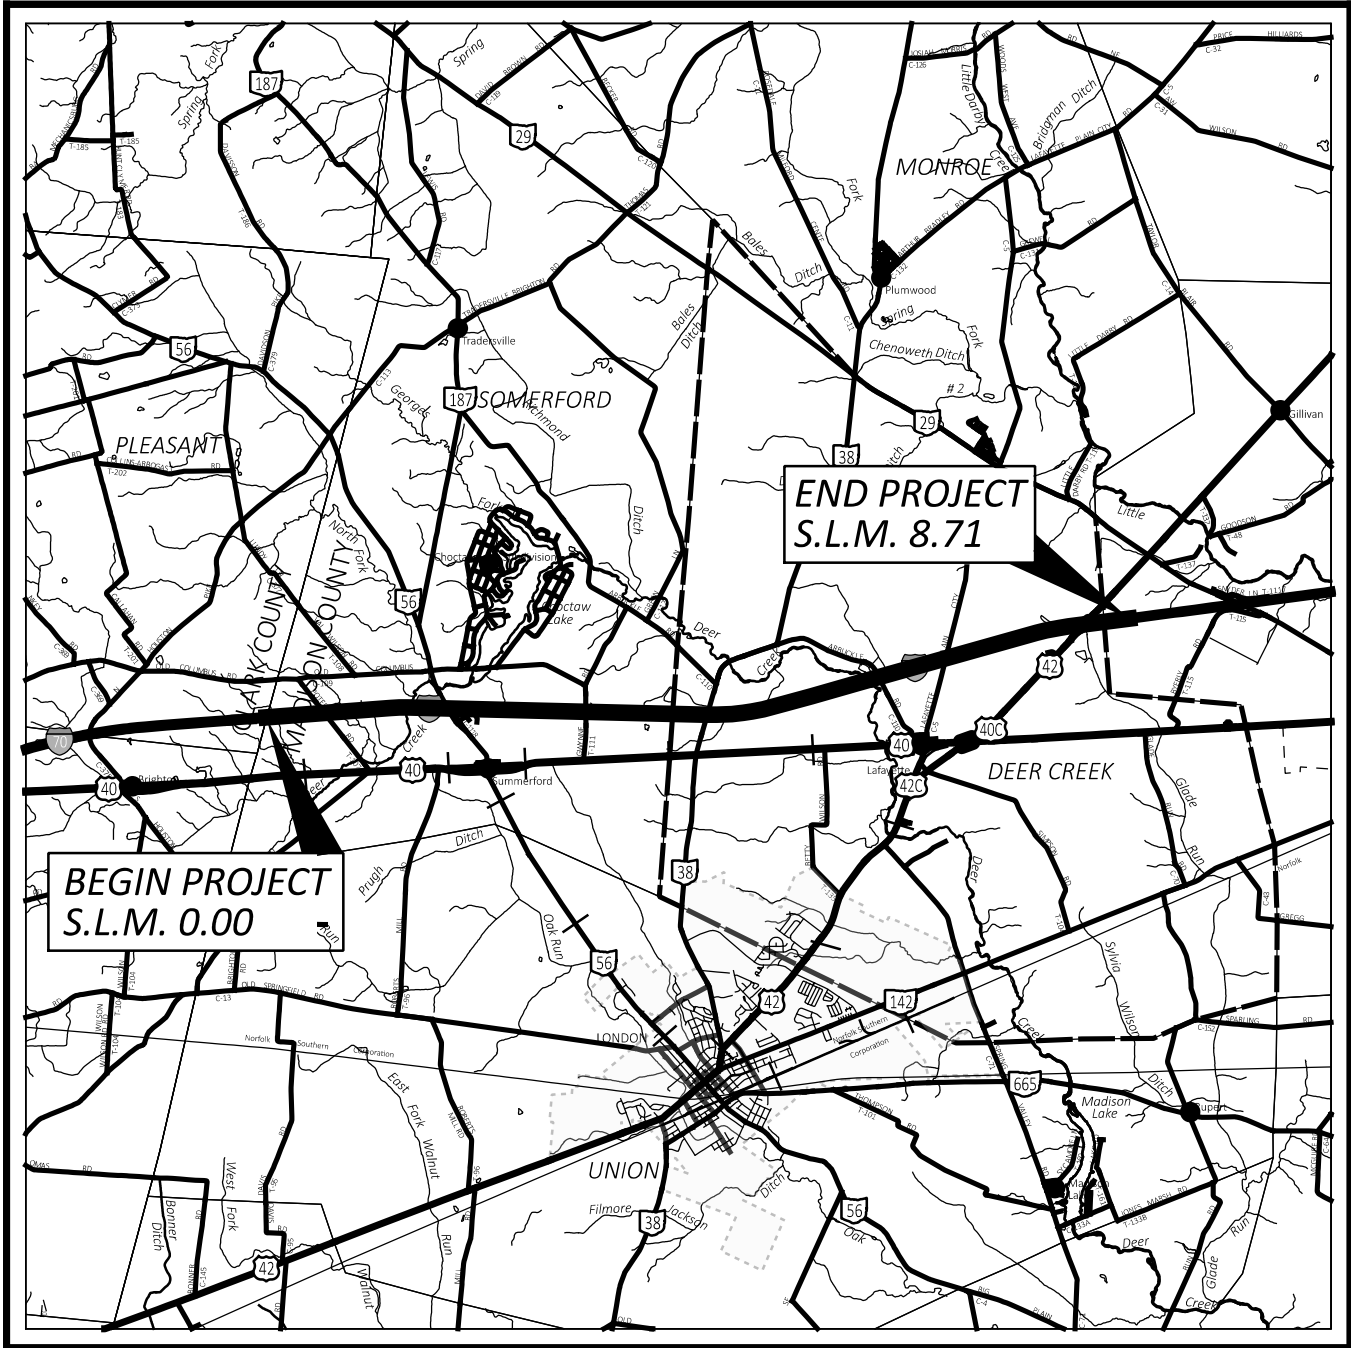

PORTION TO BE IMPROVED	
INTERSTATE HIGHWAY	
FEDERAL ROUTES	
STATE ROUTES	
COUNTY & TOWNSHIP ROADS	
OTHER ROADS	

DESIGN DESIGNATION

CURRENT ADT (2023)	61,433
DESIGN YEAR ADT (2038)	65,500
DESIGN HOURLY VOLUME (2038)	6,550
DIRECTIONAL DISTRIBUTION	51%
TRUCKS (24 HOUR B&C)	15%
DESIGN SPEED	70 MPH
LEGAL SPEED	70 MPH
DESIGN FUNCTIONAL CLASSIFICATION:	
01 INTERSTATE (RURAL)	
NHS PROJECT	YES

DESIGN EXCEPTIONS

NONE REQUIRED

ADA DESIGN WAIVERS

NONE REQUIRED

UNDERGROUND UTILITIES

Contact Two Working Days
Before You Dig


Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764
(Non members must be called directly)

PLAN PREPARED BY:
OHIO DEPT. OF TRANSPORTATION, DISTRICT 1
1885 NORTH MCCULLOUGH ST.
LIMA OHIO, 45801

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

MAD-70-0.00

SUMMERFORD & DEER CREEK TOWNSHIPS

MADISON COUNTY

INDEX OF SHEETS:

TITLE SHEET	P.1
SCHEMATIC PLAN	P.2 - P.6
TYPICAL SECTIONS	P.7 - P.8
GENERAL NOTES	P.9 - P.11
MAINTENANCE OF TRAFFIC	P.12 - P.16
GENERAL SUMMARY	P.17 - P.18
SUBSUMMARIES	P.19 - P.22
PLAN SHEETS (IR-70 MAINLINE)	P.23 - P.41
MEDIAN CROSSEOVERS	P.42
TRAFFIC CONTROL	P.43 - P.45

FEDERAL PROJECT NUMBER

E250 (586)

RAILROAD INVOLVEMENT

NONE

PROJECT DESCRIPTION

RESURFACING OF 8.71 MI. OF IR-70 BEGINNING AT THE CLARK COUNTY LINE AND ENDING EAST OF THE US-42 INTERCHANGE. ALSO, MINOR PAVEMENT REPAIR AND UPGRADE GUARDRAIL AS NEEDED.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA:	0.2 ACRES
ESTIMATED CONTRACTOR EARTH DISTURBED AREA:	0.3 ACRES
NOTICE OF INTENT EARTH DISTURBED AREA:	N/A (NOI NOT REQUIRED) *ROUTINE MAINTENANCE PROJECT


LIMITED ACCESS

THIS IMPROVEMENT IS ESPECIALLY DESIGNED FOR THROUGH TRAFFIC AND HAS BEEN DECLARED A LIMITED ACCESS HIGHWAY OR FREEWAY BY ACTION OF THE DIRECTOR IN ACCORDANCE WITH THE PROVISIONS OF SECTION 5511.02 OF THE OHIO REVISED CODE.

2023 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS AND CHANGES LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL NOT REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY AND THAT PROVISIONS FOR THE MAINTENANCE AND SAFETY OF TRAFFIC WILL BE AS SET FORTH ON THE PLANS AND ESTIMATES.

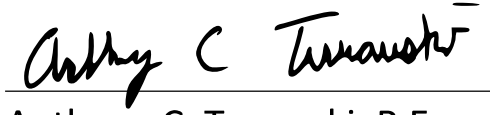
Anthony C. Turowski, P.E.
District 06 Deputy Director


Pamela Boratyn
Director, Department of Transportation

STANDARD CONSTRUCTION DRAWINGS								SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
BP-2.1	1/21/22	MGS-5.3	7/15/16	MT-99.20	4/19/19	TC-42.10	10/18/13	800-2023	7/18/25
BP-2.2	1/15/21	MGS-6.1	1/19/18	MT-101.70	7/19/24	TC-42.20	10/18/13	807	1/17/25
BP-2.5	7/19/24	MGS-6.2	7/18/25	MT-101.90	7/17/20	TC-52.10	10/18/13	808	7/19/24
BP-3.1	1/19/24			MT-102.20	4/19/19	TC-52.20	1/15/21	821	4/20/12
BP-6.1	7/19/13	MT-95.30	7/18/25	MT-102.30	10/16/15	TC-61.10	4/21/23	832	7/18/25
BP-9.1	1/18/19	MT-95.40	7/18/25	MT-104.10	1/19/24	TC-65.10	1/17/14	850	7/21/23
		MT-95.50	7/21/17	MT-105.10	1/17/20	TC-65.11	1/17/25	872	1/17/25
DM-4.3	1/15/16	MT-97.10	7/18/25			TC-71.10	7/18/25	873	4/16/21
DM-4.4	1/15/16	MT-97.12	7/18/25					875	1/17/25
		MT-98.10	1/17/20					905	1/17/25
		MT-98.11	1/17/20					908	1/17/25
MGS-2.1	7/18/25	MT-98.20	4/19/19					921	7/19/24
MGS-3.1	7/18/25	MT-98.21	7/21/23						
MGS-4.2	7/18/25	MT-98.22	1/17/20						
MGS-4.3	7/18/25	MT-98.28	1/17/20						
MGS-5.2	7/15/16	MT-98.29	1/17/20						

ENGINEER'S SEAL



DESIGN AGENCY



DESIGNER

TAB

REVIEWER

XXX MM-DD-YY

PROJECT ID

112880

SHEET

P.01

TOTAL

45