


STATE OF OHIO  
DEPARTMENT OF TRANSPORTATION


**MRW-95-15.33**  
**VILLAGE OF CHESTERVILLE**  
**CHESTER TOWNSHIP**  
**MORROW COUNTY**

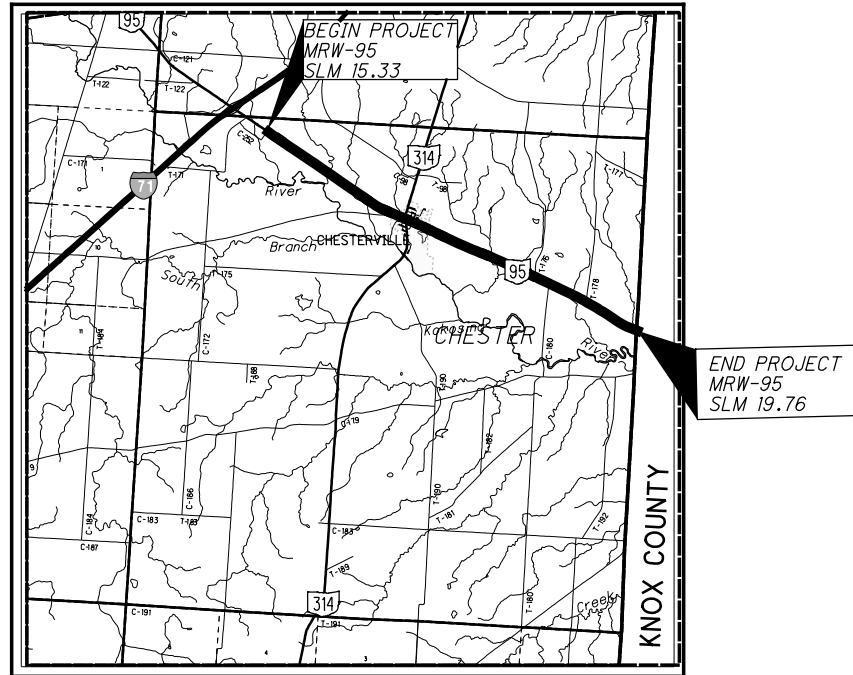

LOCATION MAP

LATITUDE: 40°28'40" LONGITUDE: 82°40'30"

SCALE IN MILES



PORTION TO BE IMPROVED	_____
INTERSTATE HIGHWAY	=====
FEDERAL ROUTES	-----
STATE ROUTES	=====
COUNTY & TOWNSHIP ROADS	=====
OTHER ROADS	-----

DESIGN DESIGNATION

	MRW-95 SLM 15.33-17.05	MRW-95 17.05-19.73
CURRENT ADT (2020)	7,700	4,100
DESIGN YEAR ADT (2032)	9,800	4,200
DESIGN HOURLY VOLUME (2032)	980	420
DIRECTIONAL DISTRIBUTION	60%	52%
TRUCKS (24 HOUR B&C)	14%	20%
DESIGN SPEED	55 MPH	55 MPH
LEGAL SPEED	55 MPH	55 MPH
NHS PROJECT	NO	NO
DESIGN FUNCTIONAL CLASSIFICATION:	05 MAJOR COLLECTOR (RURAL)	

INDEX OF SHEETS

TITLE	1
SCHEMATIC	2 - 3
TYPICAL SECTIONS	4
TYPICAL DETAILS	5 - 8
GENERAL NOTES	9 - 11
MAINTENANCE OF TRAFFIC	12 - 13
GENERAL SUMMARY	14 - 15
PAVEMENT SUBSUMMARIES	16 - 17
ROADWAY SUBSUMMARY	18
EARTHWORK SUBSUMMARY	19
ROADWAY PLAN	20 - 28
CROSS SECTIONS	29 - 33
TRAFFIC CONTROL SUBSUMMARIES	34 - 35
TRAFFIC CONTROL PLAN (NO PASSING)	36 - 38
CULVERT PLAN AND PROFILE	39
STRUCTURAL NOTES & DETAILS	40 - 41

PROJECT DESCRIPTION

RESURFACING PROJECT TO INCLUDE:  
PLANING AND ASPHALT OVERLAY 4.4 MILES OF  
SR-95 FROM .4 MILES SOUTHEAST OF I-71 (SLM 15.33)  
TO KNOX COUNTY LINE (SLM 19.73) IN MORROW COUNTY.  
SR-95 IS WITHIN THE VILLAGE OF CHESTERVILLE FROM  
SLM 16.8 TO SLM 17.3.

VARIOUS GUARDRAIL UPGRADES.

HEADWALL REPLACEMENT AND STREAM WORK  
AT STRUCTURE MRW-95-16.98.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA: .03 ACRES  
ESTIMATED CONTRACTOR EARTH DISTURBED AREA: 0.00 ACRES  
NOTICE OF INTENT EARTH DISTURBED AREA: N/A\*  
\*LESS THAN 1 ACRE DISTURBED

DESIGN EXCEPTIONS

NONE

2019 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS AND CHANGES LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL NOT REQUIRE THE CLOSING TO TRAFFIC OF THE HIGHWAY AND THAT PROVISIONS FOR THE MAINTENANCE AND SAFETY OF TRAFFIC WILL BE AS SET FORTH ON THE PLANS AND ESTIMATES.

**UNDERGROUND UTILITIES**  
Contact Two Working Days  
Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764  
(Non-members must be called directly)

PLAN PREPARED BY:



ENGINEERS SEAL:

SIGNED: *Katherine Montoya*  
DATE: 11/12/19

STANDARD CONSTRUCTION DRAWINGS						SUPPLEMENTAL SPECIFICATIONS		SPECIAL PROVISIONS	
BP-3.1	10/18/19	MGS-1.1	01/19/18	MT-97.10	04/19/19	800	10/18/19	REGIONAL GENERAL	
BP-3.2	01/18/19	MGS-2.1	01/19/18	MT-97.12	01/20/17	821	04/20/12	PERMIT	
BP-4.1	07/19/13	MGS-4.2	07/19/13	MT-99.20	04/19/19	832	10/19/18	10/24/2019	
BP-7.1	07/20/18	MGS-4.3	01/18/13	MT-101.90	07/21/17	872	07/19/19		
		MGS-5.2	07/15/16	MT-105.10	07/19/13	874	10/18/19	WATERWAY PERMIT	
		MGS-5.3	07/15/16			875	01/16/15	CONDITIONS	
				TC-41.20	10/18/13	897	01/16/15	1/8/2020	
DM-1.1	07/21/17			TC-42.20	10/18/13				
HW-2.1	07/20/18			TC-52.10	10/18/13				
				TC-52.20	07/20/18				
				TC-61.30	07/19/19				
				TC-64.10	10/18/19				
				TC-65.10	01/17/14				
				TC-65.11	07/21/17				

PLANS CERTIFIED BY:  
NAME: *A. Long* DATE: 11/12/19  
DISTRICT 6  
OHIO DEPT. OF TRANSPORTATION

APPROVED: *Matthew R. Bluff*  
DATE: 11/13/19 DISTRICT DEPUTY DIRECTOR

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ DIRECTOR, DEPARTMENT OF TRANSPORTATION

FEDERAL PROJECT NO. E190(150)  
CONSTRUCTION PROJECT NO. -  
RAILROAD INVOLVEMENT NONE  
MRW-95-15.33  
1/41

I:\ProjectData\07821\_MRW-95-15.33\Design\Roadway\Sheets\07821\_GT001.dgn 107821\_GT001 1/13/2020 11:05:03 AM anollow