


PW = PAVEMENT WIDTH
PS = PAVED SHOULDER
AS = AGGREGATE SHOULDER

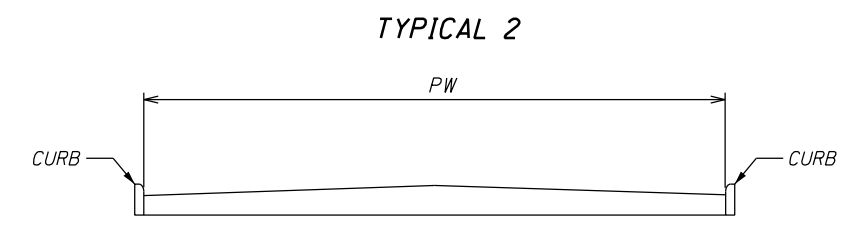


SHOULDER DATA

LOCATION	COUNTY	ROUTE	BEGIN LOG POINT SLM	END LOG POINT SLM	LENGTH		TYPICAL	PAVED SHOULDER WIDTH (FEET) (WIDTHS ARE AVERAGE THROUGHOUT SECTION)		SHOULDER AREA	897	407	408	424		617	
					MILES	LIN. FT.		A	B		PAVEMENT PLANING, ASPHALT CONCRETE, CLASS A, 1.00"	NON-TRACKING TACK COAT (@ 0.08 Gal/SY)	PRIME COAT, AS PER PLAN	THICKNESSES	FINE GRADED POLYMER ASPHALT CONCRETE, TYPE B	THICKNESSES	COMPACTED AGGREGATE, AS PER PLAN (2' WIDTH)
								SQ. YD.	SQ. YD.		GAL.	GAL.	INCH	CU. YD.	INCH	CU. YD.	
1	PER	S.R.37	0.00	2.86	2.86	15,100.80	1	1.5	1.5	5,033.60	33.3*	402.7	2,684.6	1.00	139.9	2.00	372.9
			2.86	3.26	0.40	2,112.00	1	1.5	1.5	704.00	704.0	56.4	375.5	1.00	19.6	2.00	52.1
			3.26	3.54	0.28	1,478.40	1	11.5	4.5	2,628.27	2,628.3	210.3	262.9	1.00	73.1	2.00	36.5
			3.54	4.00	0.46	2,428.80	2										
			4.00	4.23	0.23	1,214.40	1	1.5	1.5	404.80	404.8	32.4	215.9	1.00	11.3	2.00	30.0
			4.23	8.10	3.87	20,433.60	1	1.5	1.5	6,811.20		544.9	3,632.7	1.00	189.2	2.00	504.5
			8.10	8.59	0.49	2,587.20	1	1.5	1.5	862.40	862.4	69.0	460.0	1.00	24.0	2.00	63.9
BRIDGE DEDUCTIONS										(138.4)		(11.0)	(73.9)	1.00	(3.8)	2.00	(10.3)
LOCATION 1 TOTALS (CARRIED TO GENERAL SUMMARY)											4,633	1,305	7,558		454		1,050

I:\ProjectData\PER\95988\Roadway\Design\Sheets\95988_00002.dgn_Sheet_8/5/2021 5:26:43 PM jlwzj

EDGE LINE DATA											
LOCATION	COUNTY	ROUTE	SLM		LENGTH	INFORMATION ONLY			644	646	COMMENTS
						WHITE EDGE LINE QUANTITIES			EDGE LINE, 6"	EDGE LINE, 6"	
			FROM	TO	MILE	TOTAL MILES	ROADWAY MILES	BRIDGE MILES			
1	PER	S.R.37	0.00	3.54	3.54	7.08	7.08		7.08		
			3.54	4.00	0.46	NO EDGE LINES (CURB SECTION)					
			4.00	8.59	4.59	9.18	9.17	0.01	9.17	0.02	EPOXY ON STRUCTURE PER-37-0628
									0.04		ADDITIONAL FOR SIDE ROADS
LOCATION 1 TOTALS (CARRIED TO GENERAL SUMMARY)									16.29	0.02	

CENTER LINE DATA										
LOCATION	COUNTY	ROUTE	SLM		LENGTH	INFORMATION ONLY		644	646	COMMENTS
						CENTER LINE QUANTITIES		CENTER LINE	CENTER LINE	
			FROM	TO	MILE	TOTAL MILES	EQUIVALENT SOLID LINE			
1	PER	S.R. 37	0.00	8.59	8.59	8.59	11.84	8.58	0.01	EPOXY ON STRUCTURE PER-37-0628
								0.02		ADDITIONAL FOR SIDE ROADS
LOCATION 1 TOTALS (CARRIED TO GENERAL SUMMARY)								8.60	0.01	

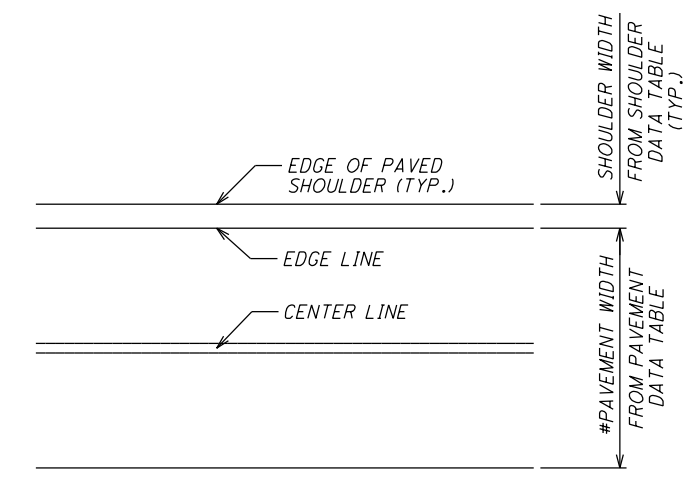

WIDTHS CALCULATED FROM CENTER OF MARKING AND EDGE LINES SHALL NOT BE PLACED CLOSER THAN 6" FROM EDGE OF PAVED SHOULDER

PAVEMENT MARKING DATA (LONG LINE)

PER-37-0.00

I:\ProjectData\PER\95988\Design\Roadway\Sheets\95988_I0002.dgn_Sheet 7/20/2021 10:34 AM jutzl