


Schedule Report

District 4

SUM-77: STA co to SR 241 [SB]

January 2026 (Published)

Segment	Route	Begin	End	Direction	Thru Lanes	Terrain Type	District	County
SUM-77: STA co to SR 241 [SB]	SSUMIR00077**C	0.00	4.58	South	3	Level	4	Summit

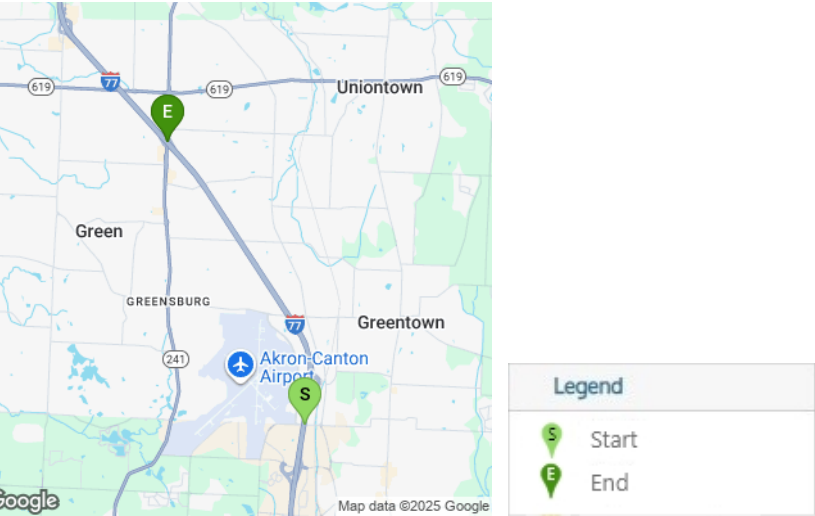

SUM-77: STA co to SR 241 [SB] January 2026 (Published)

SUM-77: STA co to SR 241
[SB] January 2026
(Published)

Minimum Lanes Open (MLO)

	Sun	Mon	Tues	Wed	Thurs	Fri	Sat
Time	MLO	MLO	MLO	MLO	MLO	MLO	MLO
0:00	1	1	1	1	1	1	1
0:30	1	1	1	1	1	1	1
1:00	1	1	1	1	1	1	1
1:30	1	1	1	1	1	1	1
2:00	1	1	1	1	1	1	1

Schedule Report

SUM-77: STA co to SR 241
[SB] January 2026
(Published)

Minimum Lanes Open (MLO)

	Sun	Mon	Tues	Wed	Thurs	Fri	Sat
Time	MLO	MLO	MLO	MLO	MLO	MLO	MLO
2:30	1	1	1	1	1	1	1
3:00	1	1	1	1	1	1	1
3:30	1	1	1	1	1	1	1
4:00	1	1	1	1	1	1	1
4:30	1	1	1	1	1	1	1
5:00	1	1	1	1	1	1	1
5:30	1	1	1	1	1	1	1
6:00	1	1	1	1	1	1	1
6:30	1	2	2	2	2	2	1
7:00	1	2	2	2	2	2	1
7:30	1	2	2	2	3	2	1
8:00	1	2	2	2	2	2	1
8:30	1	2	2	2	2	2	1
9:00	1	2	2	2	2	2	1
9:30	1	2	2	2	2	2	2
10:00	1	2	2	2	2	2	2
10:30	2	2	2	2	2	2	2
11:00	2	2	2	2	2	2	2
11:30	2	2	2	2	2	2	2
12:00	2	2	2	2	2	2	2
12:30	2	2	2	2	2	2	2
13:00	2	2	2	2	2	2	2
13:30	2	2	2	2	2	2	2
14:00	2	2	2	2	2	2	2
14:30	2	2	2	2	2	2	2
15:00	2	3	3	3	3	3	2
15:30	2	3	3	3	3	3	2
16:00	2	3	3	3	3	3	2
16:30	2	3	3	3	3	3	2

Schedule Report

SUM-77: STA co to SR 241
[SB] January 2026
(Published)

Minimum Lanes Open (MLO)

	Sun	Mon	Tues	Wed	Thurs	Fri	Sat
Time	MLO	MLO	MLO	MLO	MLO	MLO	MLO
17:00	2	3	3	3	3	3	2
17:30	2	2	2	2	2	2	2
18:00	2	2	2	2	2	2	2
18:30	1	2	2	2	2	2	2
19:00	1	1	1	1	2	2	1
19:30	1	1	1	1	1	1	1
20:00	1	1	1	1	1	1	1
20:30	1	1	1	1	1	1	1
21:00	1	1	1	1	1	1	1
21:30	1	1	1	1	1	1	1
22:00	1	1	1	1	1	1	1
22:30	1	1	1	1	1	1	1
23:00	1	1	1	1	1	1	1
23:30	1	1	1	1	1	1	1

Segment Notes

SUM-77: STA co to SR 241 [SB] January 2026 (Published)

PGA Tournament

No lane closures will be permitted during the PGA tournament at Firestone Country Club.

Schedule Report

Segment Notes

SUM-77: STA co to SR 241 [SB] January 2026 (Published)

Hall of Fame

No lane closures will be permitted during Hall of Fame week.

Shoulder Closures

Unless otherwise specified in the plans or approved by the District Work Zone Traffic Manager, shoulder closures are not permitted when the schedule above states that all lanes of traffic must be open. For example, shoulder closures are not permitted when the minimum lanes open (MLO) is equal to the total number of thru lanes.

Blank or Missing Schedule

If there is a missing schedule or no lane closure tables load upon opening a schedule (or if they load but they are blank) do not make assumptions on when lane closures are permitted. Please contact the District Work Zone Traffic Manager (DWZTM) responsible for this district for information on how to proceed.

Schedule Report

Segment Notes SUM-77: STA co to SR 241 [SB] January 2026 (Published)

Holidays, Holiday Weekends & Special Events

Unless otherwise specified in the plans, there shall be no lane closure(s) on designated holidays (including holiday weekends and special events). Holidays: New Year's Day (observed), Memorial Day, Fourth of July (observed), Labor Day, General/Regular Election Day (Nov), Thanksgiving and Christmas (observed). Except as detailed below, no lane closures are permitted after 12:00 PM (Noon) on the weekday (Mon-Fri) preceding a holiday/holiday weekend, until 6:00 AM the weekday (Mon-Fri) after the holiday/holiday weekend. (E.g. for a Mon holiday, no lane closures from 12:00 PM (Noon) on Fri until 6:00 AM Tue.) General/Regular Election Day (Nov): No lane closures after 5:00 AM the same day (Tue) until 12:00 AM the following Wed. Thanksgiving: No lane closures after 6:00 AM on the Wed preceding until 6:00 AM the following Mon. During the same periods, maintain pedestrian access if pedestrian access was present prior to construction. Newly constructed lane additions that have initially been opened to traffic, shall be open to traffic during all subsequent designated holidays (including holiday weekends and special events) as specified above.

Notification of Traffic Restrictions

Unless otherwise specified in the plans, submit a written notification of each traffic restriction and maintenance of traffic change in accordance with Traffic Engineering Manual Section 642-58, including the Notification of Traffic Restrictions Time Table. Notifications shall be sent via the district designated platform or via email to the following: Hauling.Permits@dot.ohio.gov, District Public Information Office, District Work Zone Traffic Manager (DWZTM), District Highway Management Administrator (HMA) and the District Construction Engineer (DCE). No lane closures will be permitted during Holidays, Holiday Weekends or Special Events. Traffic flow must be monitored and lanes re-opened if queues occur that exceed the allowable queue threshold as defined in the Traffic Management in Work Zones Policy.

Policy Exception Requests

Any requests for lane closures exceeding the allowable closure times in the PLC schedule(s) shall be submitted in writing to the applicable District Work Zone Traffic Manager (DWZTM) for review in accordance with the current policy regarding Traffic Management in Work Zones. These requests take additional time for ODOT review, consideration and approval or denial. Submit requests as early as possible after the apparent need has been identified. Such requests may subsequently require submission of additional information, analysis and/or data and may require submission to ODOT Central Office for consideration by the Maintenance of Traffic Exception Committee (MOTEC). Requested lane closures exceeding the allowable closure times in the PLC schedule(s) shall not occur until, and unless, approved by ODOT.

Schedule Report

Segment Notes

SUM-77: STA co to SR 241 [SB] January 2026 (Published)

Traffic Management in Work Zones Policy

All lane closures shall meet the minimum criteria presented in the current policy regarding Traffic Management in Work Zones (21-008(P) and 123-001(SP)). On the basis of this Policy and related Standard Procedure, ODOT has developed a series of lane (and ramp) closure schedules, Permitted Lane Closures (PLC), for freeways and expressways. These schedules indicate the hours of the day when a lane closure is permitted at a subject work zone location, without further investigation. Maintenance of traffic plans shall be in conformance with the corresponding Permitted Lane Closure (PLC) schedule(s) and policy. Traffic flow must be monitored and lanes re-opened if queues occur that exceed the allowable queue threshold as defined in the Traffic Management in Work Zones Policy.