

CUY-90-14.90

PID 77332/85531

APPENDIX UT-03

NEORSD Walworth Run Relocation (Reference Document)

State of Ohio
Department of Transportation
Jolene M. Molitoris, Director

Innerbelt Bridge
Construction Contract Group 1 (CCG1)



Revised Plan Information from NEORSD Addendum 3:

- A. Sheet No. G-1
 - 1. In the Sheet Index


DELETE "P-4 – WEST 15TH ST SANITARY SEWER PLAN AND PROFILE STA 0+00 TO STA 4+00" and **REPLACE** it with "P-4 – NOT USED".

2. In the Sheet Index

DELETE "P-5 – WEST 15TH ST SANITARY SEWER PLAN AND PROFILE STA 4+00 TO STA 8+00" and **REPLACE** it with "P-5 – NOT USED".

- B. Sheet No. G-2
 - 1. **DELETE** the boxes and corresponding labels called out as "P-4" and "P-5"
- C. Sheet No. P-4
 - 1. **DELETE** this plan sheet in its entirety.
- D. Sheet No. P-5
 - 1. **DELETE** this plan sheet in its entirety.
- E. Sheet No. P-7
 - 1. **DELETE** the detail entitled "W 15TH AND ABBEY AVE CATCH BASIN CONNECTION" in its entirety.
 - 2. In the CROSS REFERENCE TABLE, **DELETE** the references and descriptions for "Sheet No. P-4" and "Sheet No. P-5"
- F. Sheet No. C-1
 - 1. **DELETE** this sheet in its entirety and **REPLACE** it with revised "Sheet No. C-1" that is included in Attachment 7.
- G Sheet No. C-2
 - 1. **DELETE** this sheet in its entirety and **REPLACE** it with revised "Sheet No. C-2" that is included in Attachment 7.
- H. Sheet No. C-10
 - 1. **DELETE** this sheet in its entirety and **REPLACE** it with revised "Sheet No. C-10" that is included in Attachment 7.
- I. Sheet No. C-11
 - 1. **DELETE** the detail entitled "TYPICAL TRENCH DETAIL FOR W. 15TH STREET CL STA. 1+82 TO CL STA. 7+40" in its entirety.
- J. Sheet No. C-13
 - 1. **DELETE** the detail entitled "SANITARY SERVICE CONNECTION DETAIL FOR DIP" in its entirety.
 - 2. **DELETE** the detail entitled "TYPICAL EXISTING BRICK-TO-RCP CONNECTION DETAIL" in its entirety.
 - 3. **DELETE** "SECTION B" in its entirety.

10 \

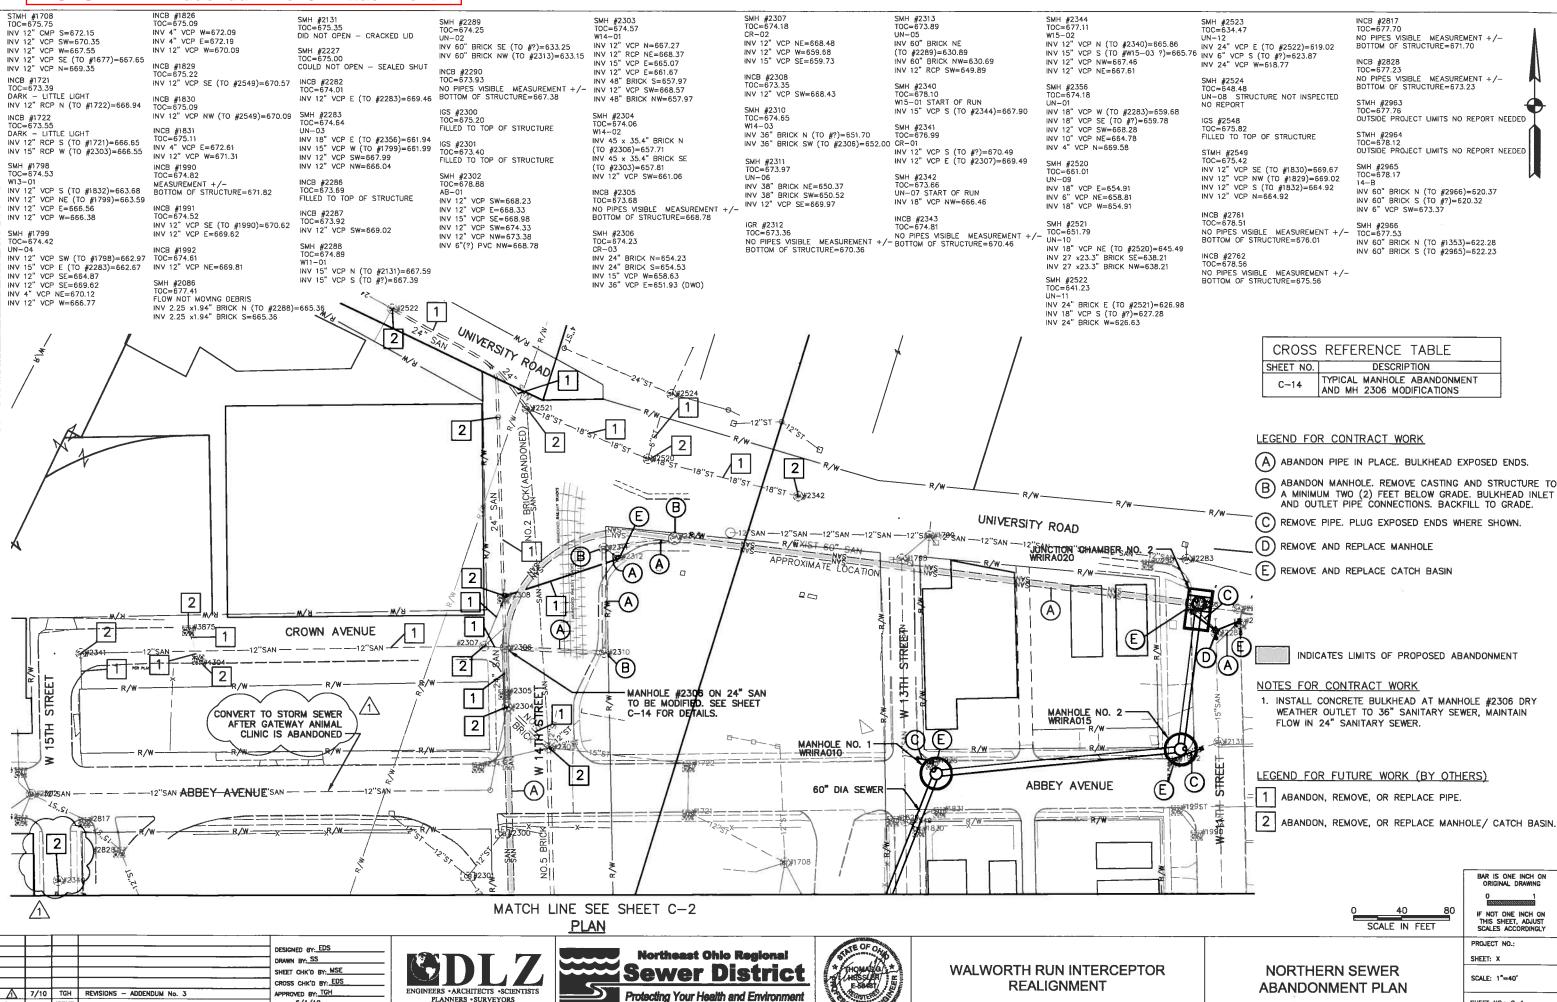

PLANNERS • SURVEYORS

DATE: 6/1/10

REV. NO.

DATE SSUE

SHEET NO.: C-1

NEORSD WRIR Addendum No. 3 - Attachment 7 MATCH LINE SEE SHEET C-1 SMH #1456 TOC=675.49 INCB #1334 TOC=675.48 SMH #1001 TOC=679.65 FAIR -01 U90-01 INV 44.4 x 35.4" BRICK NW=659.39 MEASUREMENT + /-BOTTOM OF STRUCTURE=669.88 INV 18" VCP E=664.35 INV 41.4 x 30.5" BRICK SE=659.64 INV 18" VCP W=664.40 INV 12" VCP SE=672.57 INV 12" VCP NW=669.95 TOC=675.52 FAIR-04 FAIR-04 IN #1629 INV 60" BRICK W (TO #1307)=625.27 TOC=675.88 IGR #1022 TOC=677.19 INV 60" BRICK E (TO #1150)=625.12 CURB INLET WINDOW LANE INV 12" RCP SW (TO #1023)=674.19 SMH #1456 TOC=675.49 U90-01 SMH #1023 TOC=676.91 TOC=675.78 CURB INLET WINDOW FAIR-02 INV 44.4 x 35.4" BRICK NW=659.39 INV 41.4 x 30.5" BRICK SE=659.64 CB #3734 TOC=676.73 INV 18" VCP E=663.56 STMH #1631 TOC=676.19 INV 18" VCP W=663.65 INV 12" VCP SE=672.57 2 INV 8" SW 672.73 INV 12" RCP N (TO #1676)=670.99 INV 15" VCP NE=666.31 INV 12" RCP W (TO #2548)=671.09 IGS #1484 TOC=676.52 TOC=676.52 FILLED TO GRATE - NO PIPES VISIBLE IGS #1669 TOC=673.26 TOC=676.79 INCB #1027 TOC=676.62 INV 12" VCP SW=672.09 INV 12" VCP NE=672.32 INV 12" RCP W=669.26 CB #3949 TOC=676.93 NO PIPES VISIBLE STMH #1544 SIMI #1047 TOC=679.26 FILLED TO GRATE - NO PIPES VISIBLE INCB #1676 TOC=673.38 INV 12" RCP E (TO #1669)=668.58 INV 12" RCP E (TO #1669)=668.58 INCB #1095 TOC=675.80 NO PIPE VISIBLE MEASUREMENT +/- C=674.57 BOTTOM OF STRUCTURE=671.15 W14-01 TOC=676.81 W14-01 INV 12" VCP N=667.27 INV 12" VCP NW (TO #1708)=668.48 INV 12" RCP SW (TO #1631)=668.68 INV 12" SE=672.81 SMH #1133 INV 12" RCP NE=668.37 CB #4267 TOC=676.84 INV 15" VCP E=665.07 TOC = 677.73COULD NOT OPEN - SEALED SHUT INV 6" PVC S=675.23 SMH #1150 TOC=676.18 INV 48" BRICK S=657.97 SMH #1832 TOC=676.07 (A) SMH #4303 TOC=677.11 INV 12" VCP SW=668.57 W13-02 INV 12" VCP N (TO #1798)=665.42 INV 12" VCP S=666.92 INV 12" RCP NE=670.88 INV 48" BRICK NW=657.97 W15-02 INV 12" VCP NF=669.10 INV 12" VCP N=665.86 INV 15" VCP S=665.76 SMH #2339 TOC=675.28 INV 18" VCP E=663.46 **B** INV 15" RCP NW=667.73 INV 12" VCP NW=667.46 UN-02/U90-02 SMH #1835 TOC=676.19 INV NO 4 BRICK N=662.00 INV NO 4 BRICK S=662.01 INV 12" VCP NE=667.61 INV 60" BRICK NW=628.08 INV 60" BRICK SE=627.98 DEAD END 13th PLACE NO REPORT CB #4462 TOC=676.69 STMH #1214 TOC=676.35 IGS #2296 TOC=673.69 INV 8" S 669.69 TOC=658.74 INV 12" RCP N (TO #1484)=672.35 INV 12" RCP NE=666 59 INV 12" RCP S=672.35 CB #4481 TOC=676.77 INV 24" BRICK E (TO #1307)=645.94 INV 12" RCP SW=667.64 INV 24" BRICK W (TO #2528)=645.84 IN #1215 INCB #2297 TOC=673.57 INV 8" PVC E=670.94 TOC=675.79 CURB INLET WINDOW INV 24" RCP S=646 24 INV 12" PVC W=670.89 INV 12" VCP SE=647.04 INV 12" RCP SW=666.37 CB #4484 INCB #1216 SMH #2527 TOC=675.52 TOC=651.52 INV 12" RCP SW (TO #1150)=672.32 FAIR-07 TOC=652.91 INV 12" VCP SE=648.46 INV 18" RCP E=665.77 IGS #2298 TOC=674.16 INV 15" VCP N=645.92 60" DIA SEWER INV 15" VCP SW=644.62 INV 12" RCP SE (TO #1456)=667.51 ICS #2299 FAIR-09 INV 24" BRICK E (TO #2526)=638.72 INV 12" BRICK W=638.62 INV 12" BRICK S-675 17 IN #1253 TOC=675.10 CURB INLET WINDOW INCB #1269 TOC=675.69 SMELLS INV 12" BRICK S=635.42 SMH #2529 TOC=650.51 FAIRO-8 MISTH INV 15" VCP S (TO #1150)=668.04 TOC=675.40 ≩ FAIRO-8 NO PIPES VISIBLE MEASUREMENT +/INV 60" BRICK SE (TO #1353)=630.21 BOTTOM OF STRUCTURE=672.40 TOC=666 48 INV 12" VCP W=633.81 START OF RUN-STORM TIED INTO SANITARY FAIR -05 INV 12" VCP W=629.81 INV 24" BRICK W=653.13 INV 8" VCP SE=655.88 CROSS REFERENCE TABLE LEGEND FOR CONTRACT WORK DESCRIPTION SHEET NO. -(A) (A) ABANDON PIPE IN PLACE. BULKHEAD EXPOSED ENDS. TYPICAL MANHOLE ABANDONMENT ABANDON MANHOLE. REMOVE CASTING AND STRUCTURE TO A MINIMUM TWO (2) FEET BELOW GRADE. BULKHEAD INLET AND OUTLET PIPE CONNECTIONS. BACKFILL TO GRADE WITH (C) REMOVE PIPE. PLUG EXPOSED ENDS WHERE SHOWN 2 (D) REMOVE AND REPLACE MANHOLE 1252 Track (E) REMOVE AND REPLACE CATCH BASIN

- R/W-

FAIRFIELD AVENUE

INDICATES LIMITS OF PROPOSED ABANDONMENT

LEGEND FOR FUTURE WORK (BY OTHERS)

- ABANDON, REMOVE, OR REPLACE PIPE.
- ABANDON, REMOVE, OR REPLACE MANHOLE/ CATCH BASIN.

SCALE IN FEET

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

BAR IS ONE INCH ON

PROJECT NO .:

SHEET: X SCALE: 1"=40"

SHEET NO.: C-2

ENGINEERS · ARCHITECTS · SCIENTISTS PLANNERS • SURVEYORS

DESIGNED BY: EDS

DRAWN BY. SS

7/10 TGH

DATE ISSUE

REVISIONS - ADDENDUM No. 3

SHEET CHK'D BY: MSE

CROSS CHK'D BY: EDS

PPROVED BY: TGH

ATE: 6/1/10


NCTION CHAMBER NO. 1-

Northeast Ohio Regional Sewer District Protecting Your Health and Environment




WALWORTH RUN INTERCEPTOR **REALIGNMENT**


SOUTHERN SEWER ABANDONMENT PLAN

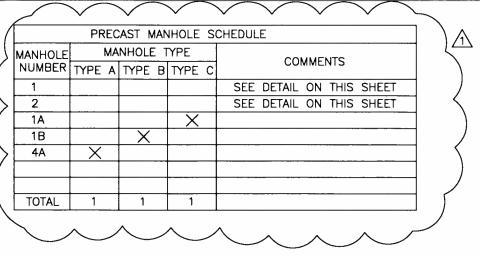



NOTES

- SECTIONS OF THE PRECAST MANHOLE SHALL BE CAST AND ASSEMBLED WITH EITHER ALL TONGUE OR ALL GROOVE ENDS UP. LIFT HOLES MAY BE PROVIDED IN EACH SECTION FOR HANDLING.
- BASES FOR MANHOLES ARE SHOWN WITH MONOLITHIC FLOOR AND RISERS WHICH MAY BE CAST IN ONE OR TWO OPERATIONS. A PERMISSIBLE ALTERNATE IS TO CAST AND SHIP THE FLOOR AND BARREL SEPARATELY. OPENINGS FOR INLET AND OUTLET PIPES SHALL BE PROVIDED, EITHER WHEN THE UNIT IS CAST OR LATER, TO MEET PROJECT REQUIREMENTS. BOTTOM CHANNELS MAY BE FORMED OF CONRETE PRECAST IN THE BASE OR INSTALLED BY FIELD CONSTRUCTION. FLOORS MAY ALSO BE
- OPENINGS IN RISER SECTIONS SHALL BE PREFABRICATED. FLEXIBLE CONNECTIONS SHALL BE PROVIDED FOR SANITARY AND STORM SEWERS. PREMIUM SEALS SHALL MEET ASTM C-923.
- JOINT SEALS BETWEEN PRECAST MANHOLE SECTIONS SHALL BE RESILENT AND FLEXIBLE GASKET JOINTS. JOINTS SHALL MEET ASTM C-443, FEDERAL SPECIFICATION SS-S-00210 (210 A), AND AASHTO O-RING JOINT, TYP-1/
- MANHOLE JOINTS SHALL BE SEALED BY A FLEXIBLE SEALANT, CONSEAL CS-202 AS MANUFACTURED BY CONSEAL CONCRETE SEALANTS, INC., OR APPROVED
- MANHOLE GRADE RINGS SHALL BE SEALED EXTERNALLY AND BETWEEN GRADE RINGS WITH A LAYER OF MASTIC COMPOUND SUCH AS FABERLITE, KENT SEAL, OR EQUAL.
- PRECAST MANHOLES SHALL CONFORM TO THE REQUIREMENTS OF ASTM C-478.
- 8. SEAL ALL LIFT HOLES WITH APPROVED CONCRETE PLUGS.
- 9. SEE PLANS FOR RIM ELEVATIONS.
- TOP MANHOLE STEP SHALL BE INSTALLED NOT MORE THAN 2' BELOW TOP OF FRAME.
- APPLY "THOROSEAL" BY THORO SYSTEM PRODUCTS, OR APPROVED EQUAL TO THE INSIDE EXPOSED SURFACES OF ALL MANHOLES.

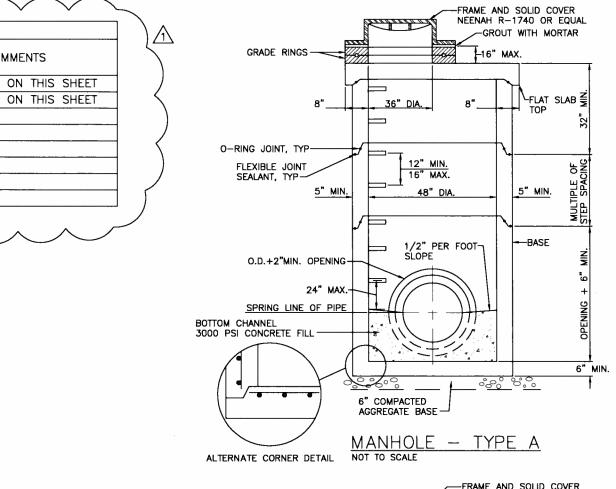

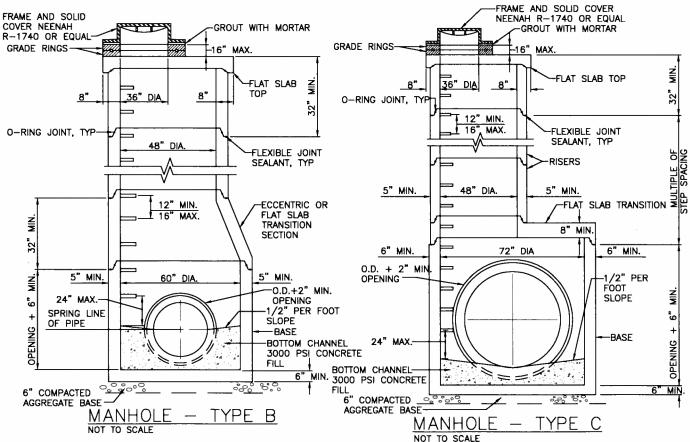

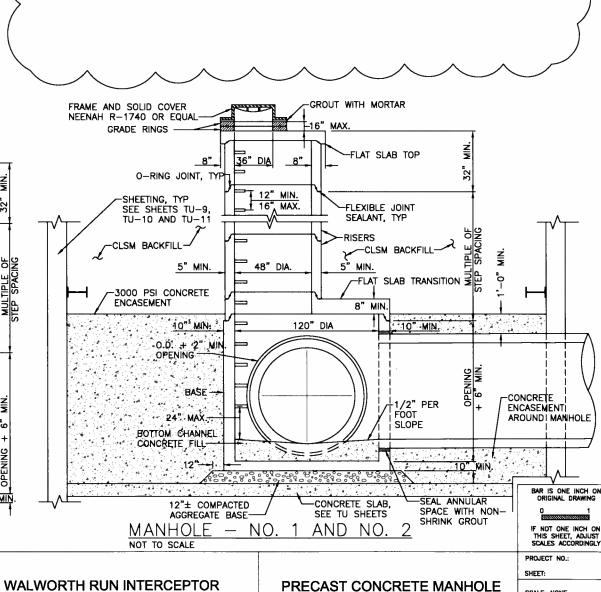









REALIGNMENT

DETAILS

SCALE: NONE SHEET NO.: C-10

NORTHEAST OHIO REGIONAL SEWER DISTRICT

WALWORTH RUN INTERCEPTOR REALIGNMENT (WRIR)

END MAINLINE END W 15TH SEWER SEWER CROWN AVE UNIVERSITY ROAD ABBEY AVE **CLEVELAND** FAIRFIELD AVE BEGIN MAINLINE W 15TH SEWE KENILWORTH AVE

LOCATION MAP

SCALE: 1"=500"

NORTHEAST OHIO REGIONAL SEWER DISTRICT

BOARD OF TRUSTEES

DARNELL BROWN, PRESIDENT MAYOR GARY STARR, VICE PRESIDENT MAYOR DEAN DEPIERO, SECRETARY MAYOR JACK BACCI SHEILA KELLY WALTER O' MALLEY RONALD SULIK

JULIUS CIACCIA, EXECUTIVE DIRECTOR

ACCEPTED BY:

EXECUTIVE DIRECTOR

5/25/10 DATE

KELLIE C. ROTUNNO, P.E. DIRECTOR OF ENGINEERING

AND CONSTRUCTION

05/27/10 DATE

NORTHEAST OHIO REGIONAL SEWER DISTRICT

SUBMITTED BY:

6/1/10



UNDERGROUND LITHLITIES BEFORE YOU DIG CALL-800-362-2764 (TOLL FREE) IIO UTILITIES PROTECTION SERVICE NON MEMBERS
MUST BE CALLED DIRECTLY

2. EXISTING STRUCTURES, GRADES, PIPING ETC,. ARE SHOWN IN APPROXIMATE LOCATIONS ON THE PLANS. THE INFORMATION SHOWN IS NOT GUARANTEED TO BE CORRECT OR COMPLETE. THE DATA SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR.

3. THE CONTRACTOR SHALL COORDINATE HIS OPERATIONS WITH THE WORK OF THE UTILITY OWNERS OR OTHERS WHO MAY RELOCATE EXISTING UTILITIES, AND SHALL NOTIFY OWNERS OF THE UTILITIES OF HIS SCHEDULE SUFFICIENTLY IN ADVANCE TO PERMIT THEM TO MAKE THE NECESSARY


4. INFORMATION ON EXISTING UTILITIES AND OTHER SUB-STRUCTURES WAS OBTAINED FROM APPROPRIATE AGENCIES. EXISTING UTILITIES SHALL BE MAINTAINED IN PLACE BY THE CONTRACTOR UNLESS OTHERWISE SHOWN ON THE PLANS OR STATED IN THE SPECIFICATIONS. THE LOCATIONS OF EXISTING UTILITIES AND SUB-STRUCTURES SHOWN ON THE DRAWINGS ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL VERIFY EXACT LOCATIONS, ELEVATIONS, AND DIMENSIONS IN THE FIELD PRIOR TO CONSTRUCTION IN THE AREA OF THE SPECIFIC SUB-STRUCTURE.

5. THE LENGTH OF PIPE SHOWN ON THE DRAWINGS IS GIVEN FROM CENTER—TO—CENTER OF STRUCTURE FOR STRUCTURES UP TO 6—FT INSIDE DIAMETER OR SIZE AND TO THE INSIDE FACE OF STRUCTURE FOR STRUCTURES OVER 6—FT INSIDE DIAMETER OR SIZE.

LEGEND

 EXISTING MANHOLE POST (SQUARE) POST (ROUND) C::2 EXISTING CATCH BASIN EXISTING HYDRANT TREE EXISTING/PROPOSED VALVE SHRUR LICHT POLE BENCH MARK TELEPHONE POLE CHISELED BENCH MARK POWER POLE EXISTING MONUMENT BOX UTILITY POLE IRON PIN/PIPE FOUND LIGHT & POWER POLE IRON PIN/PIPE SET TELEPHONE & POWER POLE TACKED HUB TELEPHONE & LIGHT POLE DRILL HOLE **GUY ANCHOR PKNAIL** Ω SIGN (1 POST) RAILROAD SPIKE SIGN (2 POST) 00 ELECTRICAL BOX (3) EXISTING SANITARY MANHOLE EXISTING ELECTRICAL MANHOLE STORM INLET/ CATCH BASIN BORING LOCATION

SECTION CUTS

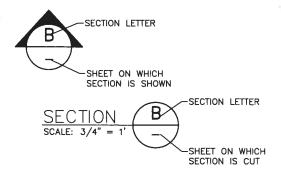

ABBREVIATIONS

ADH. - ADHESIVE E.W. - EACH WAY - PROPERTY LINE/PLATE AB - ANCHOR B ADD'L - ADDITIONAL - ANCHOR BOLT EQUAL PROP PROPOSED
POUNDS PER SQUARE INCH EX. OR - EXISTING EXIST EXP - EXPANSIO PSI POUNDS PER SQUARE FOOT POLYVINYL CHLORIDE RISER ALTERNATE PSF PVC - EXPANSION ALUM - ALUMINUM - EXTERIOR - FOUNDATION EXT AND ASS'Y - ASSEMBLY FDN. FIN FL FLR RCP - REINFORCED CONCRETE PIPE - FINISH REINF - REINFORCING - FINISH LINE BITUM. - BITUMINOUS REO'D. — REQUIRED - FLOOR REQ'MTS.— REQUIREMENTS RO — ROUGH OPENING RT — RIGHT B/ -OR BOT/ BOTTOM OF - FAR FACE - FOOTING - GAS FF FTG - BASE LINE G GA. GR. GRD. - RIGHT-OF-WAY R/W BLDG. - BUILDING ~ GAGE - SANITARY SEWER BLK. — BLOCK
BOT — BOTTOM
B PL — BASE PLATE
BRG. — BEARING GRADE SCHED - SCHEDULE SECT - SECTION SF - SQUARE FE HORIZ - HORIZONTAL HP - HIGH POINT SQUARE FEET SHT. SIM SJ - SHEET - SIMILAR HHP HR. HS I.F. BT PL.- BENT PLATE HIGH HIGH POINT CCFRPMP - CENTRIFUGALLY CAST - HANDRAIL HIGH STRENGTH - STEEL JOIST FIBER-REINFORCED POLYMER MORTAR PIPE SHORT LEG BACK-TO-BACK SHORT LEG VERTICAL SLBB SLV SPA. - INSIDE FA CENTER TO CENTER - SPACES OR SPACING INSUL. - INSULATION - CONSTRUCTION JOINT - SPREAD INV. JT INVERTJOINT CENTERLINE SQ OR Ø - SQUARE
ST - STORM SEWER
STA. - STATION - CIRCULAR - CLEAR - KIP (1000 POUNDS) CONTROLED LOW-STRENGTH LIVE LOAD LONG LEG LL LLBB ST. STL.— STAINLESS STEEL STD — STANDARD MATERIAL - STANDARD - STEEL - CONCRETE MASONRY UNIT BACK-TO-BACK LONG LEG HORIZONTAL STR. SUP. COLUMN STRUCTURAL COMB COMBINED SUPPORT CONC - CONCRETE
CONT - CONTINUO
CONTL.- CONTROL LONG LONGITUDINAL - CONCRETE SWO - STORMWATER OVERFLOW ~ LOW ~ LEFT LOW POINT - CONTINUOUS - TREAD - TOP OF LIGHT WEIGHT LW MAS OR TOP/ - CLEVELAND PUBLIC POWER MASONRY - DEFLECTION - MAXIMUM - MANHOLE MAX MH DEPR. - DEPRESSION TEMP - TEMPORARY DET - DETAIL - THICK - TOP OF MASONRY MID. MIDDLE THK. DI(DIP)- DUCTILE IRON PIPE MINIMUM TOM TYP MIN DIÀ - DIAMETER - DIAMETER U.O.N. - UNLESS OTHERWISE NOTED - MASONRY OPENING MO VCP VERT - DIMENSION - VITRIFIED CLAY PIPE - NOT APPLICABLE N/A N.F. - DEAD LOAD - NEAR FACE VERTICAL - DISTANCE WATER NO. NUMBER DWL/DWLS — DOWEL(S) DWO — DRY WEATHER OUTLET EE — EACH END WITH WEST OC O/H OPP. - ON CENTER E - OVERHEAD EXISTING - OPPOSITE W/M WATER MAIN - EACH FACE - EXPANSION JOINT - OPENING w/o - WITHOUT WP - PLUS OR MINUS - WORK POINT WS ELEV.(EL.) – ELEVATION ELEC – ELECTRIC EMBD. – EMBEDDED WATERSTOP PRECAST WELDED WIRE FABRIC

SHEET NO.	SHEET TITLE
	TITLE
G-1 -	LEGEND, SHEET INDEX, AND GENERAL NOTES
G-2 -	LOCATION MAP
G-3 -	SURVEY CONTROL
	MAINTENANCE OF TRAFFIC
MOT-1	JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 1
MOT-2 -	JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 2-PART
MOT-3 - MOT-4 -	JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 2-PART
MOT-5 -	MAINTENANCE OF TRAFFIC DETOUR ROUTE FOR MANHOLE NO.1 MAINTENANCE OF TRAFFIC DETOUR ROUTE FOR MANHOLE NO.2 AND JUNCTION CHAMBER NO.2
	PLAN & PROFILE
P-1 -	WRIR MAINLINE PLAN AND PROFILE STA 1+00 TO STA 5+00
P-2 -	WRIR MAINLINE PLAN AND PROFILE STA 5+00 TO STA 10+00
P-3 -	WRIR MAINLINE PLAN AND PROFILE STA 10+00 TO STA 15+00
P-4 -	WEST 15TH ST SANITARY SEWER PLAN AND PROFILE STA 0+00 TO STA 4+00
P-5 -	WEST 15TH ST SANITARY SEWER PLAN AND PROFILE STA 4+00 TO STA 8+00
P-6 -	CROWN AVE/W. 14TH ST STORM SEWER CONNECTION PLAN AND PROFILE
₽-7 -	SEWER PROFILES
P-8 -	SEWER PROFILES
	CIVIL
C-1 -	NORTHERN SEWER ABANDONMENT PLAN
C-2 -	SOUTHERN SEWER ABANDONMENT PLAN
C-3 -	JUNCTION CHAMBER NO. 1 SITE PLAN
C-4 - C-5 -	MANHOLE NO. 1 SITE PLAN
C-5 - C-6 -	MANHOLE NO. 2 AND JUNCTION CHAMBER NO.2 SITE PLAN WATER MAIN RELOCATION PLAN AND NOTES
C-7 -	WATER MAIN NOTES
C-8 -	WATER MAIN DETAILS
C-9 -	WATER MAIN DETAILS
C-10 -	PRECAST CONCRETE MANHOLE DETAILS
C-11 -	TRENCH REPAIR DETAILS
C-12 -	PAVEMENT SECTIONS AND DETAILS
C-13 -	SEWER DETAILS
C-14 -	SEWER DETAILS
C-15 -	CITY OF CLEVELAND CATCH BASIN CB-1 DETAIL
C-16 -	CITY OF CLEVELAND INLET BASIN DETAIL
	TUNNEL
TU−1 −	WORK SHAFT JUNCTION CHAMBER NO.1 INITIAL SUPPORTS
TU-2 -	JUNCTION CHAMBER NO.1 SUPPORTS AT EXISTING INTERCEPTOR
TU-3 - TU-4 -	JUNCTION CHAMBER NO.1 BULLSEYE AND MISCELLANEOUS DETAILS
1U-4 - TU-5 -	JUNCTION CHAMBER NO.1 STRUCTURE DETAILS WORK SHAFT JUNCTION CHAMBER NO.2 INITIAL SUPPORTS
TU-6	JUNCTION CHAMBER NO.2 SUPPORTS AT EXISTING INTERCEPTOR
TU-7 -	JUNCTION CHAMBER NO.2 BULLSEYE AND MISCELLANEOUS DETAILS
TII_8 _	WORK SHAFT HINCTION CHAMPER NO 2 STRUCTURAL DETAILS

TU-8 - WORK SHAFT JUNCTION CHAMBER NO.2 STRUCTURAL DETAILS WORK SHAFT MANHOLE NO.1 INITIAL SUPPORTS TU-9 -

TU-10 - WORK SHAFT MANHOLE NO.2 INITIAL SUPPORTS

MANHOLE NO.1 AND MANHOLE NO.2 BREAK-IN, BREAK-OUT, BACK STOP TUNNEL AND SUMP DETAILS

TU-12 -MONITORING

TU-13 -STRUCTURAL DETAILS AND NOTES

DESIGNED BY: EDS DRAWN BY: SS SHEET CHK'D BY: RDC CROSS CHK'D BY: EDS APPROVED BY: TGH ISSUE BY DATE: 6/1/10 DATE





CLSM

COL

DEFL

DIM

DIST

E.J.



WALWORTH RUN INTERCEPTOR REALIGNMENT

LEGEND, SHEET INDEX, AND **GENERAL NOTES**


PROJECT NO.: SHEET: X

SCALE: 1"=10"

SHEET NO.: G-1


BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY


В

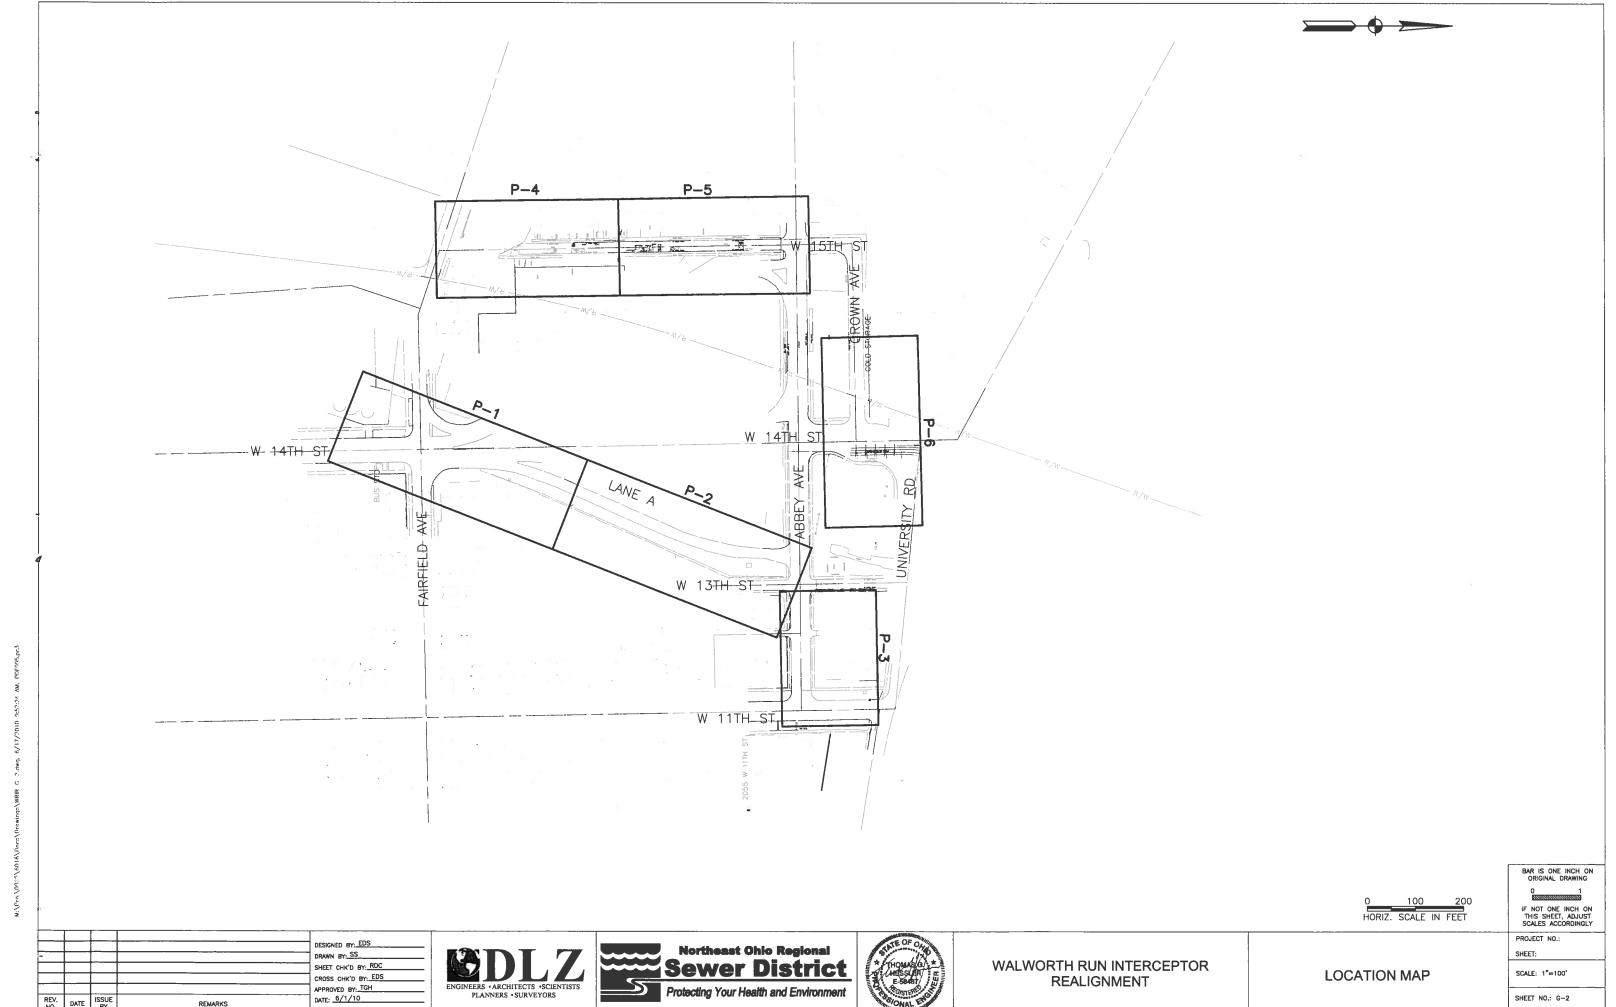

DATE ISSUE


SHEET NO.: G-2

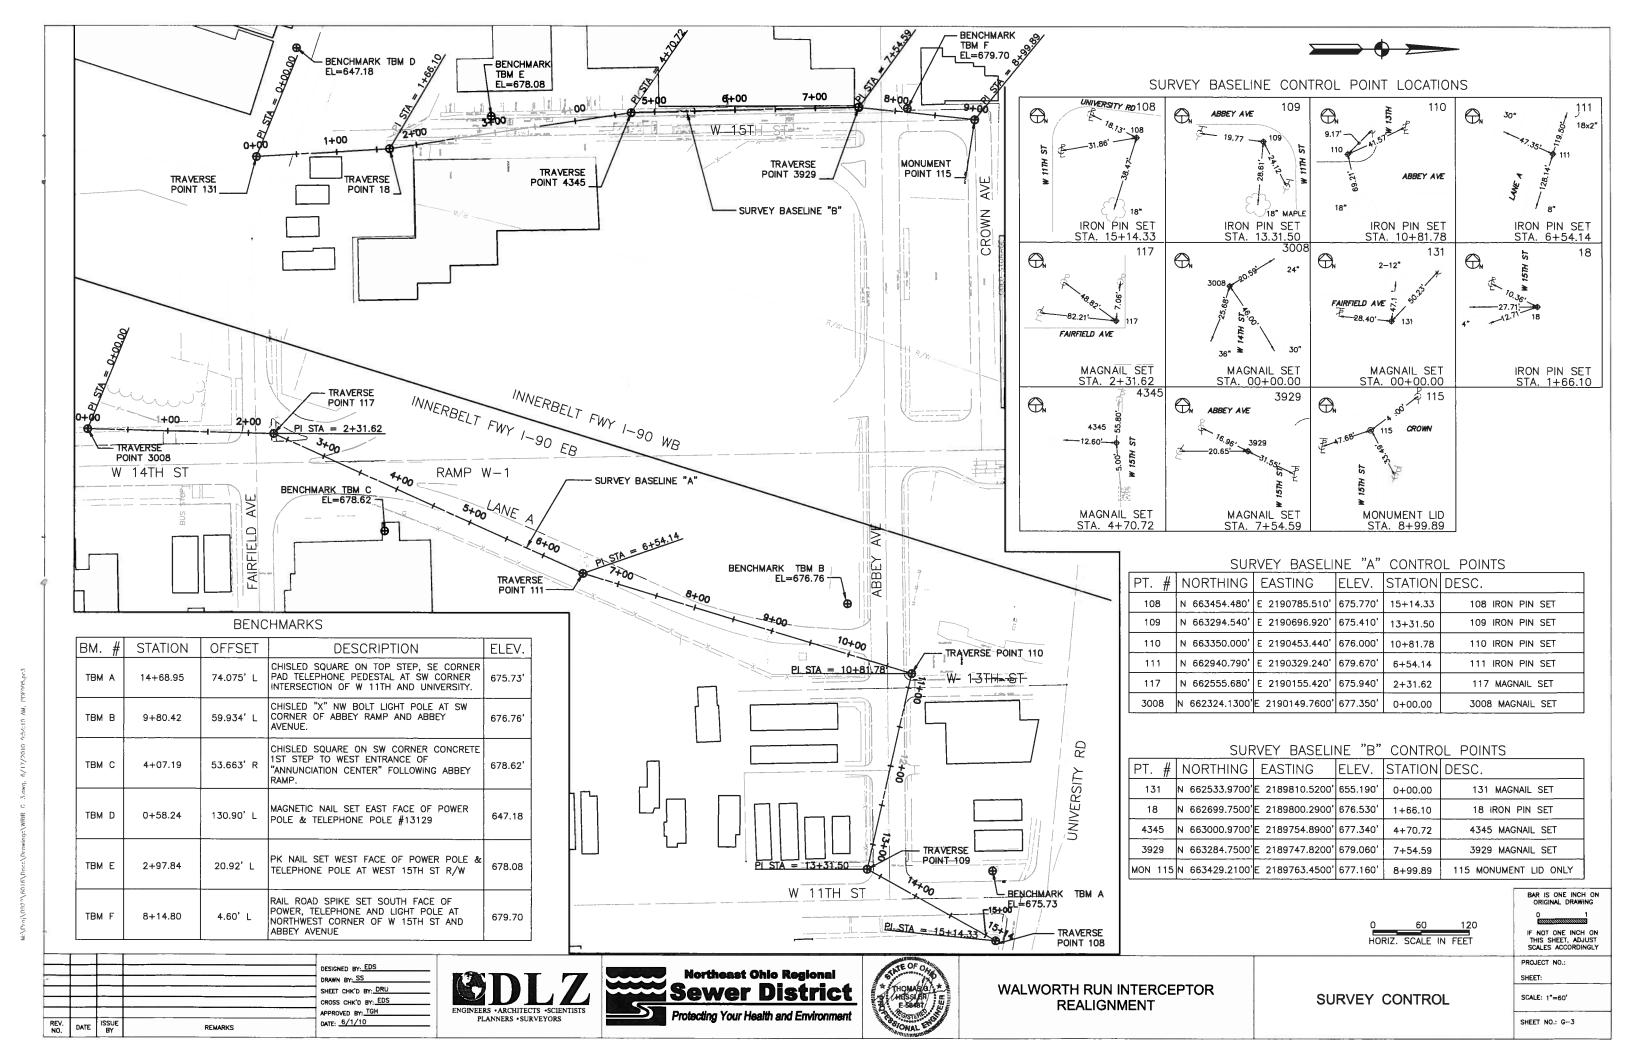


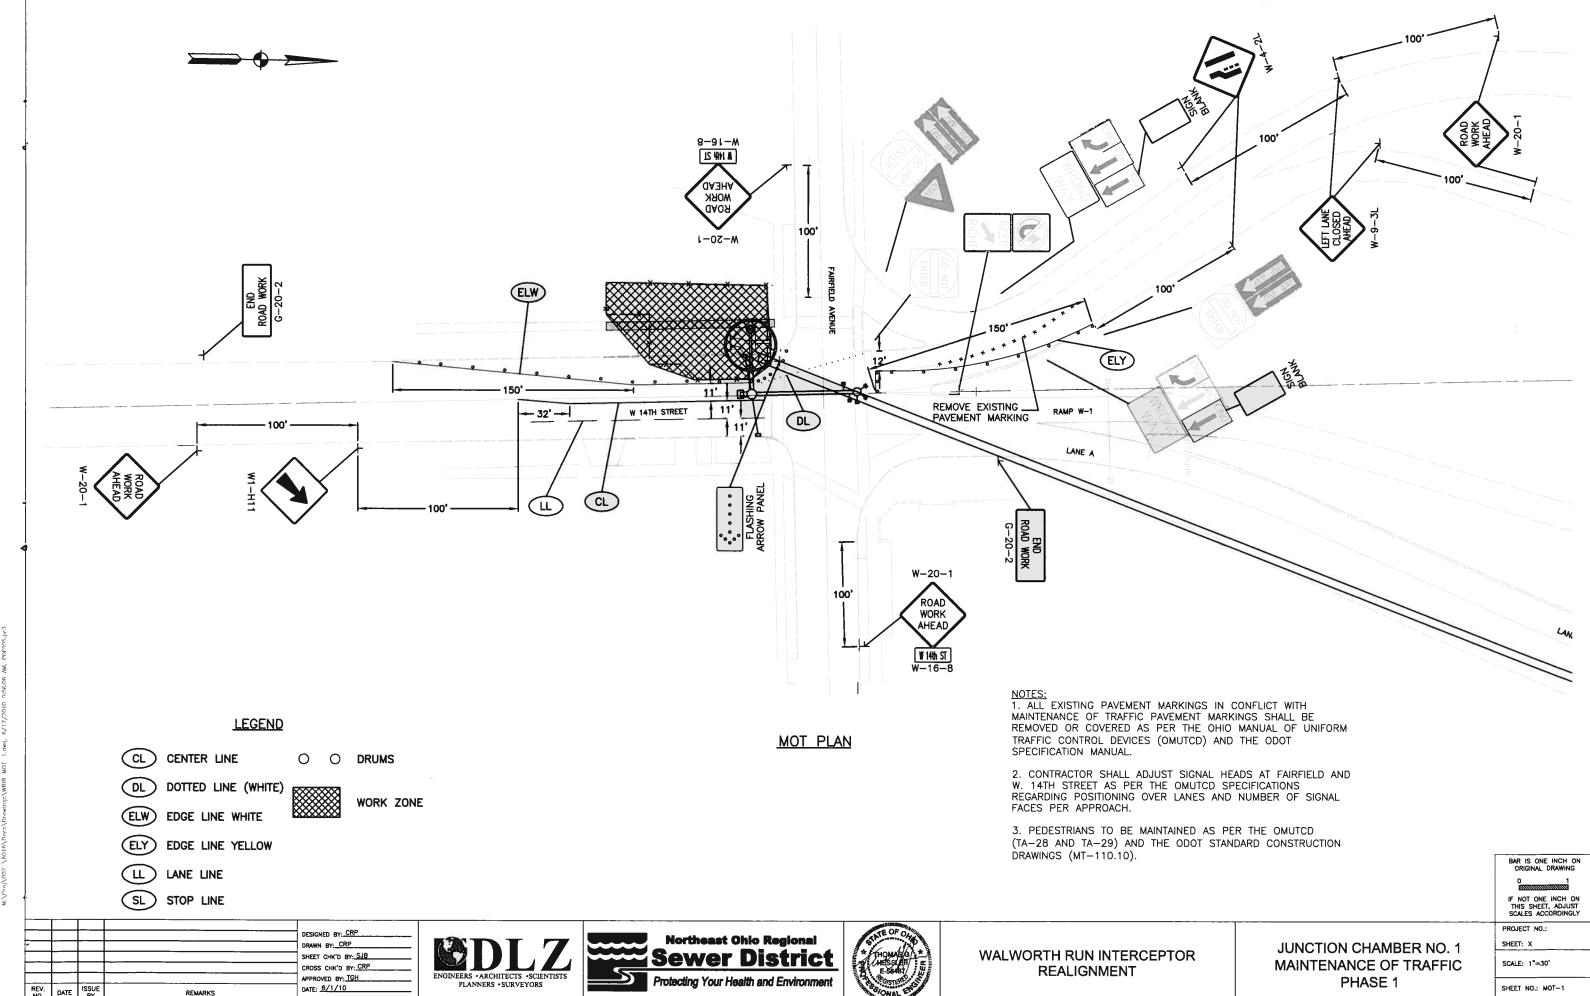

SHEET NO .: MOT-1

DATE: 6/1/10

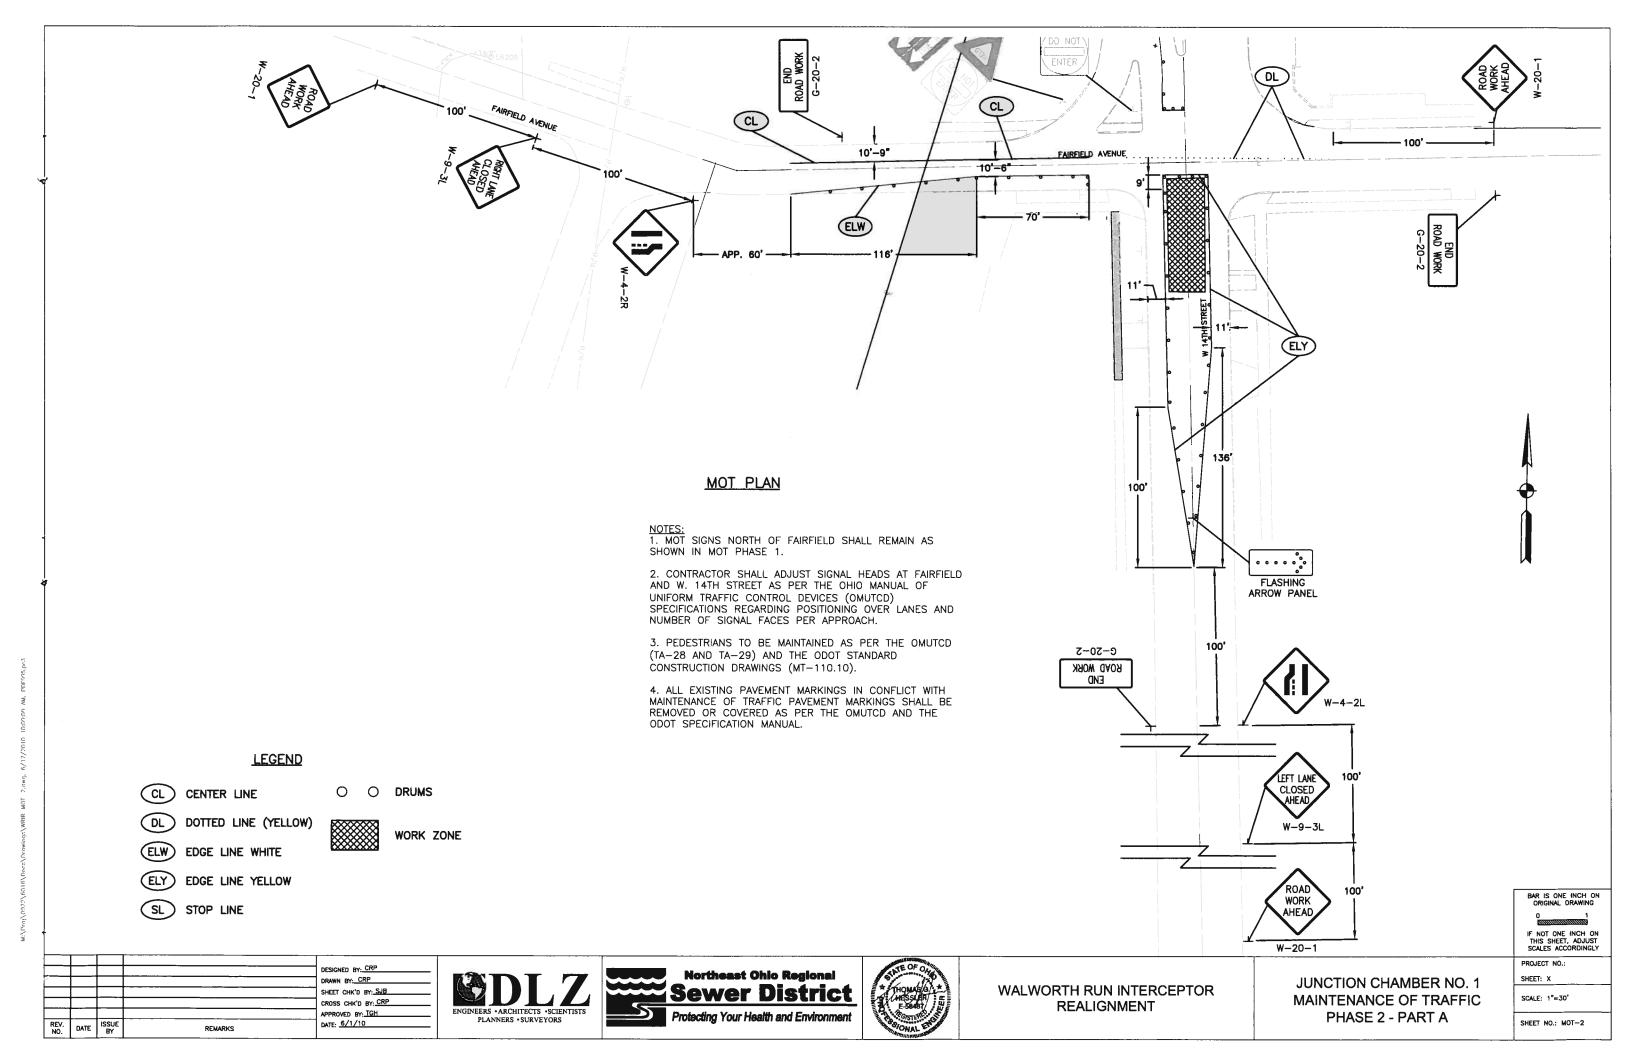

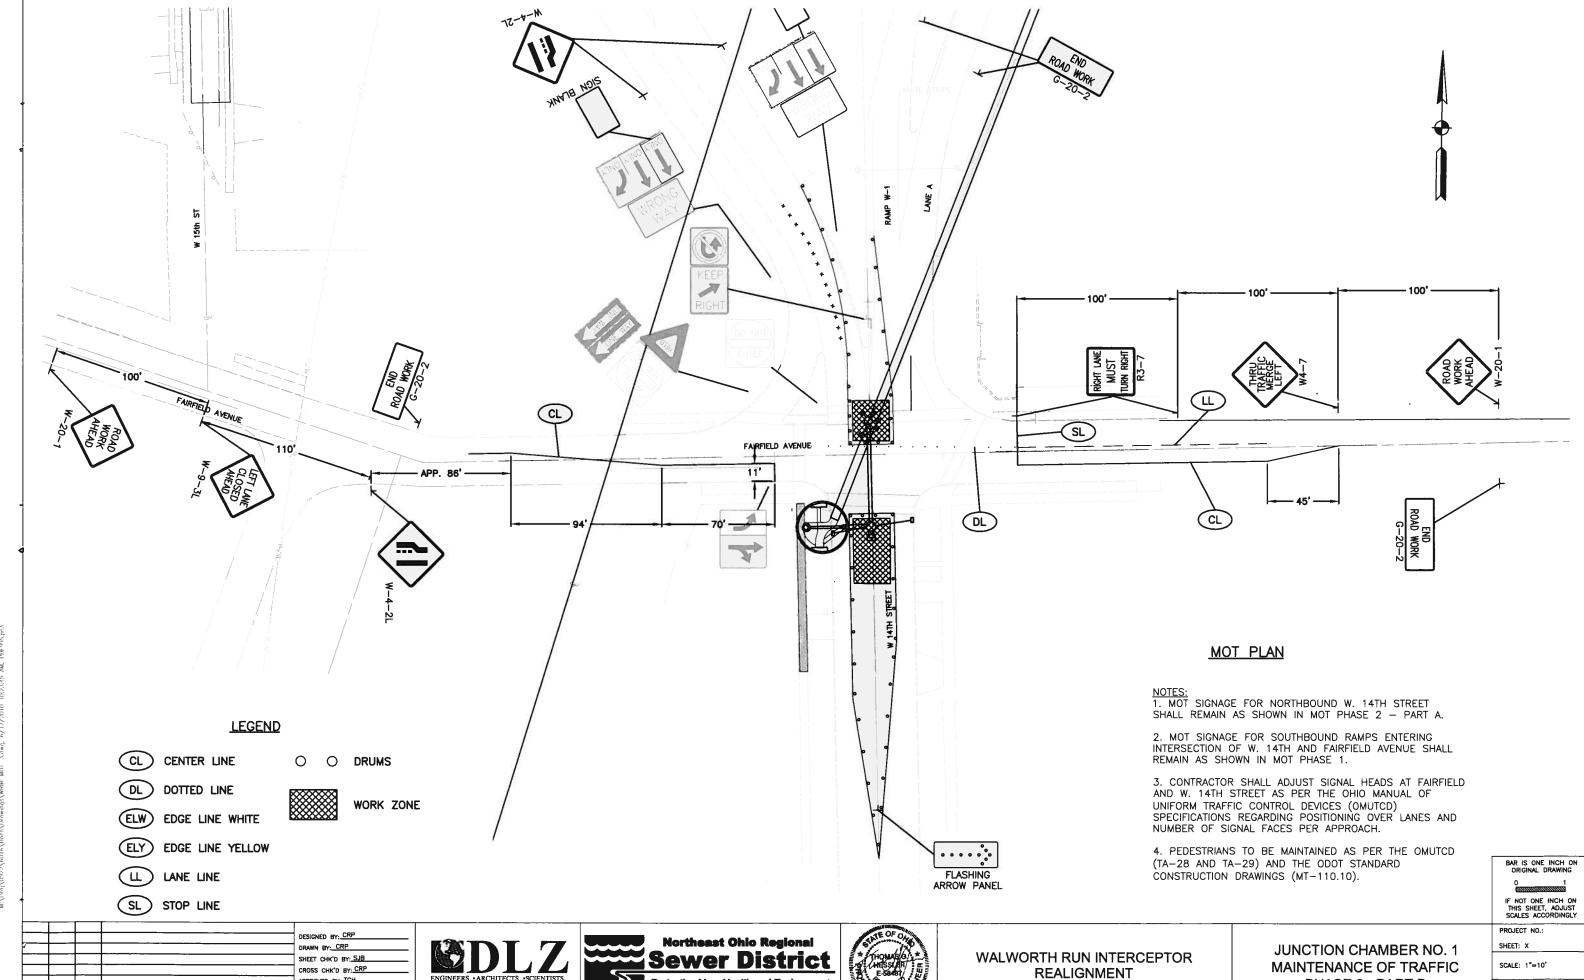

Protecting Your Health and Environment


DATE ISSUE

APPROVED BY: TGH


DATE: 6/1/10

PHASE 2 - PART B

SHEET NO .: MOT-3



- 3. THE CONTRACTOR SHALL PROVIDE A SAFE ROUTE FOR PEDESTRIANS. PEDESTRIAN TRAFFIC IS TO BE MAINTAINED AS PER THE OMUTCD (TA-28 AND TA-29) AND THE ODOT STANDARD CONSTRUCTION DRAWINGS (MT-110.10), AS
- 4. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL COMMERCIAL AND RESIDENTIAL PROPERTIES THROUGHOUT CONSTRUCTION.

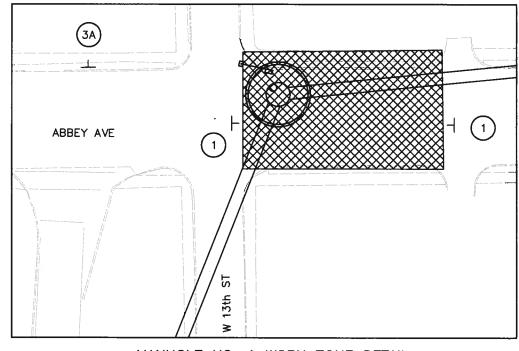





R-11-2 ON TYPE III BARRICADE



R-11-3 ROAD CLOSED LOCAL TRAFFIC ONLY M-4-10L



FOR (3A) ADD

ABBEY RD W-16-8


> 5 4 W-20-2 DETOUR AHEAD W-16-8 ABBEY RD W-16-8

FAIRFIELD AVE.

MH NO. 2F


WORK ZONE

SEE NOTES



6 W-16-8 ABBEY RD **DETOUR** M-4-9R

ST



(7)

(5)

DETOUR PLAN

DETOUR ABBEY RD

M-6-2R

(8)

(4)

5

(3A)

(5)

(6)

(7)

MH NO. 1

WORK ZONE

SEE DETAIL

FAIRFIELD AVE.

90

ABBEY AVE.

6

W-16-8

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO .: SHEET: X

SCALE: NOT TO SCALE SHEET NO .: MOT-4

REALIGNMENT

WALWORTH RUN INTERCEPTOR

DETOUR ROUTE FOR MANHOLE NO. 1

DATE


DESIGNED BY: CRP DRAWN BY: CRP SHEET CHK'D BY: SJB CROSS CHK'D BY: CRP APPROVED BY: TGH DATE: 6/1/10







MAINTENANCE OF TRAFFIC

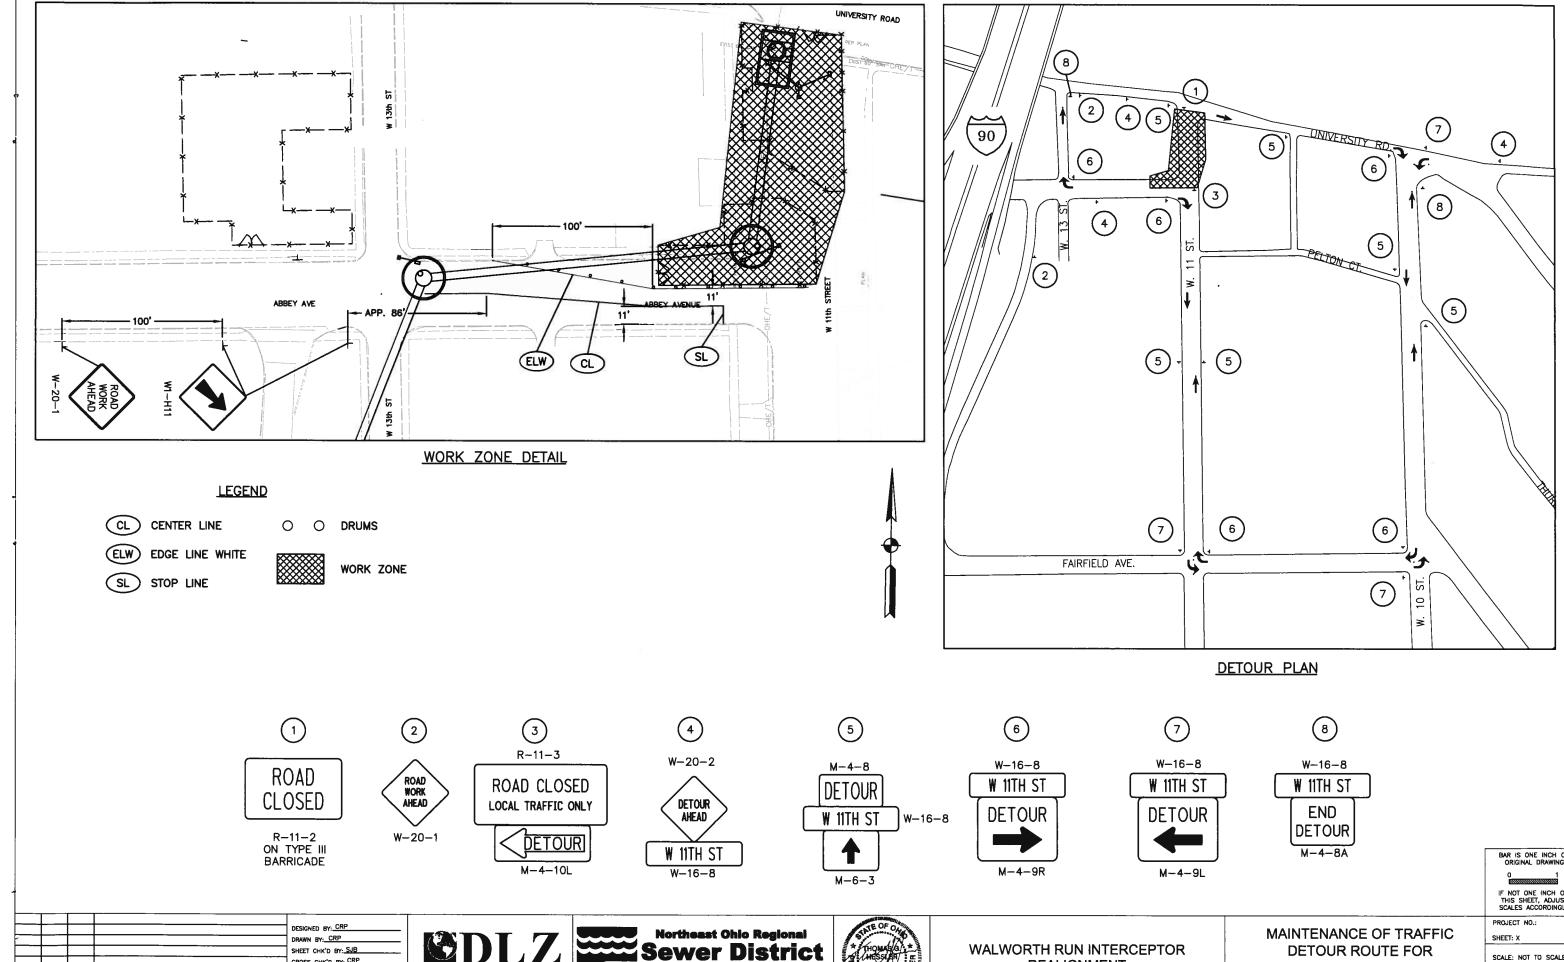

Protecting Your Health and Environment

REALIGNMENT

CROSS CHK'D BY: CRP


APPROVED BY: TGH


DATE: 6/1/10


SCALE: NOT TO SCALE SHEET NO .: MOT-5


MANHOLE NO. 2 AND


JUNCTION CHAMBER NO. 2

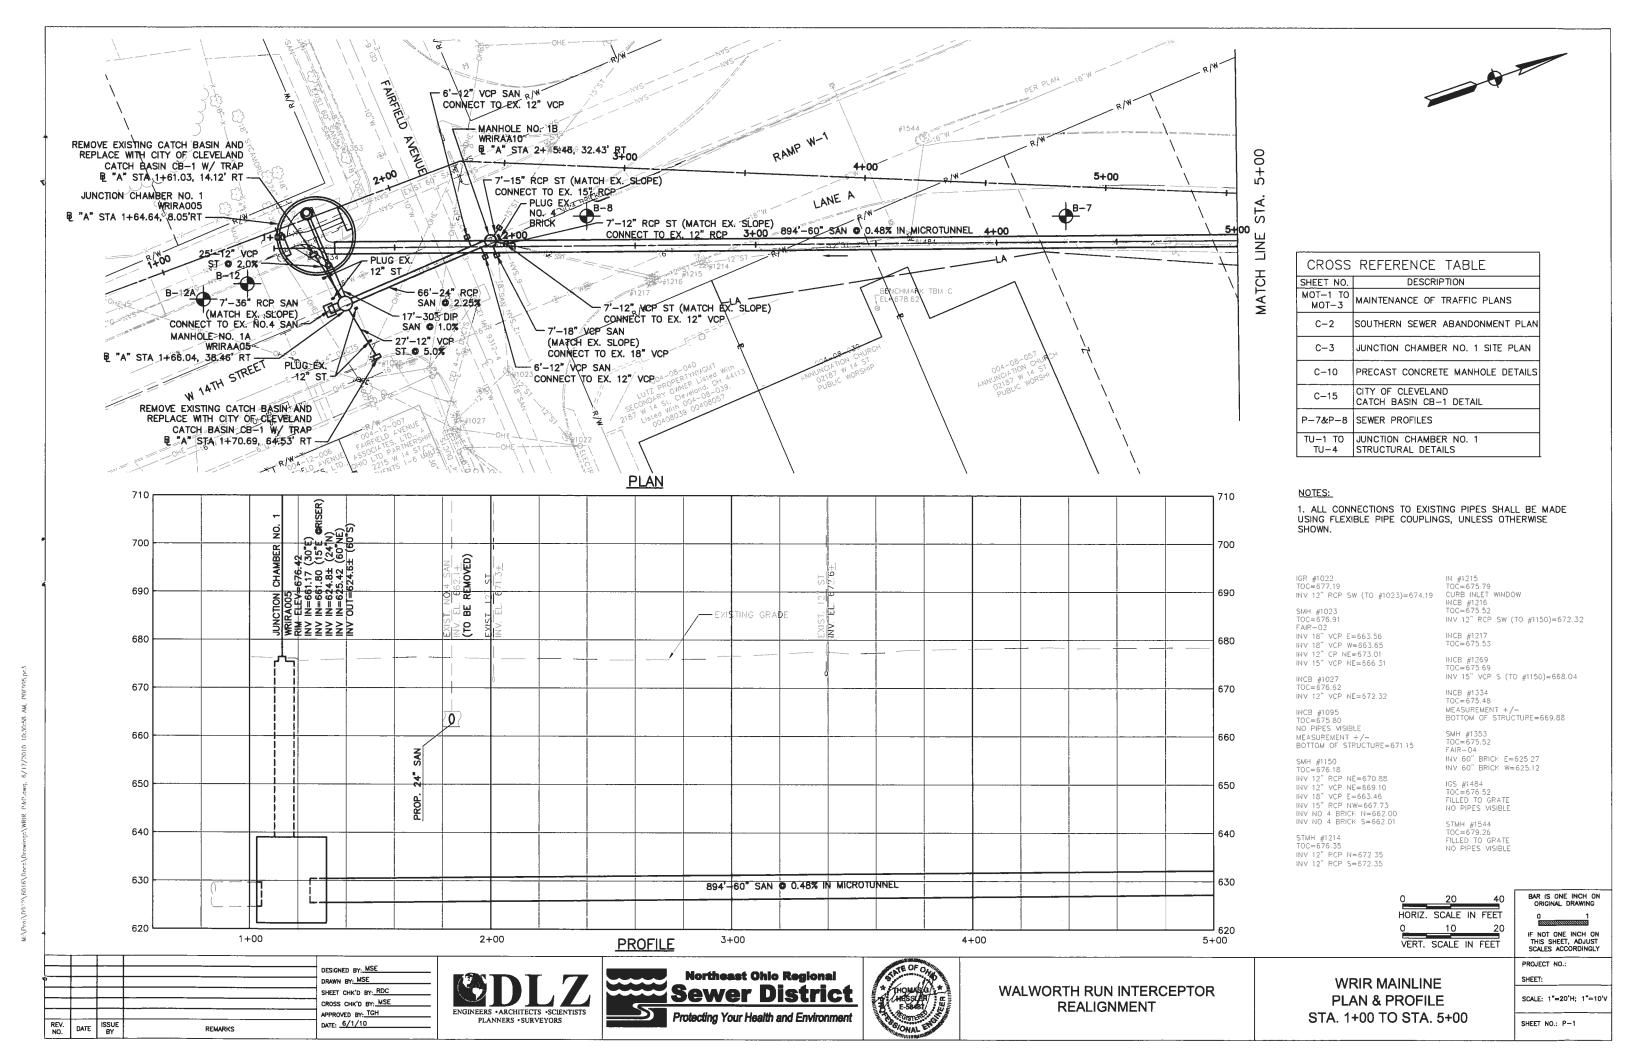


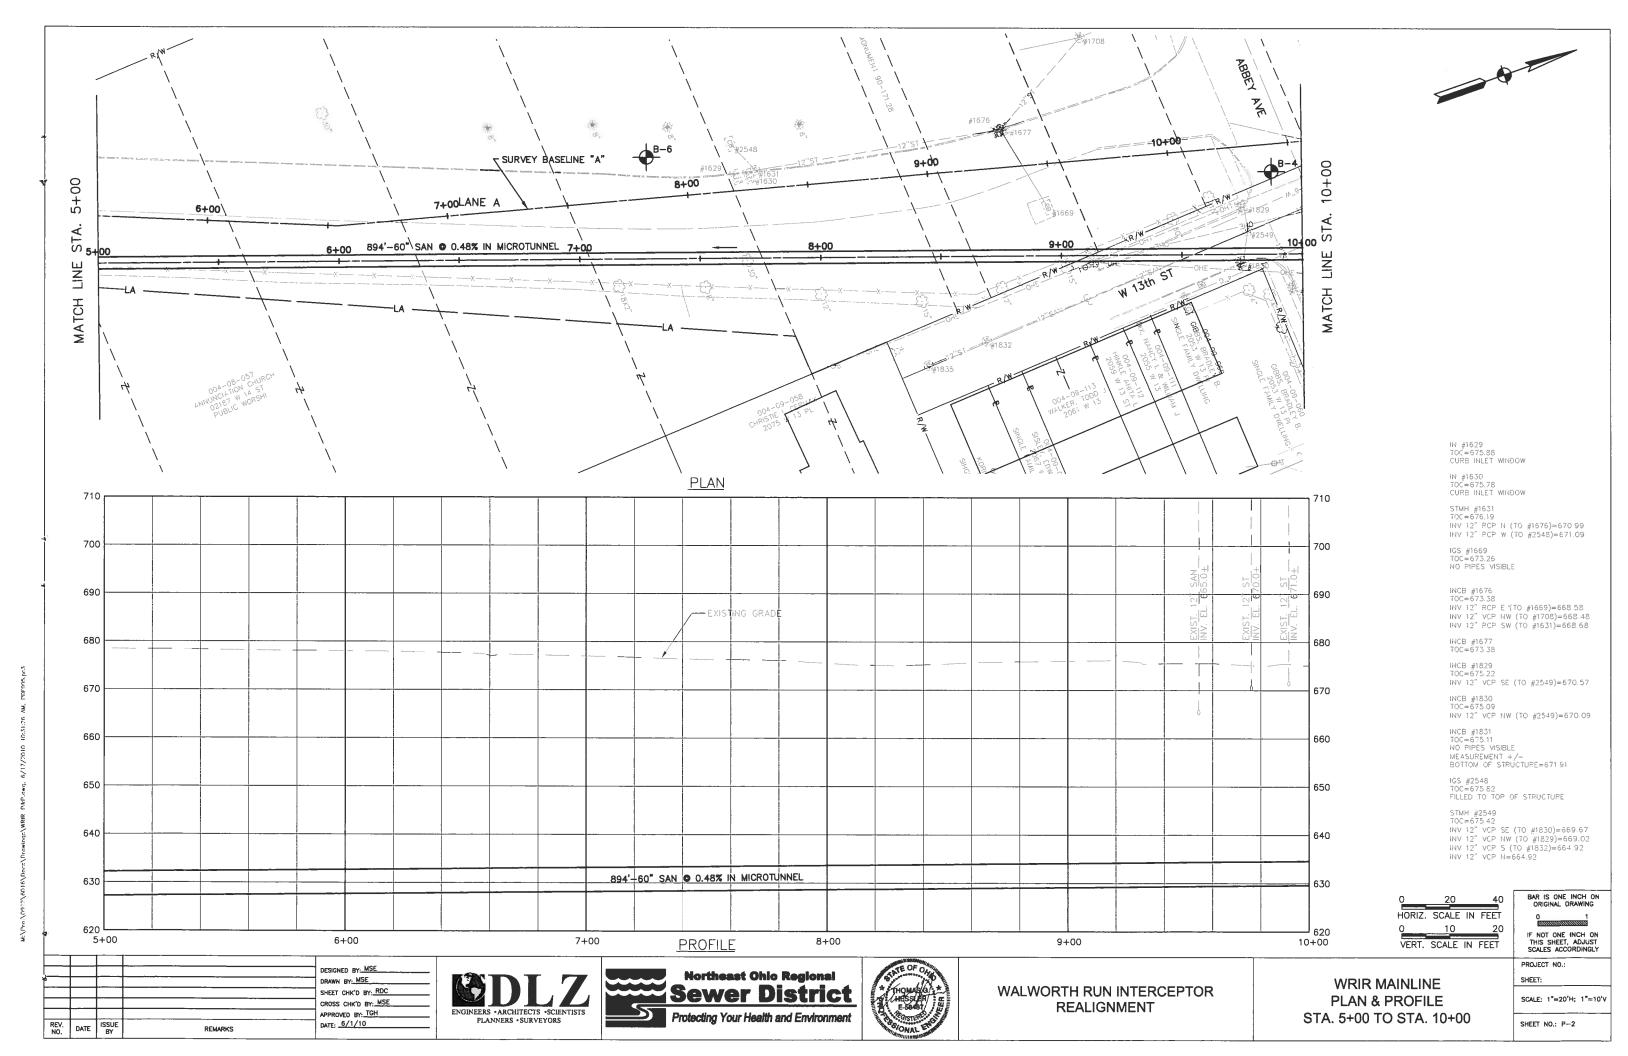

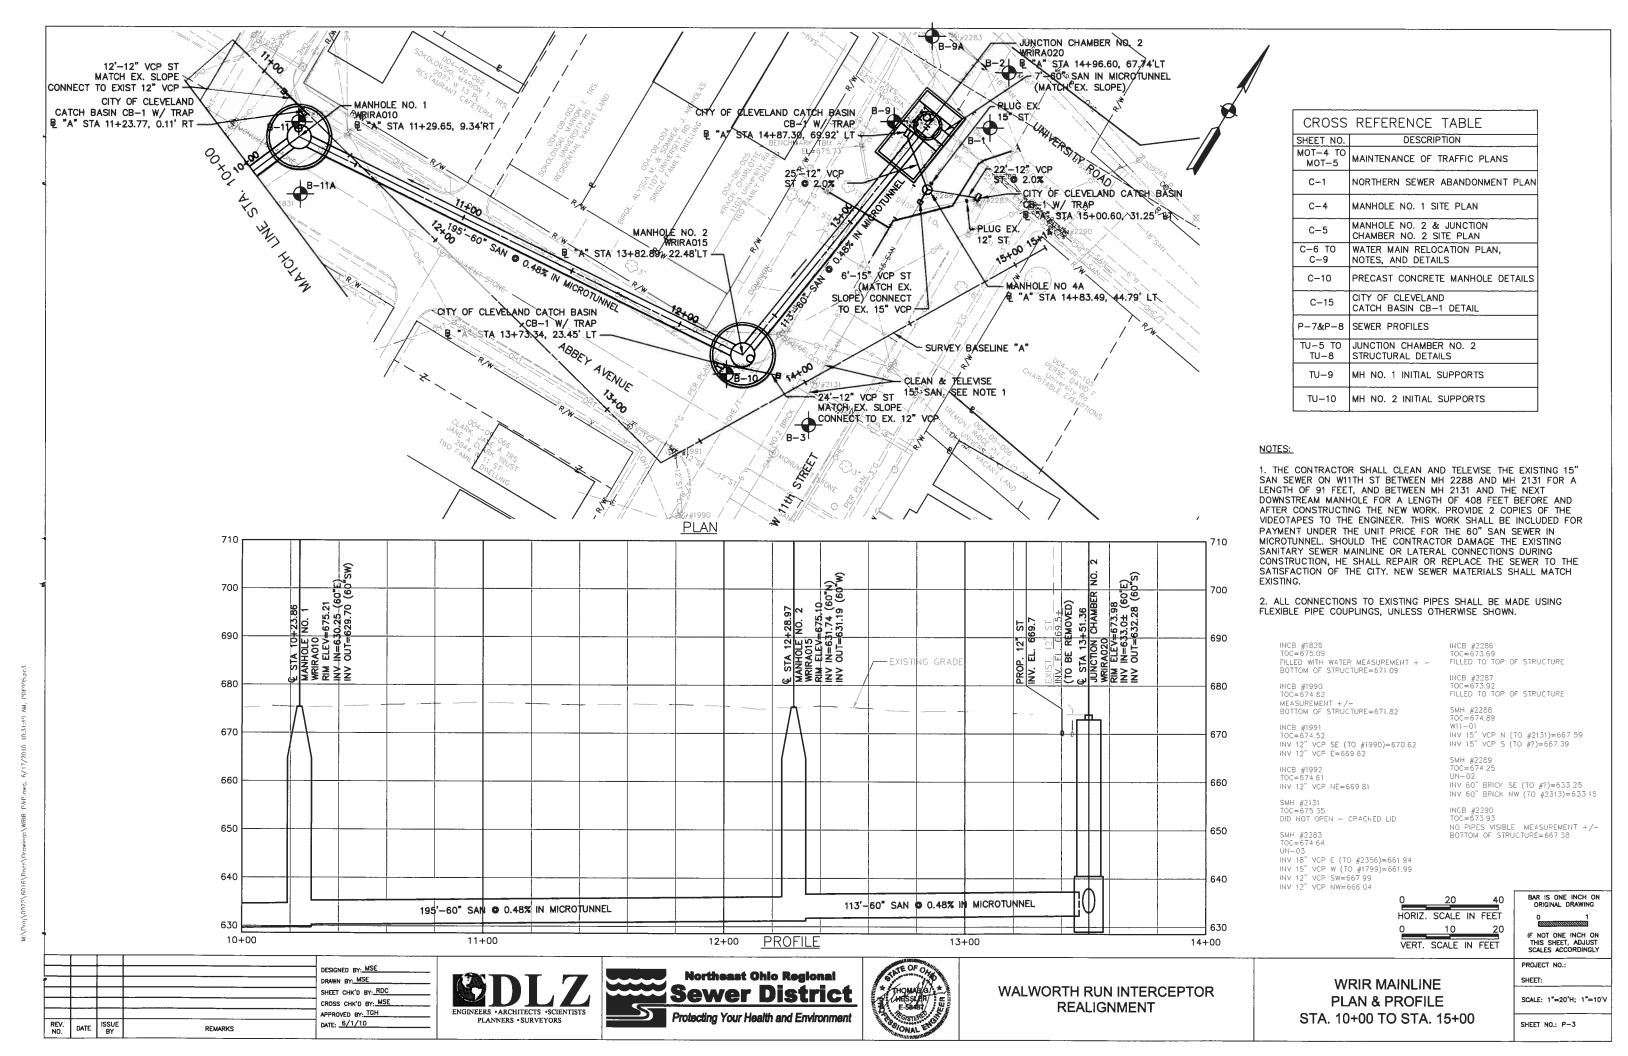

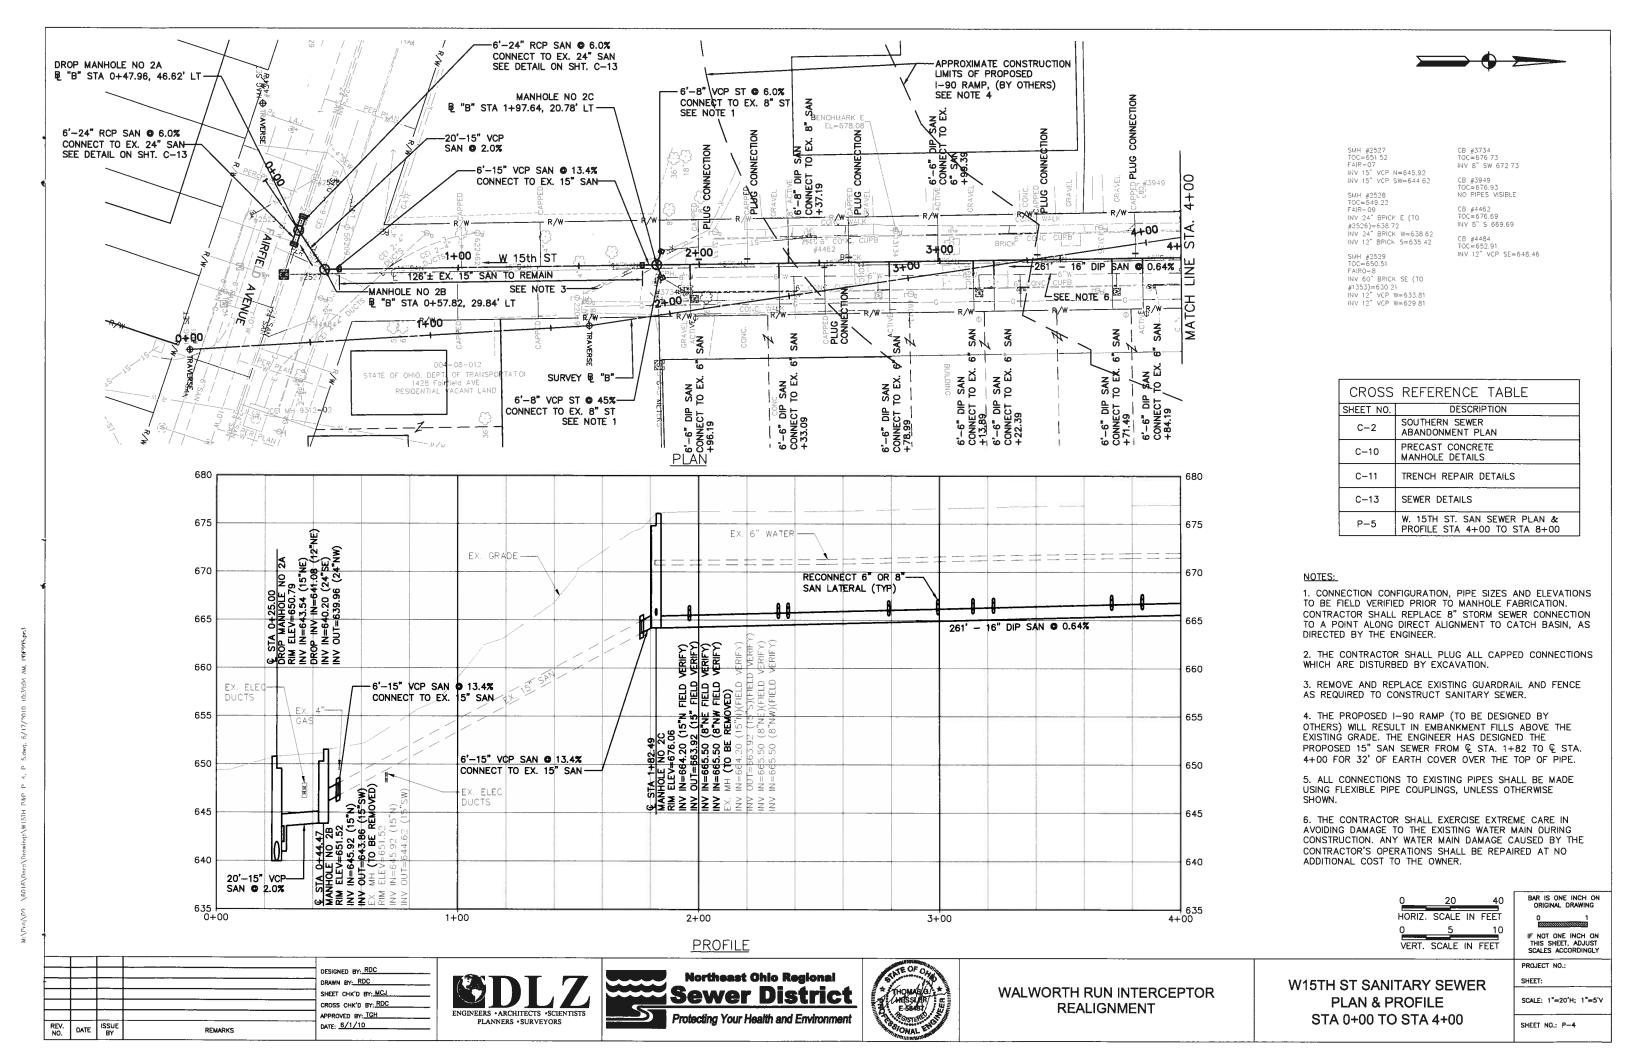

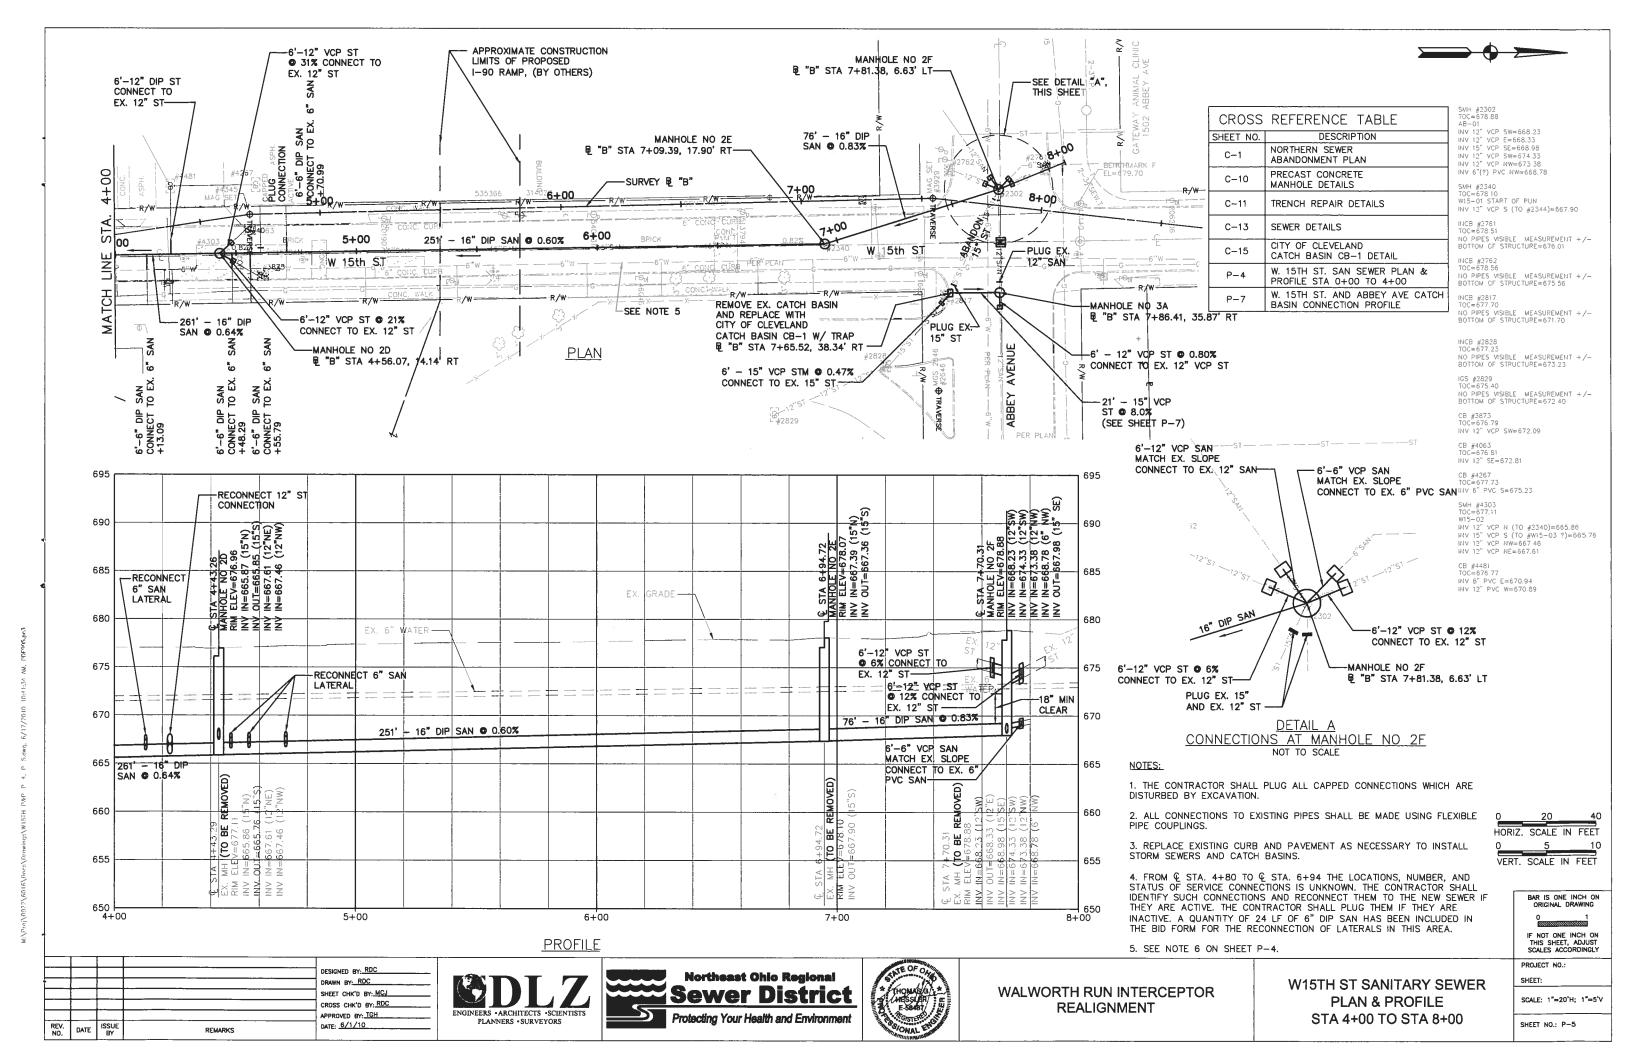

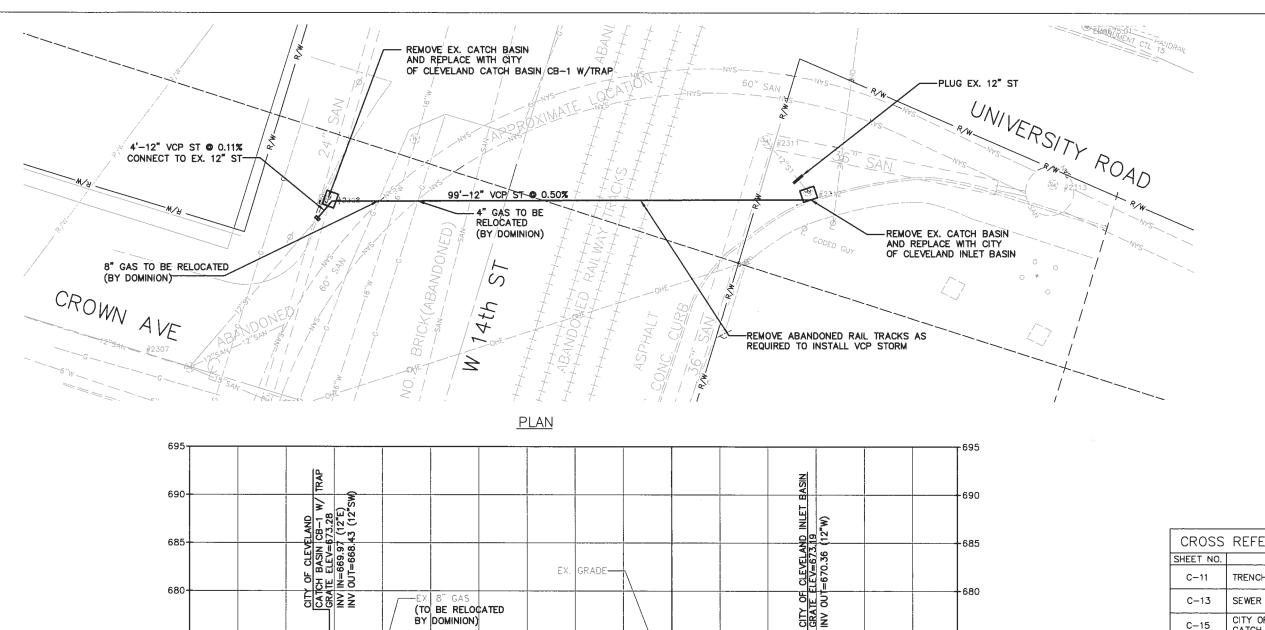

REFERENCE TABLE
DESCRIPTION
TRENCH REPAIR DETAILS
SEWER DETAILS
CITY OF CLEVELAND CATCH BASIN CB-1 DETAIL
CITY OF CLEVELAND INLET BASIN DETAIL

SMH #2307 T0C=674 18 CR-02 INV 12" VCP NE=668.48 INV 12" VCP W=659.68 INV 15" VCP SE=659.73

INCB #2308 TOC=673 35 INV 12" VCP SW=668.43

SMH #2311 TOC=673.97 UN-06 INV 38" BRICK NE=650 37 INV 38" BRICK SW=650.52

INV 12" VCP SE=669 97

IGR #2312 TOC=673 36 NO PIPES WISIBLE MEASUPEMENT +/-BOTTOM OF STPUCTUPE=670.36

NOTES:

1. ALL CONNECTIONS TO EXISTING PIPES SHALL BE MADE USING FLEXIBLE PIPE COUPLINGS.

2. REPLACE EXISTING CURB AND PAVEMENT AS NECESSARY TO INSTALL STORM SEWERS AND CATCH BASINS.

PROFILE

99'-12" VCP ST @ 0.40%

675

660

655

4'-12" VCP ST • 0.11% CONNECT

TO EX. 12" ST-

ENGINEERS • ARCHITECTS • SCIENTISTS
PLANNERS • SURVEYORS

(TO BE RELOCATED

BY DOMINION)

12" MIN CLEARANCE

EX. 16" WATER

MOVED)





EX.

WALWORTH RUN INTERCEPTOR REALIGNMENT

-675

-670

-665

-660

-655

CROWN AVE / W. 14TH ST. STORM SEWER CONNECTION PLAN & PROFILE

HORIZ. SCALE IN FEET

VERT. SCALE IN FEET

BAR IS ONE INCH ON ORIGINAL DRAWING

0 1

IF NOT ONE INCH ON


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.: SHEET:


SCALE: 1"=10"H; 1"=5"V

EET NO.: P-6

DATE

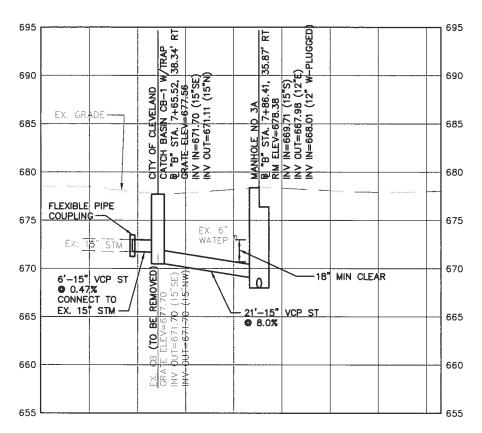

W 15TH AND ABBEY AVE CATCH BASIN CONNECTION

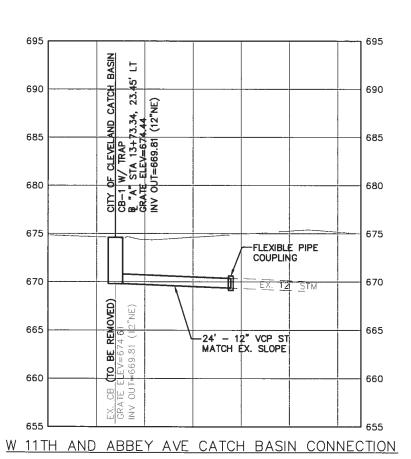

DESIGNED BY: RDC

SHEET CHK'D BY: MCJ


CROSS CHK'D BY: RDC

APPROVED BY: TGH


DATE: 6/1/10

ENGINEERS · ARCHITECTS · SCIENTISTS


DRAWN BY: RDC

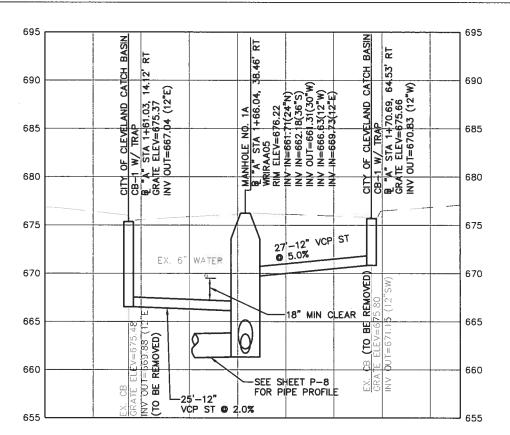

W 14TH AND FAIRFIELD AVE CATCH BASIN CONNECTIONS

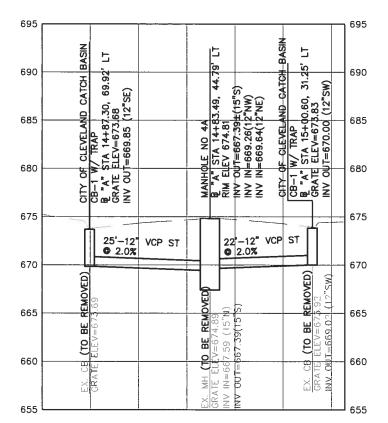

W 11TH AND UNIVERSITY AVE CATCH BASIN CONNECTIONS

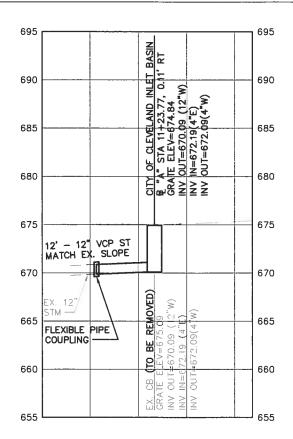

W 13TH AND ABBEY AVE CATCH BASIN CONNECTIONS

CROSS REFERENCE TABLE	
SHEET NO.	DESCRIPTION
P-1	WRIR MAINLINE PLAN AND PROFILE STA. 1+00 TO STA. 5+00
P-3	WRIR MAINLINE PLAN AND PROFILE STA. 10+00 TO STA. 15+00
P-4	W. 15TH ST. SAN SEWER PLAN & PROFILE STA 0+00 TO 4+00
P-5	W. 15TH ST. SAN SEWER PLAN & PROFILE STA 4+00 TO 8+00

NOTE: THE CONTRACTOR SHALL CUT EXISTING SHEETING AS NECESSARY TO CONSTRUCT CATCH BASIN CONNECTIONS.

HORIZ. SCALE IN FEET

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

VERT. SCALE IN FEET

PROJECT NO.:

SHEET:

SCALE: 1"=10"H; 1"=5"V

Northeast Ohio Regional Sewer District **REALIGNMENT** Protecting Your Health and Environment

WALWORTH RUN INTERCEPTOR

SEWER PROFILES

SHEET NO.: P-7

715

710


705

700

695

690

685

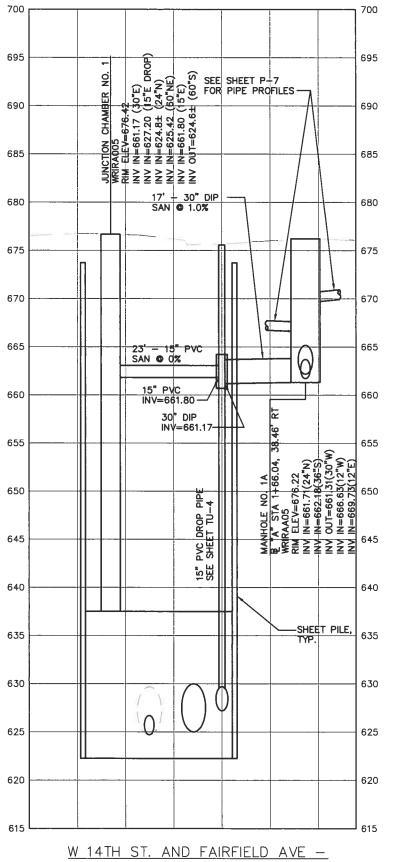

CROSS REFERENCE TABLE DESCRIPTION WRIR MAINLINE PLAN AND PROFILE STA. 1+00 TO STA. 5+00

CONNECTION TO JUNCTION CHAMBER 1

HORIZ. SCALE IN FEET VERT. SCALE IN FEET

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.:

SHEET NO .: P-8

SEWER PROFILES

SHEET: SCALE: 1"=10"H; 1"=5"V

DESIGNED BY: MSE DRAWN BY: RDC SHEET CHK'D BY: MSE CROSS CHK'D BY: RDC APPROVED BY: TGH DATE ISSUE BY DATE: 6/1/10





710

705

700

695

690

680

675

665

660

655

650

645


--PLUG EX. NO. 4 SAN


ABANDON EX


INO. 4 SAN

EX. NO.



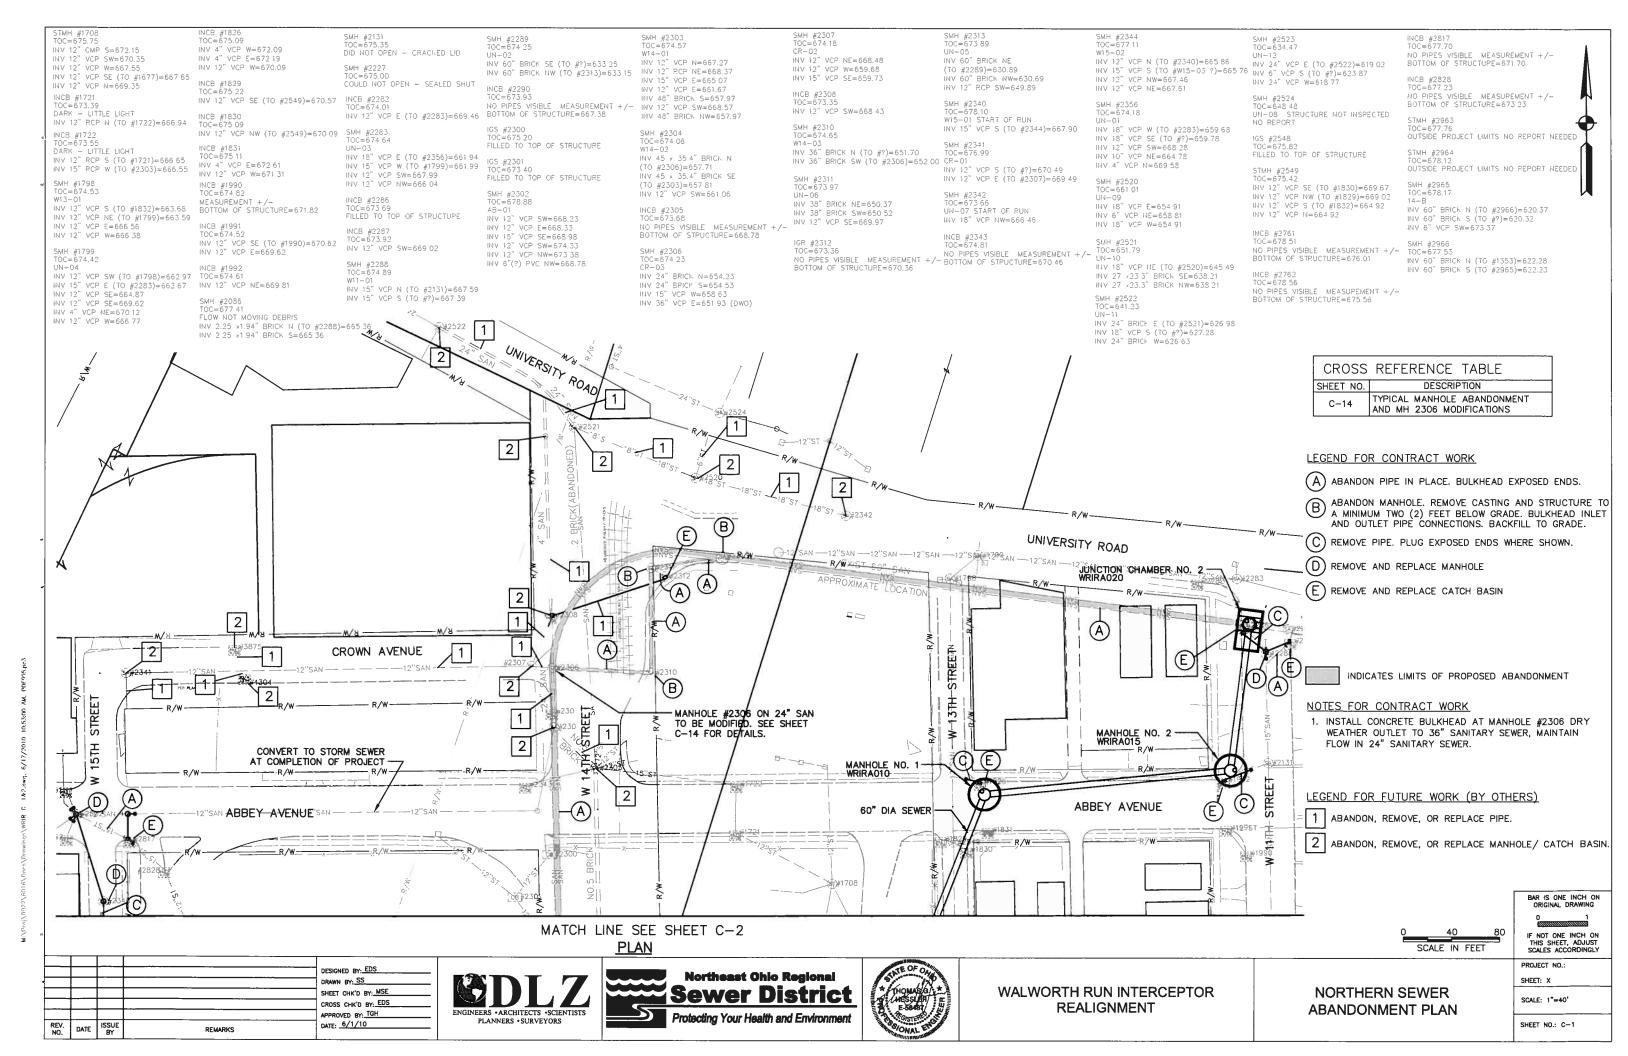

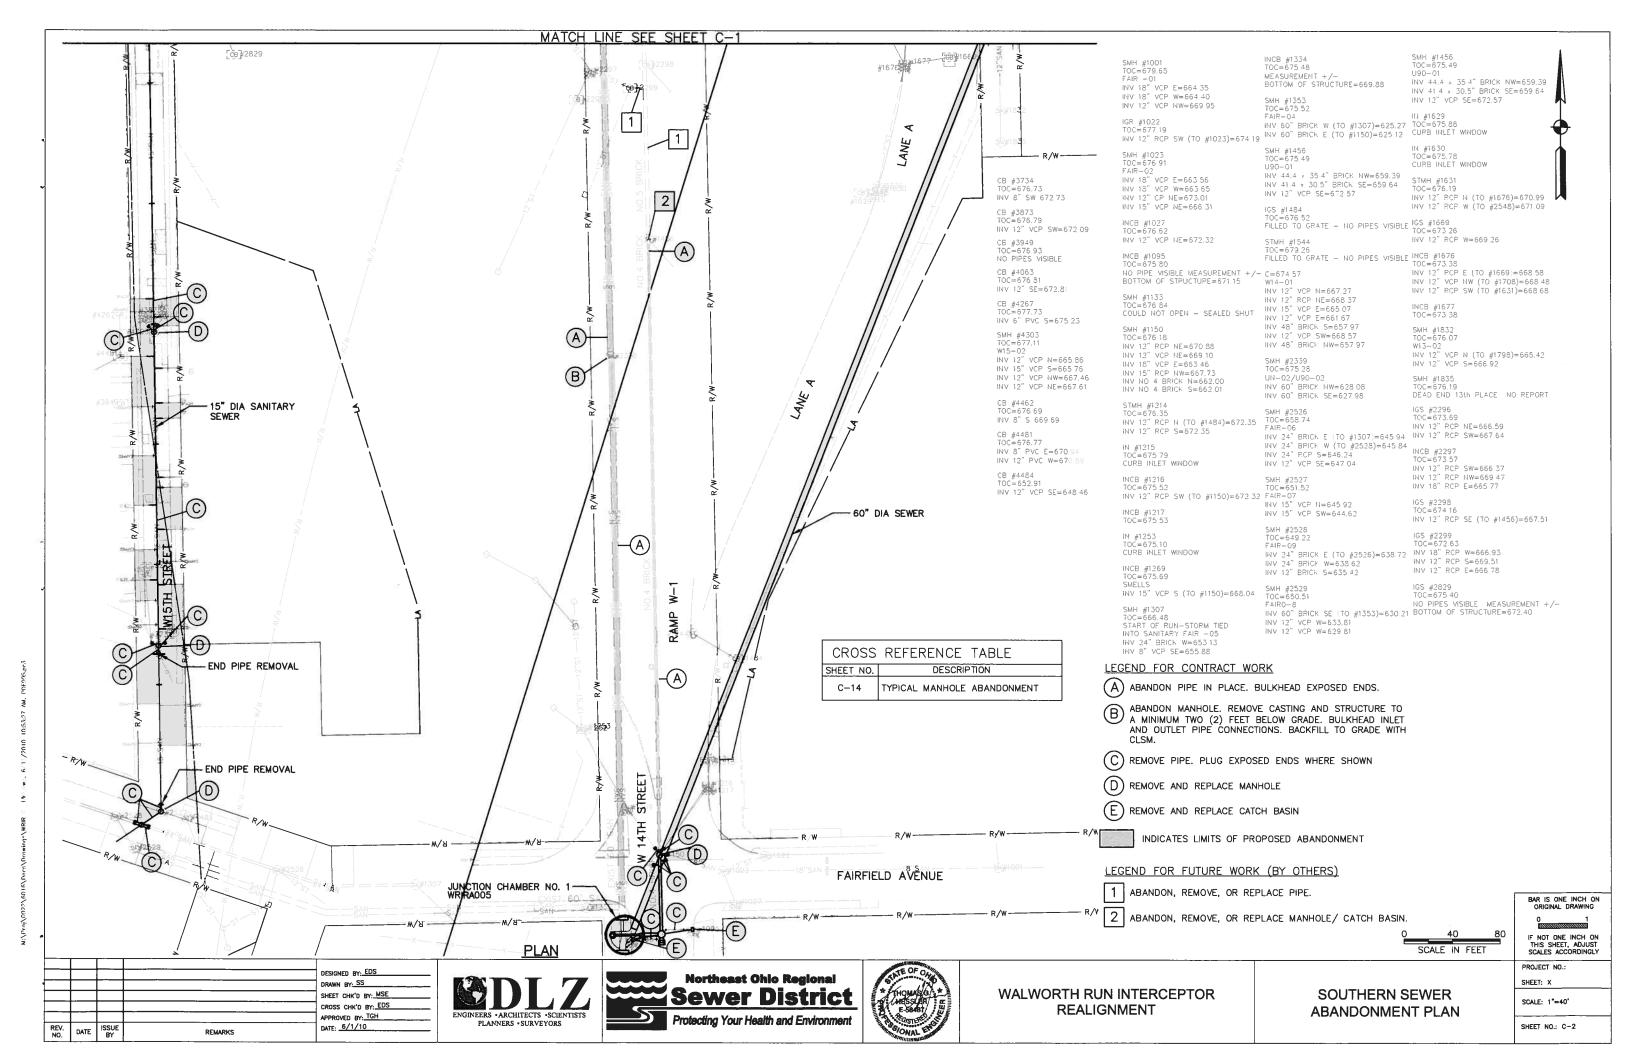

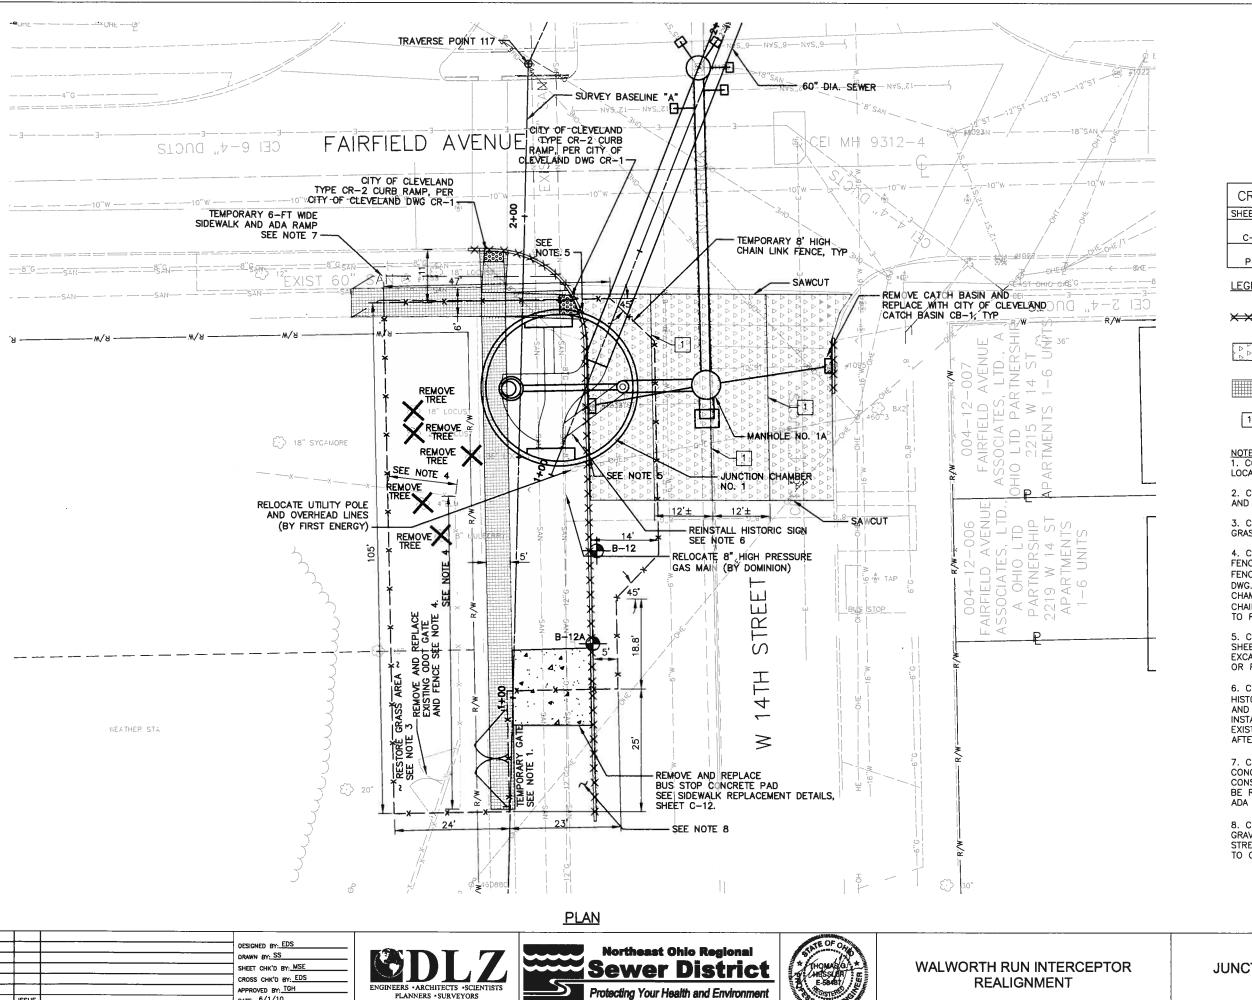

Protecting Your Health and Environment

APPROVED BY: TGH

DATE: _6/1/10

REV. NO.

ISSUE DATE

CROSS REFERENCE TABLE DESCRIPTION PAVEMENT SECTIONS AND DETAILS

WRIR PLAN & PROFILE

LEGEND

XXX REMOVE AND REPLACE CURB


REMOVE AND REPLACE FULL-DEPTH ASPHALT PAVEMENT

REMOVE AND REPLACE

LONGITUDINAL PAVEMENT JOINT

NOTES:
1. CONTRACTOR SHALL DETERMINE THE WIDTH AND LOCATION OF THE TEMPORARY GATE.

- 2. CONTRACTOR SHALL REMOVE TEMPORARY FENCING AND GATE AFTER CONSTRUCTION IS COMPLETE.
- 3. CONTRACTOR SHALL SEED AND MULCH ALL GRASS AREAS DISTURBED DURING CONSTRUCTION
- 4. CONTRACTOR SHALL REMOVE EXISTING ODOT FENCE AND GATE DURING CONSTRUCTION. REPLACE FENCE WITH NEW ODOT TYPE CL FENCE (REF. ODOT DWG. F-1.1) UPON COMPLETION OF JUNCTION CHAMBER CONSTRUCTION. PROVIDE ONE 10-FT WIDE CHAIN LINK WALK GATE (REF. ODOT DWG. F-3.2) TO REPLACE EXISTING GATE.
- 5. CONTRACTOR SHALL CUT HOLES IN THE SHEETING TO ALLOW GUTTER FLOWS TO ENTER THE EXCAVATION. CONTRACTOR SHALL TEMPORARILY PUMP OR FLUME DRAINAGE FLOWS AS REQUIRED.
- 6. CONTRACTOR SHALL REMOVE THE "TREMONT HISTORIC DISTRICT SIGN" AND FOUNDATION. STORE AND PROTECT THE SIGN DURING CONSTRUCTION. INSTALL A NEW FOUNDATION AND REINSTALL THE EXISTING SIGN AT OR NEAR ITS FORMER LOCATION AFTER THE CHAMBER CONSTRUCTION IS COMPLETE.
- 7. CONTRACTOR SHALL PROVIDE A TEMPORARY CONCRETE SIDEWALK WITH ADA RAMP DURING CONSTRUCTION. THE SIDEWALK AND RAMP SHALL BE REPLACED BY THE PERMANENT SIDEWALK AND ADA RAMP SHOWN.
- 8. CONTRACTOR SHALL PROVIDE A TEMPORARY GRAVEL OR PAVED ACCESS DRIVE FROM THE STREET TO THE TEMPORARY GATE. RESTORE SITE TO ORIGINAL CONDITION FOLLOWING CONSTRUCTION.



IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY


PROJECT NO .: SHEET: X


SCALE: 1"=10"

SHEET NO .: C-3

REALIGNMENT

JUNCTION CHAMBER NO. 1 SITE PLAN

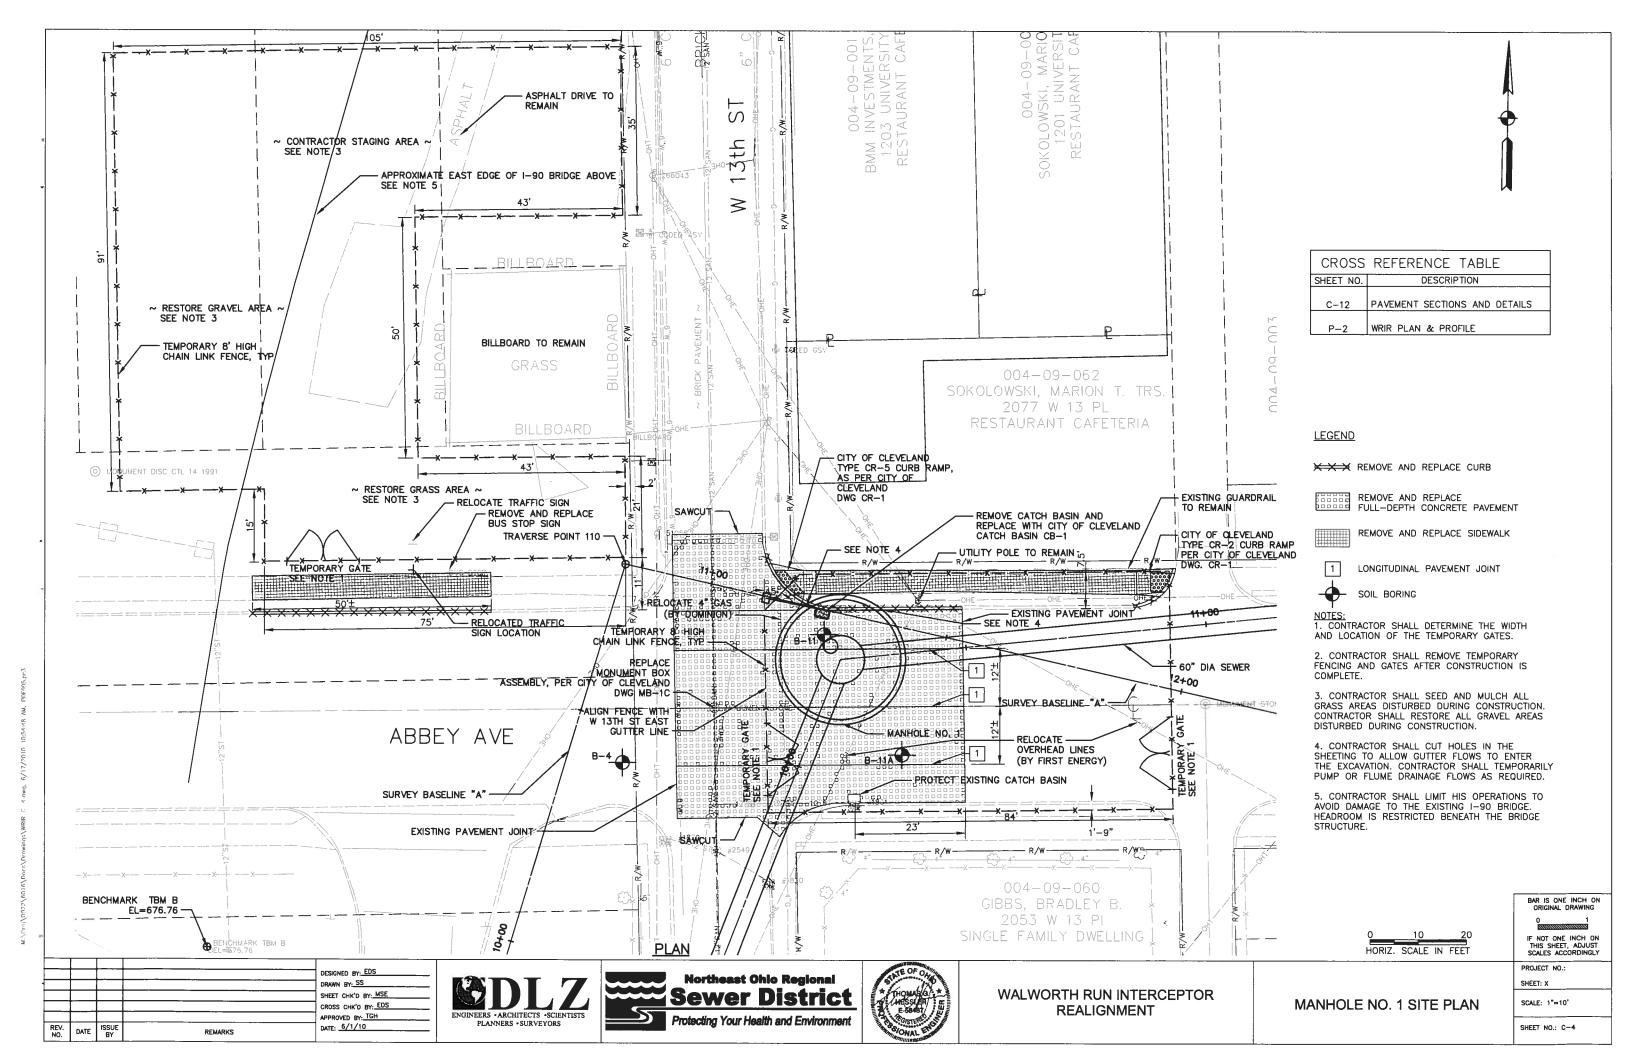


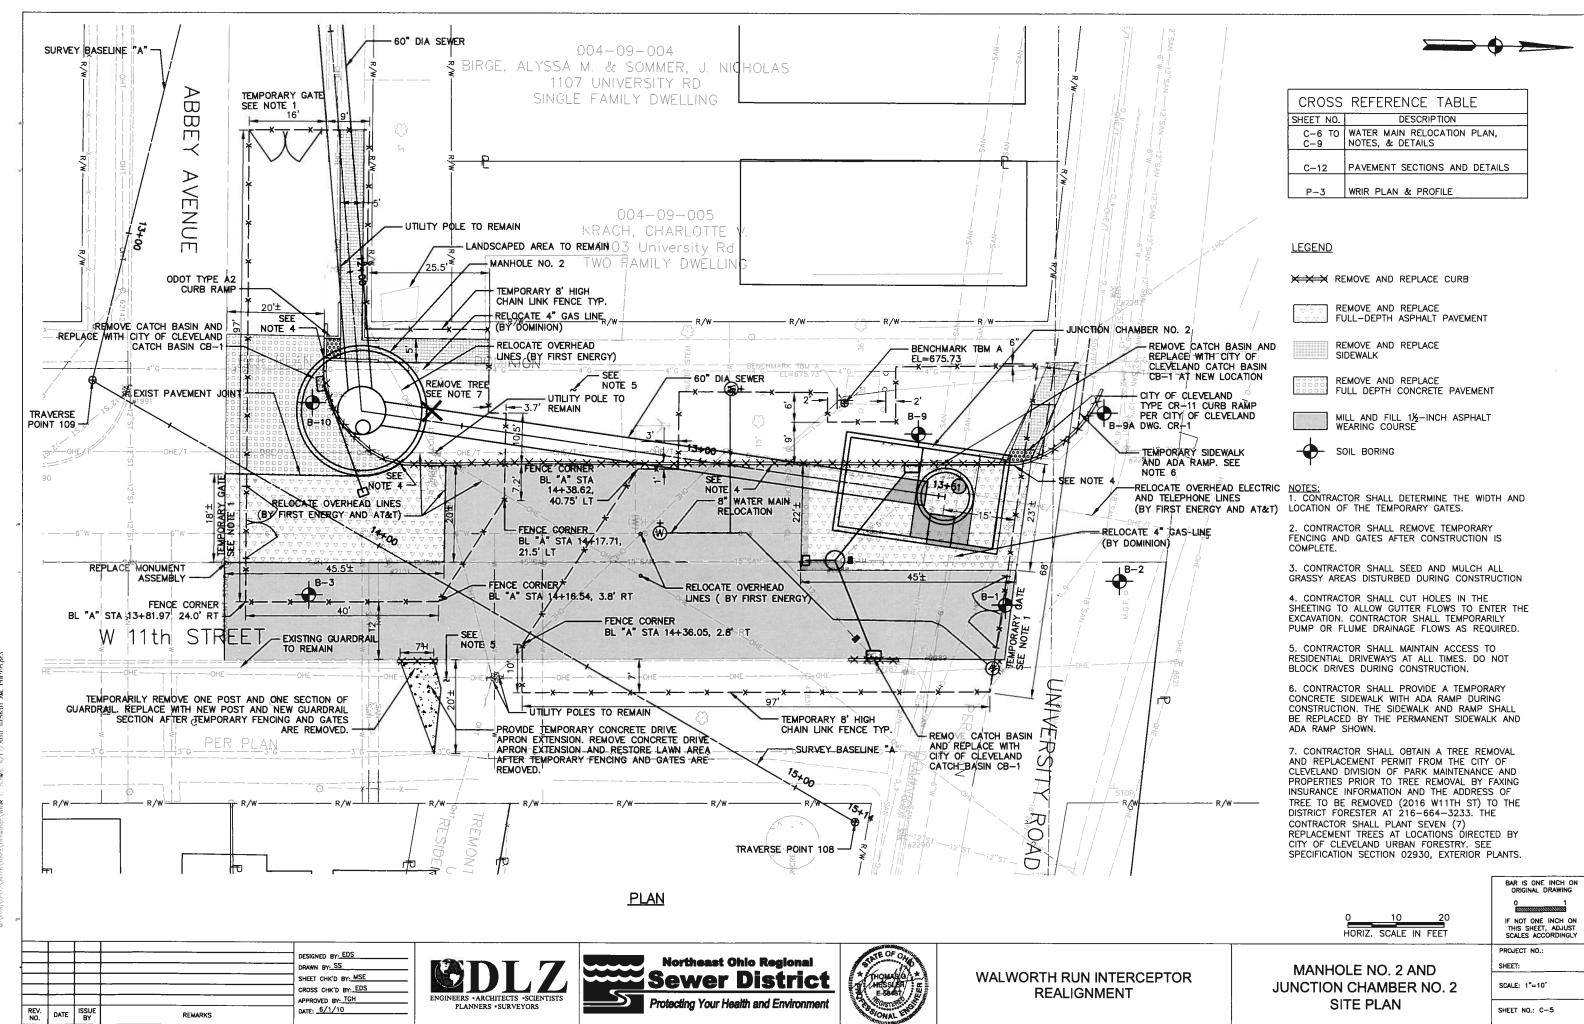




GENERAL:

- THE INFORMATION SHOWN ON THE CLEVELAND DIVISION OF WATER'S SUMMARY OF WORK/CHARGE LETTER AND STRIP MAPS IS TAKEN FROM EXISTING AVAILABLE RECORDS, AND THEIR ACCURACY IS NOT GUARANTEED.
- CALL THE INSPECTION AND ENFORCEMENT UNIT AT 216-664-2342 TO SCHEDULE A PRECONSTRUCTION MEETING. THE OPERATION OF ANY VALVE OR ALTERATION OF ANY PART OF THE WATER SYSTEM BY CONTRACTORS OR THEIR EMPLOYEES IS PROHIBITED WITHOUT THE SUPERVISION OF THE CLEVELAND DIVISION OF WATER INSPECTOR.
- THE MUNICIPALITY SHALL REQUIRE THAT THE PROJECT'S PROFESSIONAL ENGINEER OBTAIN ACTUAL FIELD MEASUREMENTS OF THE MAIN DURING INSTALLATION AND SHALL FURNISH THE CWD INSPECTOR WITH RECORD PRINTS IN A FORM ACCEPTABLE TO THE DIVISION OF WATER. THE CLEVELAND DIVISION OF WATER WILL REQUIRE THE DELIVERY AND ACCEPTANCE OF TWO COPIES OF RECORD (AS BUILT) PRINTS, STAMPED BY A PROFESSIONAL ENGINEER, BEFORE THE PRESSURE TEST AND CHLORINATION OF THE MAIN.
- FOR THE PURPOSES OF CHLORINATION AND BACTERIOLOGICAL TESTING OF THE WATER MAINS THE CONTRACTOR SHALL PROVIDE AND INSTALL, AT EACH OF THE CHLORINATION PIT LOCATIONS SHOWN AND AT OTHER LOCATIONS DETERMINED BY THE DIVISION OF WATER, FLUSHING/SAMPLING TAPS OF SIZES TO BE DETERMINED BY THE DIVISION OF WATER. CHLORINATION PITS SHALL BE SIX (6) FOOT SQUARE MEETING
- A TWO YEAR WARRANTY, COMMENCING FROM THE DATE OF ACCEPTANCE OF THE FINAL CHLORINATION OF THE WATER MAIN INSTALLATION, SHALL BE PROVIDED BY THE BUILDER/DEVELOPER AND/OR CONTRACTOR FOR ALL WATER MAINS AND SERVICE CONNECTION WORK PERFORMED BY THE CONTRACTOR, INCLUDING RETAPS, SHOULD ANY LEAKS OCCUR AND REPAIRS BE REQUIRED DUE TO DEFECTIVE MATERIAL OR
- USE BACKFILL MATERIAL AS SPECIFIED AND COMPACT SUFFICIENTLY IN THOSE AREAS WHERE EXISTING MAINS AND WATER SERVICE CONNECTIONS ARE EXPOSED. (SEE DIVISION OF WATER STANDARD DETAIL STD-001)
- ALL MATERIALS, INCLUDING BUT NOT LIMITED TO WATER MAINS, FIRE HYDRANTS, VALVES, CONNECTION MATERIALS AND OTHER WATER APPURTENANCES, SHALL BE NEW AND UNUSED AND SHALL CONFORM TO THE MOST CURRENT DIVISION OF WATER SPECIFICATIONS. ALL MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH DIVISION OF WATER'S STANDARDS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING WATER MAINS AND APPURTENANCES THEREOF WHEN CONNECTING THE NEW WATER MAIN FOR THE HYDROSTATIC TEST. ALL REPAIRS TO DAMAGED EXISTING FACILITIES SHALL BE MADE BY THE CONTRACTOR, AT THE CONTRACTOR'S EXPENSE, TO THE SATISFACTION OF THE DIVISION OF WATER. (REFER TO THE THE ALTERNATE TEST DETAIL STD-002 AS NEEDED)
- ALL HYDROSTATIC PRESSURE TESTING SHALL BE DONE BY THE CONTRACTOR IN THE PRESENCE OF THE DIVISION OF WATER'S INSPECTOR. THE HYDROSTATIC TEST PRESSURE SHALL BE 75 PSI ABOVE THE STATIC PRESSURE PREVAILING AT THE SITE, BUT IN NO CASE LESS THAN 150 PSI. THE PRESSURE TEST SHALL BE FOR A DURATION OF TWO (2) HOURS WITH THE PRESSURE BEING MAINTAINED WITHIN 5 PSI OF THE REQUIRED TEST PRESSURE. SHOULD THE PRESSURE TEST FAIL, THE CONTRACTOR SHALL FIND AND CORRECT THE DEFICIENCY(IES) TO THE SATISFACTION OF THE DIVISION OF WATER AND REPEAT THE TWO (2) HOUR PRESSURE TEST.
- ALL PIPE, UNLESS OTHERWISE CALLED FOR, SHALL BE DUCTILE IRON, MINIMUM CLASS 52, CEMENT LINED HAVING PUSH-ON JOINTS WITH RADIALLY COMPRESSED RUBBER RING GASKET AND INSTALLED AS PER THE MOST CURRENT REVISION OF AWWA C600.
- OB. ALL FITTINGS, UNLESS OTHERWISE CALLED FOR, SHALL BE APPROVED DUCTILE IRON, CLASS 350, CEMENT LINED OR FUSION BONDED EPOXY COATED. ALL FITTINGS AND PIPE CONNECTED TO FITTINGS SHALL BE RESTRAINED USING A "RETAINED" MECHANICAL JOINT CONFORMING TO THE MATERIAL AND PERFORMANCE REQUIREMENTS OF ANSI/AWWA C-110/A21.10 AND ANSI/AWWA C-111/A21.11, OR "COMPACT" FITTINGS IN ACCORDANCE WITH ANSI/AWWA C-153/A21.53. EXCEPT FOR ANCHOR TEES, REDUCERS OR OTHER SPECIAL CIRCUMSTANCES WHEN DIRECTED BY CLEVELAND DIVISION OF WATER, ALL FITTINGS ARE TO HAVE BELL ENDS.
- IOC. ALL BOLTS AND NUTS ON ALL "RETAINED" MECHANICAL JOINTS SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS
- IOD. WHERE SHOWN ON THE PLANS, OR WHEN OTHERWISE CALLED FOR, PIPE AND FITTINGS SHALL HAVE AN APPROVED "TYPE I" OR "TYPE II" BOLTLESS RESTRAINED PUSH-ON JOINTS TO THE LIMITS SHOWN ON THE DRAWINGS.

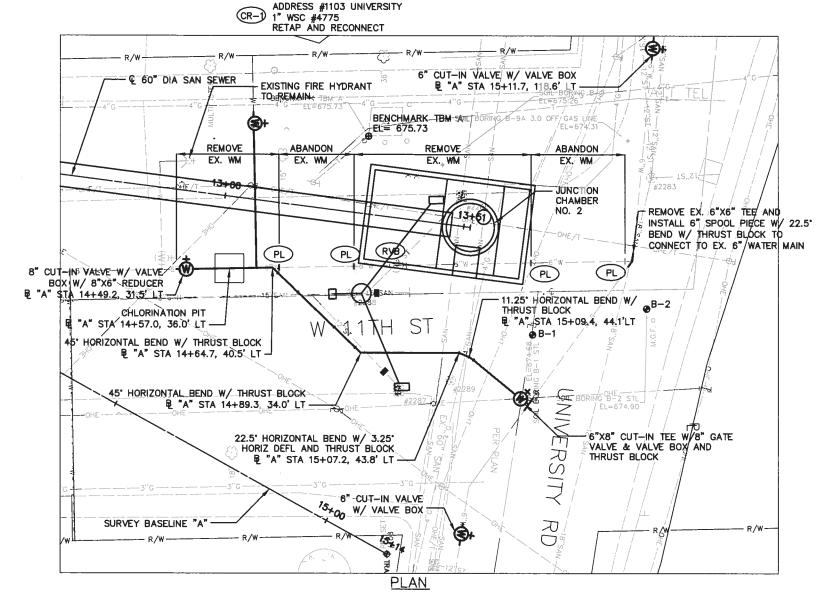

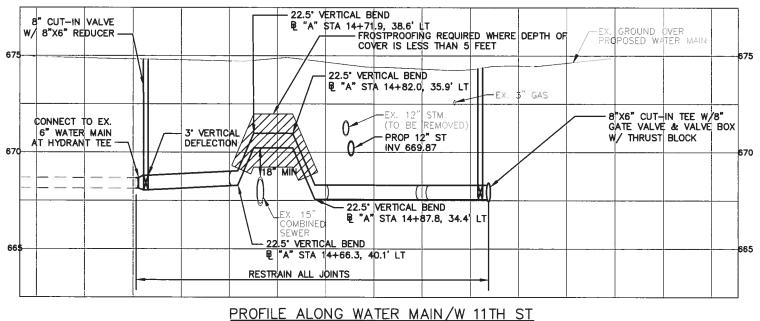

LEGEND

REPLACE EXISTING CONNECTION, SHORT SIDE, (1" AND UNDER) WITH COPPER CONNECTION, INCLUDING CURB VALVE AND VALVE BOX

PLUG EXISTING WATER MAIN END

REMOVE VALVE AND VALVE BOX

VERTICAL SCALE IN FEET

HORIZ, SCALE IN FEET

BAR IS ONE INCH ON IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.:

SHEET:

1"=10"

WALWORTH RUN INTERCEPTOR **REALIGNMENT**

AND NOTES

WATER MAIN RELOCATION PLAN SCALE: SHEET NO .:



DESIGNED BY: EDS DRAWN BY: SS SHEET CHK'D BY: MCJ CROSS CHK'D BY: EDS APPROVED BY: TGH DATE: 6/1/10 DATE ISSUE





PHOTOS SHALL BE SUBMITTED ON A DAILY BASIS UNLESS OTHERWISE DEFINED BY THE CWD INSPECTOR OR ENGINEER. ALL PHOTOS TAKEN OVER THE COURSE OF THE PROJECT SHALL BE SUBMITTED BY THE CONTRACTOR AS PART OF THE AS-BUILT SUMITTAL, AS-BUILTS SHALL BE CONSIDERED INCOMPLETE WITHOUT SAID COLLECTION OF DIGITAL PHOTOS.

- 11. IN ALL HYDRANT INSTALLATIONS THE CONTRACTOR SHALL FACE ALL HYDRANT'S 4" (STEAMER) NOZZLE TOWARD THE PAVEMENT PRIOR TO TESTING AND CHLORINATION OF WATER MAINS. CONTRACTOR SHALL CONSULT WITH THE LOCAL MUNICIPALITY'S ENGINEERING OR SERVICE DEPARTMENT TO OBTAIN HYDRANT MODEL AND NOZZLE THREAD REQUIREMENTS IF NOT INDICATED ON THE APPROVED PLANS.
- 12. ALL VALVES SHALL BE AN APPROVED MODEL RESILIENT SEATED GATE VALVES AS PER THE MOST CURRENT VERSION OF AWWA C509 OR C515.

- 13. WATER CONNECTIONS SHOWN ON THESE DRAWINGS ARE FOR REFERENCE ONLY AND ARE NOT PART OF THE WATER MAIN APPROVAL. ADDITIONAL PERMITS FOR SERVICE CONNECTIONS MUST BE OBTAINED FROM THE DIVISION OF WATER PRIOR TO INSTALLATION OF ANY PORTION OF THE SERVICE CONNECTION(S). IT IS THE CONTRACTOR'S RESPONSIBILITY TO ARRANGE FOR PERMITS FOR ALL SIZE WATER SERVICE CONNECTIONS BEFORE PERFORMING ANY WORK. THE AMOUNT OF THE CHARGES CAN BE OBTAINED FROM THE DIVISION OF WATER, PERMITS AND SALES SECTION AT 216-664-2444 X5203.
- 14. ONE INCH SERVICE CONNECTIONS SHALL BE PERMITTED TO SERVICE HOMES BASED ON THE FOLLOWING CRITERIA:
- * PEAK FLOW DEMANDS DO NOT EXCEED 25 GPM FOR AN INDIVIDUAL HOME/UNIT. INCLUSIVE OF ALL USAGE (FIRE, DOMESTIC AND/OR IRRIGATION) AND
- * LENGTH OF ONE INCH CONNECTION DOES NOT EXCEED 75 FEET AS MEASURED FROM THE MAIN TO THE POINT OF ENTRY INTO THE PROPOSED HOME/UNIT.

ANY SERVICE REQUESTS DIFFERING FROM THE STATED CRITERIA SHALL REQUIRE THE SUBMITTAL OF A COMPLETE WATER SERVICE APPLICATION, PEAK DEMANDS ARE TO BE ASSESSED ON APPLICATION AND SETBACKS ARE TO BE SHOWN ON AN ACCOMPANYING SITE PLAN. SITE PLANS SHALL SHOW WATER METER VAULTS IN THE RIGHT OF WAY OR IN AN EASEMENT CONTIGUOUS TO THE RIGHT OF WAY FOR ANY HOMES/UNITS WITH SETBACKS GREATER THAN 150 FEET. EASEMENTS ARE TO BE PROVIDED WITH THE SERVICE CONNECTION APPLICATION SUBMITTAL.

ALL WATER MAIN CURB VALVE BOXES & METER VAULTS SHALL BE INSTALLED IN GRASS

IF A WATER MAIN OR SERVICE CONNECTION BREAK OCCURS DURING CONSTRUCTION AND EMERGENCY ASSISTANCE IS REQUIRED, PLEASE NOTIFY THE DIVISION OF WATER AT 216-664-3060

UTILITIES:

- THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES AT LEAST TWO (2) WORKING DAYS (NOT INCLUDING SATURDAYS AND LEGAL HOLIDAYS) PRIOR TO CONSTRUCTION TO HAVE ÙTILITIES STAKED, MARKED OR OTHERWISE DESIGNATED IN THE CONSTRUCTION AREA IN SUCH A MANNER AS TO INDICATE THEIR COURSE TOGETHER WITH THE APPROXIMATE DEPTH AT WHICH THEY WERE INSTALLED. THE MARKING OR LOCATION SHALL OCCUR APPROXIMATELY TWO DAYS AHEAD OF THE PLANNED CONSTRUCTION.
- THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN ON THE PLANS AND BELIEVED TO ESSENTIALLY CORRECT. THE LOCATIONS WERE OBTAINED FROM THE OWNERS OF THE UTILITIES AS REQUIRED BY SECTION 153.64 O.R.C. NO GUARANTEE IS MADE RELATIVE TO THE COMPLETENESS OR ACCURACY AND THE CONTRACTOR IS REQUIRED TO CONTACT THE REGISTERED UTILITY PROTECTION SERVICE AND THE OWNERS OF EACH UNDERGROUND UTILITY FACILITY SHOWN ON THE PLANS AT LEAST TWO WORKING DAYS PRIOR TO COMMENCING CONSTRUCTION IN ANY AREA.
- ALL EXISTING UTILITIES, SERVICES, POLES AND CONNECTIONS SHALL BE PROTECTED AT THE CONTRACTOR'S EXPENSE. IF DAMAGE IS CAUSED BY CONSTRUCTION TO ANY EXISTING UTILITY, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OR RESTORATION OF SAME AT HIS EXPENSE IN ACCORDANCE WITH DIRECTIONS OF THE ENGINEERS, AND FOR ANY RESULTING CONTINGENT DAMAGES. EXISTING UTILITIES INCLUDE, BUT ARE NOT LIMITED TO WATER MAINS, STORM SEWERS, SANITARY SEWERS, GAS, ELECTRICAL, TELEPHONE, FIBER OPTIC CABLE, TELEVISION CABLE, AND INDIVIDUAL SERVICE CONNECTIONS AND LATERALS.

UTILITIES (CONTINUED)

- 4. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXPOSE ALL EXISTING UTILITIES, SERVICES, OR STRUCTURES TO VERIFY THE VERTICAL AND HORIZONTAL LOCATION OF THE UTILITY, SERVICE, OR STRUCTURE AND ITS EFFECT ON THE PROPOSED CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE HIS WORK WITH THE UTILITY OWNER.
- 5. INDIVIDUAL STORM, SANITARY, GAS, WATER, ELECTRICAL, TELEPHONE AND CABLE SERVICE CONNECTIONS MAY NOT BE SHOWN. THE CONTRACTOR SHALL LOCATE AND PROTECT SERVICE CONNECTIONS THROUGHOUT THE COURSE OF THE WORK. IN THE EVENT SERVICE CONNECTIONS ARE BROKEN OR DISTURBED. THE CONTRACTOR SHALL REPAIR OR REPLACE THE SERVICE CONNECTIONS TO THE SATISFACTION OF THE ENGINEER AT NO ADDITIONAL COST TO THE OWNER. THE CONTRACTOR SHALL EXPECT EACH RESIDENCE/COMMERCIAL PROPERTY ALONG THE ROUTE TO HAVE AT LEAST ONE SERVICE CONNECTION FOR EACH
- 6. EXISTING LATERAL CONNECTIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL FIELD LOCATE TO DETERMINE LOCATION AND NUMBER OF LATERALS, NOT ALL LATERALS MAY BE
- 7. STORM SEWER, SANITARY SEWER, AND CULVERT INVERTS SHOWN ON THE PLANS ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY DEPTHS AND LOCATIONS PRIOR TO
- 8. THE CONTRACTOR SHALL REPAIR AT HIS OWN COST ANY DAMAGE TO TRAFFIC SIGNAL LOOP DETECTORS. ONTRACTOR SHALL FIELD VERIFY ALL LOOP DETECTORS WITHIN PROJECT

PAVEMENTS AND WALKS:

- ROADWAYS, DRIVES, AND PAVEMENTS DISTURBED BY CONSTRUCTION SHALL BE REPLACED. SEE DETAILS ON PLANS AND SPECIFICATIONS. TEMPORARY PAVEMENT SHALL BE USED WHEN HOT MIX ASPHALT IS NOT AVAILABLE OR WHEN WEATHER FOR PAVEMENT IS UNACCEPTABLE, SIDEWALKS AND DRIVEWAY APRONS SHALL BE FLOAT FINISHED
- 2. THE CONTRACTOR MAY DAMAGE EXISTING ROADWAY CURBING WHILE INSTALLING THE WATER MAIN. THE CONTRACTOR SHALL REPLACE ANY DAMAGED CURBING ALONG ALL ROADS WITH ODOT 609 CURBING. CURB REPLACEMENT SHALL MATCH EXISTING CURB, AND LIMITS OF REPLACEMENT SHALL BE TO THE NEAREST CONTROL JOINT ON EITHER SIDE OF THE AREA
- 3. WHERE NECESSARY TO DISTURB PAVEMENTS OR DRIVES, PAVEMENT SHALL BE CUT IN NEAT, STRAIGHT LINES.

SUPPLEMENTAL WATER MAIN NOTES:

- 1. ALL NEW VALVES SHALL OPEN BY TURNING CLOCKWISE, VALVES SHALL BE SAME SIZE AS THE WATER MAIN. ALL VALVE BOXES SHALL BE INSTALLED FLUSH TO GRADE.
- 2. THE MAXIMUM TRENCH OPENING SHALL NOT EXCEED 100 LINEAL FEET. WHERE ACCESS TO DRIVES AND PARKING LOTS IS HINDERED OR BLOCKED FOR AN EXTENDED PERIOD OF TIME. THE CONTRACTOR SHALL PROVIDE TEMPORARY BITUMINOUS PAVEMENT TO MAINTAIN ACCESS. CONTRACTOR SHALL KEEP ALL WORK WITHIN THE RIGHT-OF-WAY.
- 3. UNLESS OTHERWISE NOTED, THE NEW WATER MAIN SHALL HAVE 6' MINIMUM COVER OVER THE TOP OF PIPE.
- 4. A MINIMUM OF 35 PSI SHALL BE MAINTAINED TO THE CURB STOP DURING NORMAL OPERATING CONDITIONS.
- 5. BOOSTER PUMPS ARE NOT PERMITTED ON SERVICE CONNECTIONS
- 6. PIPE JOINTS SHALL BE DEFLECTED TO MAINTAIN HORIZONTAL ALIGNMENT AND VERTICAL ELEVATIONS UNLESS OTHERWISE INDICATED. DEFLECTIONS SHALL NOT EXCEED THE PIPE MANUFACTURERS RECOMMENDATIONS.
- 7. ALL COSTS ASSOCIATED WITH ABANDONING AND/OR REMOVING THE EXISTING WATER MAIN, LINE VALVES, OR SERVICE CONNECTIONS SHALL BE INCLUDED IN THE BID PRICE PER LINEAL FOOT OF WATER MAIN.
- 8. NEW FIRE HYDRANTS SHALL BE BAGGED UNTIL THE NEW WATER MAIN IS INSTALLED AND IN
- 9. THE WATER MAIN SHALL BE PRESSURE TESTED AND DISINFECTED PRIOR TO PERFORMING CORPORATION STOP TAPS.
- 10. FIRE HYDRANT PLACEMENT SHALL BE ESTABLISHED BY GOVERNING FIRE DEPARTMENT.
- 11. CONTRACTOR SHALL PRESSURE TEST AND DISINFECTION TEST WITHIN 15 DAYS OF WATER MAIN
- 12. ANY EXISTING UTILITIES OR APPURTENANCES INSIDE OR OUTSIDE OF THE CONSTRUCTION LIMITS DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.

- 13. GROUNDWATER CONTROL MEASURES SHALL BE IN PLACE PRIOR TO THE TIME THE EXCAVATION REACHES THE GROUNDWATER LEVEL TO MAINTAIN INTEGRITY OF THE IN-SITU MATERIALS. WHILE THE EXCAVATION IS OPEN, THE GROUNDWATER LEVEL SHALL BE MAINTAINED CONTINUOUSLY AT 2 FEET OR MORE BELOW THE WORKING LEVEL.
- 14. UNSTABLE OR UNSUITABLE PIPE FOUNDATION CONDITIONS THAT RESULT FROM INADEQUATE OR INAPPROPRIATE DEWATERING METHODS SHALL BE CORRECTED BY THE CONTRACTOR AT
- 15. ANY EXISTING PROPERTY CORNER PINS OR MONUMENTS DAMAGED OR DESTROYED BY THE CONSTRUCTION SHALL BE RESET BY A REGISTERED SURVEYOR UPON COMPLETION OF THE PROJECT PRIOR TO FINAL PAYMENT. A CERTIFICATION SHALL BE FURNISHED BY A REGISTERED SURVEYOR, STATING THAT SAID DAMAGES HAVE BEEN RESTORED. THE COST SHALL BE INCLUDED IN THE PRICE BID PER LINEAL FOOT OF WATER MAIN.
- 16. ACCESS TO ADJOINING PROPERTIES SHALL BE MAINTAINED AT ALL TIMES.
- 17. RIGHT-OF-WAY AND PROPERTY LINES SHOWN WERE PREPARED FROM RECORD INFORMATION AND DO NOT REPRESENT A BOUNDARY SURVEY.
- 18. CONTRACTOR SHALL CLEAN THE ROADWAY AT THE END OF EACH DAY OF OPERATION OR EVERY 500 FEET OF INSTALLED WATER MAIN. CLEANING SHALL BE PERFORMED USING A POWER BROOM OR HYDROSPRAYER, OR AS DIRECTED BY THE ENGINEER.
- 19. THE CONTRACTOR SHALL OBTAIN ALL PERMITS REQUIRED FOR CONSTRUCTION, INCLUDING BUT NOT LIMITED TO EXCAVATION AND ROAD OPENINGS. PERMITS SHALL BE OBTAINED FROM THE CITY ENGINEER AND FROM ANY LOCAL GOVERNMENTAL OFFICIALS IN WHICH THE
- 20. CONTRACTOR SHALL NOT BE PERMITTED TO STORE MATERIALS, EQUIPMENT, OR VEHICLES ON PRIVATE PROPERTY.
- 21. THE CONTRACTOR SHALL PROVIDE TEMPORARY WATER MAINS AND SERVICE CONNECTIONS PER SPECIFICATION SECTION 02660. TEMPORARY MAINS SHALL BE LAID IN THE GUTTERLINES AND SHALL CROSS THE STREETS AT INTERSECTIONS. TEMPORARY MAINS SHALL NOT BE LAID ON TREELAWNS.

CONSTRUCTION SEQUENCE

THE PROPOSED WATER MAIN SHALL BE CONSTRUCTED GENERALLY IN ACCORDANCE WITH THE FOLLOWING CONSTRUCTION SEQUENCE:

- INSTALL AND OPERATIONALIZE TEMPORARY WATER SERVICE CONNECTION TO 1103 UNIVERSITY ROAD.
- 2. INSTALL 8-INCH CUT-IN VALVE WITH 8-INCH BY 6-INCH REDUCER AT BASELINE STATION 14+49.2, 31.5' LT AND 6-INCH CUT-IN VALVES ON UNIVERSITY ROAD.
- 3. CLOSE VALVES AT BASELINE STATION 14+49.2, 31.5' LT AND ON UNIVERSITY ROAD TO ISOLATE THE WATER MAIN ON W 11TH STREET BETWEEN BASELINE STATION 14+49.2 AND UNIVERSITY ROAD.
- 4. BEGINNING AT BASELINE STATION 14+49.2, 31.5' LT, REMOVE EXISTING 6-INCH WATER MAIN AND INSTALL PROPOSED 8-INCH WATER MAIN. INSTALL TEMPORARY END CAPS, DO NOT CONNECT TO EXISTING MAIN AT UNIVERSITY ROAD.
- 5. REMOVE EXISTING 6-INCH BY 6-INCH TEE AND BEND AT UNIVERSITY ROAD AND INSTALL 22.5' BEND AND 6-INCH SPOOL PIECES TO CONNECT TO EXISTING WATER MAIN. PLUG ABANDONED WATER MAIN ENDS WHERE SHOWN ON PLANS.
- 6. COMPLETE HYDROSTATIC PRESSURE TESTING, DISINFECTION, BACTERIA TESTING, AND FLUSHING OF NEW MAIN.
- 7. INSTALL 6-INCH BY 8-INCH CUT-IN TEE WITH 8-INCH VALVE AT UNIVERSITY ROAD, AND COMPLETE CONNECTION AT UNIVERSITY RD.
- 8. OPEN LINE VALVES AND OPERATIONALIZE NEW WATER MAIN
- 9. TAP NEW MAIN, AND REPLACE AND OPERATIONALIZE NEW SERVICE CONNECTION.
- 10. REMOVE TEMPORARY WATER MAIN SYSTEM.

BAR IS ONE INCH ON IF NOT ONE INCH ON THIS SHEET, ADJUST

SCALES ACCORDINGLY PROJECT NO.

SCALE:


DESIGNED BY: EDS DRAWN BY: SS SHEET CHK'D BY: MCJ CROSS CHK'D BY: EDS APPROVED BY: TGH DATE: 6/1/10 ISSUE







C-7

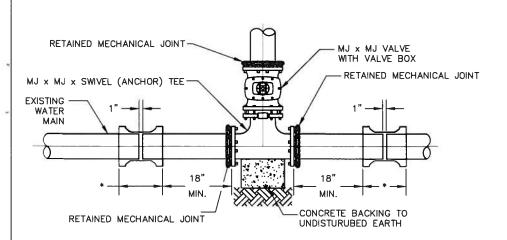

CUT-IN TEE DETAIL METHOD No.1 (STD-TO1)

*CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.


MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM-A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No's 38, 138 OR 162 (TRANSITION TYPE), OR SMITH-BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.

ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".


THE DIVISION OF WATER WILL DETERMINE THE FIELD LOCATION OF THE CUT-IN-VALVE ASSEMBLY. THE DIVISION OF WATER WILL ALSO SET THE TIME OF INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY.

THE CONTRACTOR SHALL DO ALL PIPE CUTTING AND INSTALLATION. HOWEVER, THE INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY SHALL BE DONE UNDER THE SUPERVISION OF THE DIVISION OF WATER.

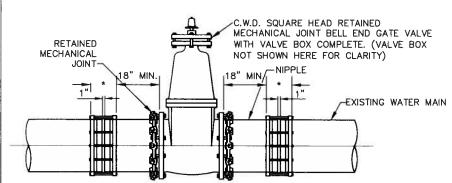


NOTE:
BEFORE CUTTING EXISTING WATER MAIN, THE NIPPLES SHALL BE
CONNECTED TO THE MECHANICAL JOINT BELL END GATE VALVE.
AFTER CUTTING PIPE, FINAL CONNECTIONS SHALL BE
MADE WITH COUPLINGS/SOLID SLEEVES AS SPECIFIED.

CUT-IN-VALVE DETAIL (STD-005)
NOT TO SCALE

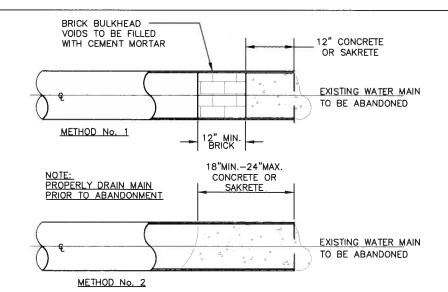

PLUGGING ABANDONED WATER MAIN ENDS (STD-004)

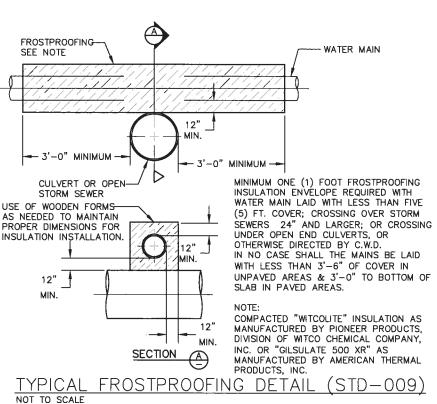


-GRADE -GRADE MAX. WIDTH 2'-0"+0.02'-0"+0.D. *COMPACTED BACKFILL OR CLSM-CDF SEE NOTES AND 2 BELOW MIN -BACKFILL 12" TAMPED SAND WATER MAN-* CONTROLLED LOW STRENGTH MATERIAL-AMPLE BELL HOLES SHALL BE FORMED IN ROCK IN EARTH CONTROLLED DENSITY FILL (CLSM-CDF) TO PERMIT PROPER "FLOWABLE FILL" MAY BE USED IN LIEU OF JOINTING PREMIUM BACKFILL

WATER MAIN TRENCH DETAILS (STD-001)
NOT TO SCALE

NOTES:

- 1) PREMIUM BACKFILL CONSISTING OF CONTROLLED LOW STRENGTH MATERIAL CONTROLLED DENSITY FILL (CLSM—CDF) "FLOWABLE FILL" IS REQUIRED:
- A) UNDER ALL EXISTING OR FUTURE PAVEMENTS, SIDEWALKS AND DRIVES
- B) AT ALL LOCATIONS WITHIN THE CITY OF CLEVELAND CORPORATION LIMITS
- C) AS SPECIFIED IN LOCAL MUNICIPALITIES SERVED BY CWD (SEE LOCAL REQUIREMENTS)
 2) WHEN PREMIUM BACKFILL IS REQUIRED BY THE LOCAL MUNICIPALITY FOR CASES OTHER THAN THOSE LISTED IN NOTE 1 ABOVE, IT SHALL BE LIMESTONE GRADED PER ODOT 304.02 OR ODOT 411. NO SLAG IS PERMITTED.*
- 3) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, AND THOROUGHLY COMPACTED SO AS TO PROVIDE A SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.
- 4) MINIMUM COMPACTION FOR ALL SAND BEDDING, BACKFILL AND PREMIUM BACKFILL SHALL BE 95% STANDARD PROCTOR.
- 5) PAVEMENT, SIDEWALK OR DRIVES TO BE INSTALLED IN ACCORDANCE WITH LOCAL MUNICIPALITY'S SPECIFICATIONS.

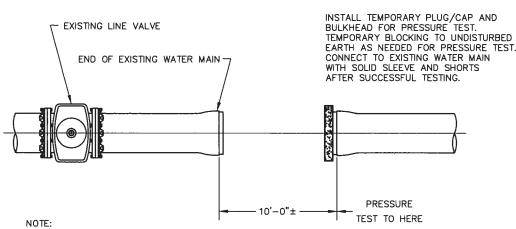

PRESSURE TESTING OF WATER MAINS:
WHERE NEW/EXTENDED WATER MAINS ARE CONNECTED TO AN EXISTING WATER MAIN FOR PRESSURE TEST,
RESULTING IN FAILURE OF THE PRESSURE TEST OR ANY DAMAGE TO THE EXISTING WATER MAIN, OR ITS
APPURTENANCES, THE REPAIR THEREOF SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
ALL REPAIRS SHALL BE DONE TO THE SATISFACTION OF THE DIVISION OF WATER.

ALTERNATE PRESSURE TESTING DETAIL (STD-002)
NOT TO SCALE

BAR IS ONE INCH ON ORIGINAL DRAWING

0 1

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.:







WALWORTH RUN INTERCEPTOR REALIGNMENT

WATER MAIN DETAILS

PROJECT NO.:
SHEET:
SCALE: NONE

SHEET NO.:

- 1) PLAIN END x PLAIN END DUCTILE IRON PIPE AS SPECIFIED (CUT TO SUIT).
- 2) *CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.


COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.

MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM~A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No's 38, 138 OR 162 (TRANSITION TYPE) OR SMITH-BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.

3) ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".

PIECE INSTALLATION DETAIL (STD-008)

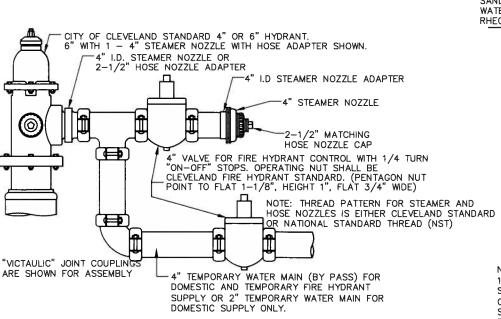

TEMPORARY WATER MAIN & HYDRANT CONNECTION ASSEMBLY-A TO PROVIDE SIMULTANEOUS SERVICE EXISTING HYDRANT AND TEMPORARY BYPASS MAIN (STD-H14)

DESIGNED BY: EDS DRAWN BY: SS SHEET CHK'D BY: MCJ CROSS CHK'D BY: EDS PPROVED BY: TGH DATE: 6/1/10


ENGINEERS · ARCHITECTS · SCIENTISTS




NOT TO SCALE





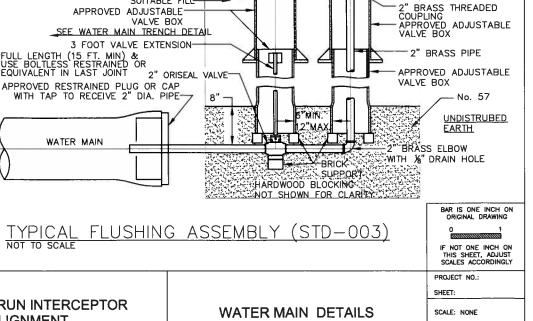

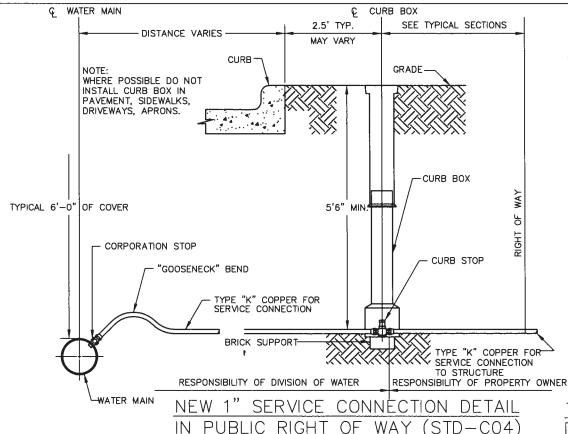

THRUST BLOCK DETAIL NOT TO SCALE

D+8*

SECTION

BOTTOM OF

D+8'

D = PIPE DIAMETER

SECTION

PLAN

TAPPING

(22-1/2 DEGREE) BEND

2'-0"

PLAN

VALVE BOX CENTERED OVER RISER TYPICAL-

VALVE BOX COVER TYPICAL

SUITABLE FILL-


APPROVED ADJUSTABLE-

FULL LENGTH (15 FT. MIN) & USE BOLTLESS RESTRAINED OR EQUIVALENT IN LAST JOINT

WATER MAIN

BOTTOM OF TRENCH

PLAN

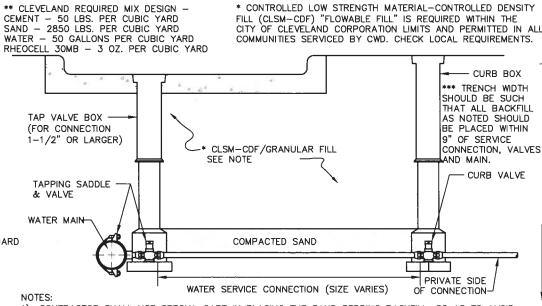

1) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING BACKFILL, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, AND THOROUGHLY COMPACTED SO ÀS TO PROVIDE À SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.

2) MINIMUM COMPACTION FOR ALL SAND BEDDING BACKFILL, BACKFILL AND PREMIUM BACKFILL SHALL BE 95% STANDARD PROCTOR

SERVICE CONNECTION BACKFILL DETAIL NOT TO SCALE

FLUSHING ASSEMBLY (STD-003)

WALWORTH RUN INTERCEPTOR REALIGNMENT

D+8'

BOTTOM OF

TRENCH

B

SECTION

ALL DIMENSIONS SHOWN HEREON

ARE MINIMUM; THRUST BLOCK SHALL BE POURED TO DISTURBED

NOTE 2: ALL CONCRETE FOR THRUST BLOCKS SHALL BE CLASS "C" HAVING 4,000 PSI 28 DAY

COMPRESSIVE STRENGTH.

DO NOT COVER BOLTS WITH

CONCRETE ON MECHANICAL

USE FORMS WHEN POURING

CONCRETE TO MAINTAIN SHAPE

UNDISTRUBED

<u>EARTH</u>

UNDISTRUBED

EARTH

-- SUITABLE FILL

HARDWOOD BLOCKING ON

CENTER OF

FLUSHPIPE

10" MAX

₩8" MIN.

AND DIMENSIONS OF THRUST

(45 DEGREE) BEND


EARTH


JOINTS.


BLOCKS.


ALTERNATE LOCATION


NOT TO SCALE

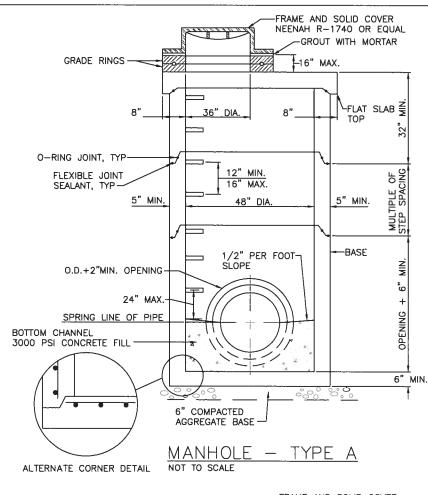

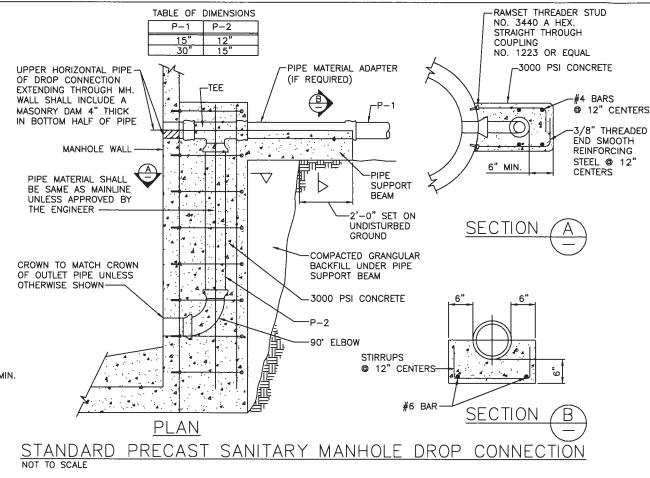

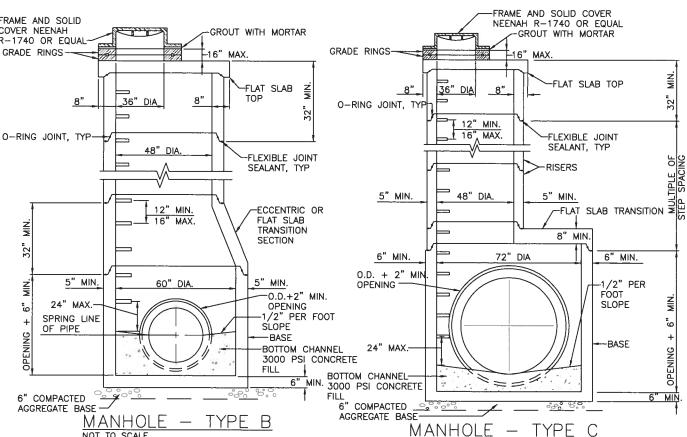

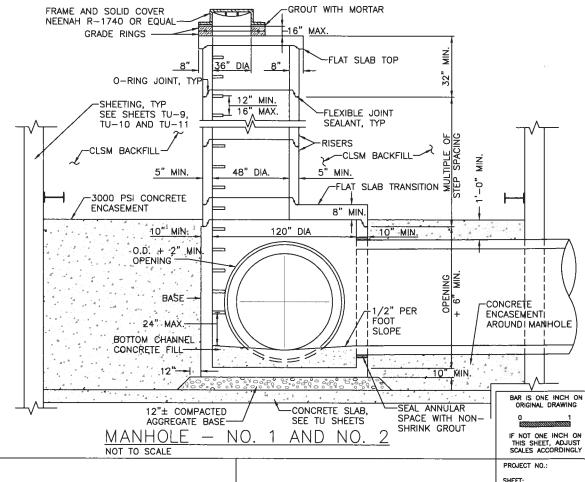

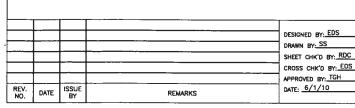

10. TOP MANHOLE STEP SHALL BE INSTALLED NOT MORE

11. APPLY "THOROSEAL" BY THORO SYSTEM PRODUCTS,

OR APPROVED EQUAL TO THE INSIDE EXPOSED

THAN 2' BELOW TOP OF FRAME.

SURFACES OF ALL MANHOLES.



NOT TO SCALE



NOT TO SCALE


WALWORTH RUN INTERCEPTOR REALIGNMENT

PRECAST CONCRETE MANHOLE **DETAILS**

SCALE: NONE SHEET NO .: C-10 SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR ASPHALT PAVEMENT WITH CONCRETE BASE

NOT TO SCALE

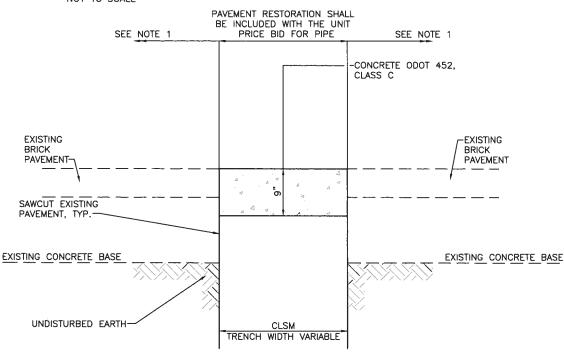

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR W. 15TH STREET € STA. 1+82 TO € STA. 7+40.

NOT TO SCALE

REMARKS

REV. NO.

ISSUE DATE

DESIGNED BY: EDS

RAWN BY: SS

SHEET CHK'D BY: MSE

CROSS CHK'D BY: EDS

APPROVED BY: TGH

DATE: 6/1/10

ENGINEERS • ARCHITECTS • SCIENTISTS



MIN. D/4" DEEP X 1/4"

W/ODOT ITEM 705.04

SÉALANT, TYP.

EX. CONCRETE

PAVEMENT

WIDE JOINT TO BE SEALED

SAWCUT EXISTING

UNDISTURBED EARTH

PAVEMENT, TYP.-

NOT TO SCALE WALWORTH RUN INTERCEPTOR

REALIGNMENT

TYPICAL TRENCH DETAIL FOR ASPHALT

PAVEMENT WITH BRICK BASE

TRENCH REPAIR DETAILS

SCALE: NONE

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE

TYPICAL TRENCH DETAIL FOR CONCRETE PAVEMENT NOT TO SCALE

CLSM RENCH WIDTH

VARIABLE

*18"


MATCH EX. PAVEMENT

THICKNESS UNLESS

OTHERWISE SHOWN-

*18

MIN

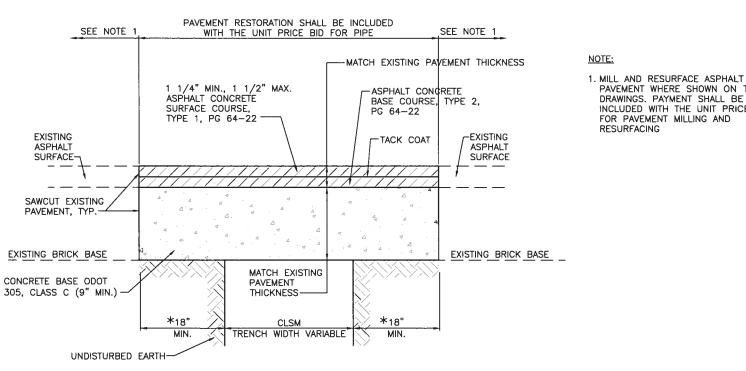

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

-CONCRETE ODOT 452, CLASS C

REMOVE TO EXISTING PAVEMENT

EX. CONCRETE PAVEMENT

OMIT HOOK BOLTS FOR SIDEWALKS WHERE "D" IS 6" OR LESS.

1. 9" MIN. FOR ROADWAY

4" MIN. FOR SIDEWALKS

3/4" DIA. HOOK BOLTS @ 30" CENTERS.

-EX. PAVEMENT JOINT OR CURB

MINIMUM PAVEMENT THICKNESS SHALL BE AS FOLLOWS:

6" MIN. FOR DRIVEWAYS OR PARKING AREAS

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

JOINT OR TO EXISTING CURB

BAR IS ONE INCH ON

PAVEMENT WHERE SHOWN ON THE

INCLUDED WITH THE UNIT PRICE BID

DRAWINGS. PAYMENT SHALL BE


FOR PAVEMENT MILLING AND


RESURFACING

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.: SHEET:


SHEET NO .: C-11

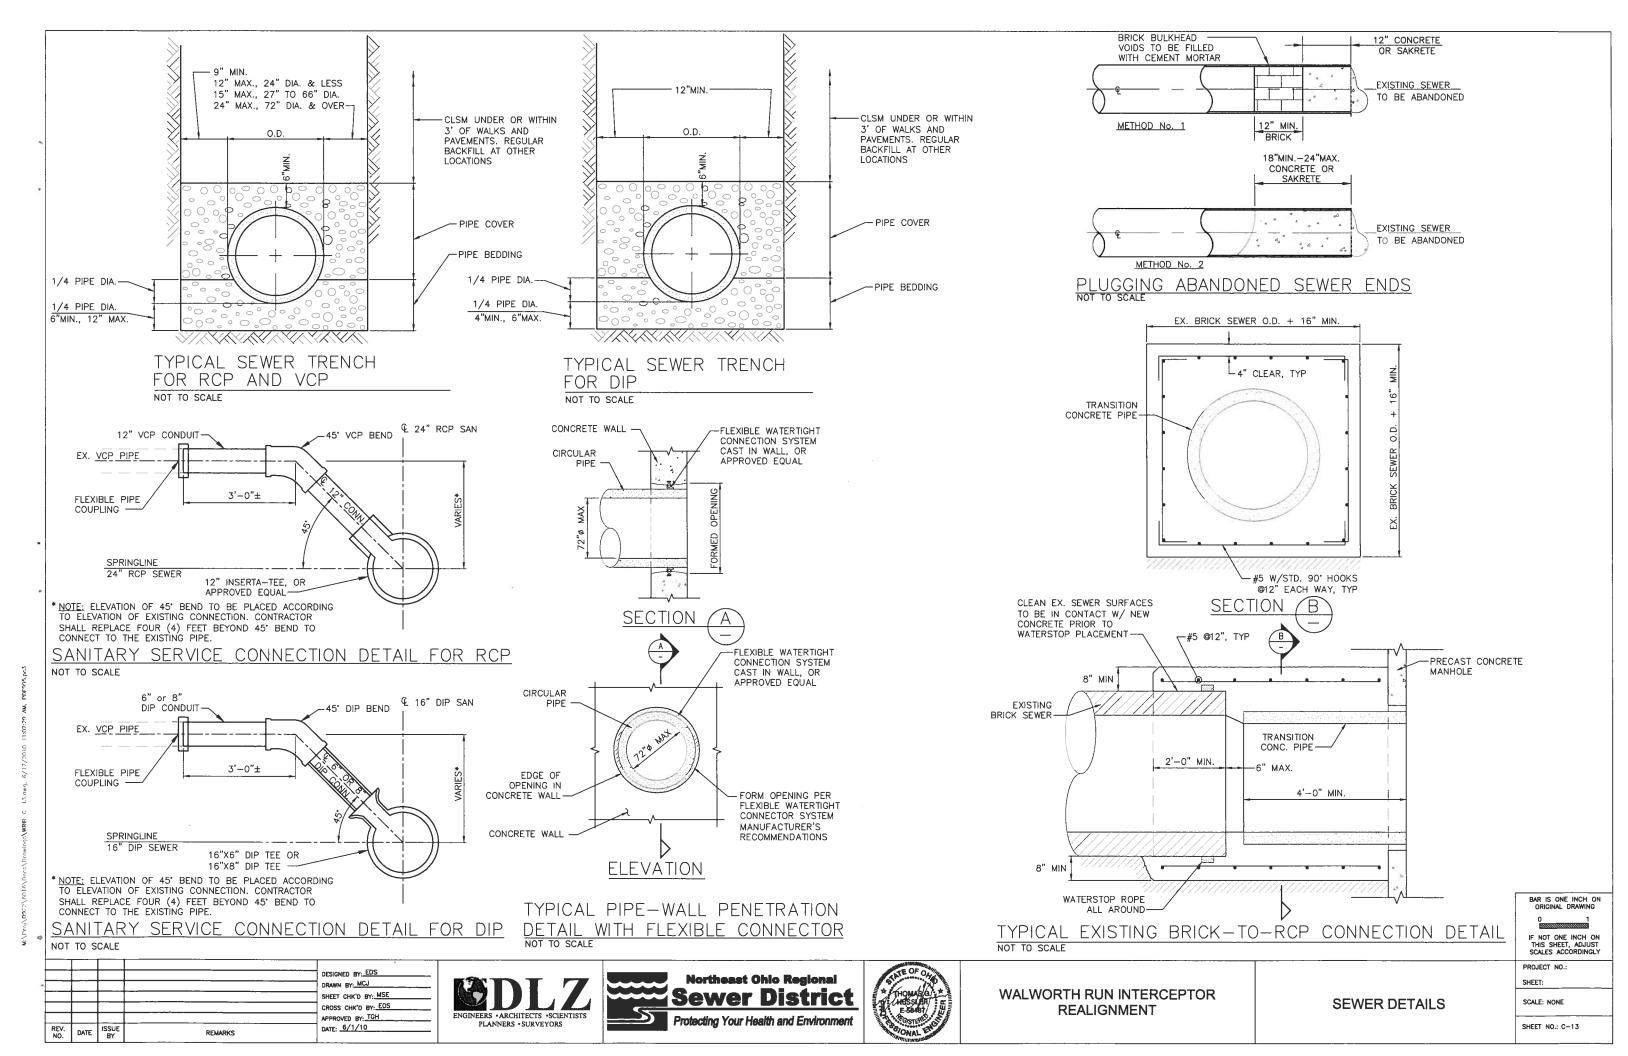

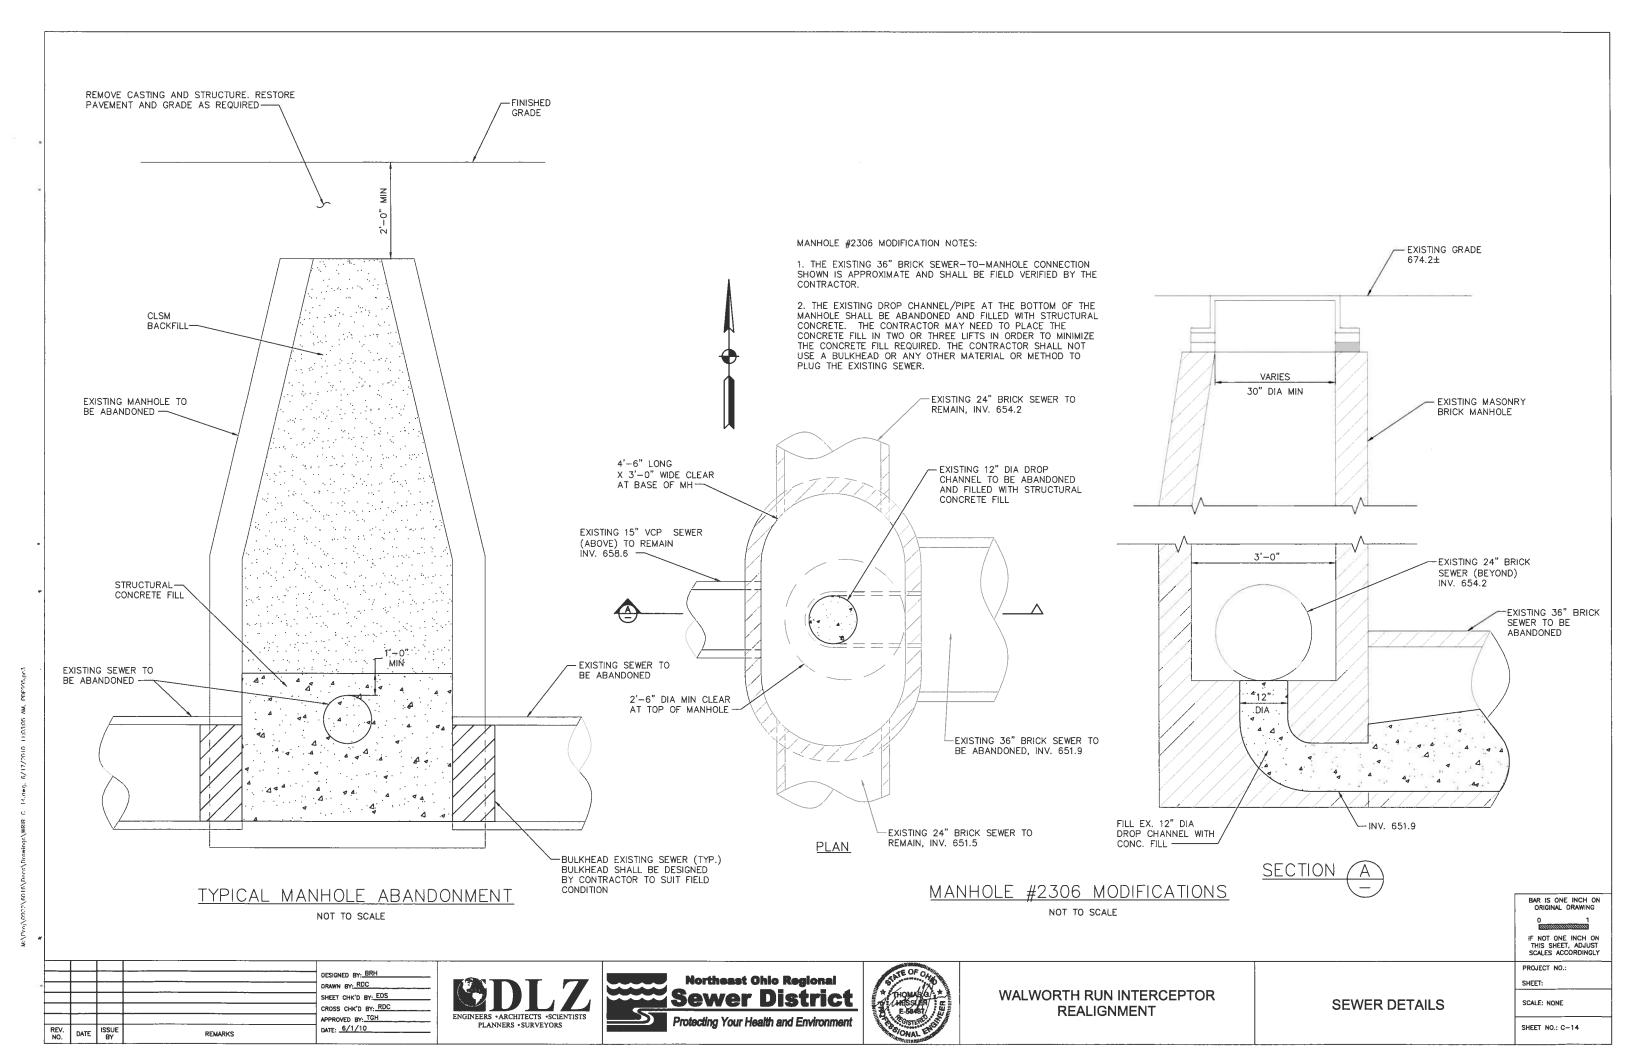

REV. NO.

DATE ISSUE

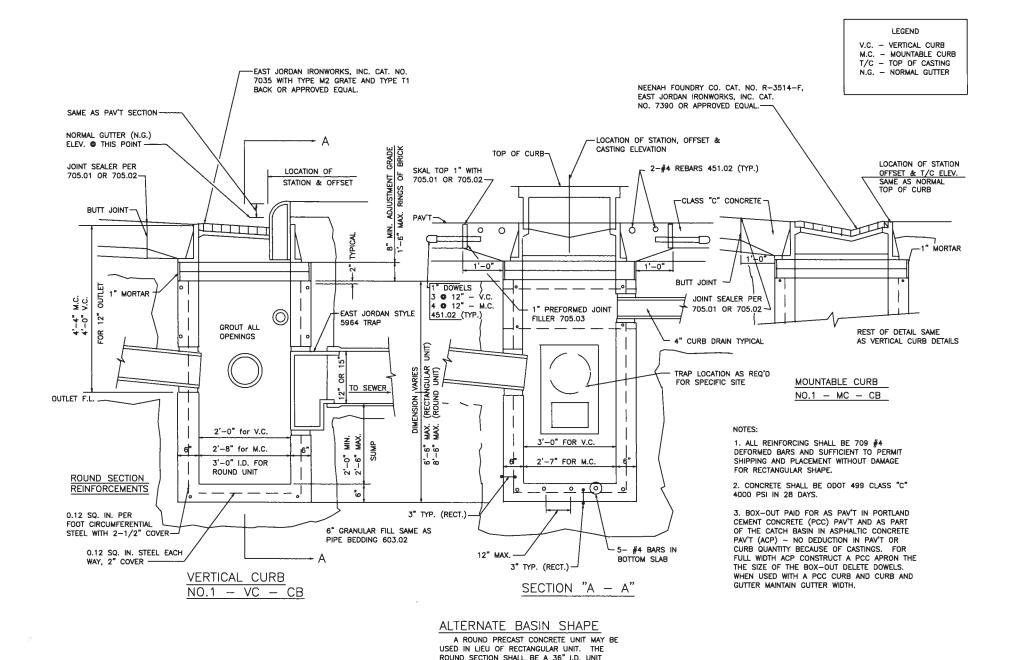

X W5 WELDED WIRE FABRIC IN VERTICAL

SITION (ROUND TO RECTANGULAR) SECTION TO FIT CASTING BEING USED. TRANSITION UNIT REQUIRES A #5 REBAR AT CORNERS OF RECTANGULAR SHAPED SECTION AND 3 x 8 W6 X

CITY OF CLEVELAND STANDARD CATCH BASIN CB-1 NOT TO SCALE

DESIGNED BY: EDS DRAWN BY: SS SHEET CHK'D BY: RDC CROSS CHK'D BY: EDS APPROVED BY: TGH DATE: 6/1/10

REMARKS







WALWORTH RUN INTERCEPTOR REALIGNMENT

CITY OF CLEVELAND **CATCH BASIN CB-1 DETAIL**


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO .:

BAR IS ONE INCH ON ORIGINAL DRAWING

SHEET:

SCALE: NONE

SHEET NO.: C-15

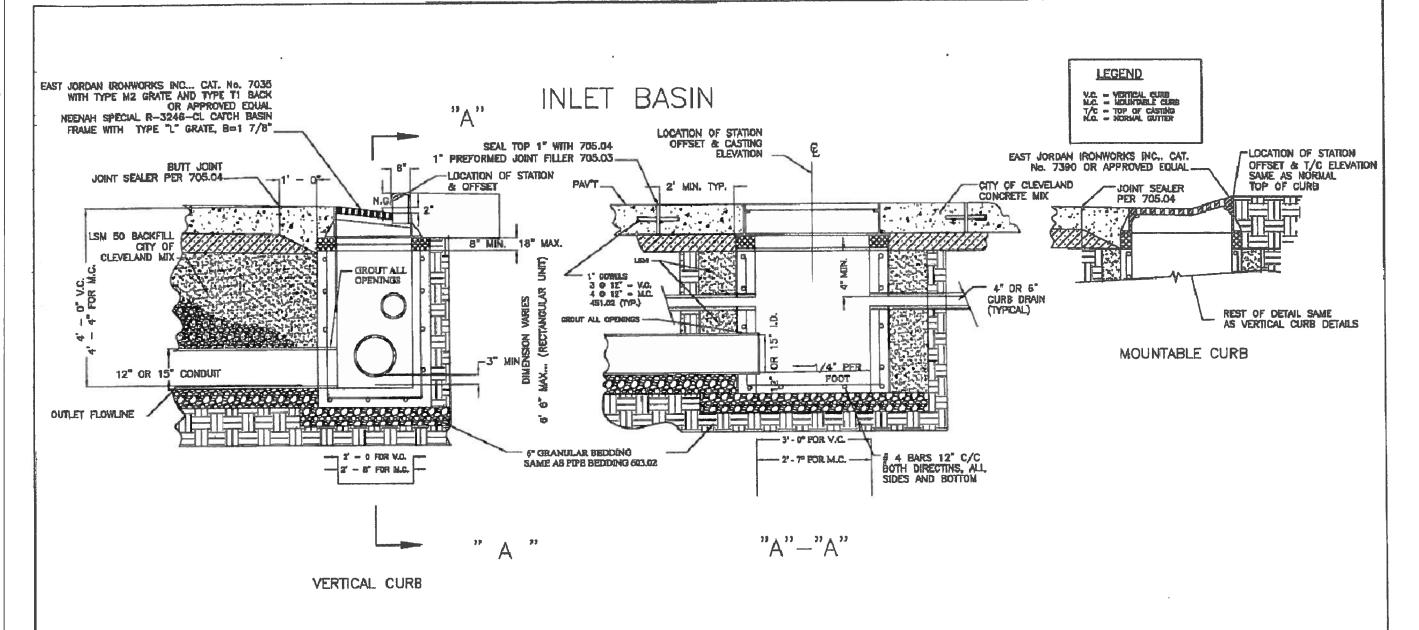

NOTES

- ALL REINFORCING SHALL BE # 4 DEFORMED BARS, AS PER ODOT 709, AND SUFFICIENT TO PERMIT SHIPPING AND PLACEMENT WITHOUT DAMAGE TO RECTANGULAR SHAPE.
- CONCRETE SHALL BE ODOT 499 CLASS "C" 4000 PSI IN 28 DAYS.
- BOX-OUT SHALL BE PAID FOR AS PAVEMENT IN PORTLAND CEMENT CONCRETE PAVEMENT AND AS PART OF THE CATCH BASIN IN ASPHALTIC CONCRETE PAVEMENT WITH NO REDUCTION IN PAVEMENT OR CURB QUANTITY BECAUSE OF CASTING.
- FOR FULL WIDTH ASPHALTIC CONCRETE PAVEMENT- CONSTRUCT A PORTLAND CEMENT CONCRETE APRON.
- MINIMUM WALL THISKNESS B" FOR CAST IN PLACE AND 6" FOR PRECAST



DEPARTMENT OF PUBLIC SERVICE DIVISION OF ENGINEERING & CONSTRUCTION JOMARIE WASIK-DRECTOR OF PUBLIC SERVICE STANDARD CONSTRUCTION DRAWING STANDARD RECTANGULAR PRECAST CONCRETE NLET BASIN NOT TO SCALE

DRAWN BY: R. PLIODZINSKAS

DATE: 4/8/08

Submitted by: <u>W. McLaughlin</u>

DATE: 4/8/08

DATE: 1-8-09

COMMISSIONER OF ENGINEERING & CONSTRUCTION

FILE NO. CB-1

SHEET 2/7

(27)

DESIGNED BY: EDS SHEET CHK'D BY: RDC CROSS CHK'D BY: EDS APPROVED BY: TGH DATE: 6/1/10 REV. NO. ISSUE BY DATE

REMARKS







WALWORTH RUN INTERCEPTOR REALIGNMENT


CITY OF CLEVELAND **INLET BASIN DETAIL**


BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

> PROJECT NO .: SHEET:

SCALE: NONE

SHEET NO .: C-16

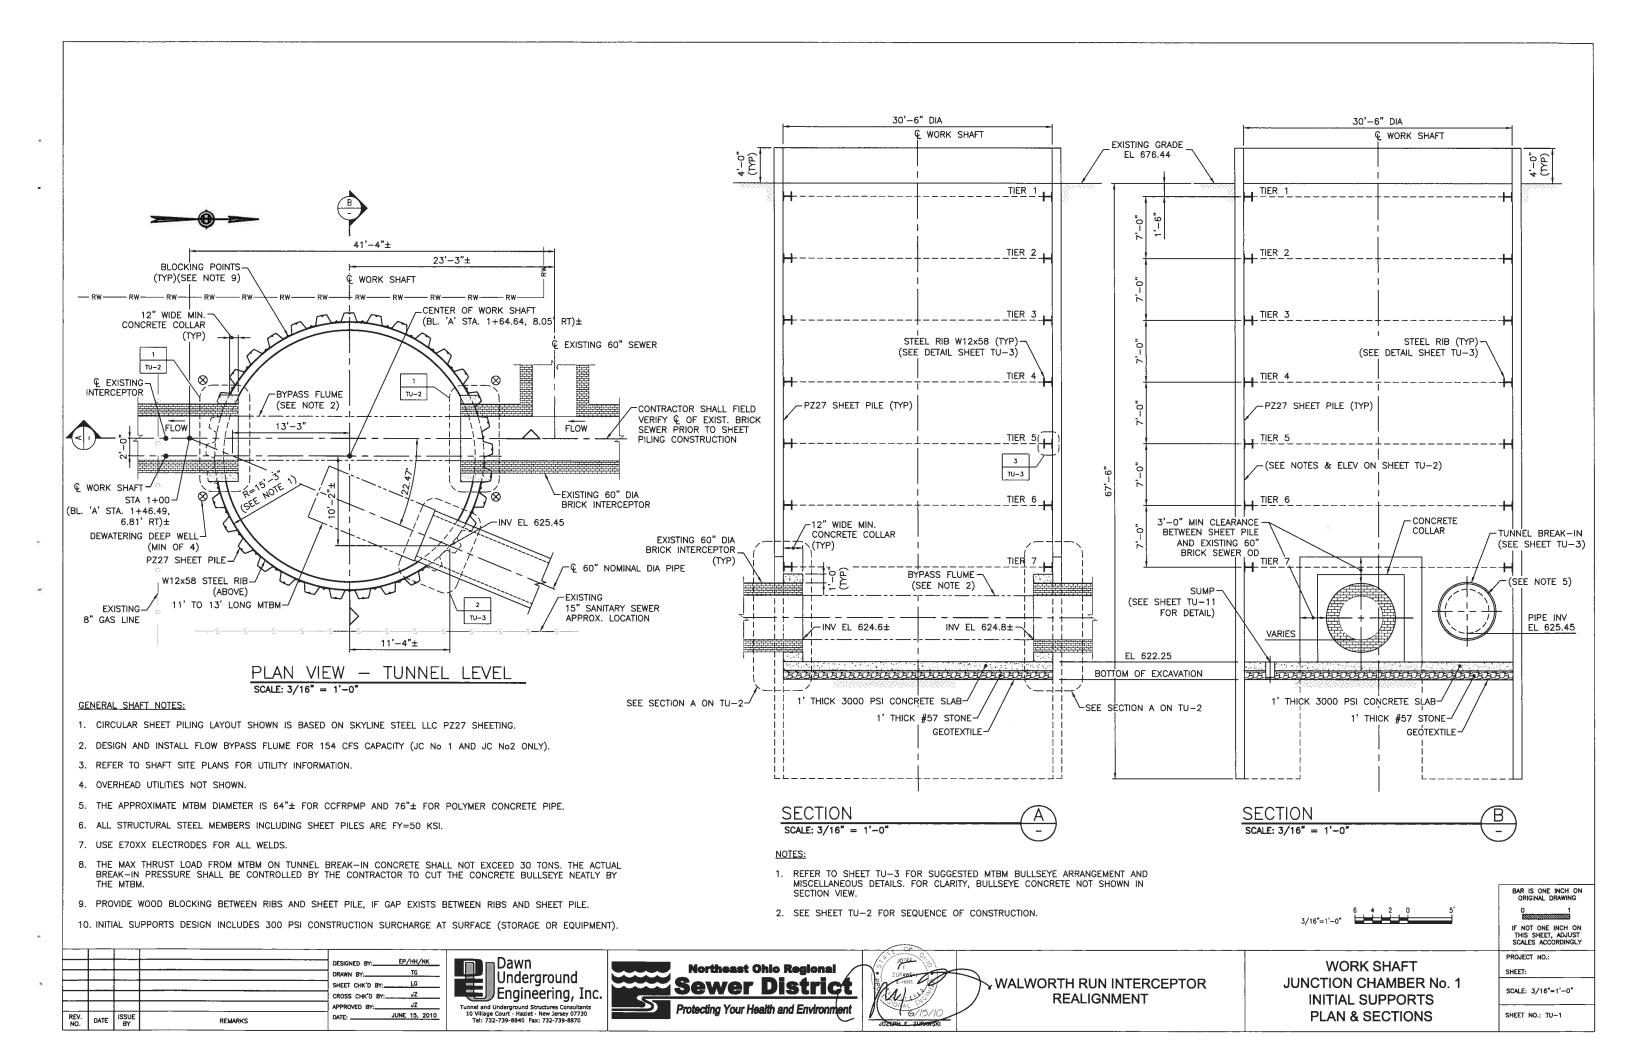

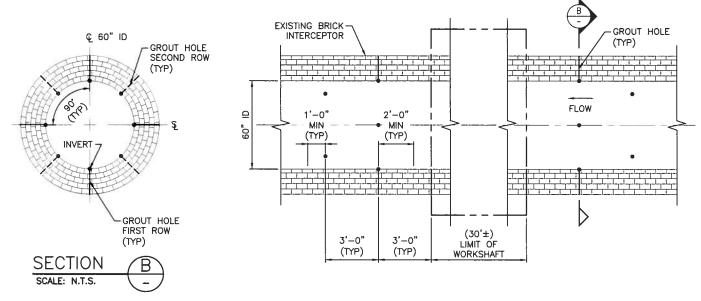

NOTE: GROUT HOLE PATTERN FOR CUT-OFF & CONTACT GROUTING FROM WITHIN EXISTING INTERCEPTOR.

GROUT HOLE PATTERN

SCALE: 3/8" = 1'-0"

SEQUENCE OF CONSTRUCTION FOR WORK SHAFT AT JUNCTION CHAMBER NO. 1

1. INSTALL SHEET PILES TO THE DEPTH SHOWN. IN PROXIMITY OF THE EXISTING INTERCEPTOR, TERMINATE THE SHEET PILES MINIMUM THREE (3) FEET ABOVE AND ON BOTH SIDES OF THE INTERCEPTOR'S EXTERIOR LIMITS.

2. INSTALL SECOND (OUTER) ROW OF SHEET PILES AT THE TUNNEL BREAK-IN LOCATION WITHIN LIMITS INDICATED.

FROM WITHIN THE EXISTING INTERCEPTOR PERFORM CUT-OFF /CONTACT GROUTING OF THE INTERCEPTOR'S EXTERIOR IN A PATTERN SHOWN ON THE

4. INSTALL DEWATERING DEEP WELLS. LOCATE THE WELLS AS CLOSE AS PRACTICAL TO THE EXTERIOR OF THE SHEET PILING AND THE EXISTING INTERCEPTOR TO MINIMUM DEPTH INDICATED IN GBR.

START OPERATING DEWATERING WELLS ON 24 HOURS/DAY 7 DAYS/WEEK BASIS. EXCAVATE WORK SHAFT TO MAXIMUM OF 2 FEET DEPTH BELOW TIER 1 LEVEL AND INSTALL TIER 1 STEEL SUPPORTS.

CONTINUE TO EXCAVATE SHAFT IN STEPS TO MAXIMUM OF 2 FEET DEPTH BELOW EACH TIER LEVEL AND SUBSEQUENTLY INSTALL EACH TIER STEEL

SUPPORTS (FROM TIER 2 THROUGH TIER 6).

AFTER INSTALLATION OF THE TIER 6, CONTINUE TO EXCAVATE THE SHAFT TO A MAXIMUM OF 2 FEET DEPTH BELOW TIER 7 LEVEL. DURING THE EXCAVATION EMPLOY STEEL POLLING AND LAGGING PLATES TO COVER THE GAP AND TO CONTROL SOIL INFLOW FROM WITHIN THE GAP BETWEEN THE SHEET PILING AND THE OUTSIDE OF EXISTING INTERCEPTOR. DRIVE THE PLATES BELOW THE EXCAVATION TO MAINTAIN STABLE CONDITIONS AT ALL TIMES, WELD STEEL POLLING/LAGGING PLATES TOGETHER AND TO SHEET PILING TO COMPLETELY CLOSE THE GAP. INSTALL TIER 7 STEEL SUPPORTS (STEEL RIB WALER). CONTINUE TO EXCAVATE THE SHAFT TO THE SPRING LINE LEVEL OF THE

EXISTING INTERCEPTOR BY INSTALLING STEEL LAGGING/POLLING PLATES WITHIN THE GAP BETWEEN THE SHEET PILING AND EXISTING INTERCEPTOR TO CONTROL SOIL AND WATER INFILTRATION. PROVIDE WATER TIGHT SEAL AND FILL VOIDS IN THIS AREA BY EMPLOYING FOAM, CHEMICAL AND OTHER GROUTING METHODS.

WELD ALL STEEL PLATES TOGETHER AND TO SHEET PILES.

10. DURING LOW FLOW CONDITION, SAW CUT THE INTERCEPTOR UP TO ITS SPRING LINE AT FUTURE CONCRETE COLLAR LIMIT AND DEMOLISH AND REMOVE THE TOP HALF OF EXISTING INTERCEPTOR. PROVIDE A FLOW BYPASS SYSTEM FOR THE SEWER FLOW.

11. CONTINUE TO EXCAVATE THE SHAFT TO THE BOTTOM OF THE EXCAVATION BY INSTALLING STEEL LAGGING/POLLING PLATES WITHIN THE GAP BETWEEN THE SHEET PILING AND EXISTING INTERCEPTOR TO CONTROL SOIL AND WATER INFILTRATION. PROVIDE WATER TIGHT SEAL AND FILL VOIDS IN THIS AREA BY EMPLOYING FOAM, CHEMICAL AND OTHER GROUTING METHODS. WELD ALL STEEL PLATES TOGETHER AND TO SHEET PILES.

12. DEMOLISH BOTTOM HALF (BELOW SPRING LINE) OF THE EXISTING INTERCEPTOR. PROVIDE SUPPORT TO FLOW BYPASS SYSTEM AS NECESSARY. INSTALL STEEL POSTS ON BOTH SIDES OF THE EXISTING SEWER AND BOTH SIDES OF TUNNEL BREAK-IN FROM TIER 7 INTO FUTURE CONCRETE SLAB AS SHOWN ON THE DRAWINGS. CLEAN THE BOTTOM OF EXCAVATION AND PLACE GEOTEXTILE, CRUSHED STONE BASE AND CONCRETE SLAB.

PROVIDE SUMP PIT AS SHOWN ON THE DRAWINGS. PLACE CONCRETE COLLAR AROUND THE EXISTING INTERCEPTOR. ALLOW THE CONCRETE SLAB AND COLLAR TO GAIN THE DESIGN STRENGTH. STOP OPERATING DEWATERING WELLS. IF THE AREA AROUND THE EXISTING INTERCEPTOR SHOWS LEAKAGE, CORRECT THE PROBLEM BY WELDING, GROUTING AND SEALING UNTIL INFILTRATION IS STOPPED AND STABILITY IS ASSURED.

CONTINUOUSLY PUMP OUT THE WATER FROM THE SUMP PIT FOR THE ENTIRE DURATION OF WORK.


PROCEDURE FOR BREAK-IN FOR DRIVE 1

15. PLACE SUITABLE GROUT BETWEEN THE TWO ROWS OF SHEET PILING AT TUNNEL BREAK-IN LOCATION TO PREVENT GROUNDWATER OR SOIL INFILTRATION WHEN MAIN SHEET PILES ARE CUT FOR MICROTUNNEL BORING MACHINE (MTBM) BULL'S

. TEST THE BULL'S EYE AREA FOR WATER TIGHTNESS BY DRILLING TEST PORTS. PROVIDE ADDITIONAL GROUTING AS NECESSARY TO ELIMINATE ANY LEAKAGE. WHEN ACCEPTABLE, CUT THE MAIN SHEET PILES (INSTALLED FOR THE SHAFT) IN THE MICROTUNNEL BREAK—IN AREA (BULL'S EYE). IF DURING CUTTING OF SHEET PILES, GROUNDWATER OR SOIL INFILITRATION IS OBSERVED, PROVIDE SECONDARY GROUT TO COMPLETELY SEAL THE BULL'S EYE ZONE AS NECESSARY.


PLACE CONCRETE BULLSEYE AND INSTALL STEEL BULL'S EYE SEAL PLATE AT THE TUNNEL BREAK-IN FOR DRIVE 1. ALLOW THE CONCRETE TO GAIN THE DESIGN STRENGTH. PULL THE SECOND (OUTER) ROW OF SHEET PILES JUST ENOUGH TO CLEAR THE MICROTUNNEL BORING MACHINE (MTBM) FOR DRIVE 1.

18. RECEIVE THE MTBM IN THE SHAFT AND GROUT THE ANNULUS AROUND THE CARRIER PIPE THROUGH THE PIPE GROUT PORTS BEFORE THE SEALS ARE REMOVED AT BULL'S EYES OF THE DRIVE.

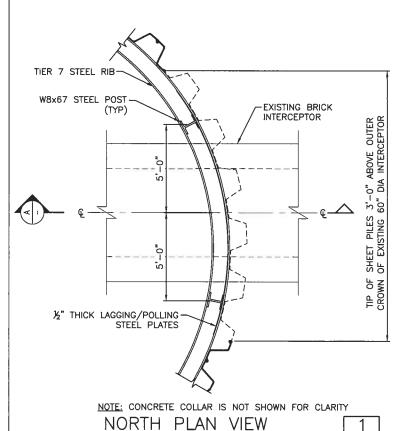

SCALE: 3/8" = 1'-0"

DATE

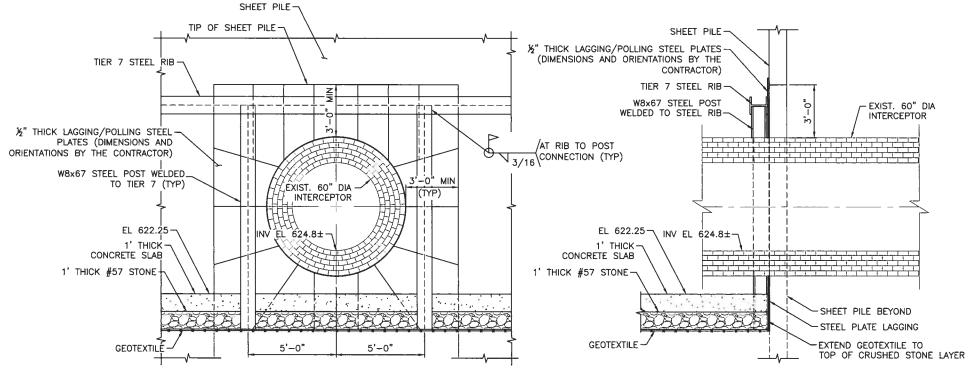

NOTE: CONCRETE COLLAR IS NOT SHOWN FOR CLARITY NORTH FRONT ELEVATION SCALE: 3/8" = 1'-0"

NOTE: SOUTH PLAN VIEW AND ELEVATION ARE SYMMETRICAL TO NORTH PLAN VIEW AND ELEVATION

NOTE: CONCRETE COLLAR IS NOT SHOWN FOR CLARITY SCALE: 3/8" = 1'-0'

3/8"=1'-0"

BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO .:

SHEET:

SCALE: 3/16"=1'-0"

∎Dawn Underground Engineering, Inc.

TU-1

EP/HH/NH

JUNE 15, 2010

DESIGNED BY

CROSS CHK'D BY:

APPROVED BY:_







WALWORTH RUN INTERCEPTOR REALIGNMENT

JUNCTION CHAMBER No. 1 SUPPORTS AT EXISTING INTERCEPTOR

WORK SHAFT


SHEET NO .: TU-2

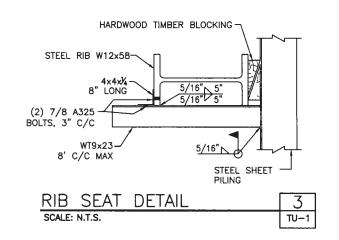

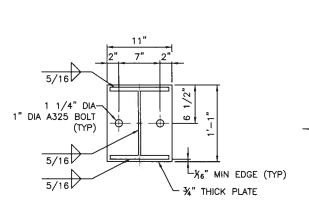


BUTT PLATE DETAIL

SCALE: 1 1/2" = 1'-0"

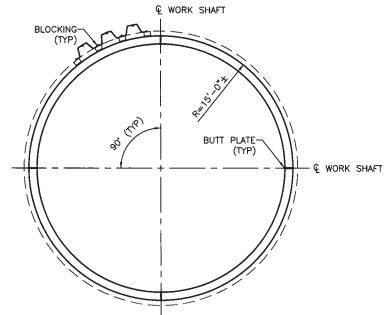


4 PIECE RING OF W12x58 STEEL RIB

SCALE: 3/6" = 1'-0"

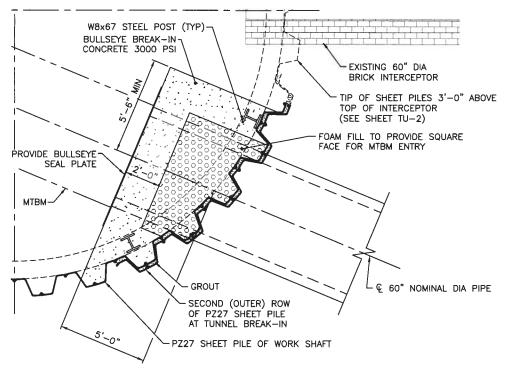




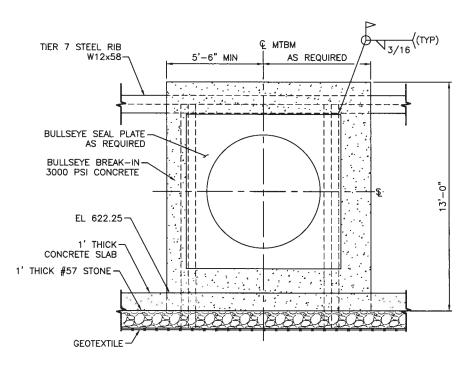

ELEVATION
TUNNEL BREAK-IN DETAIL

SCALE: 3/8" = 1'-0"

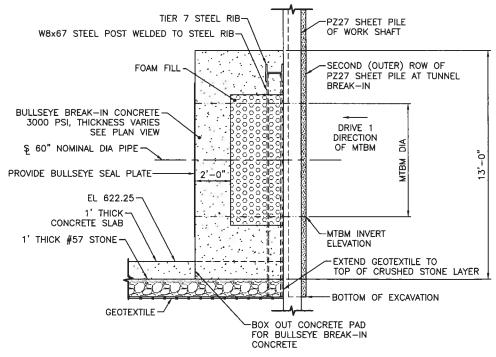

SECTION TUNNEL BREAK—IN DETAIL scale: 3/8" = 1'-0"

3/8"=1'-0"

BAR IS ONE INCH ON ORIGINAL DRAWING

O 1

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY











WALWORTH RUN INTERCEPTOR REALIGNMENT WORK SHAFT
JUNCTION CHAMBER No. 1
BULLSEYE AND MISCELLANEOUS
DETAILS


PROJECT NO.:
SHEET:
SCALE: 3/16"=1'-0"
SHEET NO.: TU-3

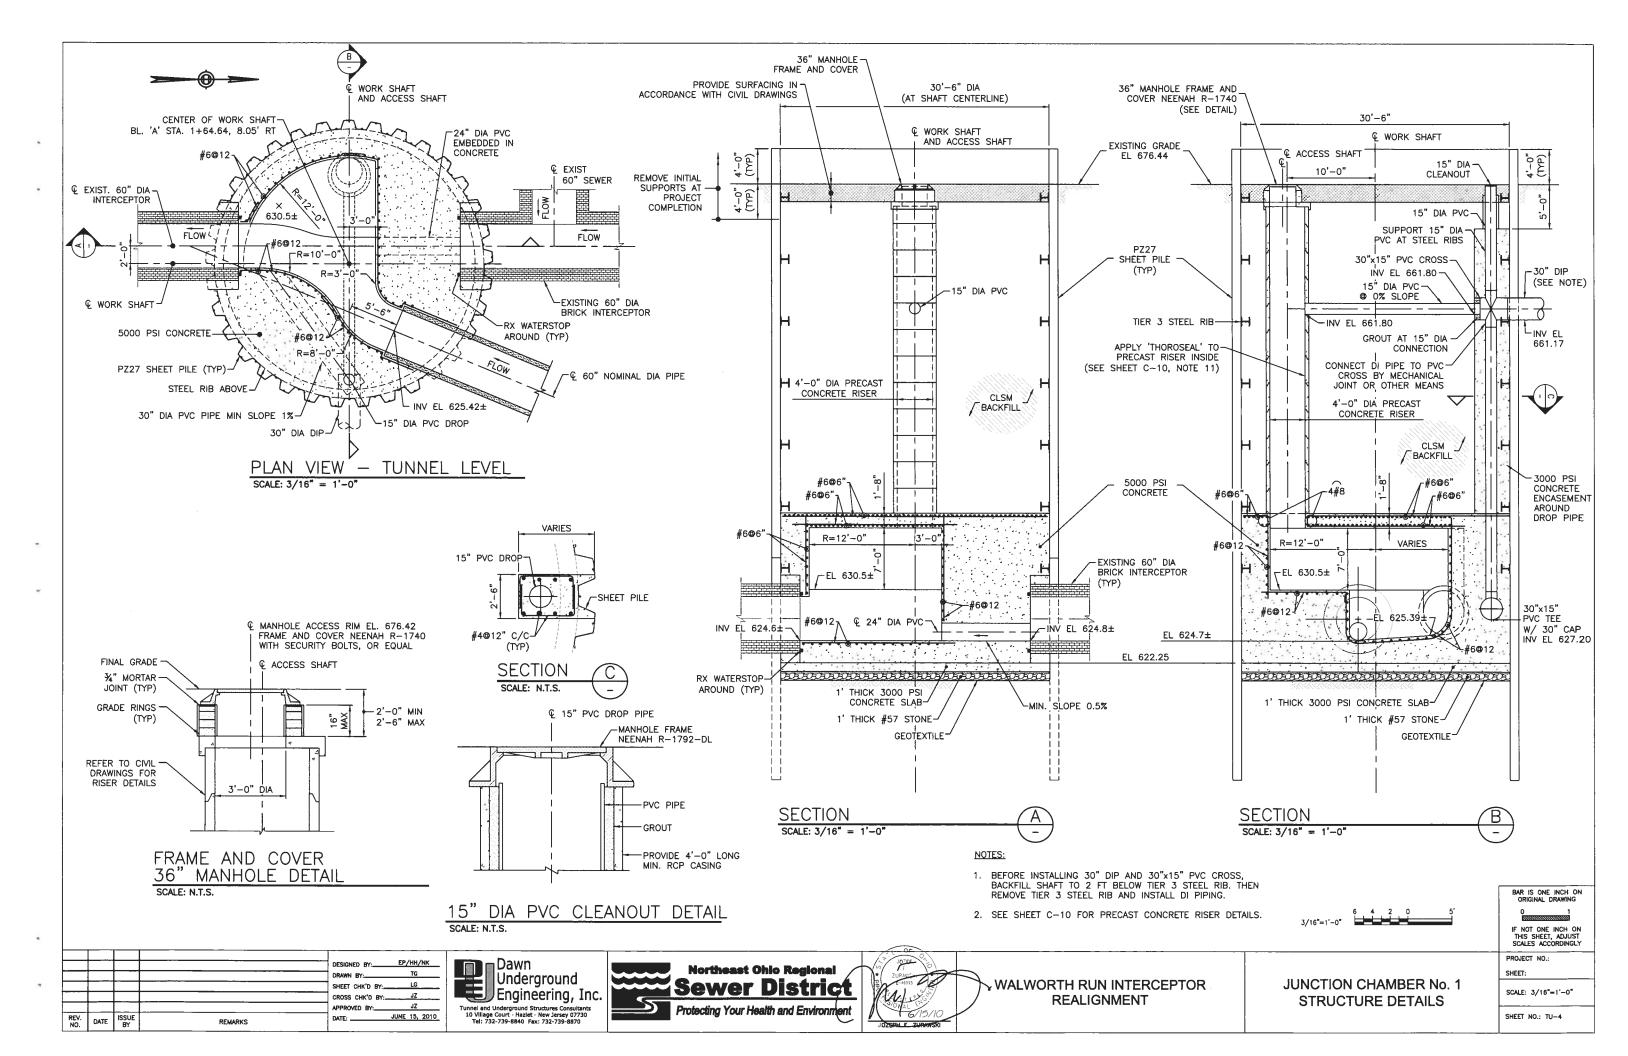


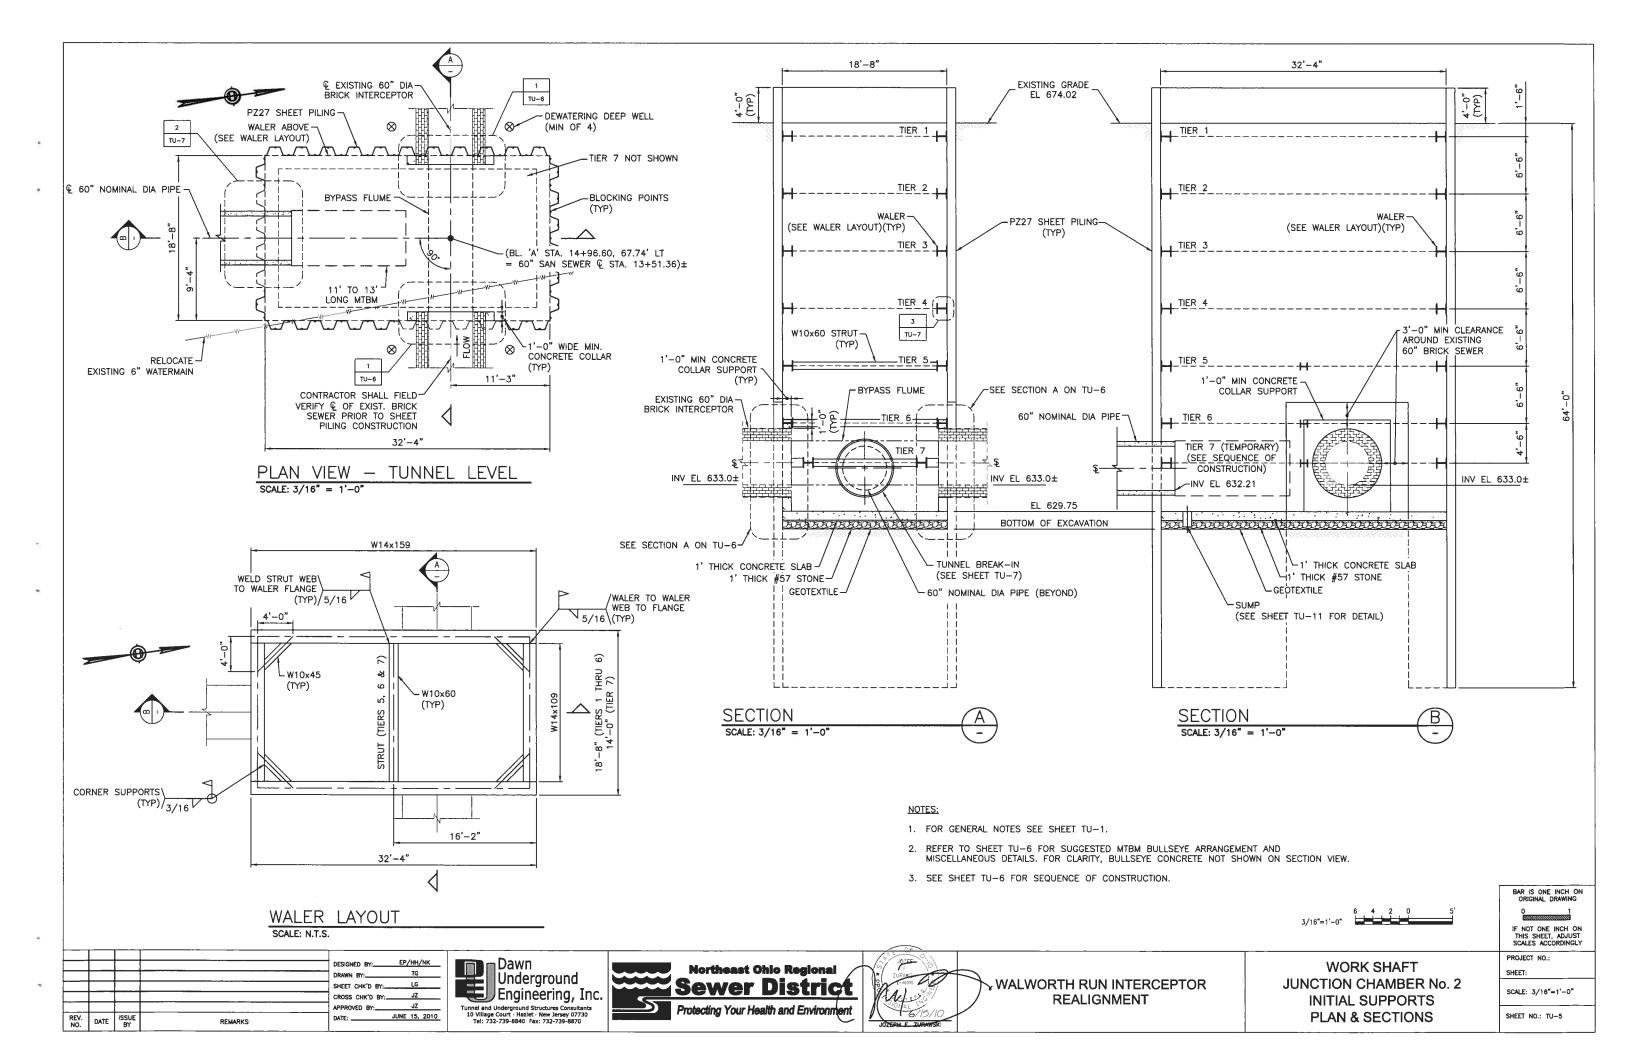

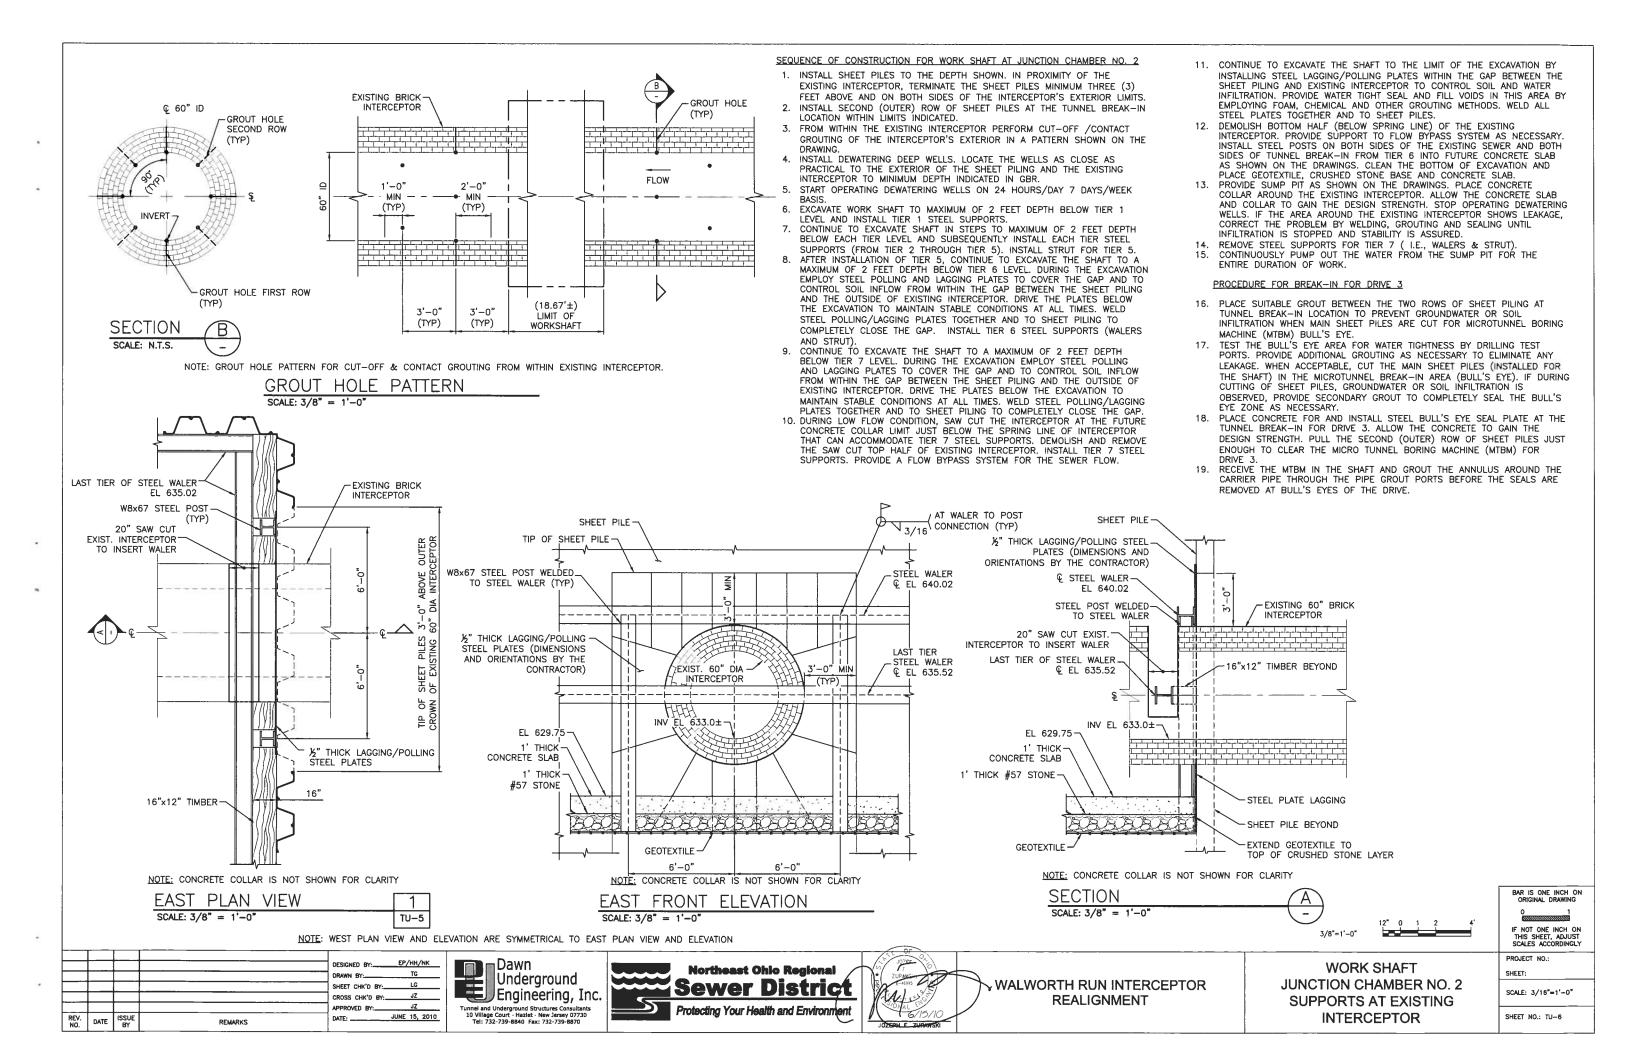


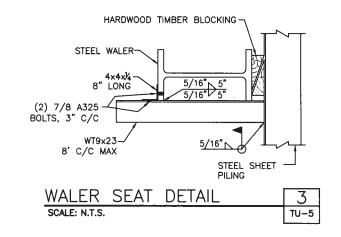


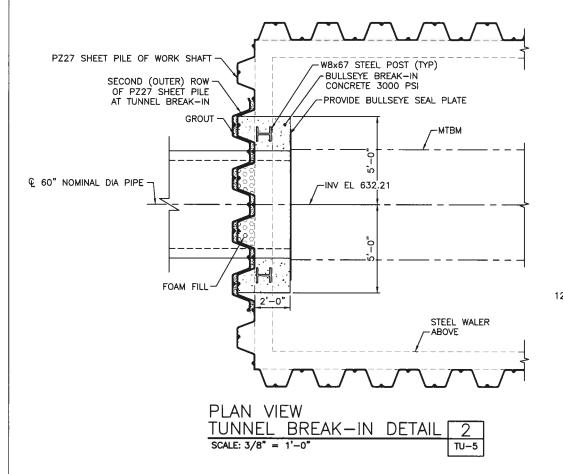

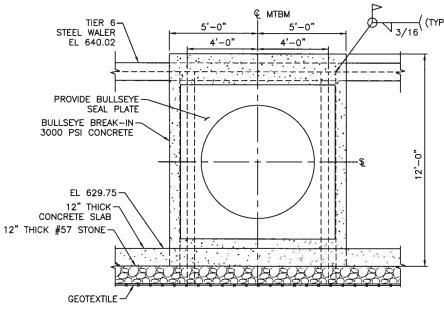

ELEVATION
TUNNEL BREAK—IN DETAIL
SCALE: 3/8" = 1'-0"

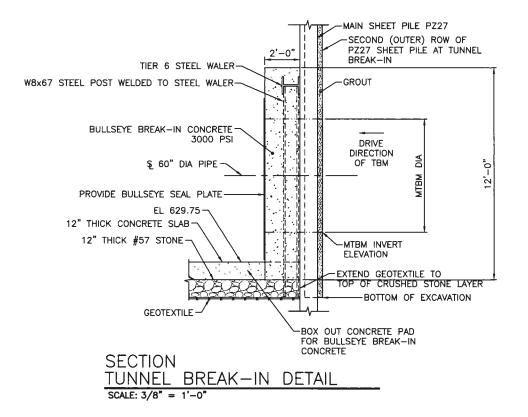



BAR IS ONE INCH ON ORIGINAL DRAWING

0 1
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

Dawn Underground Engineering, Inc.

EP/HH/NK

JUNE 15, 2010

CROSS CHK'D BY:___

APPROVED BY:__

REMARKS

DATE







WALWORTH RUN INTERCEPTOR REALIGNMENT WORK SHAFT
JUNCTION CHAMBER No. 2
BULLSEYE AND MISCELLANEOUS
DETAILS


PROJECT NO.:
SHEET:


SCALE: 3/16"=1'-0"


SHEET NO.: TU-7

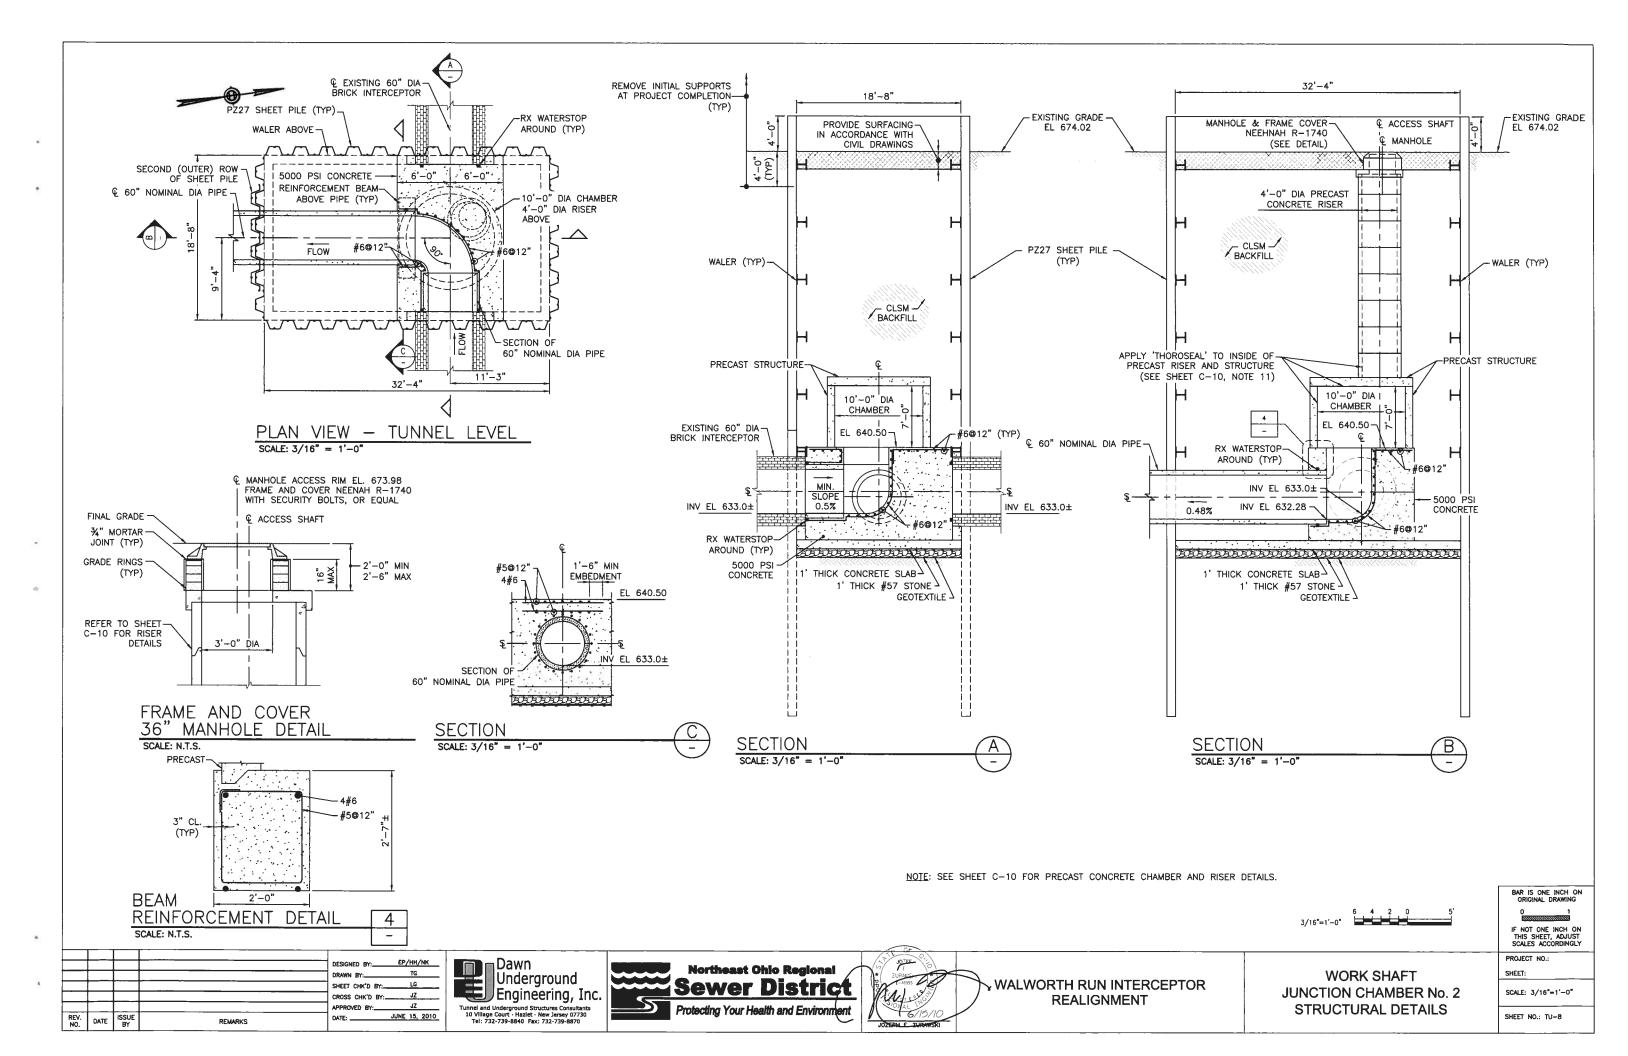

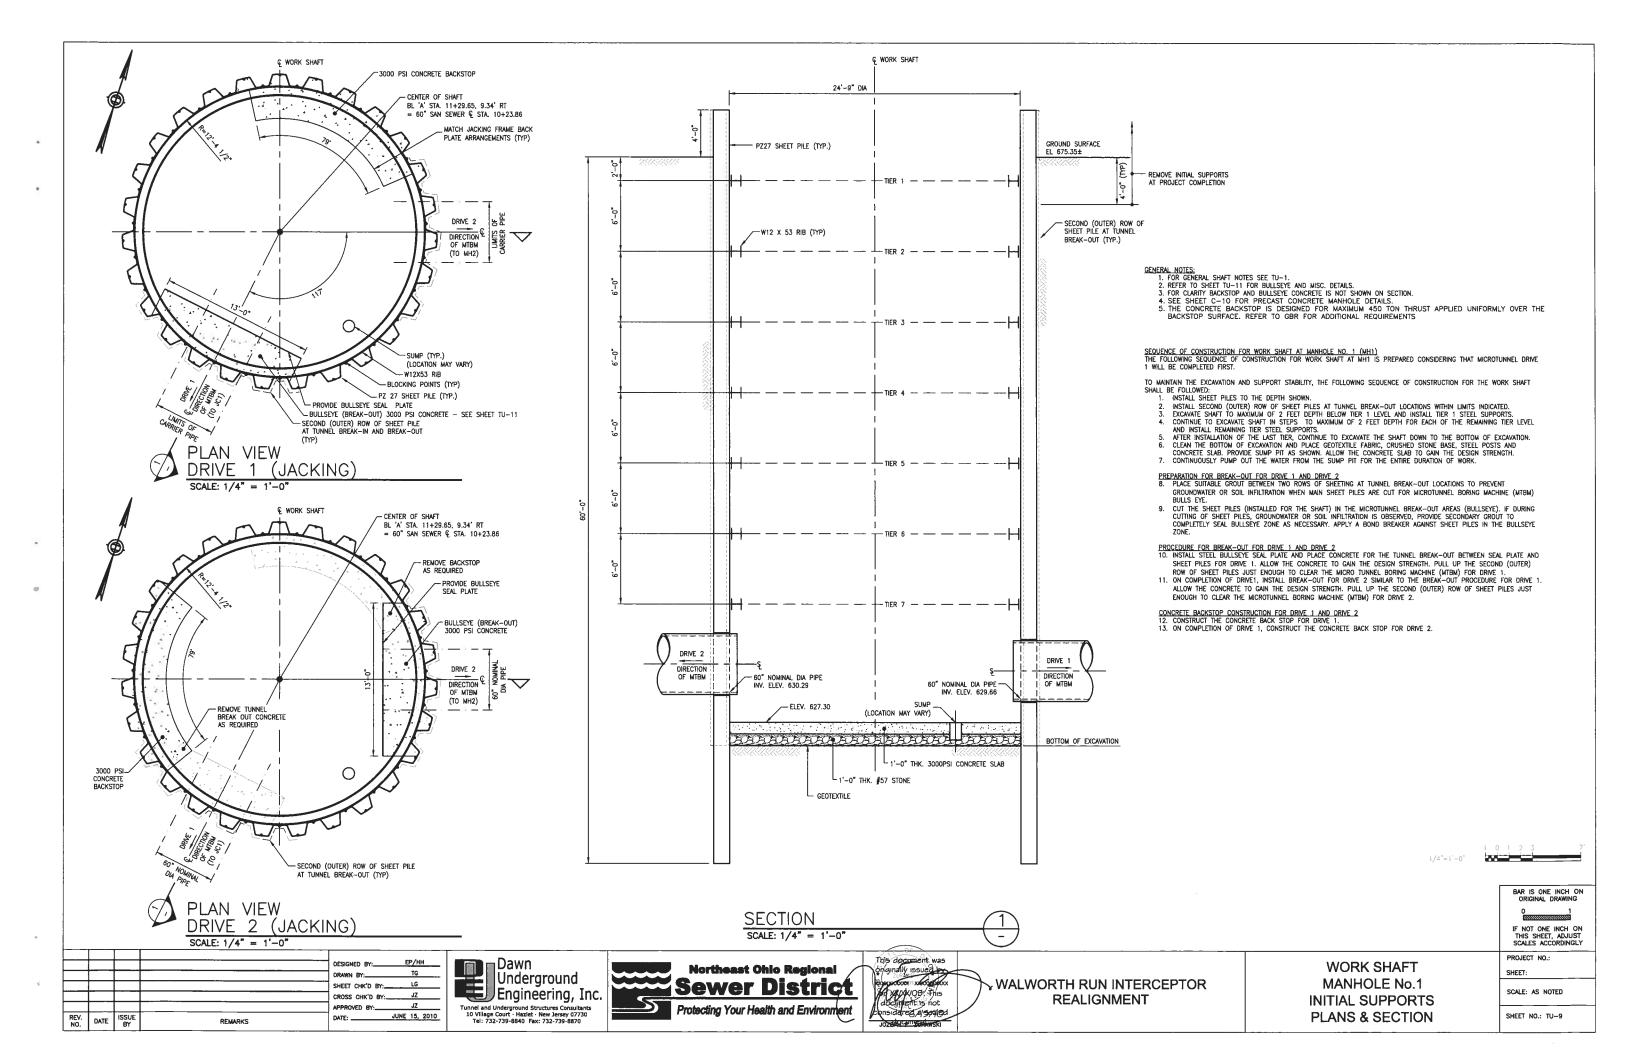

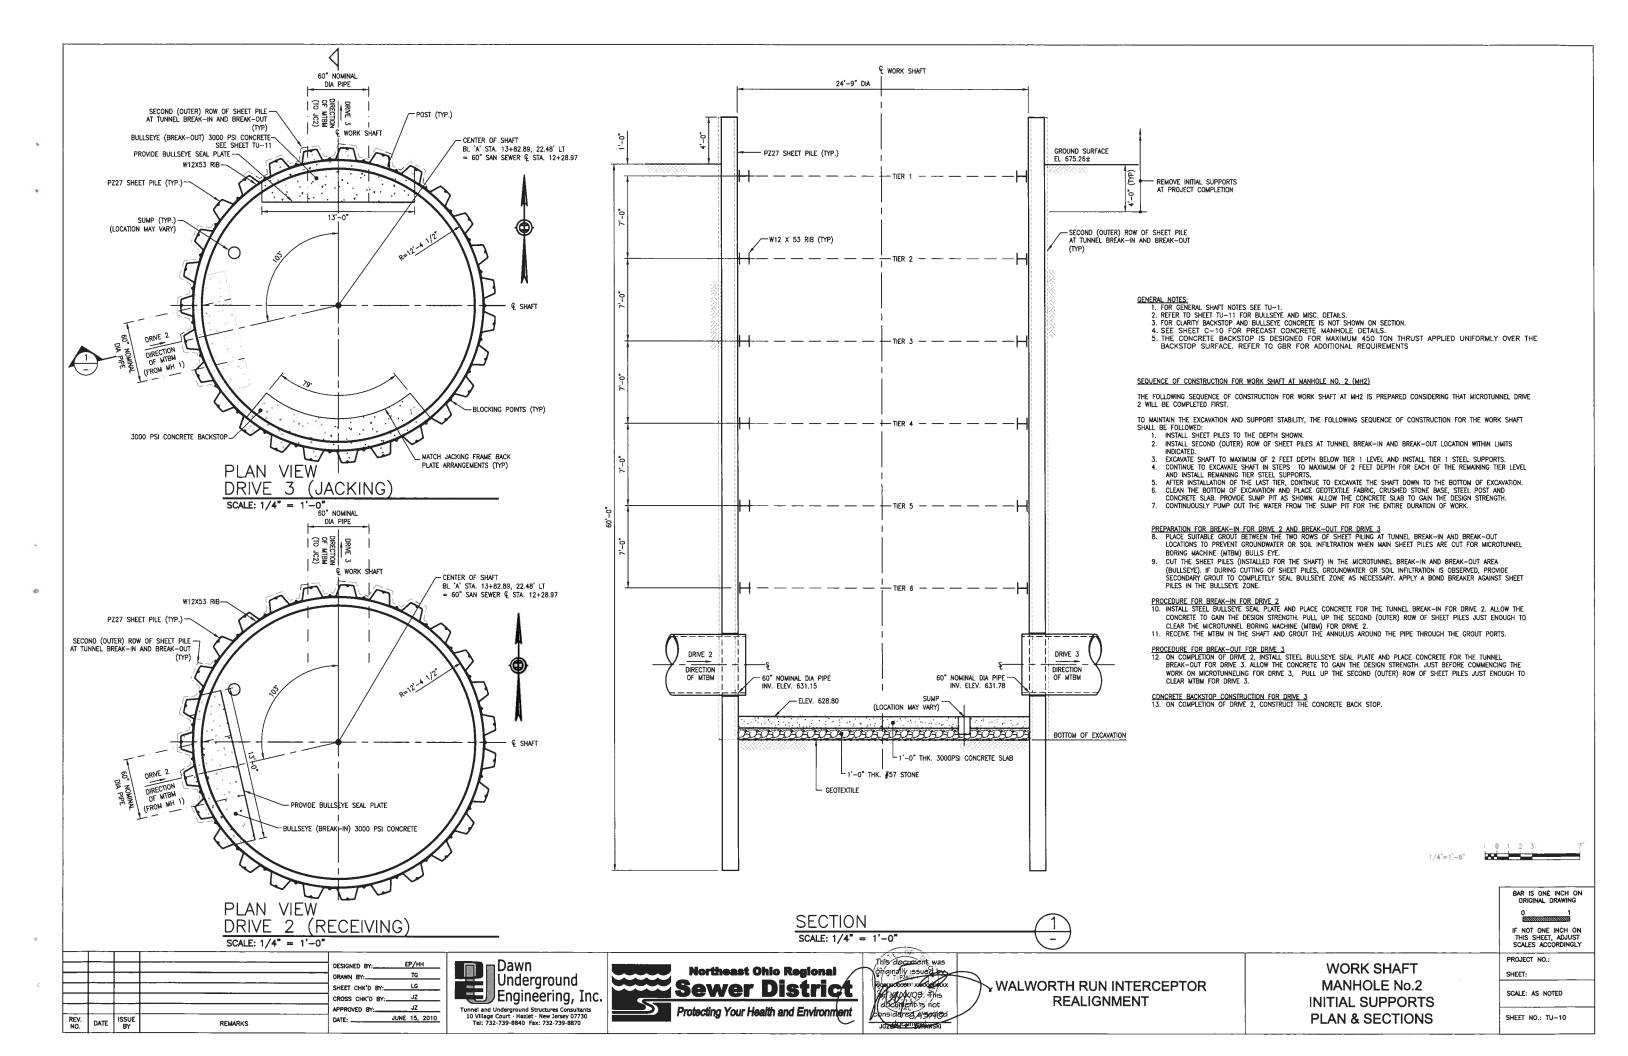

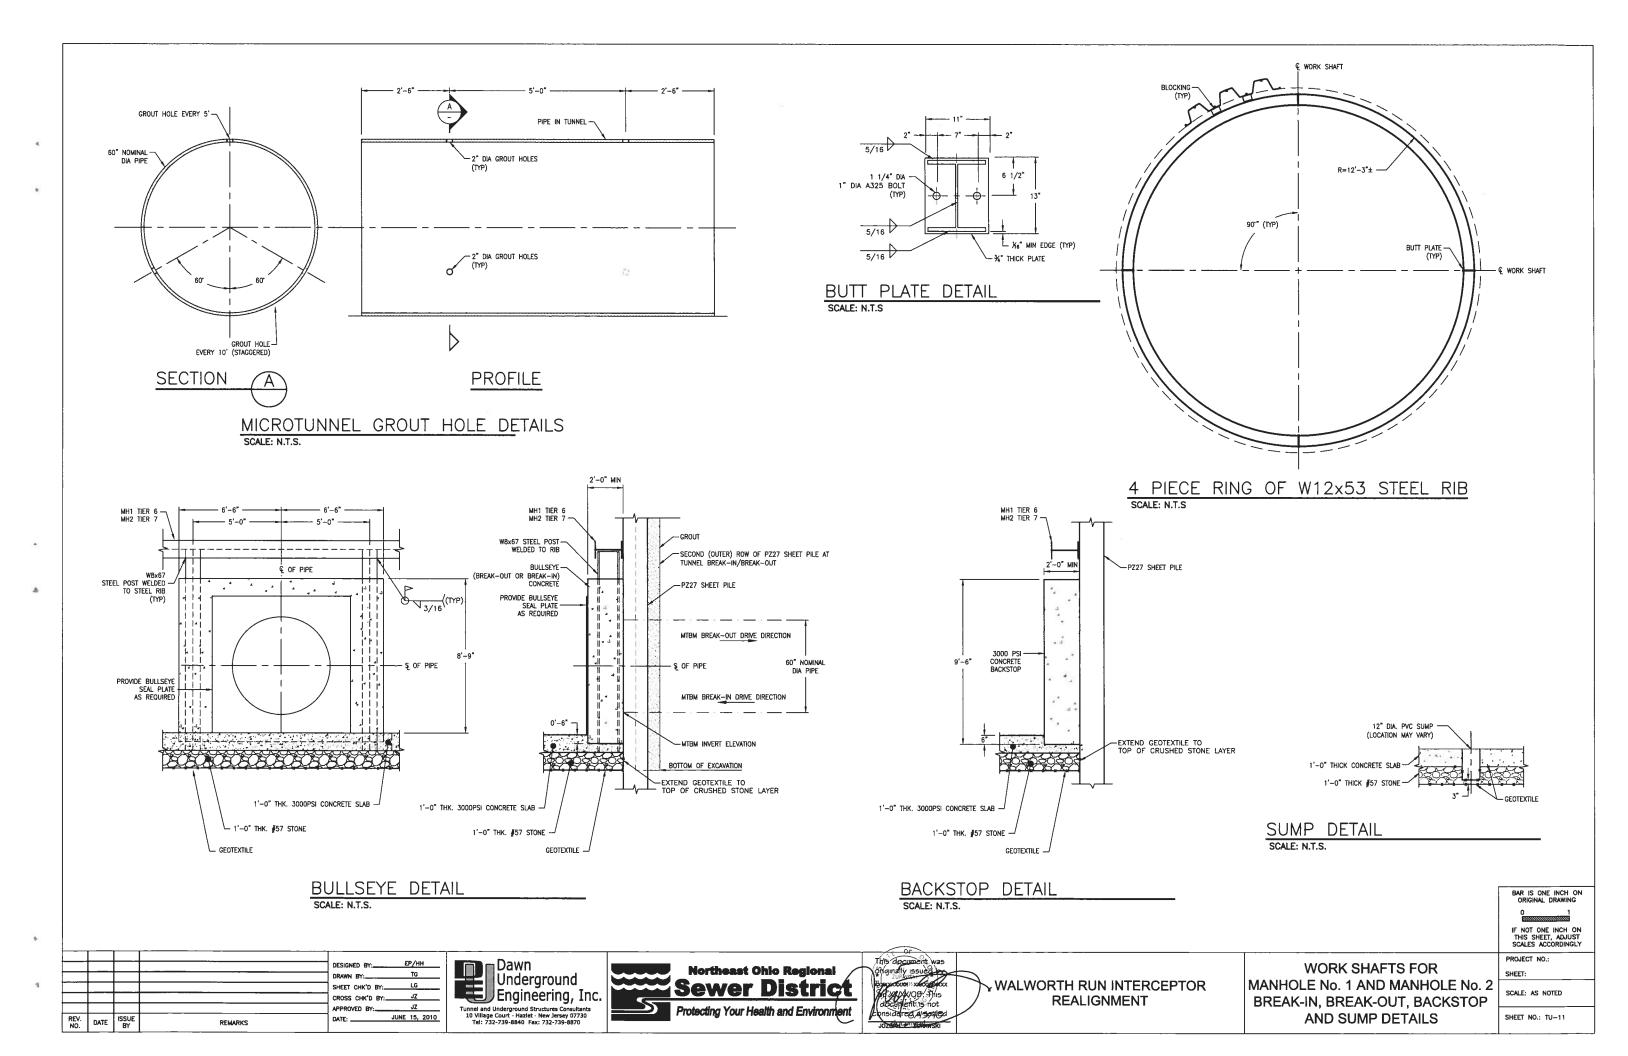

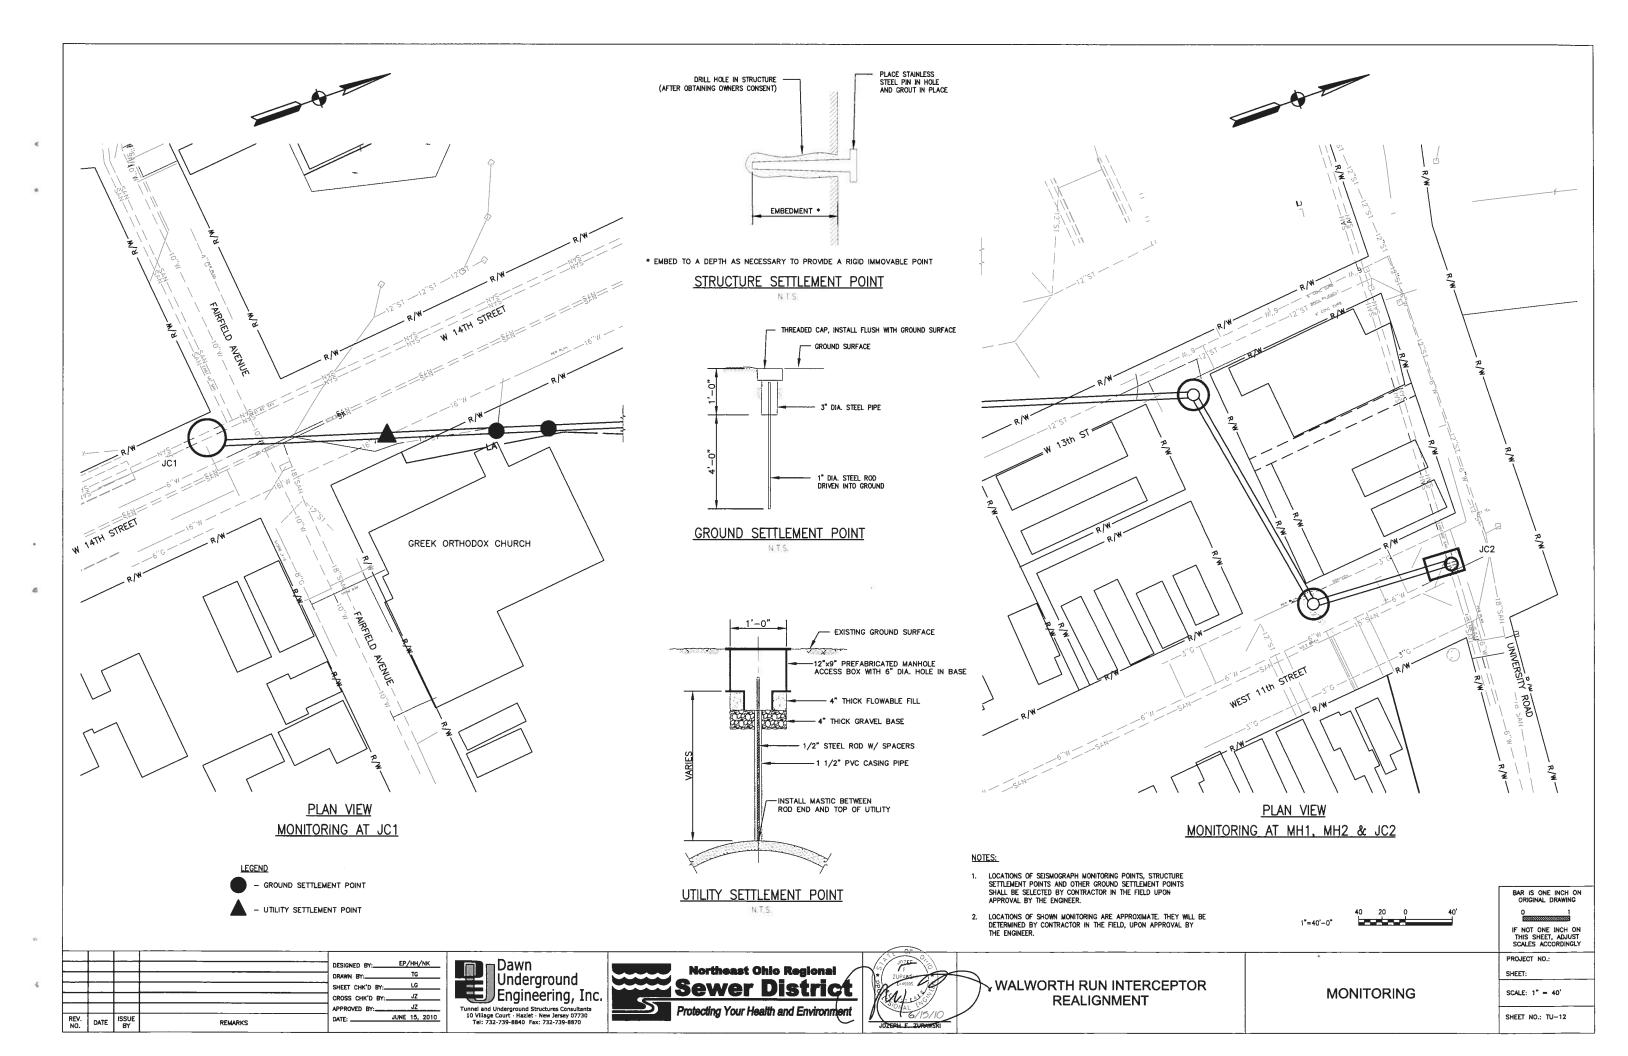

GENERAL

- QUALITY OF CONSTRUCTION REQUIRED, PERFORMANCE LEVELS OF WORKMANSHIP, MANUFACTURING AND INDUSTRY STANDARDS, STRENGTH AND PHYSICAL REQUIREMENTS OF MATERIALS, CONFORMANCE TO CODES AND REGULATIONS, QUARANTEES AND OTHER PROJECT REQUIREMENTS ARE SPECIFIED IN THE SPECIFICATIONS.
- 2. IF MATERIALS, QUANTITIES, STRENGTHS OR SIZES INDICATED BY THE DRAWINGS OR SPECIFICATIONS ARE NOT IN AGREEMENT WITH THESE NOTES, THE BETTER QUALITY AND/OR GREATER QUANTITY, STRENGTH OR SIZE INDICATED, SPECIFIED, OR NOTED SHALL BE PROVIDED.
- 3. PERFORM ALL WORK IN COORDINATION WITH ALL DRAWINGS AND INFORMATION RELATED TO STRUCTURAL WORK.
- 4. IT IS SOLELY THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE ERECTION PROCEDURE AND SEQUENCE TO ENSURE THE SAFETY OF THE STRUCTURE AND ITS COMPONENT PARTS DURING ERECTION. THIS INCLUDES, BUT IS NOT LIMITED TO, THE ADDITION OF WHATEVER TEMPORARY BRACING, GUYS OR TIE-DOWNS THAT MAY BE NECESSARY, SUCH TEMPORARY MATERIAL SHALL BE REMOVED AND SHALL REMAIN THE PROPERTY OF THE CONTRACTOR AFTER COMPLETION OF THE PROJECT.
- 5. DURING CONSTRUCTION, STRUCTURE MAY BE BUOYANT WHEN EMPTY. IN THE EVENT THAT THE EXCAVATION BECOMES FLOODED OR THE SURROUNDING GROUND SHOULD BECOMES SATURATED, ALL NECESSARY PRECAUTIONS SHALL BE TAKEN TO PREVENT FLOATATION OF THE STRUCTURE.

STANDARD HOOKS

UNLESS OTHERWISE SHOWN OR NOTED, ALL 90', 135' AND 180' HOOKS FOR REINFORCING SHALL BE IN ACCORDANCE WITH THE STANDARD HOOK DETAILS SHOWN IN AC DETAILING MANUAL.

CAST-IN-PLACE CONCRETE

CONCRETE SHALL HAVE THE FOLLOWING MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS:

• 5,000 psi

- CONTRACTOR SHALL REVIEW ALL DRAWINGS FOR SIZE AND LOCATION OF EMBEDDED ITEMS, SLEEVES, SLAB DEPRESSIONS. THESE ITEMS SHALL BE FURNISHED AND INSTALLED PRIOR TO PLACEMENT OF CONCRETE.
- 3. WHERE BAR LENGTHS ARE GIVEN ON THE DRAWINGS, THE LENGTH OF ANCHOR HOOK, IF REQUIRED, IS NOT INCLUDED.


- 5. PROVIDE WATERSTOPS AT ALL CONSTRUCTION JOINTS IN SLABS AND WALLS.
 PROVIDE 6" MIDE PVC WATERSTOP AT ALL HORIZONTAL AND VERTICAL CONSTRUCTION JOINTS IN SLABS AND WALLS OF NEW CONCRETE CONSTRUCTION.
 PROVIDE BENTONITE (HYDROPHILIC) WATERSTOP AT PIPE-WALL-PENETRATIONS, PRECAST CONCRETE RISSES AND AT JOINTS BETWEEN EXISTING STRUCTURE AND NEW CONCRETE CONSTRUCTION.
- WELDING OF REINFORCING STEEL IS NOT PERMITTED, UNLESS SPECIFICALLY SHOWN ON THE DRAWINGS.
- 7. REINFORCING BARS REQUIRED FOR PROPER SUPPORT OF PRINCIPAL REINFORCING SHALL BE DETAILED AND SUPPLIED BY THE CONTRACTOR WHETHER OR NOT THEY ARE INDICATED ON THE DRAWINGS.
- B. POSITIVE CONNECTION SPLICES: MECHANICAL CONNECTIONS SHALL DEVELOP 125 PERCENT OF THE YIELD STRENGTH OF THE REINFORCING BAR. ALL SPLICES WILL BE VISUALLY INSPECTED BY THE ENGINEER TO VERIFY THAT THE SPLICE HAS BEEN MADE PROPERLY.
- BOND BREAKER MATERIAL SHALL BE 15 POUNDS FELT PAPER, UNLESS NOTED OTHERWISE.


REINFORCEMENT BAR DEVELOPMENT

1. UNLESS OTHERWISE INDICATED ON THE DRAWINGS, REINFORCING BARS SHALL BE DEVELOPED AND/OR SPLICED IN ACCORDANCE WITH THE FOLLOWING TABLE:


BAR SIZE	MIN. LAP LENGTHS FOR BEAMS *		MIN. LAP LENGTHS FOR SLABS AND WALLS		MIN. LAP LENGTHS FOR COLUMNS	MIN. EMBEDMENT LENGTHS			MIN. STD. HOOKS		
						STRAIGHT BARS*		WITH	80,	135*	
	CLASS B		CLASS B						A OR G	A OR G	Н
	TOP***	OTHERS	TOP***	OTHERS		TOP***	OTHERS	HOOKS	A OR G	A OK G	п
#3	25	19	16	16	12	19	15	5	6	4	2.5
#4	33	25	20	16	15	25	19	7	8	4.5	3
# 5	41	31	25	19	19	31	24	9	10	5.5	3.75
#6	49	37	29	23	23	37	29	10	12	8	4.5
#7	71	54	43	33	27	54	42	12	14	9	5.25
#8	81	62	49	37	30	62	48	14	16	10.5	6
#9	91	70	60	46	34	70	54	15	19	-	
#10	102	79	74	57	39	79	61	17	22	_	-
#11	114	87	89	69	43	87	67	19	24	_	-

- 2. REINFORCEMENT LAP SPLICE, EMBEDMENT LENGTH AND STANDARD HOOKS TABLE IS BASED ON A MINIMUM CONCRETE COMPRESSIVE STRENGTH OF 4000 PSI AND 60,000 PSI REINFORCEMENT (WITH NO EPOXY COATING).
- 3. ALL LAP SPLICES SHALL BE CLASS B SPLICES.
- THE MINIMUM LAP LENGTH FOR BEAMS AND STRAIGHT EMBEDMENTS ARE BASED ON A 3 BAR DIAMETER MINIMUM CENTER TO CENTER BAR SPACING AND A 2 INCH BAR COVER. IF THE SPLICE AND/OR EMBEDMENT DOES NOT CONFORM TO THESE REQUIREMENTS, THEN CONTRACTOR SHALL APPLY APPROPRIATE FACTORS IN COMPLIANCE WITH ACI 318 WITH APPROVAL BY ENGINEER.
- THE MINIMUM LAP LENGTH FOR SLABS AND WALLS IS BASED ON A 6 INCH BAR SPACING AND A 2 INCH BAR COVER. IF THE LAP CONDITION DOES NOT CONFORM TO THESE REQUIREMENTS, THENUSE BEAM LAP LENGTHS; OR COMPLY WITH LAP REQUIREMENTS OF ACI 318 WITH APPROVAL BY ENGINEER.
- *** TOP BARS ARE DEFINED AS ALL HORIZONTAL BARS, EXCLUDING WALL BARS, WITH 12" OR MORE FRESH CONCRETE BENEATH.
- WHERE SPLICES ARE INDICATED BETWEEN BARS OF DIFFERENT SIZES, THE SPLICE LENGTH SHAL BE BASED ON THE SMALLER BAR SIZE.





PRECAST RISER TO C.I.P. CONCRETE JOINT DETAIL
SCALE: N.T.S.

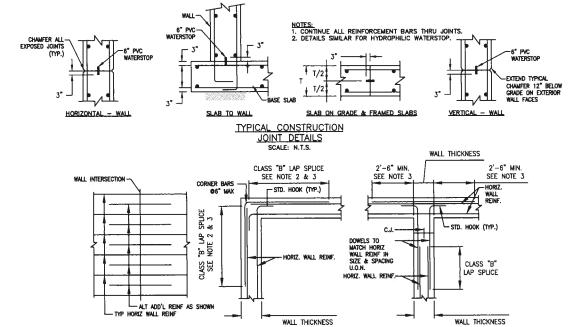


PLAN TYPICAL REINFORCEMENT DETAIL AT WALL INTERSECTIONS
SCALE: N.T.S.

PLAN

<u>NOTES:</u>
1. PROVIDE ADDITIONAL REINFORCING AT WALL INTERSECTIONS AS SHOWN ABOVE UNLESS NOTED OTHERWISE ON DRAWINGS.

- PROVIDE CORNER BAR REINFORCING AT SIX INCHES SPACING, UNLESS OTHERWISE NOTED ON DRAWINGS, AT ALL CORNERS.
 CORNER BAR REINFORCEMENT SHALL MATCH TYPICAL HORIZONTAL WALL REINFORCEMENT IN SIZE. DIMENSIONS SHALL BE 0.25
 TIMES THE CLEAR SPAN DISTANCE BETWEEN WALL INTERSECTIONS MEASURED HORIZONTALLY, BUT SHALL NOT BE LESS THEN
 TYPE "8" LAP SPLICE NOR GREATER THEN 6"-0".
- ADDITIONAL REINFORCEMENT SHALL MATCH SIZE AND SPACING OF WALL HORIZONTAL REINFORCEMENT, UNLESS OTHERWISE NOTED. ALTERNATE ADDITIONAL REINFORCEMENT WITH HORIZONTAL WALL REINFORCEMENT.

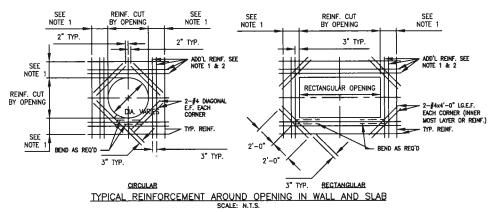

2. PROVIDE MATCHING DOWELS. WHERE REQUIRED TO PROVIDE CLASS "B" LAP WITH ADDITIONAL REINFORCEMENT.









WALWORTH RUN INTERCEPTOR REALIGNMENT

TYPICAL DEVELOPED WALL INTERSECTION

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.: SHEET:

STRUCTURAL DETAILS AND NOTES

SCALE: 3/16"=1'-0"


BAR IS ONE INCH ON

SHEET NO.: TU-13



NORTHEAST OHIO REGIONAL SEWER DISTRICT

WALWORTH RUN INTERCEPTOR REALIGNMENT (WRIR)

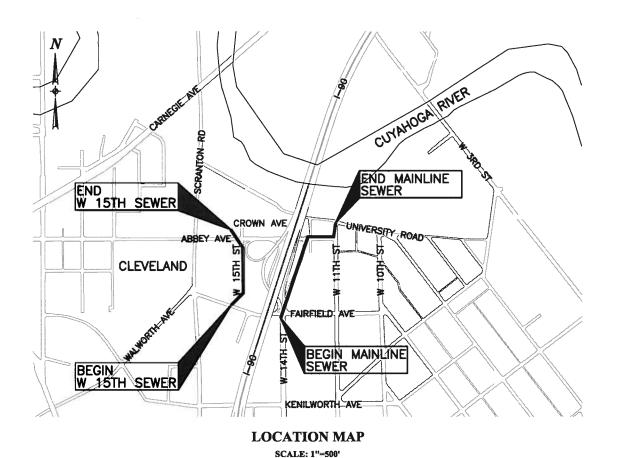

NORTHEAST OHIO REGIONAL SEWER DISTRICT

BOARD OF TRUSTEES

DARNELL BROWN, PRESIDENT GARY W. STARR, VICE PRESIDENT DEAN DEPIERO, SECRETARY MAYOR JACK BACCI SHEILA J. KELLY WALTER O' MALLEY RONALD D. SULIK

JULIUS CIACCIA, JR., EXECUTIVE DIRECTOR

ACCEPTED BY:

JULIUS CIACCIA, JR. **EXECUTIVE DIRECTOR** DATE

WRIR

KELLIE C. ROTUNNO DIRECTOR OF ENGINEERING AND CONSTRUCTION

DATE

NORTHEAST OHIO REGIONAL SEWER DISTRICT

SUBMITTED BY:

DLZ OHIO, INC.

DLZ OHIO, INC

DATE

PLANNERS • SURVEYORS

90% SUBMITTAL APRIL 30, 2010



NOTES

- 1. BASIS OF BEARING AND ELEVATION: HORIZONTAL AND VERTICAL CONTROL IS BASED ON THE OHIO NORTH ZONE STATE PLANE COORDINATE SYSTEM NAD 83 AND THE NAVD 88 VERTICAL DATUM.
- 2. EXISTING STRUCTURES, GRADES, PIPING ETC,. ARE SHOWN IN APPROXIMATE LOCATIONS ON THE PLANS. THE INFORMATION SHOWN IS NOT GUARANTEED TO BE CORRECT OR COMPLETE. THE DATA SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR.
- 3. THE CONTRACTOR SHALL COORDINATE HIS OPERATIONS WITH THE WORK OF THE UTILITY OWNERS OR OTHERS WHO MAY RELOCATE EXISTING UTILITIES, AND SHALL NOTIFY OWNERS OF THE UTILITIES OF HIS SCHEDULE SUFFICIENTLY IN ADVANCE TO PERMIT THEM TO MAKE THE NECESSARY
- 4. INFORMATION ON EXISTING UTILITIES AND OTHER SUB-STRUCTURES WAS OBTAINED FROM APPROPRIATE AGENCIES. EXISTING UTILITIES SHALL BE MAINTAINED IN PLACE BY THE CONTRACTOR UNLESS OTHERWISE SHOWN ON THE PLANS OR STATED IN THE SPECIFICATIONS. THE LOCATIONS OF EXISTING UTILITIES AND SUB-STRUCTURES SHOWN ON THE DRAWINGS ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL VERIFY EXACT LOCATIONS, ELEVATIONS, AND DIMENSIONS IN THE FIELD PRIOR TO CONSTRUCTION IN THE AREA OF THE SPECIFIC SUB-STRUCTURE.
- 5. THE LENGTH OF PIPE SHOWN ON THE DRAWINGS IS GIVEN FROM CENTER-TO-CENTER OF STRUCTURE FOR STRUCTURES UP TO 6-FT INSIDE DIAMETER OR SIZE AND TO THE INSIDE FACE OF STRUCTURE FOR STRUCTURES OVER 6-FT INSIDE DIAMETER OR SIZE.

LEGEND

© p · mayora arange D [] O		EXISTING MANHOLE EXISTING CATCH BASIN EXISTING HYDRANT EXISTING/PROPOSED VALVE LIGHT POLE TELEPHONE POLE POWER POLE UTILITY POLE LIGHT & POWER POLE TELEPHONE & POWER POLE TELEPHONE & LIGHT POLE GUY ANCHOR SIGN (1 POST) SIGN (2 POST) EXISTING SANITARY MANHOLE			POST (SQUARE) POST (ROUND) TREE SHRUB BENCH MARK CHISELED BENCH MARK EXISTING MONUMENT BOX IRON PIN/PIPE FOUND IRON PIN/PIPE SET TACKED HUB DRILL HOLE PKNAIL RAILROAD SPIKE ELECTRICAL BOX
	_	• •	00	_	
<u> </u>	_	STORM INLET/ CATCH BASIN	(b)	-	EXISTING ELECTRICAL MANHOLE
	-	STORM INLET/ CATCH BASIN	- 	-	BORING LOCATION





CONCRETE GROUT

SCREENED GRAVEL

UNDISTURBED EARTH

SECTION CUTS





ABBREVIATIONS

FIBER-PEIN-DYCED POLYMER MORTAR PIPE C/C - CENTER TO CENTER C.J CONSTRUCTION JOINT Q CENTERLINE CIRC - CIRCULAR CIRC - CIRCULAR CLSM MATERIAL COMU - CONTROLED LOW-STRENGTH COL - COLUMN COMIT - CONTROLED LOW-STRENGTH COL - COLUMN COMIT - CONTROLED LOW-STRENGTH COL - COLUMN COMIT - CONTROLED LOW-STRENGTH COM - CONCRETE COMC - CONCRETE CONT - CONTINUOUS CONT - CONTI	ADH. — ADHESIVE AB — ANCHOR BOLT ADD'L — ADDITIONAL ALT. — ALTERNATE ALUM — ALUMINUM & — AND ASS'Y — ASSEMBLY @ — AT BITUM. — BITUMINOUS B/ — BOTTOM OF OR BOT/ B — BASE LINE OR BL BLDG. — BUILDING BLDG. — BUILDING BLK. — BLOCK BOT — BASE PLATE BRG. — BASE PLATE BRG. — BASE PLATE BRG. — BASE PLATE BRG. — BERRING BT PL. — BENT PLATE CCFRPMP — CENTRIFUGALLY CAST FIBER—REINFORCED POLYMER MORTAR PIPE C/C — CENTER TO CENTER C.J. — CONSTRUCTION JOINT Q — CENTERLINE CIRC — CIRCULAR CLSM — MATERIAL CMU — CONTROLED LOW—STRENGTH CONC — CONCRETE CONT — CONTROLED CONT — CONTROLED CONT — CONTROLED CONT — CONTROL CONT — CONTROL COPP — DEFL — DETAIL DI(DIP) — DUCTILE IRON PIPE DIA — DIAMETER DIM — DIMENSION DL — DETAIL DI(DIP) — DUCTILE IRON PIPE DIA — DIAMETER DIM — DIMENSION DL — DETAIL DI — DETAIL DI — DETAIL DI — DISTANCE DWU — DRY WEATHER OUTLET EE — EACH FACE E.J. — EXPANSION JOINT E. — EAST ELEV.(EL.) — ELEVATION ELECTRIC	E.W. — EACH WAY EQ — EQUAL EX OR — EXISTING EXIST — EXPANSION EXT — EXTERIOR FDN. — FOUNDATION FIN — FINISH FL — FINISH LINE FLR — FLOOR FF — FAR FACE FTG — FOOTING G — GAS GA. — GAGE GR. — GAGE GR. — GRADE GRD. — GROUND HORIZ — HORIZONTAL HP — HIGH POINT HR. — HANDRAIL HS — HIGH POINT HR. — HANDRAIL HS — HIGH STRENGTH IS. — INSIDE FACE INT — INTERIOR INSUL. — INVERT JT — JOINT K. — KIP (1000 POUNDS) LL LUVE LOAD LLB — LONG LEG HORIZONTAL LLV — LONG LEG HO	PROPERTY LINE/PLATE ROP — PROPOSED SI — POUNDS PER SQUARE INCH SF — POUNDS PER SQUARE FOOT VC — POLYVINYL CHLORIDE — RISER ICP — REINFORCED CONCRETE PIPE IEINF — REINFORCING IEQ'MTS. — REQUIREMENTS IO — ROUGH OPENING IT — RIGHT I/W — RIGHT—OF—WAY IAN — SANITARY SEWER ICHED — SCHEDULE IECT — SCCTION IF — SQUARE FEET IHIT. — SHEET IHIT. — SHEET IJIM — SIMILAR IJ — STEEL JOIST ILBB — SHORT LEG BACK—TO—BACK ISV — SPACES OR SPACING IPPAD. — SPRAD IQ OR IZ — SQUARE ITT — STORM SEWER ITT — STORM SEW
--	--	--	--

		CHEET INDEX
		SHEET INDEX
<u>SHEET NO.</u>	4	SHEET TITLE
		TITLE
G-1 -	_	LEGEND, SHEET INDEX, AND GENERAL NOTES
G-2 -	-	LOCATION MAP
G-3 -	_	SURVEY CONTROL
		MAINTENANCE OF TRAFFIC
MOT-1 -	_	JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 1
MOT-2 -		JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 2-PART A
MOT-3 -		JUNCTION CHAMBER NO.1 MAINTENANCE OF TRAFFIC PHASE 2-PART E
MOT-4 -		MAINTENANCE OF TRAFFIC DETOUR ROUTE FOR MANHOLE NO.1
MOT-5 -	-	MAINTENANCE OF TRAFFIC DETOUR ROUTE FOR MANHOLE NO.2 AND
		JUNCTION CHAMBER NO.2
		PLAN & PROFILE
P-1 -	-	WALWORTH RUN INTERCEPTOR STA 1+00 TO STA 5+00
P-2 -	_	WALWORTH RUN INTERCEPTOR STA 5+00 TO STA 10+00
P-3 -	-	WALWORTH RUN INTERCEPTOR STA 10+00 TO STA 15+00
P-4 -	-	WEST 15TH ST SANITARY SEWER STA 0+00 TO STA 4+00
P-5 -	_	WEST 15TH ST SANITARY SEWER STA 4+00 TO STA 8+00
P-6 -	-	CROWN AVE/W. 14TH ST STORM SEWER CONNECTION
P-7 -	_	SEWER PROFILES
P-8 -	-	SEWER PROFILES
		CML
C-1	_	NORTHERN SEWER ABANDONMENT PLAN
C-2	_	SOUTHERN SEWER ABANDONMENT PLAN
C-3	_	JUNCTION CHAMBER NO. 1 SITE PLAN
C-4	_	MANHOLE NO. 1 SITE PLAN
	_	MANHOLE NO. 2 AND JUNCTION CHAMBER NO.2 SITE PLAN
C-6	_	WATER MAIN RELOCATION PLAN AND NOTES
	_	WATER MAIN NOTES AND DETAILS
C-8	_	WATER MAIN DETAILS
	_	WATER MAIN DETAILS
C-10	_	PRECAST CONCRETE MANHOLE DETAILS
C-11		TRENCH REPAIR DETAILS
C-12		PAVEMENT SECTIONS AND DETAILS
C-13		SEWER DETAILS
C-14		CITY OF CLEVELAND CATCH BASIN CB-1 DETAIL
C-15	_	CITY OF CLEVELAND INLET BASIN DETAIL
		TUNNEL
TU-1		WORK SHAFT JUNCTION CHAMBER NO.1 INITIAL SUPPORTS
TU-2		JUNCTION CHAMBER NO.1 SUPPORTS AT EXISTING INTERCEPTOR
TU-3		JUNCTION CHAMBER NO.1 BULLSEYE AND MISCELLANEOUS DETAILS
TU-4		JUNCTION CHAMBER NO.1 STRUCTURE DETAILS
TU-5		WORK SHAFT JUNCTION CHAMBER NO.2 INITIAL SUPPORTS
TU-6		JUNCTION CHAMBER NO.2 SUPPORTS AT EXISTING INTERCEPTOR
TU−7	-	JUNCTION CHAMBER NO.2 BULLSEYE AND MISCELLANEOUS DETAILS


TU-8 - WORK SHAFT JUNCTION CHAMBER NO.2 STRUCTURAL DETAILS


TU-11 - MANHOLE NO.1 AND MANHOLE NO.2 BREAK-IN, BREAK-OUT, BACK STOP AND SUMP DETAILS

TU-9 - WORK SHAFT MANHOLE NO.1 INITIAL SUPPORTS TU-10 - WORK SHAFT MANHOLE NO.2 INITIAL SUPPORTS

TU-13 - STRUCTURAL DETAILS AND NOTES

TU-12 - MONITORING









WALWORTH RUN INTERCEPTOR **REALIGNMENT**

GENERAL NOTES


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY


SHEET: X


SCALE: 1"=10"


SHEET NO.: G-1


LEGEND, SHEET INDEX, AND

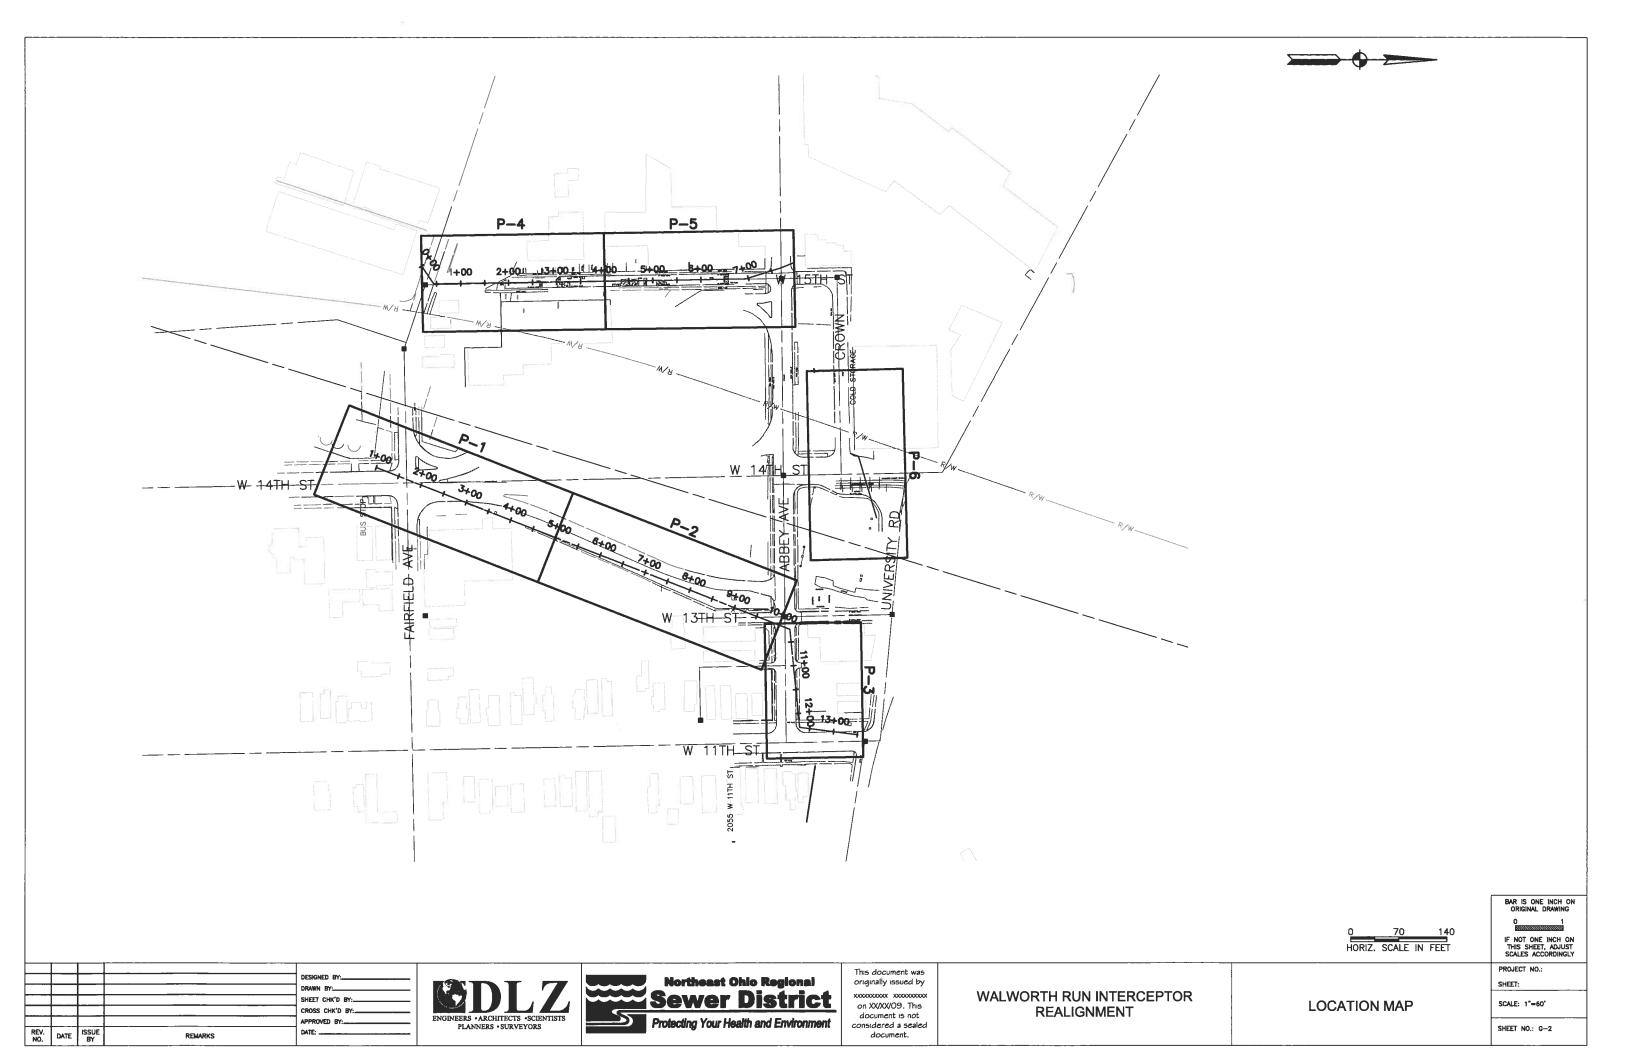


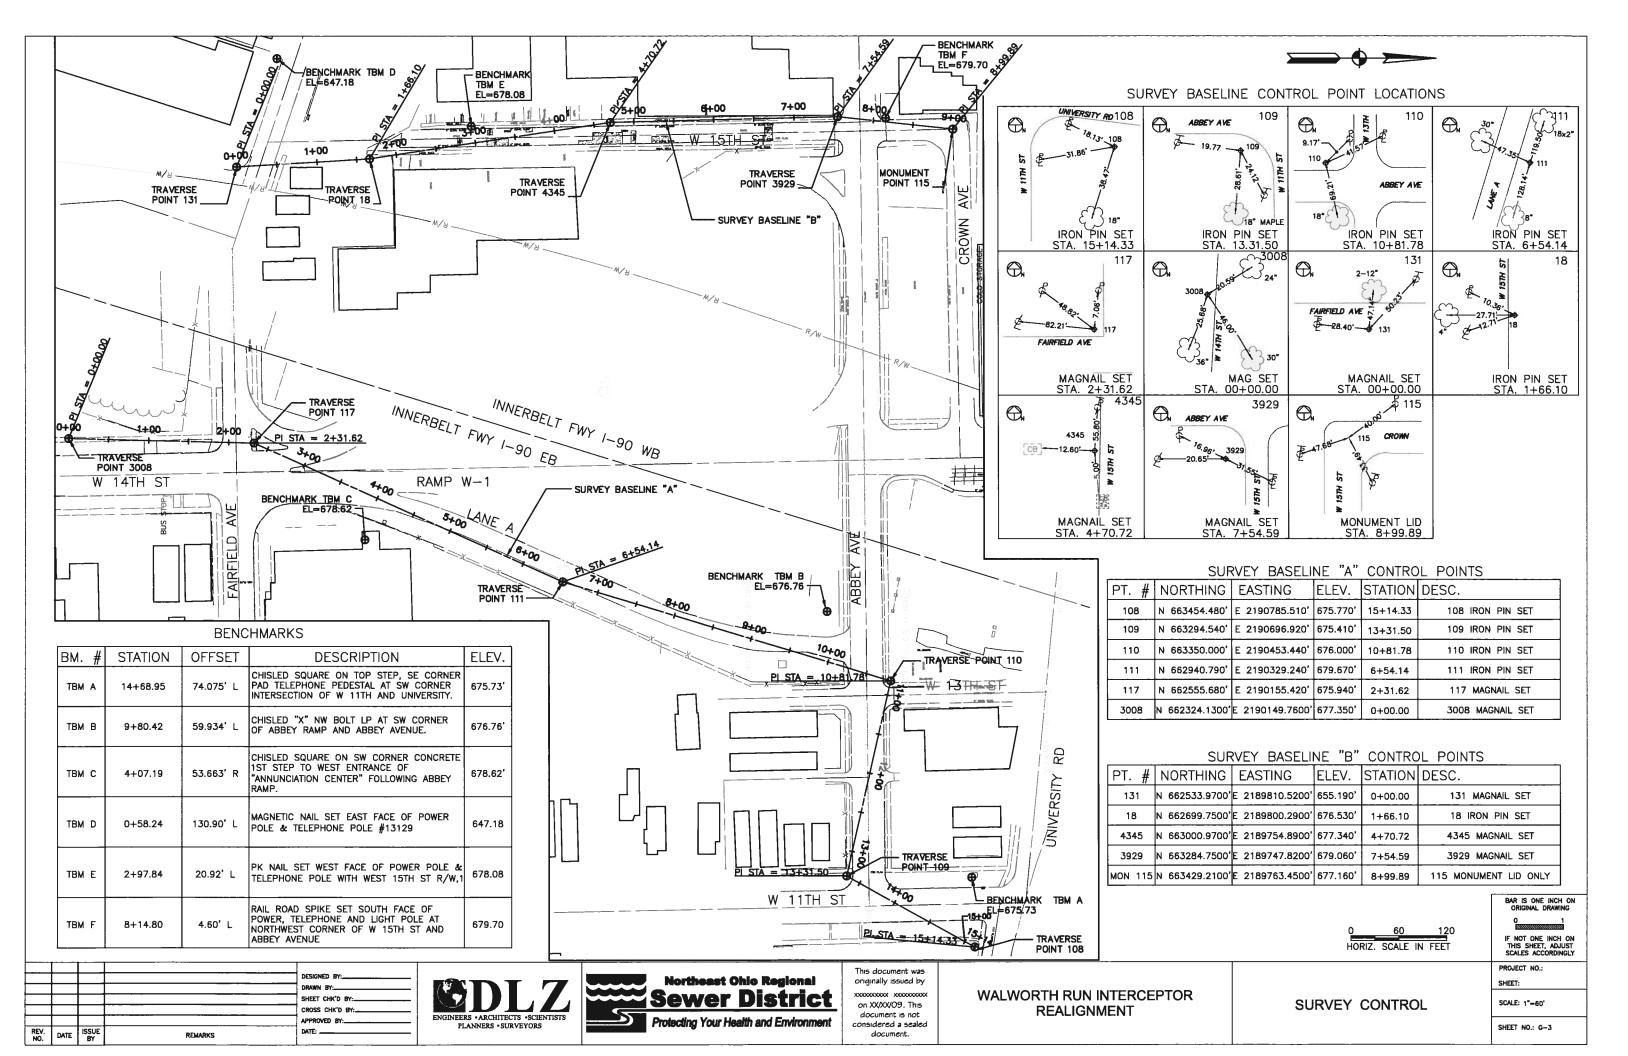

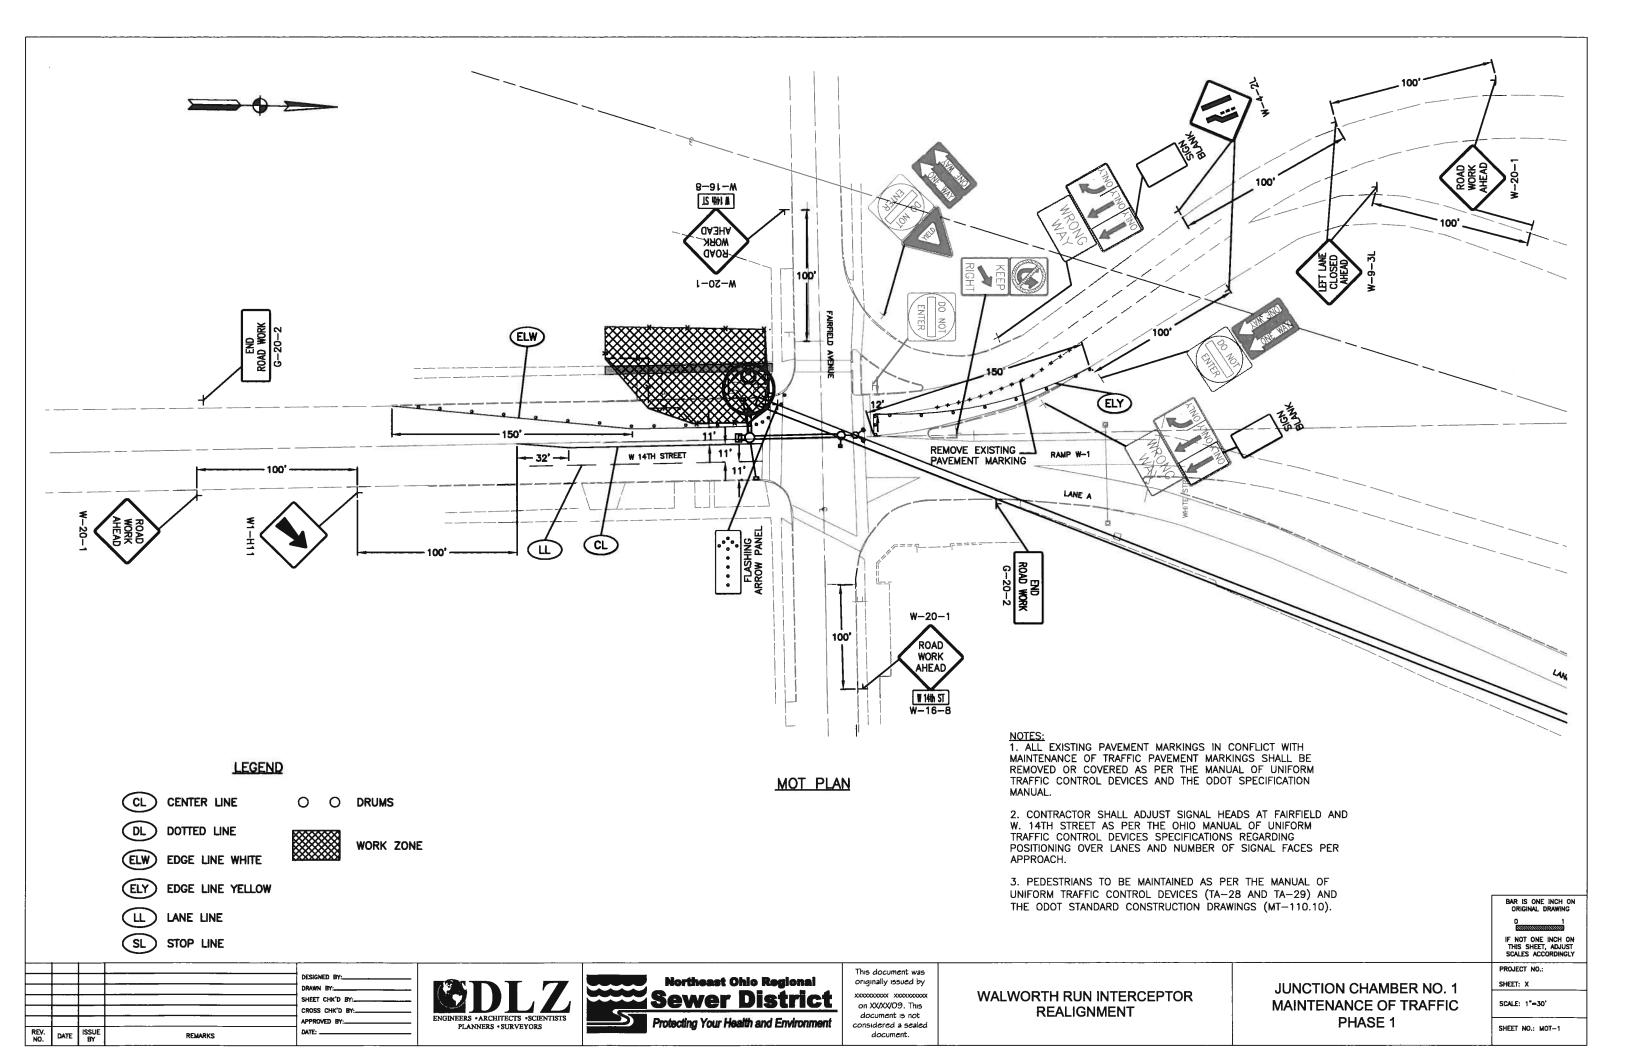

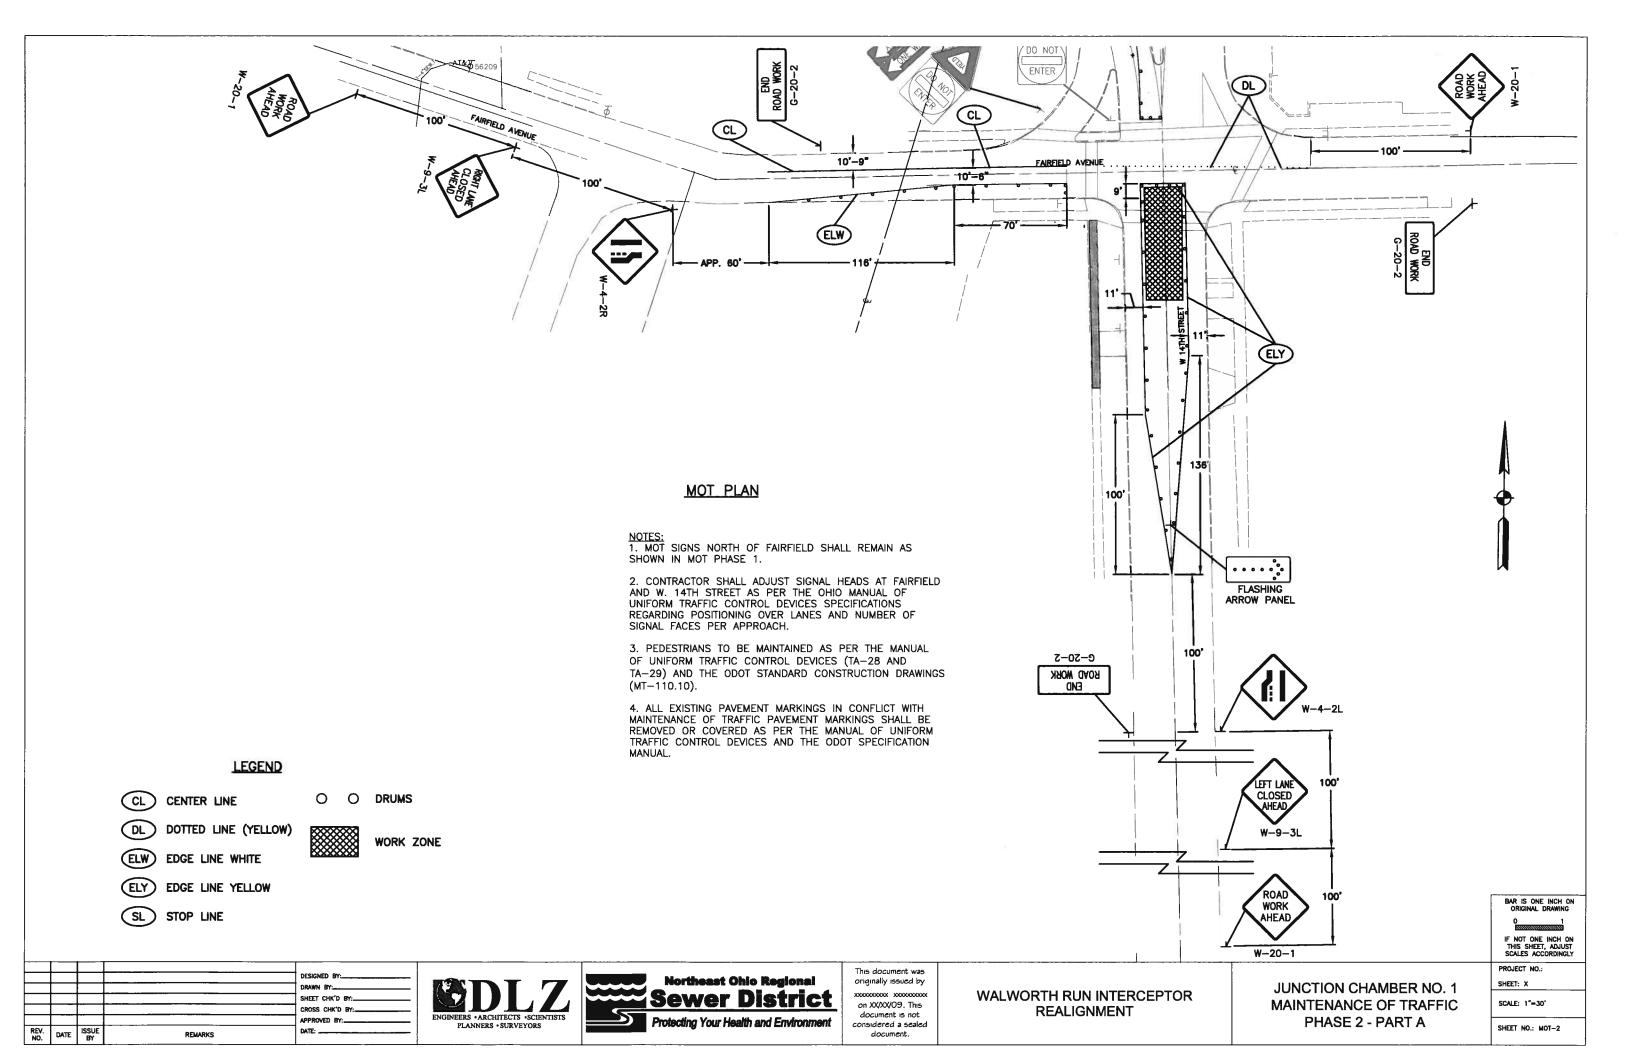

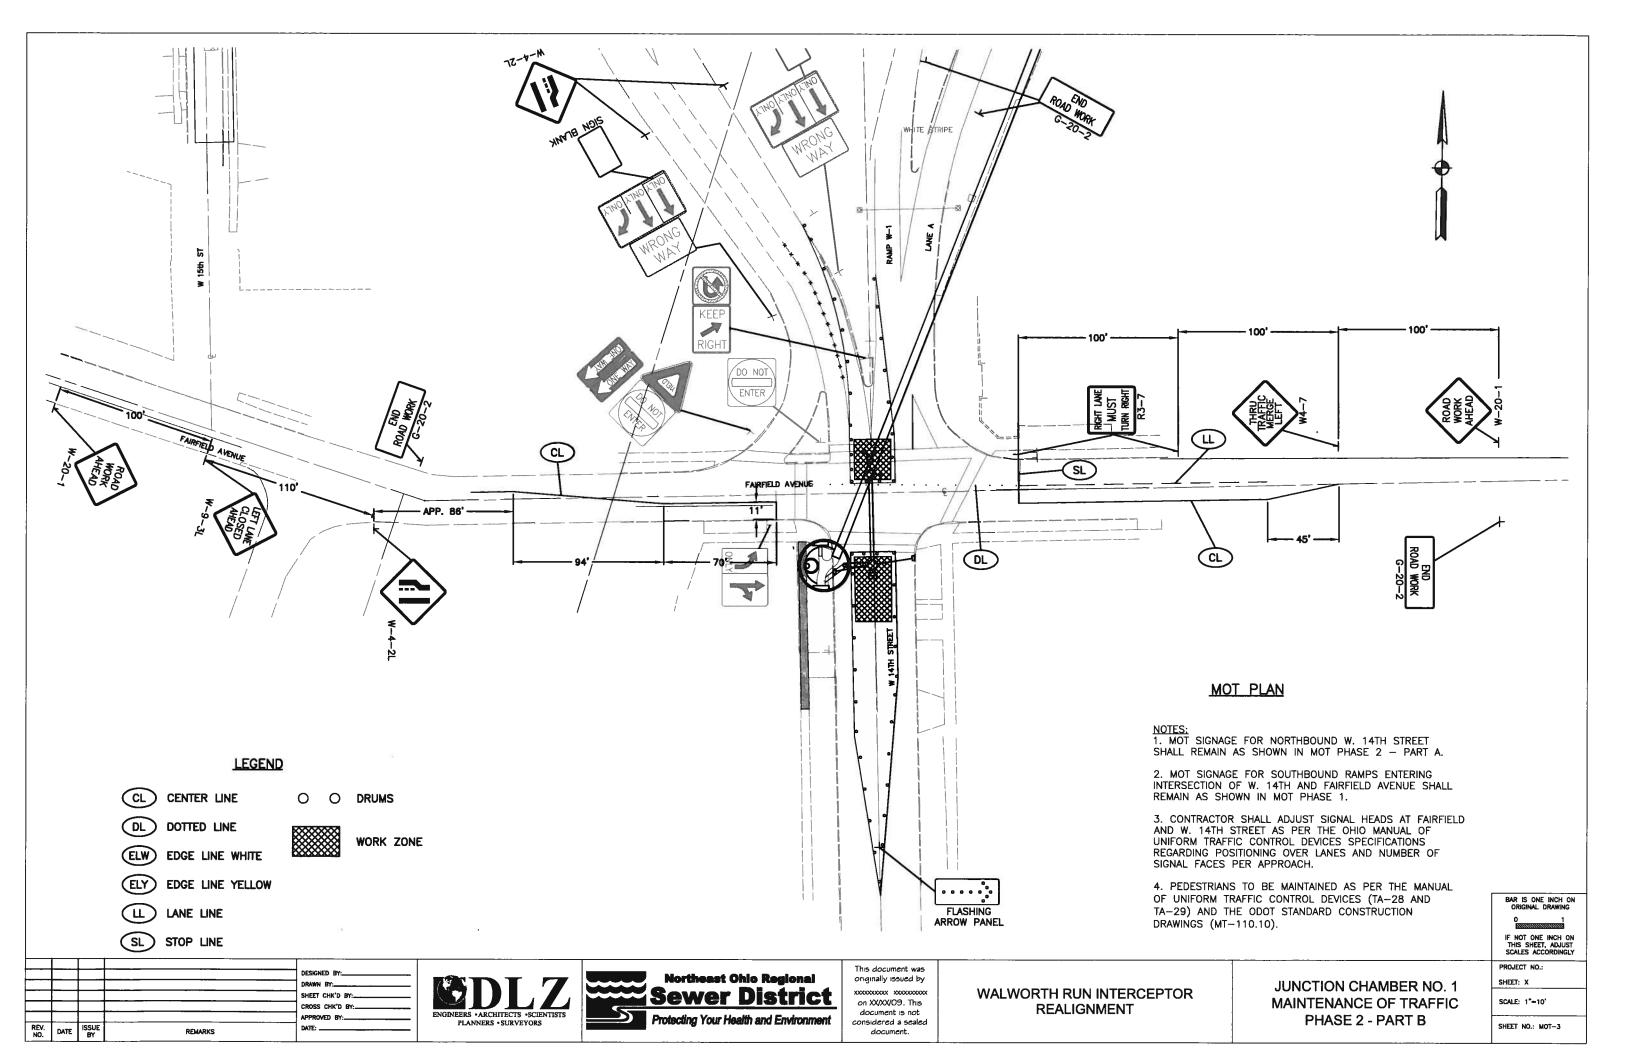

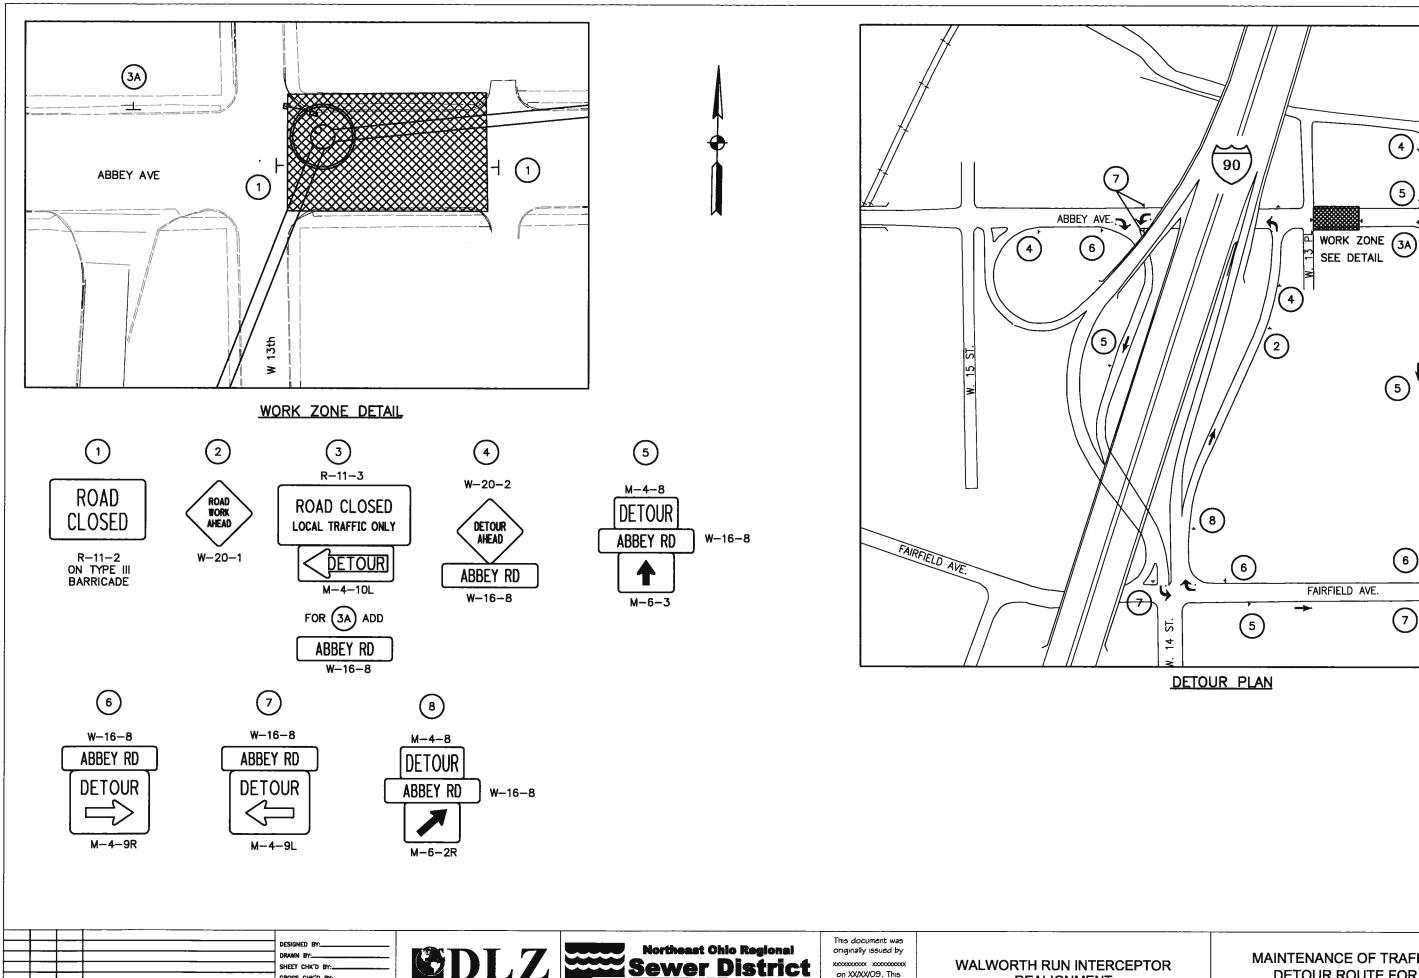

Protecting Your Health and Environment

M6-2R-2

on XXXX/09. This

document is not

considered a sealed

REALIGNMENT

SHEET CHK'D BY:..

CROSS CHK'D BY:

APPROVED BY:.

REMARKS

REV. DATE ISSUE BY

MAINTENANCE OF TRAFFIC WALWORTH RUN INTERCEPTOR **DETOUR ROUTE FOR** MANHOLE NO. 1


PROJECT NO .: SHEET: X SCALE: NOT TO SCALE


BAR IS ONE INCH ON ORIGINAL DRAWING


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY


(5)


SHEET NO.: MOT-4

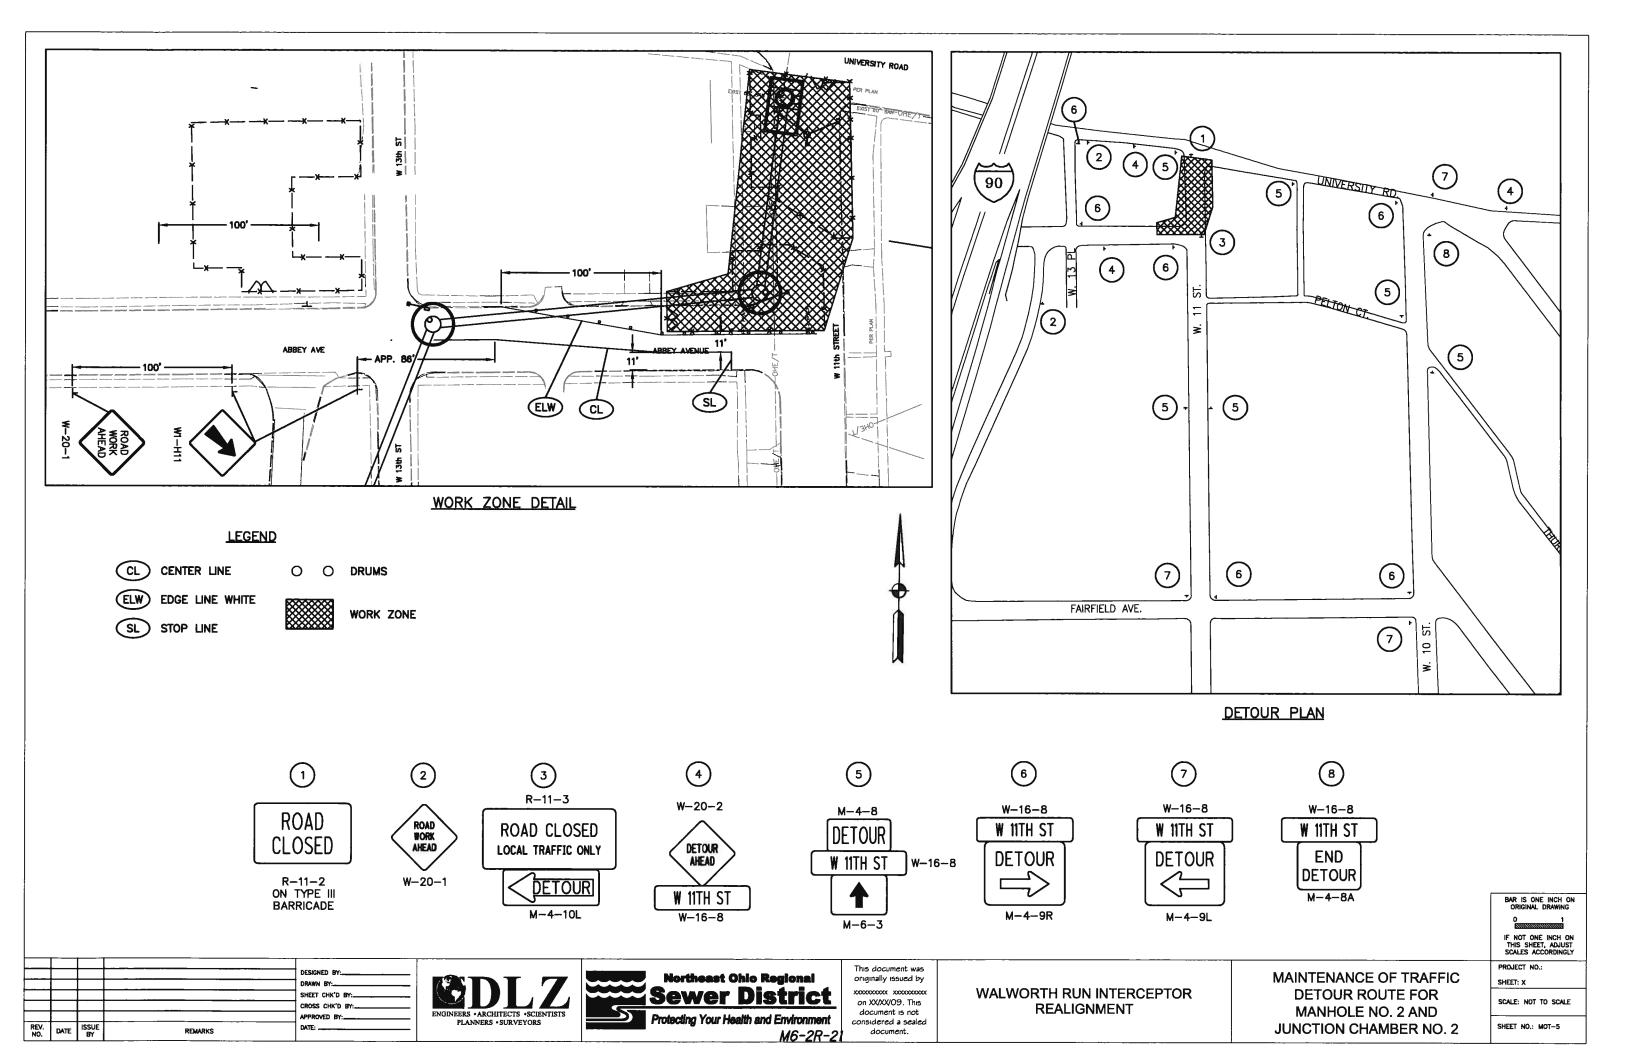


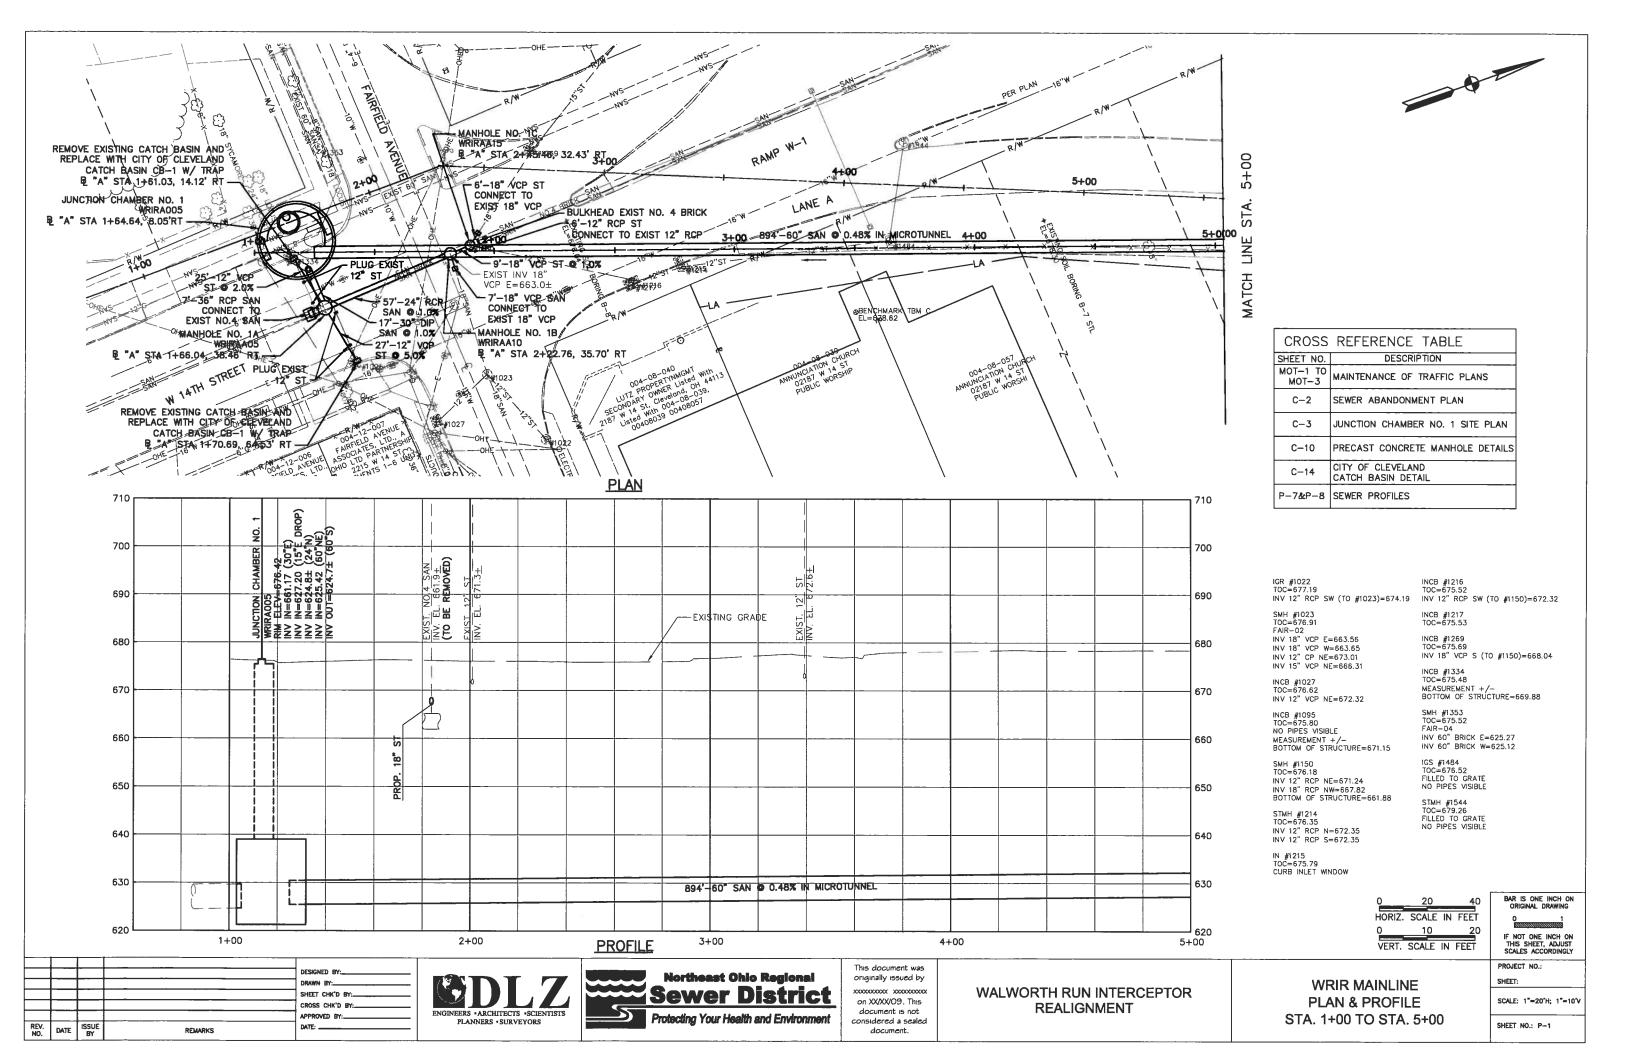


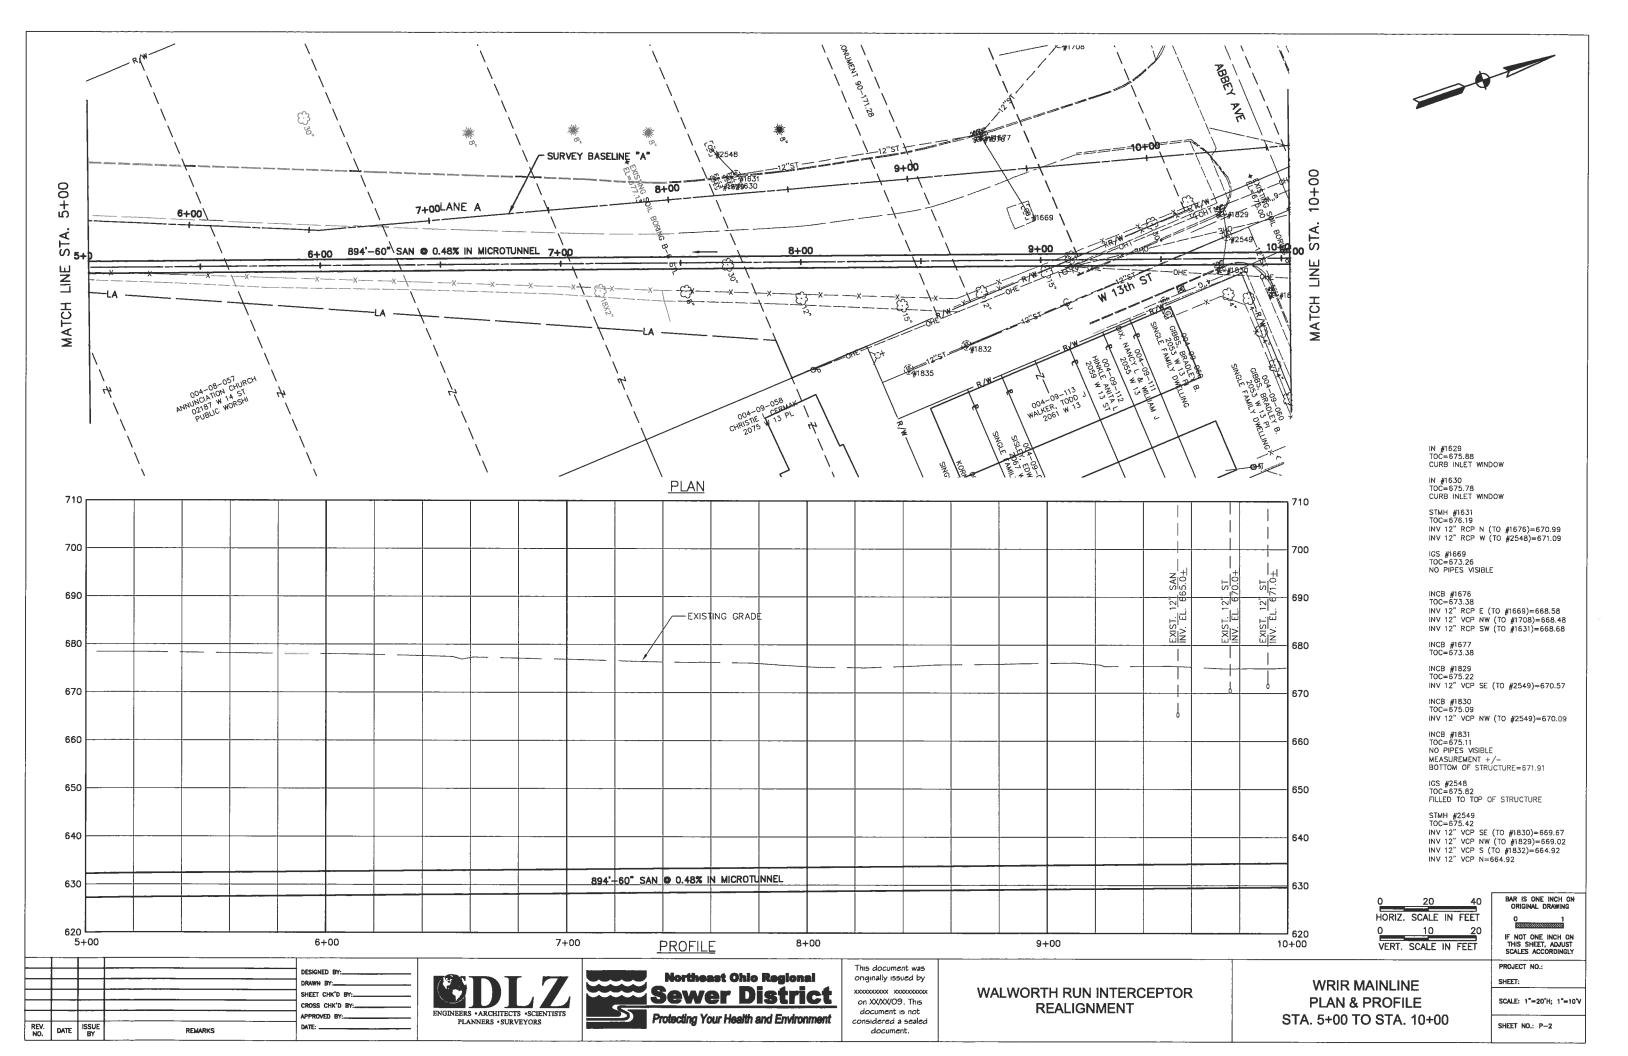


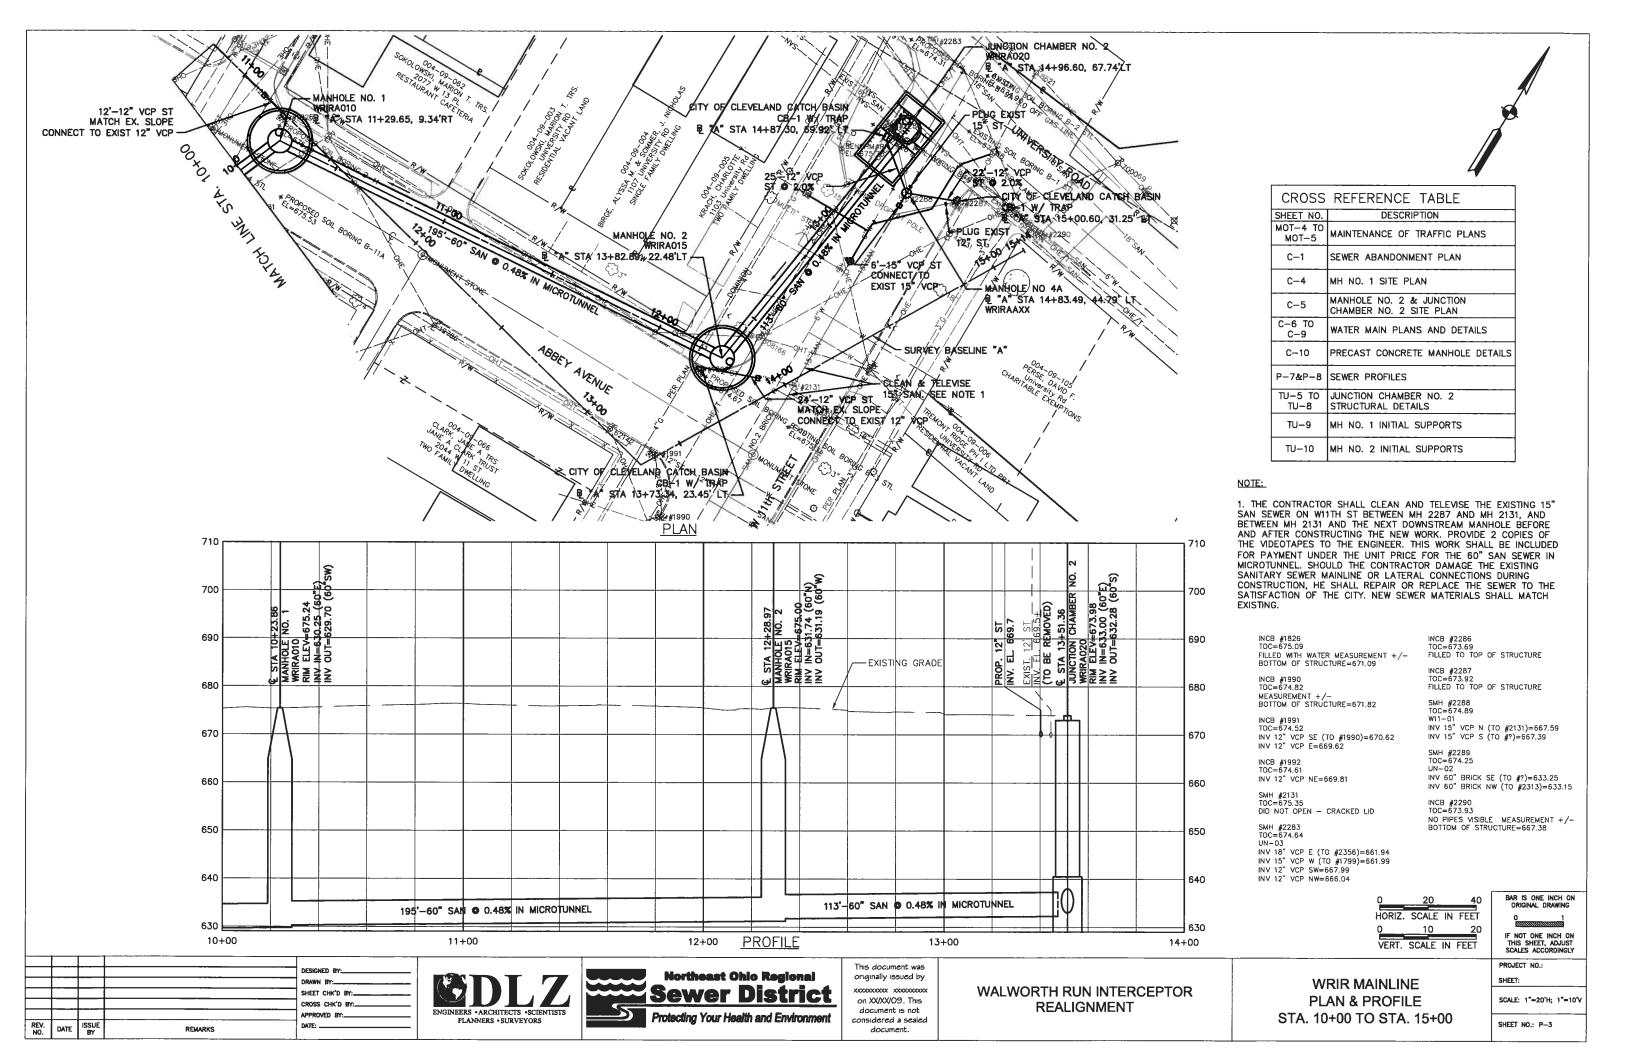

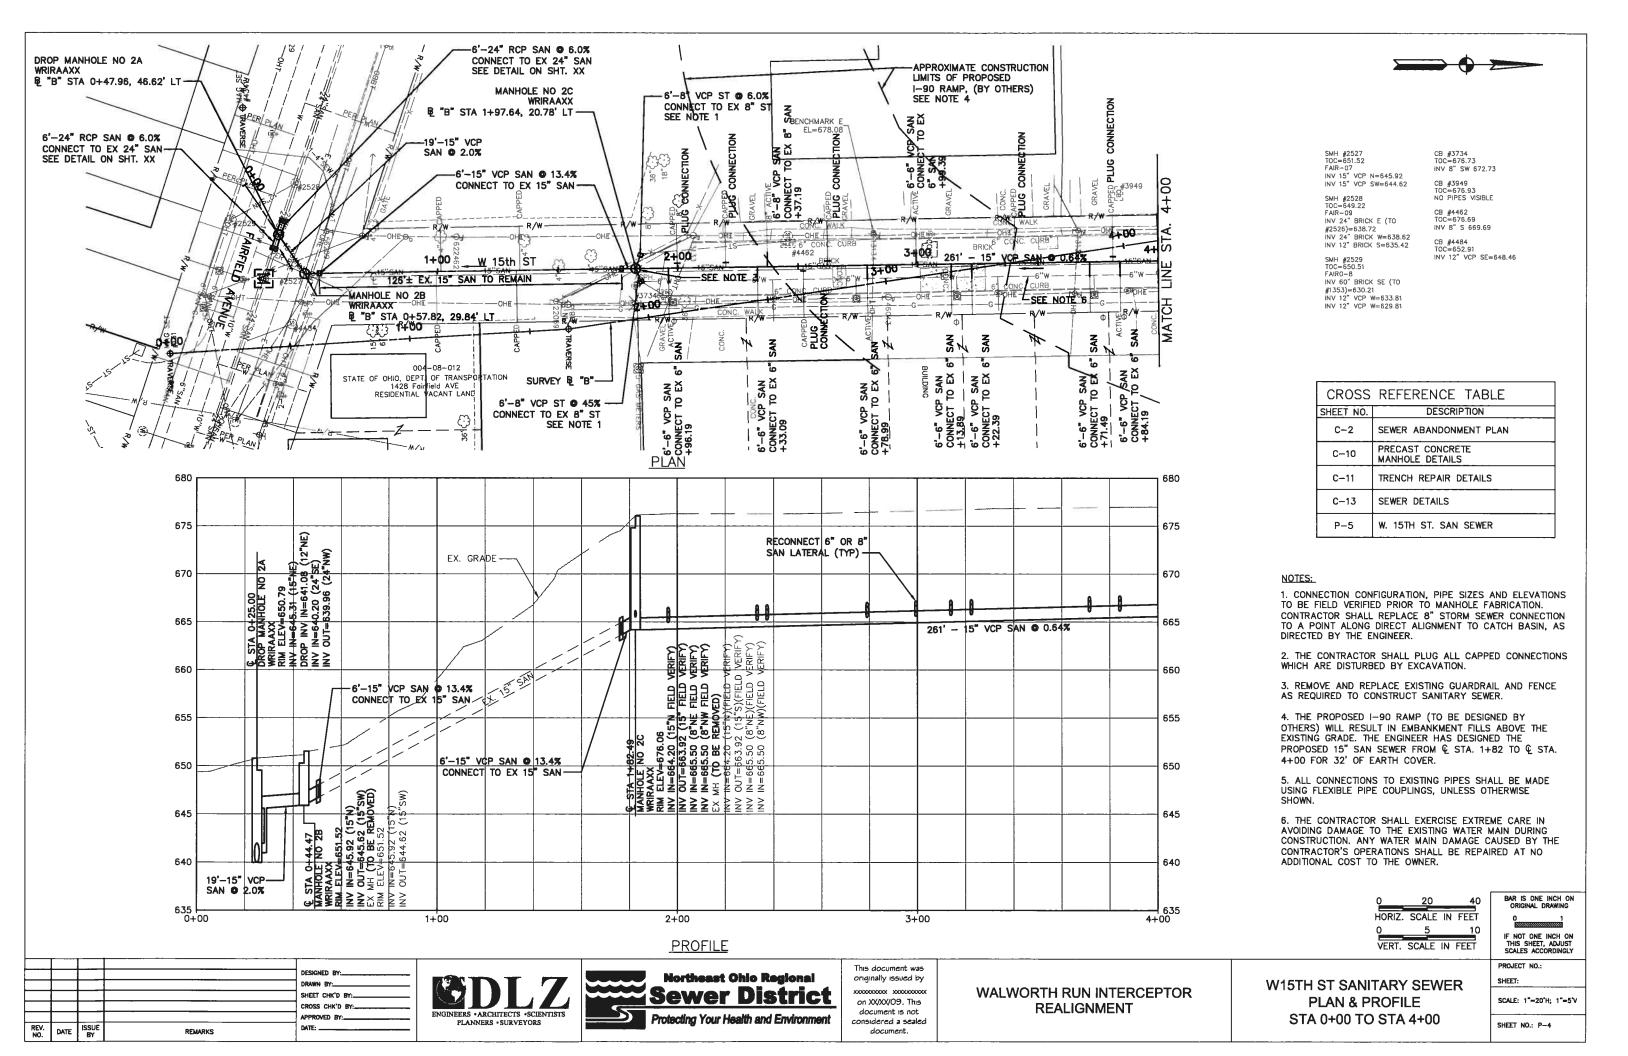


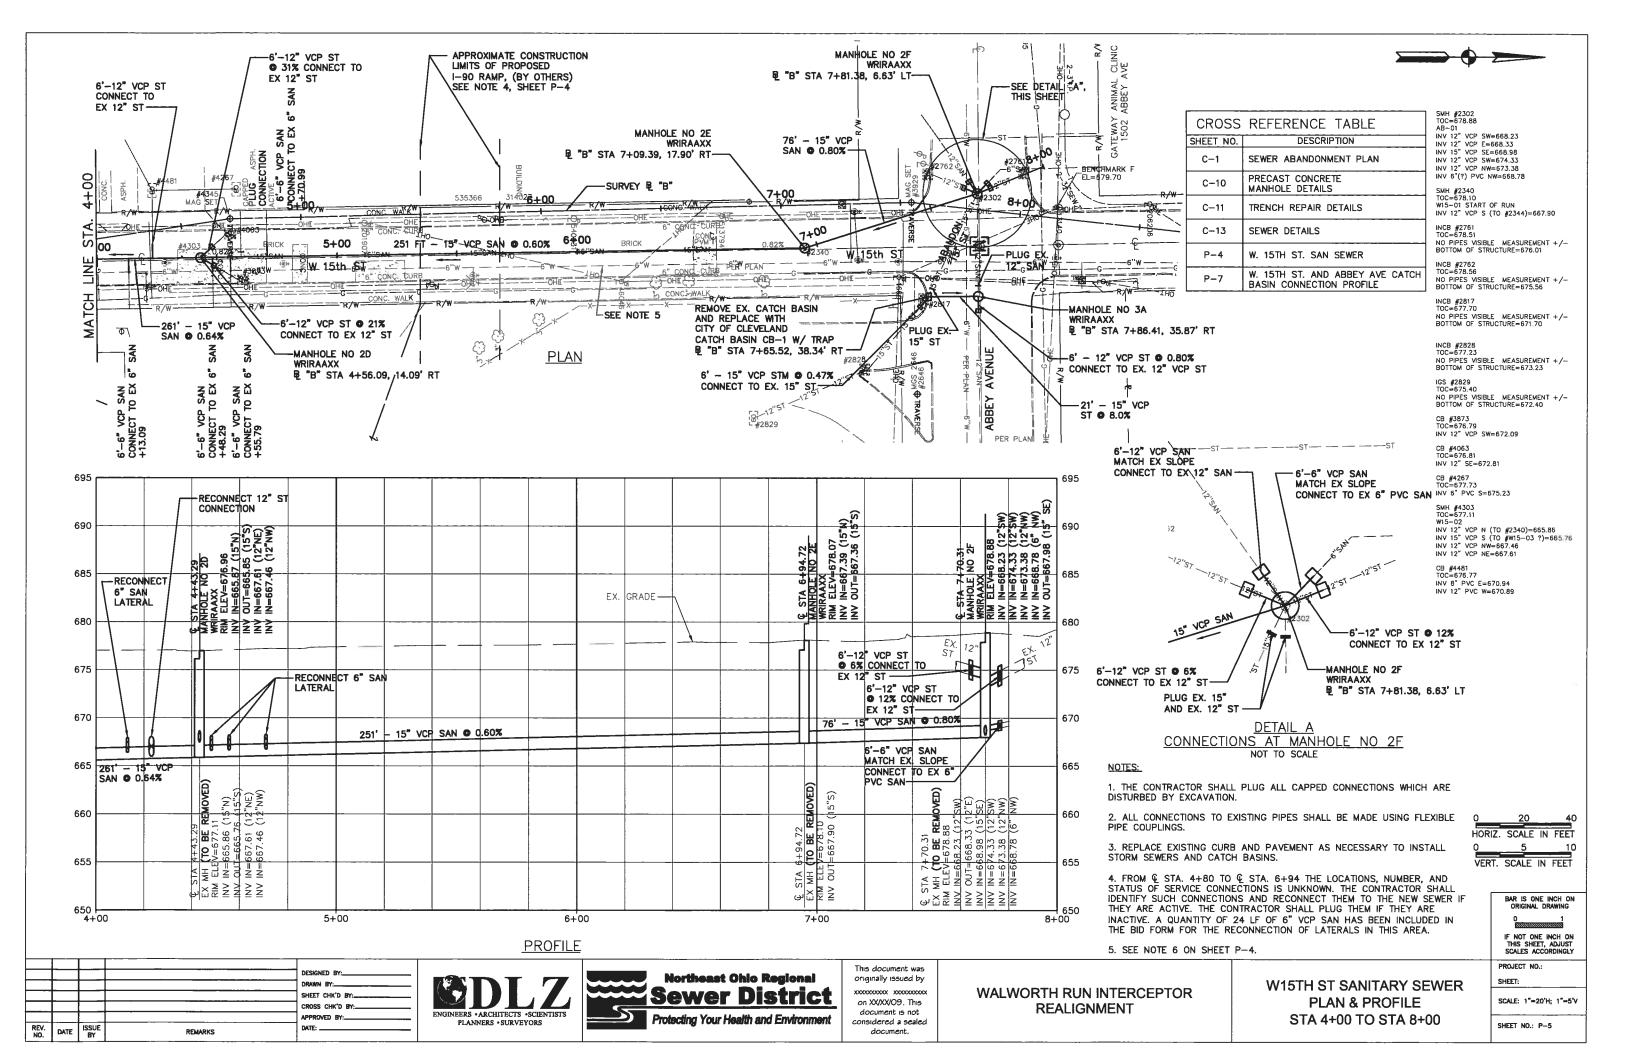


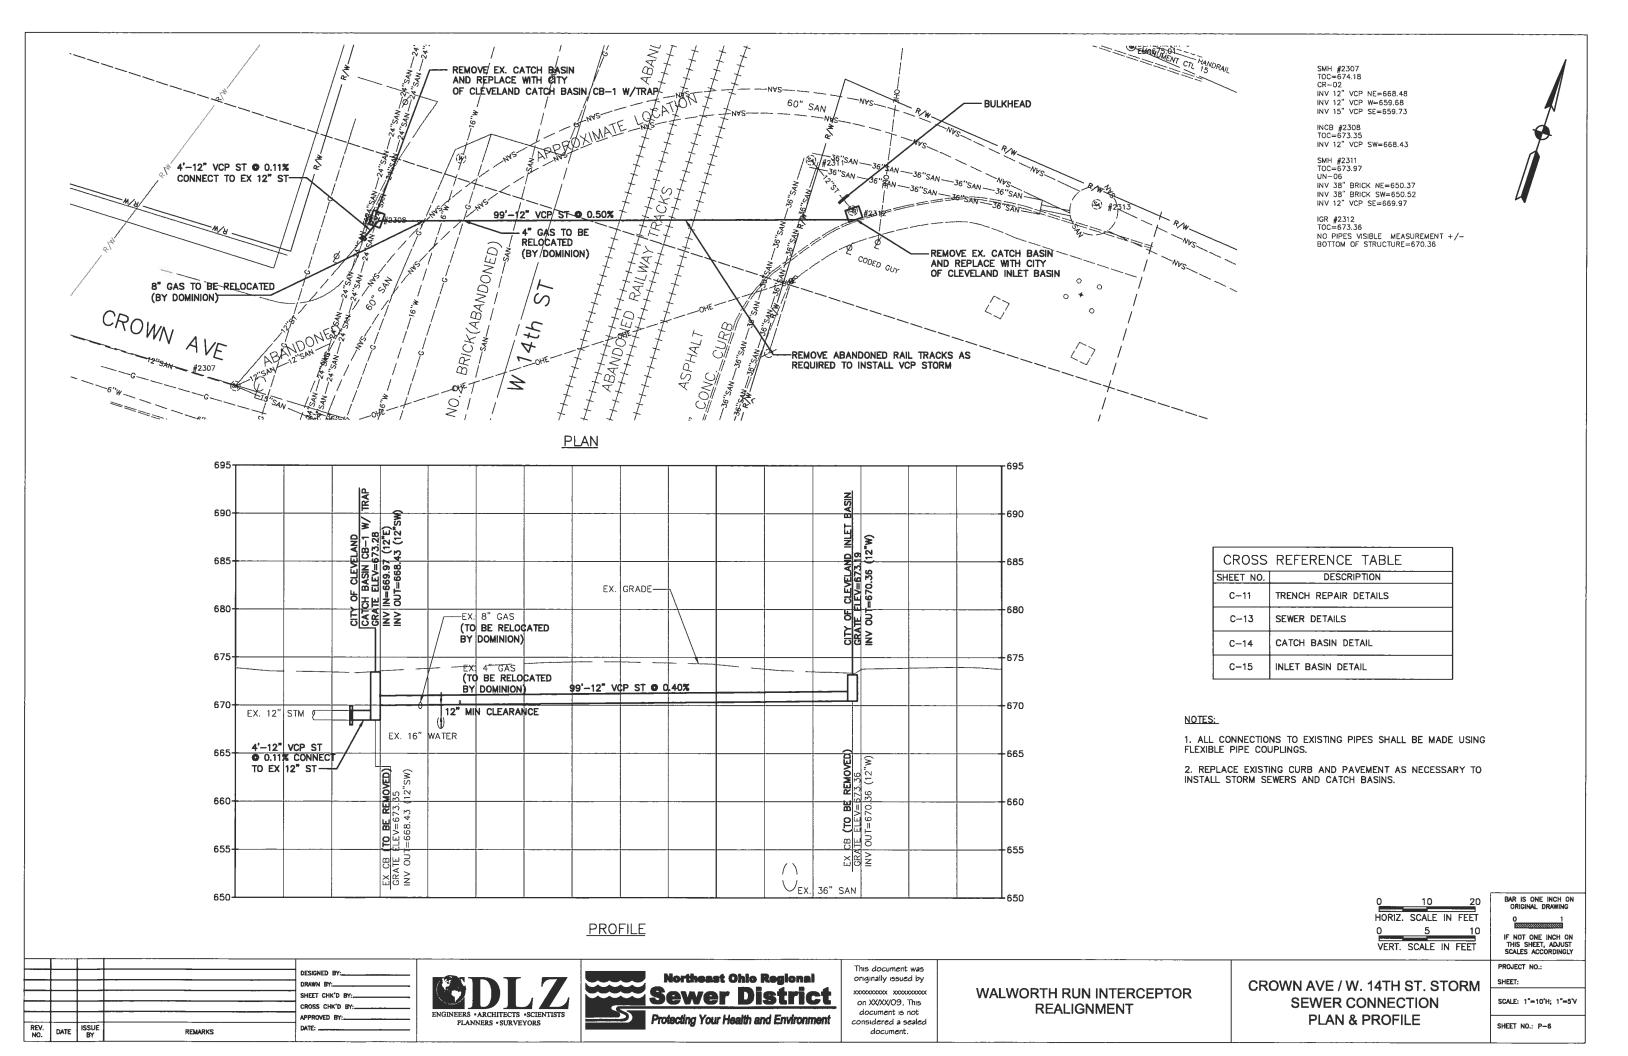

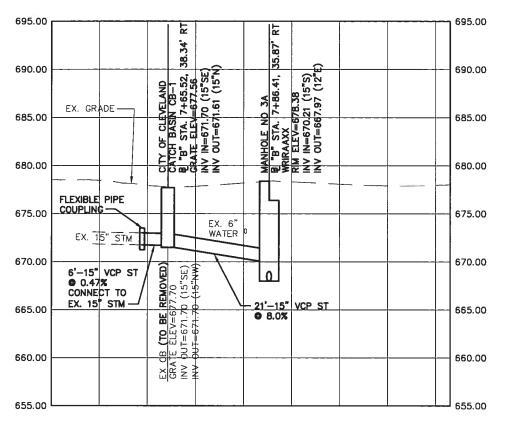


W 15TH AND ABBEY AVE CATCH BASIN CONNECTION

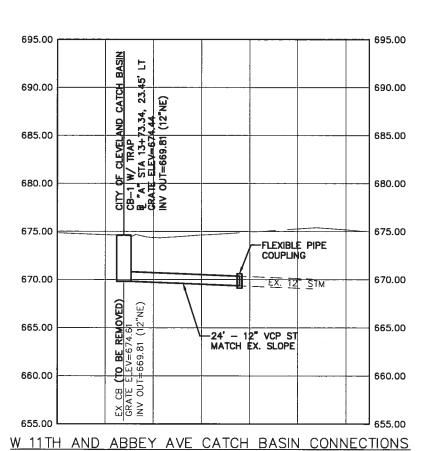


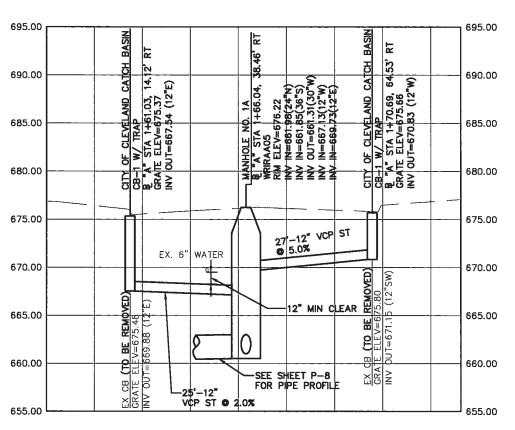

W 14TH AND FAIRFIELD AVE CATCH BASIN CONNECTIONS

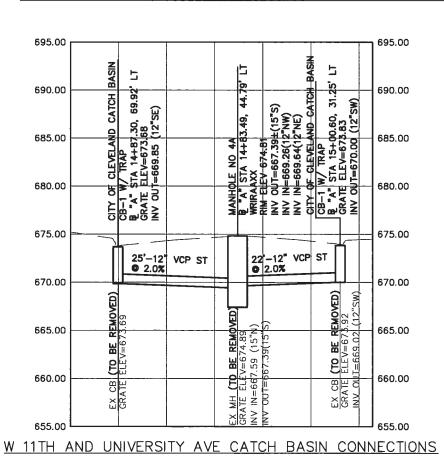

NOTE: THE CONTRACTOR SHALL CUT EXISTING SHEETING AS NECESSARY TO CONSTRUCT CATCH BASIN CONNECTIONS.

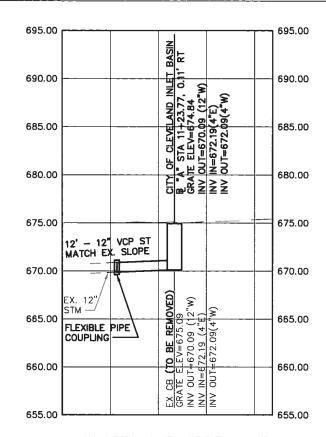

W 13TH AND ABBEY AVE CATCH BASIN CONNECTIONS

HORIZ. SCALE IN FEET

BAR IS ONE INCH ON ORIGINAL DRAWING

VERT. SCALE IN FEET

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.:

DESIGNED BY CROSS CHK'D BY: APPROVED BY: RÉV. NO. ISSUE BY DATE REMARKS






This document was originally issued by on XXXXV09. This document is not considered a sealed

document


WALWORTH RUN INTERCEPTOR REALIGNMENT

SEWER PROFILES

SCALE: 1"=10"H: 1"=5"V SHEET NO.: P-7

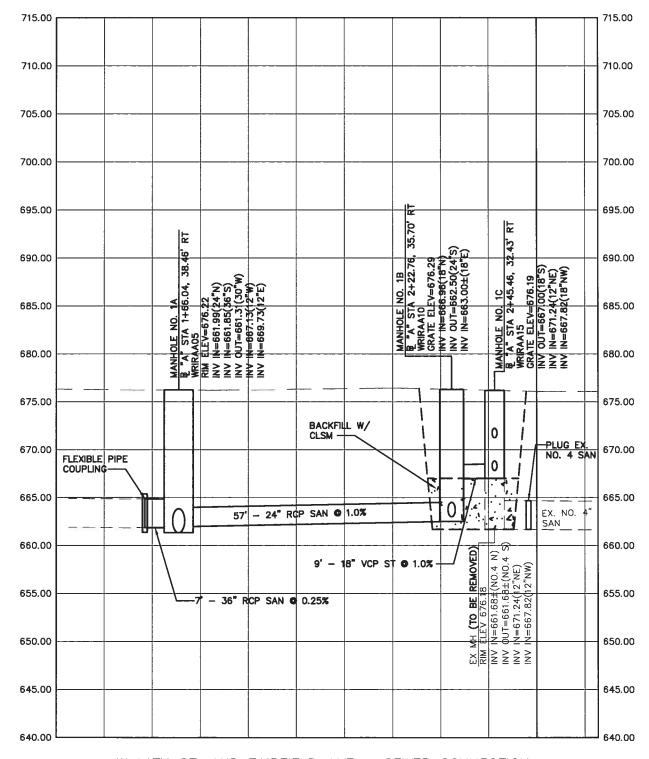

W 14TH ST. AND FAIRFIELD AVE - SEWER CONNECTION

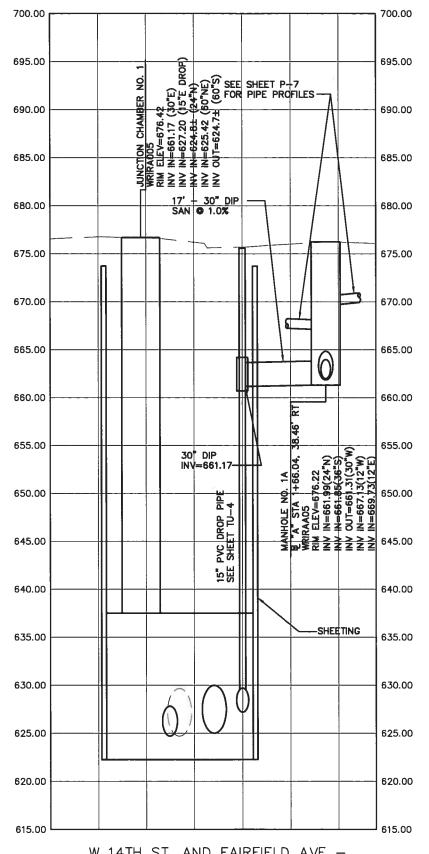

<u>W 14TH ST. AND FAIRFIELD AVE — CONNECTION TO JUNCTION CHAMBER 1</u>

HORIZ. SCALE IN FEET VERT. SCALE IN FEET

BAR IS ONE INCH ON ORIGINAL DRAWING

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

SEWER PROFILES

SCALE: 1"=10"H; 1"=5"V

PROJECT NO.

REALIGNMENT

WALWORTH RUN INTERCEPTOR

SHEET CHK'D BY:. CROSS CHK'D BY:_ APPROVED BY:_ DATE: __ DATE REMARKS







This document was


on XX/XX/09. This


document is not


document.

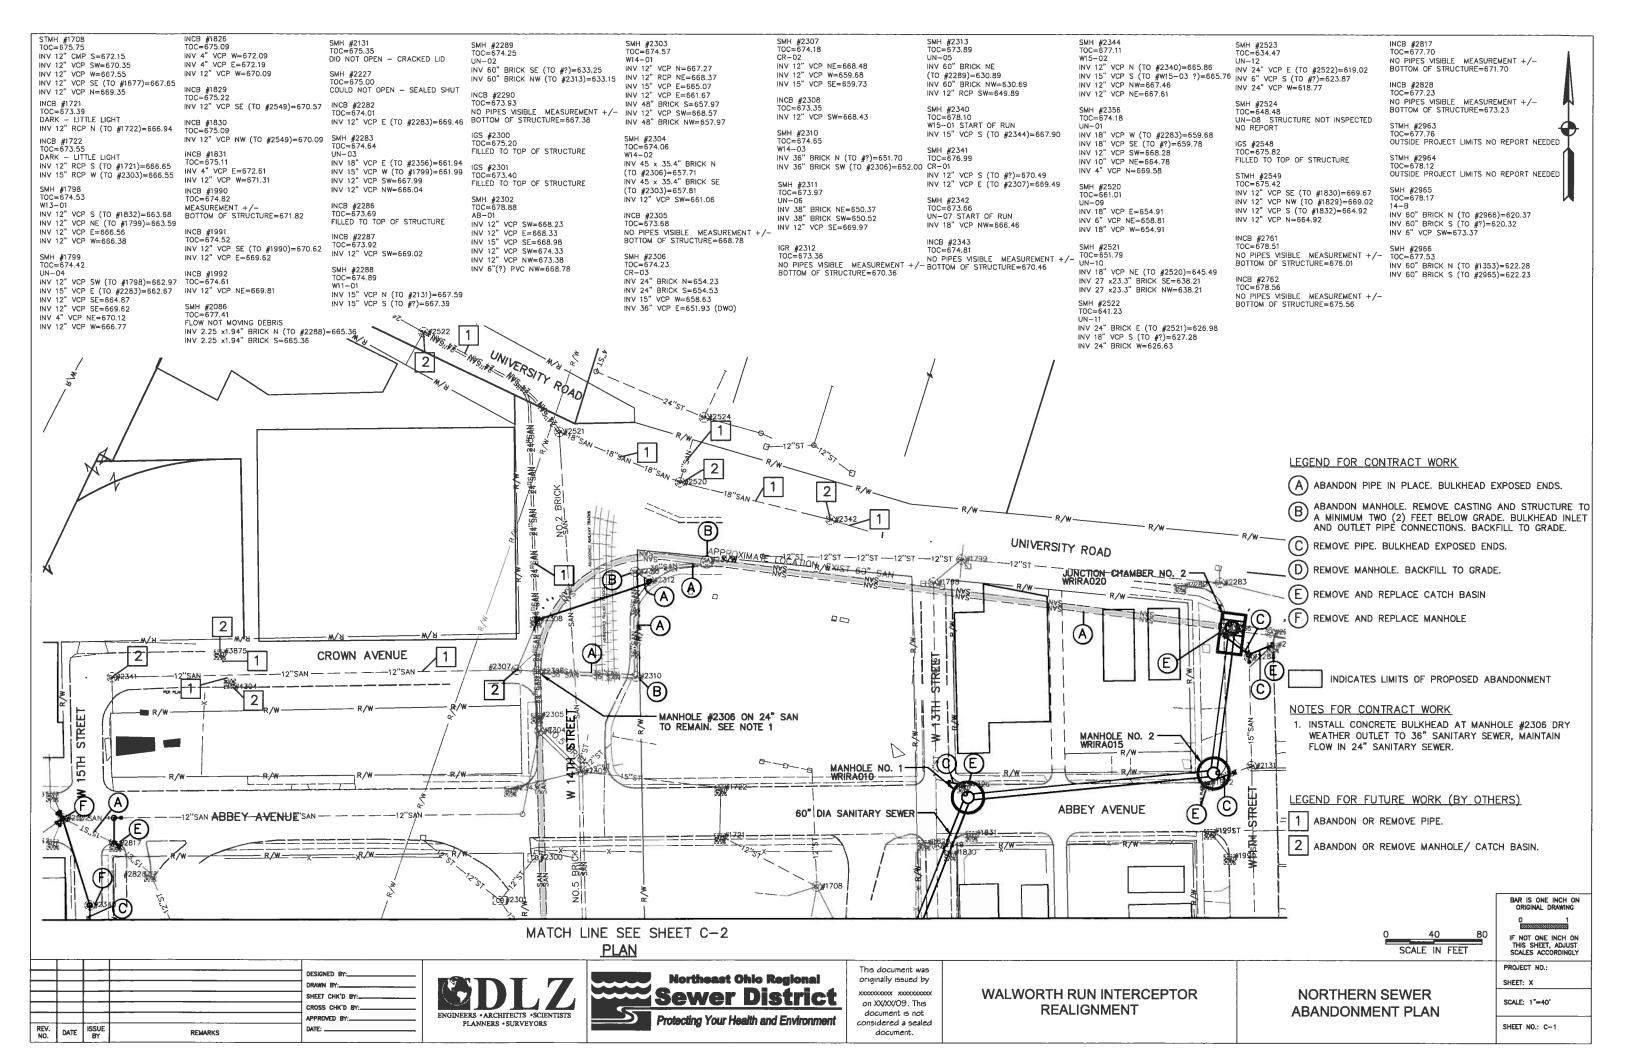

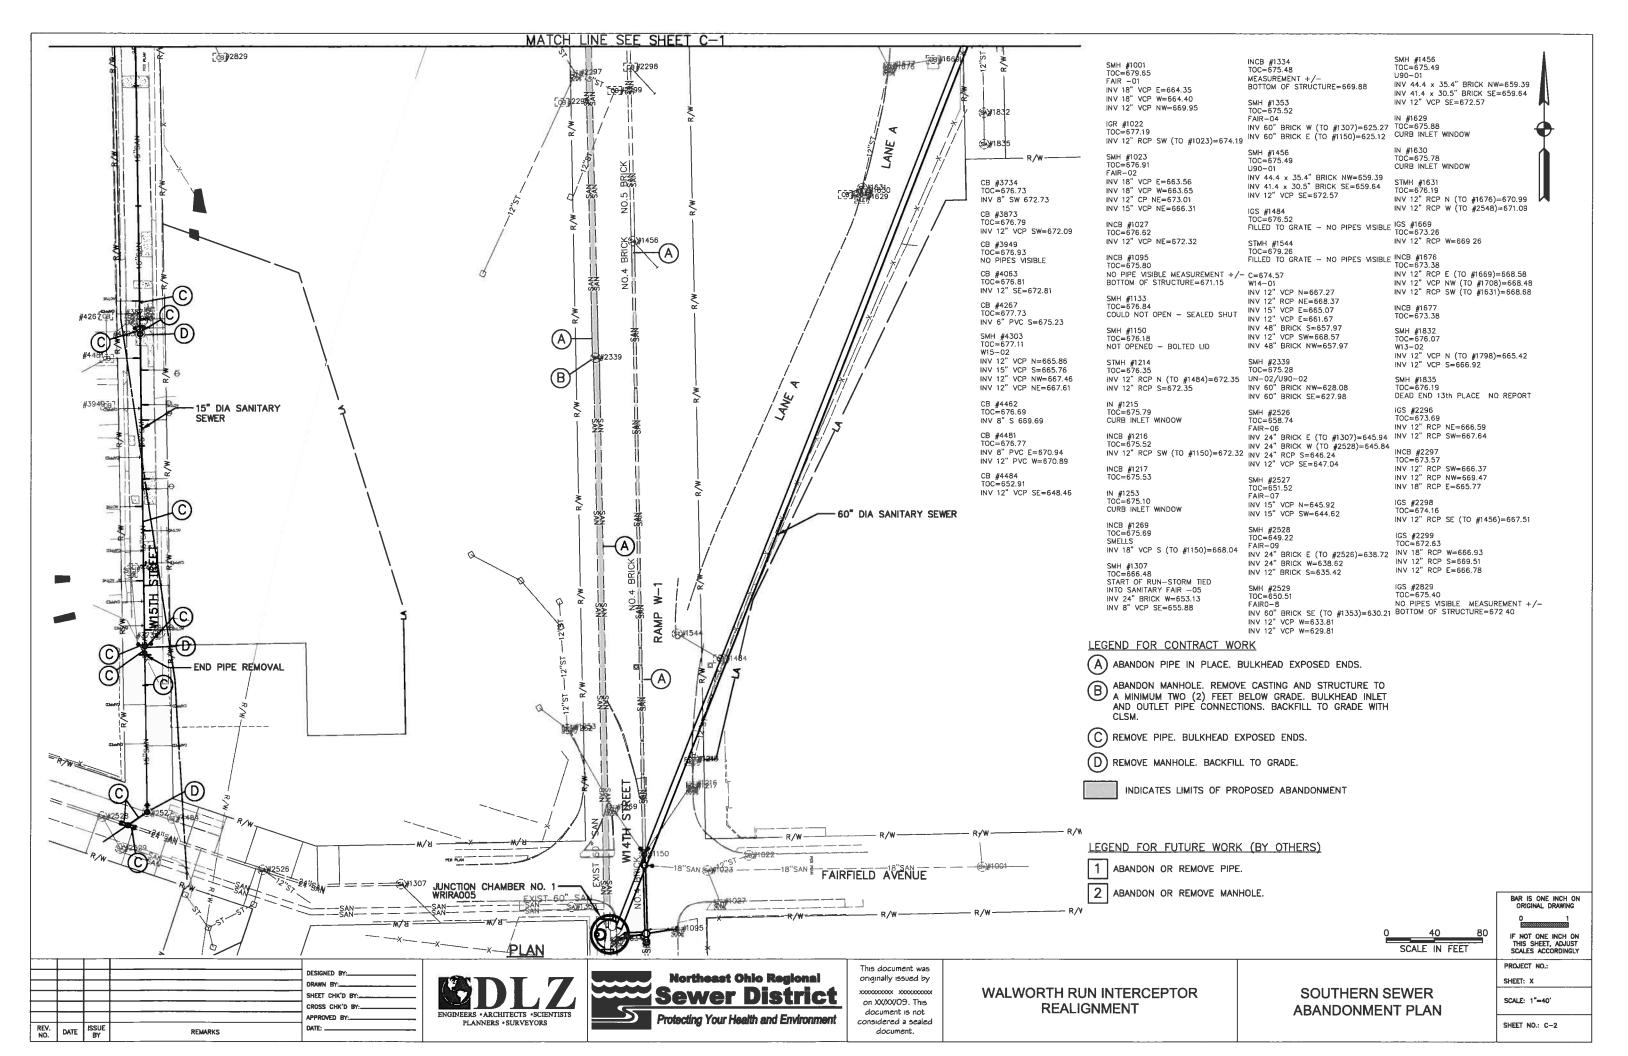

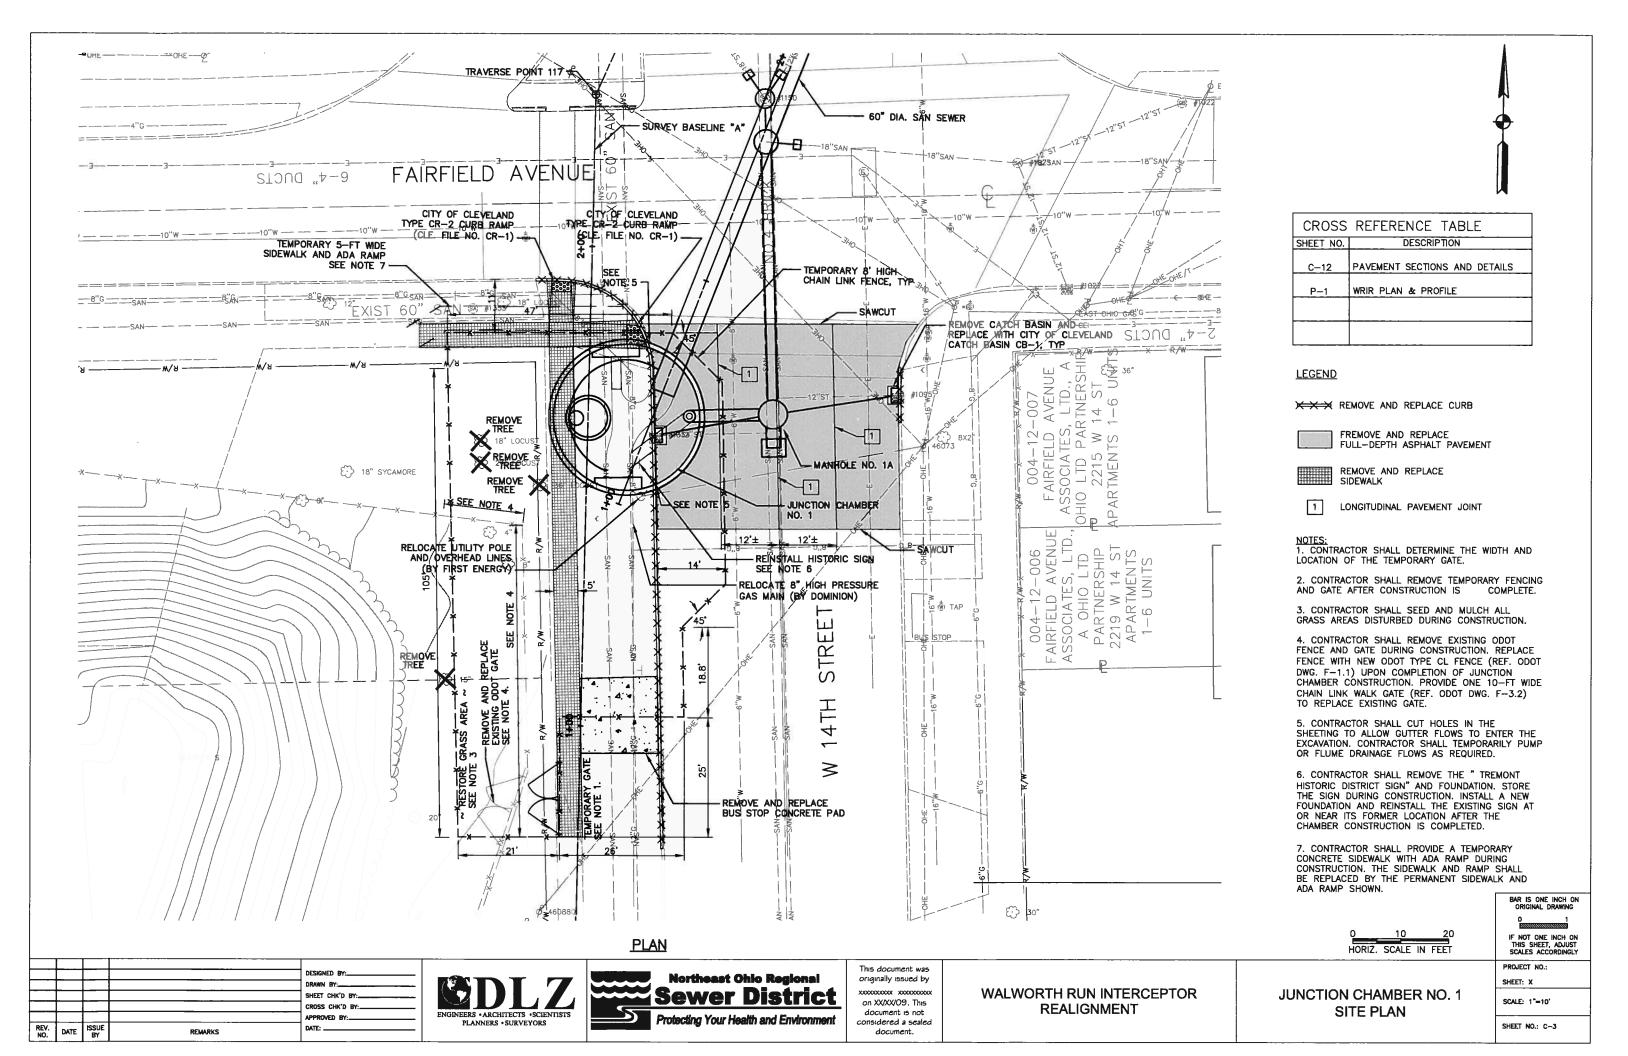

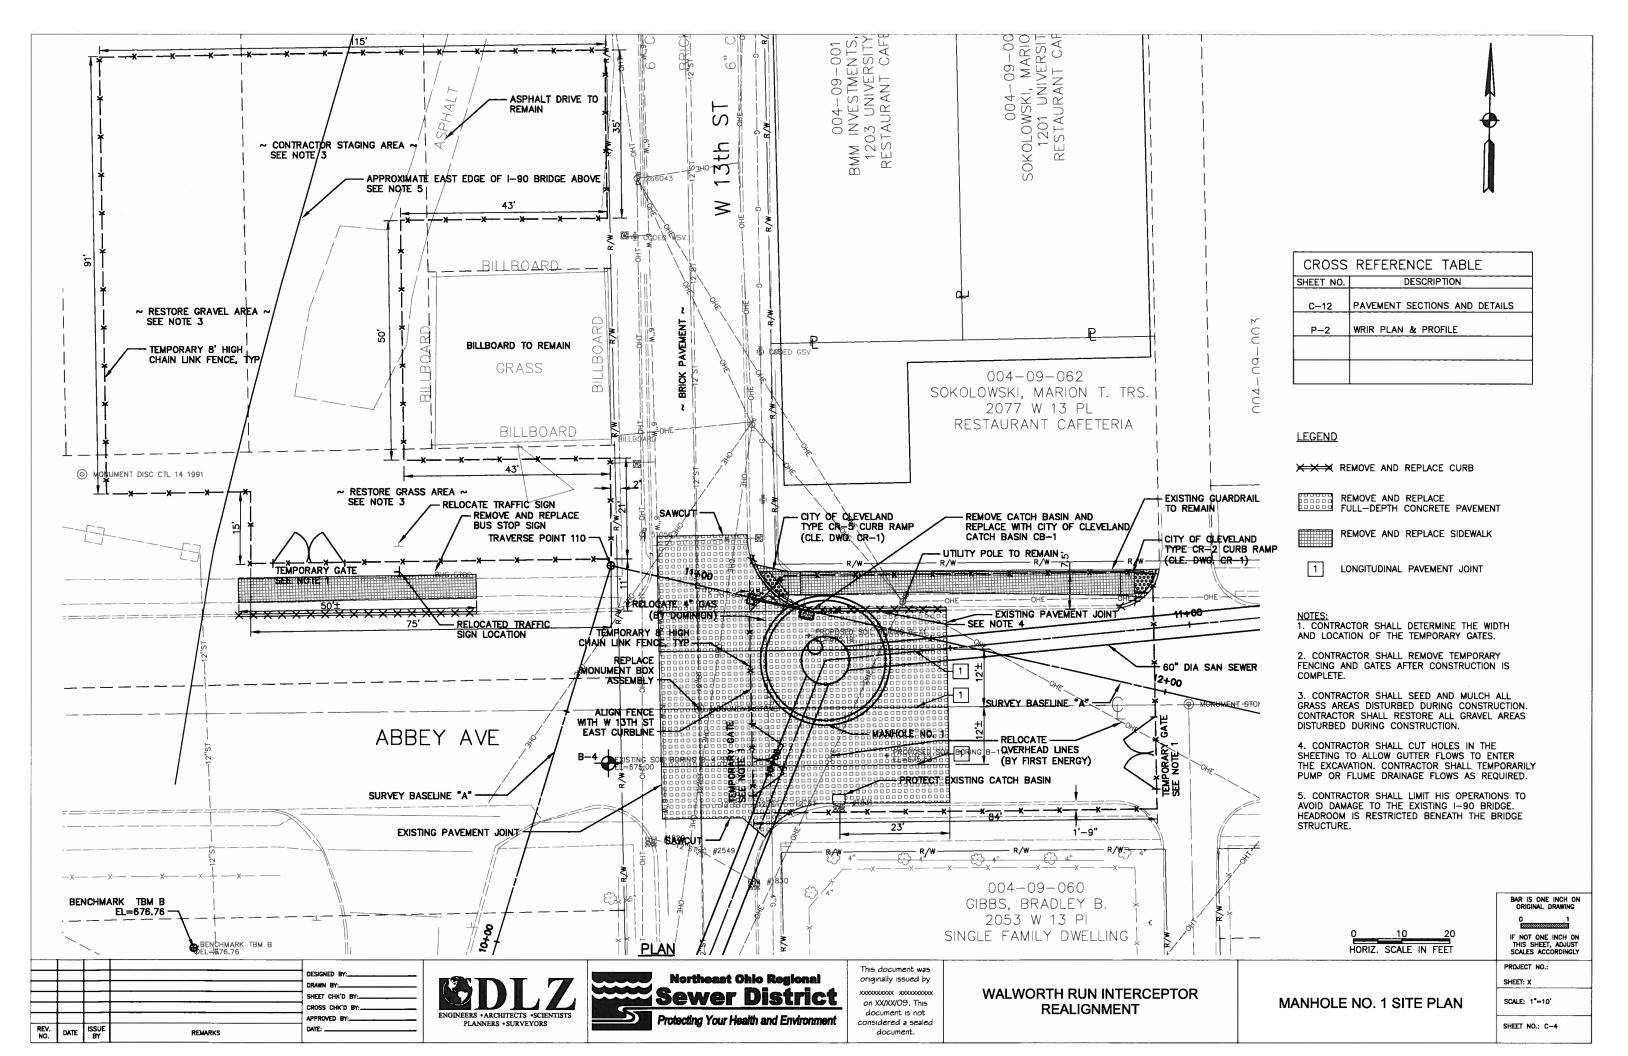

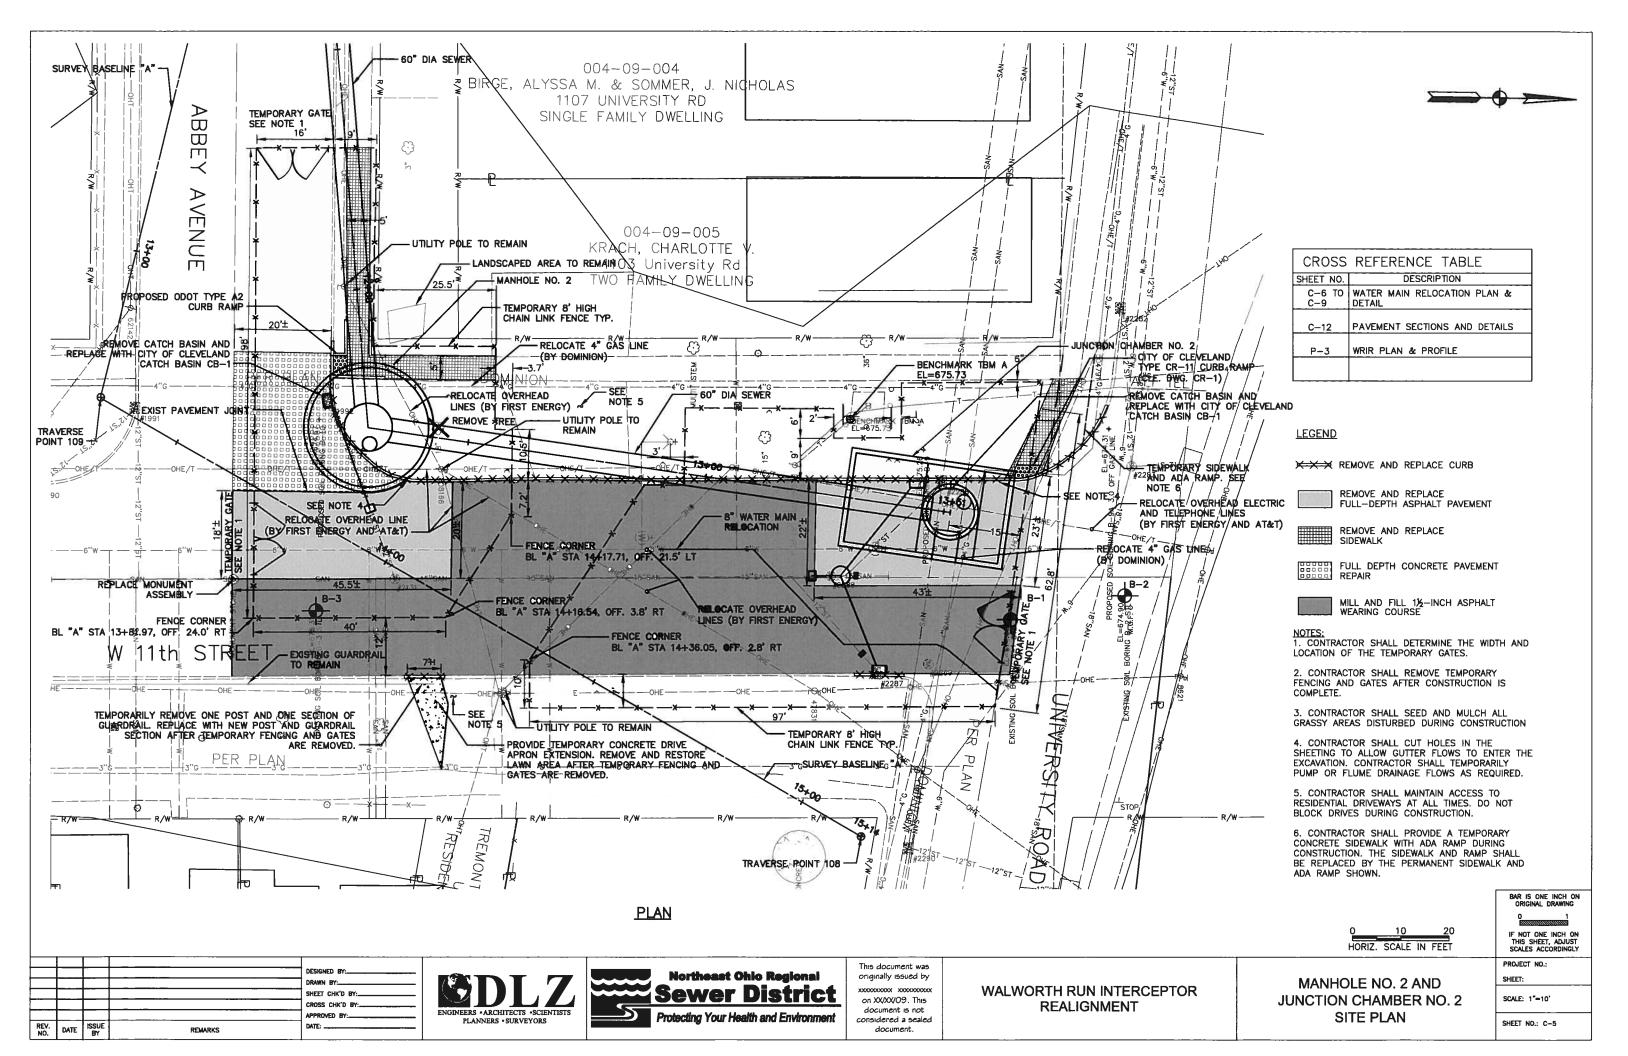



CLEVELAND DIVISION OF WATER NOTES FOR NEW WATER MAIN INSTALLATION

CONTRACTOR IS TO ABIDE BY THE MOST CURRENT VERSION OF THE CLEVELAND, DIVISION OF WATER NOTES AND DETAILS. THE MOST UP-TO-DATE VERSION CAN BE FOUND AT WWW.CLEVELANDWATER.COM.

GENERAL:

- THE INFORMATION SHOWN ON THE CLEVELAND DIVISION OF WATER'S SUMMARY OF WORK/CHARGE LETTER AND STRIP MAPS ARE TAKEN FROM EXISTING AVAILABLE RECORDS. AND THEIR ACCURACY IS NOT GUARANTEED.
- CALL THE INSPECTION AND ENFORCEMENT UNIT AT 216-664-2342 TO SCHEDULE A PRECONSTRUCTION MEETING. THE OPERATION OF ANY VALVE OR ALTERATION OF ANY PART OF THE WATER SYSTEM BY CONTRACTORS OR THEIR EMPLOYEES IS PROHIBITED WITHOUT THE SUPERVISION OF THE CLEVELAND DIVISION OF WATER INSPECTOR.
- THE MUNICIPALITY SHALL REQUIRE THAT THE PROJECT'S PROFESSIONAL ENGINEER OBTAIN ACTUAL FIELD MEASUREMENTS OF THE MAIN DURING INSTALLATION AND SHALL FURNISH THE CWD INSPECTOR WITH RECORD PRINTS IN A FORM ACCEPTABLE TO THE DIVISION OF WATER. THE CLEVELAND DIVISION OF WATER WILL REQUIRE THE DELIVERY AND ACCEPTANCE OF TWO COPIES OF RECORD (AS BUILT) PRINTS. STAMPED BY A PROFESSIONAL ENGINEER, BEFORE THE PRESSURE TEST AND CHLORINATION OF THE MAIN.
- FOR THE PURPOSES OF CHLORINATION AND BACTERIOLOGICAL TESTING OF THE WATER MAINS THE CONTRACTOR SHALL PROVIDE AND INSTALL, AT EACH OF THE CHLORINATION PIT LOCATIONS SHOWN AND AT OTHER LOCATIONS DETERMINED BY THE DIVISION OF WATER, FLUSHING/SAMPLING TAPS OF SIZES TO BE DETERMINED BY THE DIVISION OF WATER. CHLORINATION PITS SHALL BE SIX (6) FOOT SQUARE MEETING
- A TWO YEAR WARRANTY, COMMENCING FROM THE DATE OF ACCEPTANCE OF THE FINAL CHLORINATION OF THE WATER MAIN INSTALLATION, SHALL BE PROVIDED BY THE BUILDER/DEVELOPER AND/OR CONTRACTOR FOR ALL WATER MAINS AND SERVICE CONNECTION WORK PERFORMED BY THE CONTRACTOR, INCLUDING RETAPS, SHOULD ANY LEAKS OCCUR AND REPAIRS BE REQUIRED DUE TO DEFECTIVE MATERIAL OR
- USE BACKFILL MATERIAL AS SPECIFIED AND COMPACT SUFFICIENTLY IN THOSE AREAS WHERE EXISTING MAINS AND WATER SERVICE CONNECTIONS ARE EXPOSED. (SEE DIVISION OF WATER STANDARD DETAIL STD-001)
- 7. ALL MATERIALS, INCLUDING BUT NOT LIMITED TO WATER MAINS, FIRE HYDRANTS. VALVES, CONNECTION MATERIALS AND OTHER WATER APPURTENANCES, SHALL BE NEW AND UNUSED AND SHALL CONFORM TO THE MOST CURRENT DIVISION OF WATER SPECIFICATIONS. ALL MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH DIVISION
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING WATER MAINS AND APPURTENANCES THEREOF WHEN CONNECTING THE NEW WATER MAIN FOR THE HYDROSTATIC TEST. ALL REPAIRS TO DAMAGED EXISTING FACILITIES SHALL BE MADE BY THE CONTRACTOR, AT THE CONTRACTOR'S EXPENSE, TO THE SATISFACTION OF THE DIVISION OF WATER. (REFER TO THE THE ALTERNATE TEST DETAIL STD-002 AS NEEDED)
- ALL HYDROSTATIC PRESSURE TESTING SHALL BE DONE BY THE CONTRACTOR IN THE PRESENCE OF THE DIVISION OF WATER'S INSPECTOR. THE HYDROSTATIC TEST PRESSURE SHALL BE 75 PSI ABOVE THE STATIC PRESSURE PREVAILING AT THE SITE, BUT IN NO CASE LESS THAN 150 PSI. THE PRESSURE TEST SHALL BE FOR A DURATION OF TWO (2) HOURS WITH THE PRESSURE BEING MAINTAINED WITHIN 5 PSI OF THE REQUIRED TEST PRESSURE. SHOULD THE PRESSURE TEST FAIL THE CONTRACTOR SHALL FIND AND CORRECT THE DEFICIENCY(IES) TO THE SATISFACTION OF THE DIVISION OF WATER AND REPEAT THE TWO (2) HOUR PRESSURE TEST.
- 10A. ALL PIPE, UNLESS OTHERWISE CALLED FOR, SHALL BE DUCTILE IRON, MINIMUM CLASS 52, CEMENT LINED HAVING PUSH-ON JOINTS WITH RADIALLY COMPRESSED RUBBER RING GASKET AND INSTALLED AS PER THE MOST CURRENT REVISION OF AWWA C600.
- 10B. ALL FITTINGS, UNLESS OTHERWISE CALLED FOR, SHALL BE APPROVED DUCTILE IRON, CLASS 350, CEMENT LINED OR FUSION BONDED EPOXY COATED. ALL FITTINGS AND PIPE CONNECTED TO FITTINGS SHALL BE RESTRAINED USING A "RETAINED" MECHANICAL JOINT CONFORMING TO THE MATERIAL AND PERFORMANCE REQUIREMENTS OF ANSI/AWWA C-110/A21.10 AND ANSI/AWWA C-111/A21.11, OR "COMPACT" FITTINGS IN ACCORDANCE WITH ANSI/AWWA C-153/A21.53. EXCEPT FOR ANCHOR TEES, REDUCERS OR OTHER SPECIAL CIRCUMSTANCES WHEN DIRECTED BY CLEVELAND DIVISION OF WATER, ALL FITTINGS ARE TO HAVE BELL ENDS.
- 10C. ALL BOLTS AND NUTS ON ALL "RETAINED" MECHANICAL JOINTS SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".
- 10D. WHERE SHOWN ON THE PLANS, OR WHEN OTHERWISE CALLED FOR, PIPE AND FITTINGS SHALL HAVE AN APPROVED "TYPE I" OR "TYPE II" BOLTLESS RESTRAINED PUSH-ON JOINTS TO THE LIMITS SHOWN ON THE DRAWINGS.

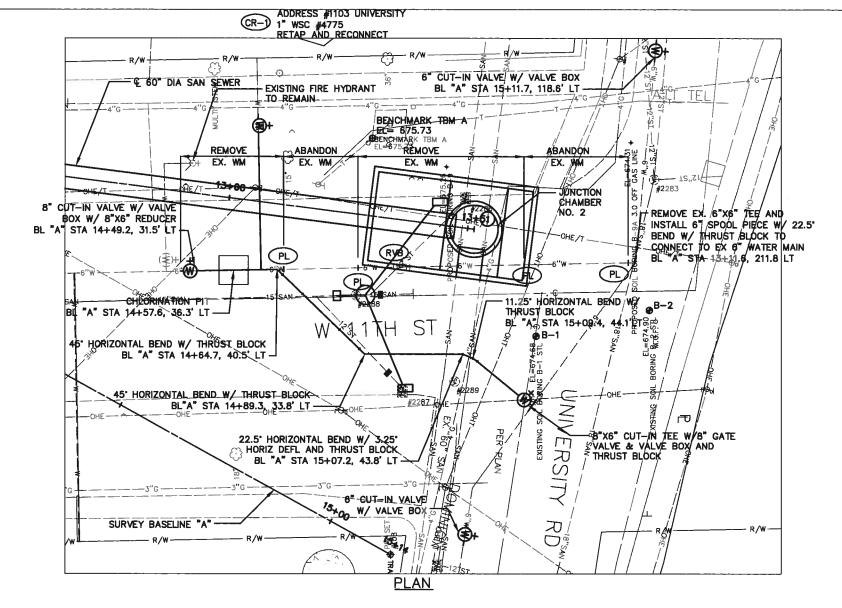

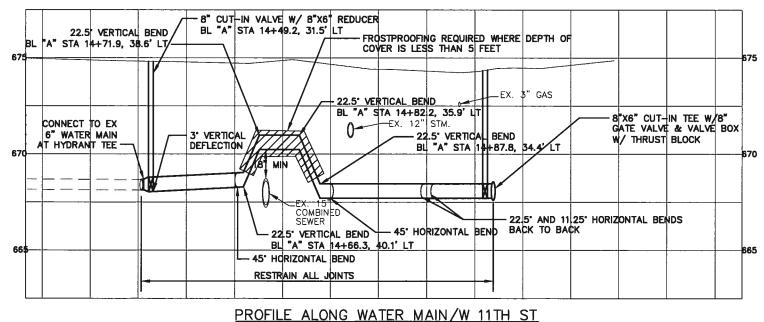

LEGEND

REPLACE EXISTING CONNECTION, SHORT SIDE, (1" AND UNDER) WITH " COPPER CONNECTION. INCLUDING CURB VALVE AND VALVE BOX

PLUG EXISTING WATER MAIN END

(RVB) REMOVE VALVE AND VALVE BOX

VERTICAL SCALE IN FEE

HORIZ, SCALE IN FEET

BAR IS ONE INCH ON ORIGINAL DRAWING

PROJECT NO

SHEET NO .:

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

1"=10"

SHEET: SCALE:

WATER MAIN RELOCATION PLAN AND NOTES

DESIGNED BY: SHEET CHK'D BY DATE





WALWORTH RUN INTERCEPTOR on XX/XX/09. This REALIGNMENT document is not considered a sealed

CLEVELAND DIVISION OF WATER NOTES FOR NEW WATER MAIN INSTALLATION (CONTINUED)

10E. AT THE END OF EACH WORKDAY, THE CONTRACTOR SHALL PLUG ALL OPEN PIPE ENDS WITH WATER TIGHT PLUGS AS PER THE "PREVENTITIVE AND CORRECTIVE MEASURES DURING CONSTRUCTION" SECTION OF THE MOST CURRENT REVISION OF AWWA C-651 AS TO PREVENT THE INFILTRATION OR INTRUSION OF ANY FOREIGN OBJECTS OR MATERIALS. DATE STAMPED DIGITAL PHOTOS SHALL BE PROVIDED FOR EACH WORKDAY DEMONSTRATING THAT PROPER AWWA C-651 METHODS WERE USED TO PLUG ALL OPEN WATER MAIN ENDS. EACH PHOTO SHALL CLEARLY IDENTIFY THE STATION AT WHICH THE PIPE IS PLUGGED. THE STATIONING SHALL BE SHOWN BY THE USE OF A STATION MARKER PLACED AT THE PLUGGED PIPE END.

PHOTOS SHALL BE SUBMITTED ON A DAILY BASIS UNLESS OTHERWISE DEFINED BY THE CWD INSPECTOR OR ENGINEER. ALL PHOTOS TAKEN OVER THE COURSE OF THE PROJECT SHALL BE SUBMITTED BY THE CONTRACTOR AS PART OF THE AS-BUILT SUMITTAL. AS-BUILTS SHALL BE CONSIDERED INCOMPLETE WITHOUT SAID COLLECTION OF DIGITAL PHOTOS.

- 11. IN ALL HYDRANT INSTALLATIONS THE CONTRACTOR SHALL FACE ALL HYDRANT'S 4" (STEAMER) NOZZLE TOWARD THE PAVEMENT PRIOR TO TESTING AND CHLORINATION OF WATER MAINS. CONTRACTOR SHALL CONSULT WITH THE LOCAL MUNICIPALITY'S ENGINEERING OR SERVICE DEPARTMENT TO OBTAIN HYDRANT MODEL AND NOZZLE THREAD REQUIREMENTS IF NOT INDICATED ON THE APPROVED PLANS.
- ALL VALVES SHALL BE AN APPROVED MODEL RESILIENT SEATED GATE VALVES AS PER THE MOST CURRENT VERSION OF AWWA C509 OR C515.

CONNECTIONS:

- 13. WATER CONNECTIONS SHOWN ON THESE DRAWINGS ARE FOR REFERENCE ONLY AND ARE NOT PART OF THE WATER MAIN APPROVAL. ADDITIONAL PERMITS FOR SERVICE CONNECTIONS MUST BE OBTAINED FROM THE DIVISION OF WATER PRIOR TO INSTALLATION OF ANY PORTION OF THE SERVICE CONECTION(S). IT IS THE CONTRACTORS RESPONSIBILITY TO ARRANGE FOR PERMITS FOR ALL SIZE WATER SERVICE CONNECTIONS BEFORE RFORMING ANY WORK. THE AMOUNT OF THE CHARGES CAN BE OBTAINED FROM THE DIVISION OF WATER, PERMITS AND SALES SECTION AT 216-664-2444 X5203.
- 14. ONE INCH SERVICE CONNECTIONS SHALL BE PERMITTED TO SERVICE HOMES BASED ON THE FOLLOWING CRITERIA:
- * PEAK FLOW DEMANDS DO NOT EXCEED 25 GPM FOR AN INDIVIDUAL HOME/UNIT. INCLUSIVE OF ALL USAGE (FIRE, DOMESTIC AND/OR IRRIGATION) AND
- * LENGTH OF ONE INCH CONNECTION DOES NOT EXCEED 75 FEET AS MEASURED FROM THE MAIN TO THE POINT OF ENTRY INTO THE PROPOSED HOME/UNIT.

ANY SERVICE REQUESTS DIFFERING FROM THE STATED CRITERIA SHALL REQUIRE THE SUBMITTAL OF A COMPLETE WATER SERVICE APPLICATION. PEAK DEMANDS ARE TO BE ASSESSED ON APPLICATION AND SETBACKS ARE TO SHOWN ON AN ACCOMPANYING SITE PLAN. SITE PLANS SHALL SHOW WATER METER VAULTS IN THE RIGHT OF WAY OR IN AN EASEMENT CONTIGUOUS TO THE RIGHT OF WAY FOR ANY HOMES/UNITS WITH SETBACKS GREATER THAN 150 FEET. EASEMENTS ARE TO BE PROVIDED WITH THE SERVICE CONNECTION APPLICATION SUBMITTAL.

 ALL WATER MAIN CURB VALVE BOXES & METER VAULTS SHALL BE INSTALLED IN GRASS AREAS WHEN POSSIBLE.

EMERGENCIES

16. IF A WATER MAIN OR SERVICE CONNECTION BREAK OCCURS DURING CONSTRUCTION AND EMERGENCY ASSISTANCE IS REQUIRED, PLEASE NOTIFY THE DIVISION OF WATER T. 21 SECTION OF WATER TO SECTION OF THE DIVISION OF WATER TO SECTION OF THE DIVISION OF WATER TO SECTION OF THE DIVISION OF THE DIVISION OF WATER TO SECTION OF THE DIVISION OF THE D

UTILITIES:

DATE

- 1. THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES AT LEAST TWO (2) WORKING DAYS (NOT INCLUDING SATURDAYS AND LEGAL HOLIDAYS) PRIOR TO CONSTRUCTION TO HAVE UTILITIES STAKED, MARKED OR OTHERWISE DESIGNATED IN THE CONSTRUCTION AREA IN SUCH A MANNER AS TO INDICATE THEIR COURSE TOGETHER WITH THE APPROXIMATE DEPTH AT WHICH THEY WERE INSTALLED. THE MARKING OR LOCATION SHALL OCCUR APPROXIMATELY TWO DAYS AHEAD OF THE PLANNED CONSTRUCTION.
- 2. THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN ON THE PLANS AND BELIEVED TO ESSENTIALLY CORRECT. THE LOCATIONS WERE OBTAINED FROM THE OWNERS OF THE UTILITIES AS REQUIRED BY SECTION 153.64 O.R.C. NO GUARANTEE IS MADE RELATIVE TO THE COMPLETENESS OR ACCURACY AND THE CONTRACTOR IS REQUIRED TO CONTACT THE REGISTERED UTILITY PROTECTION SERVICE AND THE OWNERS OF EACH UNDERGROUND UTILITY FACILITY SHOWN ON THE PLANS AT LEAST TWO WORKING DAYS PRIOR TO COMMENCING CONSTRUCTION IN ANY AREA.
- 5. ALL EXISTING UTILITIES, SERVICES, POLES AND CONNECTIONS SHALL BE PROTECTED AT THE CONTRACTOR'S EXPENSE. IF DAMAGE IS CAUSED BY CONSTRUCTION TO ANY EXISTING UTILITY, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OR RESTORATION OF SAME AT HIS EXPENSE IN ACCORDANCE WITH DIRECTIONS OF THE ENGINEERS, AND FOR ANY RESULTING CONTINGENT DAMAGES. EXISTING UTILITIES INCLUDE, BUT ARE NOT LIMITED TO WATER MAINS, STORM SEWERS, SANITARY SEWERS, GAS, ELECTRICAL, TELEPHONE, FIBER OPTIC CABLE, TELEVISION CABLE, AND INDIVIDUAL SERVICE CONNECTIONS AND LATERALS.

UTILITIES (CONTINUED)

- 4. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXPOSE ALL EXISTING UTILITIES, SERVICES, OR STRUCTURES TO VERIFY THE VERTICAL AND HORIZONTAL LOCATION OF THE UTILITY, SERVICE, OR STRUCTURE AND ITS EFFECT ON THE PROPOSED CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE HIS WORK WITH THE UTILITY OWNER.
- 5. INDIVIDUAL STORM, SANITARY, GAS, WATER, ELECTRICAL, TELEPHONE AND CABLE SERVICE CONNECTIONS MAY NOT BE SHOWN. THE CONTRACTOR SHALL LOCATE AND PROTECT SERVICE CONNECTIONS THROUGHOUT THE COURSE OF THE WORK. IN THE EVENT SERVICE CONNECTIONS ARE BROKEN OR DISTURBED, THE CONTRACTOR SHALL REPAIR OR REPLACE THE SERVICE CONNECTIONS TO THE SATISFACTION OF THE ENGINEER AT NO ADDITIONAL COST TO THE OWNER. THE CONTRACTOR SHALL EXPECT EACH RESIDENCE/COMMERCIAL PROPERTY ALONG THE ROUTE TO HAVE AT LEAST ONE SERVICE CONNECTION FOR EACH UTILITY.
- EXISTING LATERAL CONNECTIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL FIELD LOCATE TO DETERMINE LOCATION AND NUMBER OF LATERALS. NOT ALL LATERALS MAY BE SHOWN.
- STORM SEWER, SANITARY SEWER, AND CULVERT INVERTS SHOWN ON THE PLANS ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY DEPTHS AND LOCATIONS PRIOR TO CONSTRUCTION.
- 8. THE CONTRACTOR HALL REPAIR AT HIS OWN COST ANY DAMAGE TO TRAFFIC SIGNAL LOOP DETECTORS. ONTRACTOR SHALL FIELD VERIFY ALL LOOP DETECTORS WITHIN PROJECT AREA.

PAVEMENTS AND WALKS:

- 1. ROADWAYS, DRIVES, AND PAVEMENTS DISTURBED BY CONSTRUCTION SHALL BE REPLACED. SEE DETAILS ON PLANS AND SPECIFICATIONS. TEMPORARY PAVEMENT SHALL BE USED WHEN HOT MIX ASPHALT IS NOT AVAILABLE OR WHEN WEATHER FOR PAVEMENT IS UNACCEPTABLE. SIDEWALKS AND DRIVEWAY APRONS SHALL BE FLOAT FINISHED.
- 2. THE CONTRACTOR MAY DAMAGE EXISTING ROADWAY CURBING WHILE INSTALLING THE WATER MAIN. THE CONTRACTOR SHALL REPLACE ANY DAMAGED CURBING ALONG ALL ROADS WITH ODOT 609 CURBING. CURB REPLACEMENT SHALL MATCH EXISTING CURB, AND LIMITS OF REPLACEMENT SHALL BE TO THE NEAREST CONTROL JOINT ON EITHER SIDE OF THE AREA DAMAGED.
- THE CONTRACTOR MAY DAMAGE EXISTING DRIVE APRONS WHILE INSTALLING THE WATER MAIN. DRIVE APRONS SHALL BE REMOVED AND REPLACED TO THE NEAREST JOINT. PAVEMENT TYPE AND THICKNESS SHALL MATCH EXISTING.
- WHERE NECESSARY TO DISTURB PAVEMENTS OR DRIVES, PAVEMENT SHALL BE CUT IN NEAT, STRAIGHT LINES.

SUPPLEMENTAL WATER MAIN NOTES:

- ALL NEW VALVES SHALL OPEN BY TURNING CLOCKWISE. VALVES SHALL BE SAME SIZE AS THE WATER MAIN. ALL VALVE BOXES SHALL BE INSTALLED FLUSH TO GRADE.
- 2. THE MAXIMUM TRENCH OPENING SHALL NOT EXCEED 100 LINEAL FEET. WHERE ACCESS TO DRIVES AND PARKING LOTS IS HINDERED OR BLOCKED FOR AN EXTENDED PERIOD OF TIME, THE CONTRACTOR SHALL PROVIDE TEMPORARY BITUMINOUS PAVEMENT TO MAINTAIN ACCESS. CONTRACTOR SHALL KEEP ALL WORK WITHIN THE RIGHT-OF-WAY.
- 3. UNLESS OTHERWISE NOTED, THE NEW WATER MAIN SHALL HAVE 6' MINIMUM COVER OVER THE TOP OF PIPE.
- A MINIMUM OF 35 PSI SHALL BE MAINTAINED TO THE CURB STOP DURING NORMAL OPERATING CONDITIONS.
- 5. BOOSTER PUMPS ARE NOT PERMITTED ON SERVICE CONNECTIONS.
- 6. PIPE JOINTS SHALL BE DEFLECTED TO MAINTAIN HORIZONTAL ALIGNMENT AND VERTICAL ELEVATIONS UNLESS OTHERWISE INDICATED. DEFLECTIONS SHALL NOT EXCEED THE PIPE MANUFACTURERS RECOMMENDATIONS.
- 7. ALL COSTS ASSOCIATED WITH ABANDONING AND/OR REMOVING THE EXISTING WATER MAIN, LINE VALVES, OR SERVICE CONNECTIONS SHALL BE INCLUDED IN THE BID PRICE PER LINEAL FOOT OF WATER MAIN.
- 8. NEW FIRE HYDRANTS SHALL BE BAGGED UNTIL THE NEW WATER MAIN IS INSTALLED AND IN OPERATION.
- THE WATER MAIN SHALL BE PRESSURE TESTED AND DISINFECTED PRIOR TO PERFORMING CORPORATION STOP TAPS.
- 10. FIRE HYDRANT PLACEMENT SHALL BE ESTABLISHED BY GOVERNING FIRE DEPARTMENT.
- 11. CONTRACTOR SHALL PRESSURE TEST AND DISINFECTION TEST WITHIN 15 DAYS OF WATER MAIN INSTALLATION.
- 12. ANY EXISTING UTILITIES OR APPURTENANCES INSIDE OR OUTSIDE OF THE CONSTRUCTION LIMITS DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.

This document was

originally issued by

on XXXXX/09. This

document is not

considered a sealed

document.

- 13. GROUNDWATER CONTROL MEASURES SHALL BE IN PLACE PRIOR TO THE TIME THE EXCAVATION REACHES THE GROUNDWATER LEVEL TO MAINTAIN INTEGRITY OF THE IN-SITU MATERIALS. WHILE THE EXCAVATION IS OPEN, THE GROUNDWATER LEVEL SHALL BE MAINTAINED CONTINUOUSLY AT 2 FEET OR MORE BELOW THE WORKING LEVEL.
- 14. UNSTABLE OR UNSUITABLE PIPE FOUNDATION CONDITIONS THAT RESULT FROM INADEQUATE OR INAPPROPRIATE DEWATERING METHODS SHALL BE CORRECTED BY THE CONTRACTOR AT NO COST TO THE OWNER.
- 15. ANY EXISTING PROPERTY CORNER PINS OR MONUMENTS DAMAGED OR DESTROYED BY THE CONSTRUCTION SHALL BE RESET BY A REGISTERED SURVEYOR UPON COMPLETION OF THE PROJECT PRIOR TO FINAL PAYMENT. A CERTIFICATION SHALL BE FURNISHED BY A REGISTERED SURVEYOR, STATING THAT SAID DAMAGES HAVE BEEN RESTORED. THE COST SHALL BE INCLUDED IN THE PRICE BID PER LINEAL FOOT OF WATER MAIN.
- 16. ACCESS TO ADJOINING PROPERTIES SHALL BE MAINTAINED AT ALL TIMES.
- 17. RIGHT-OF-WAY AND PROPERTY LINES SHOWN WERE PREPARED FROM RECORD INFORMATION AND DO NOT REPRESENT A BOUNDARY SURVEY.
- 18. CONTRACTOR SHALL CLEAN THE ROADWAY AT THE END OF EACH DAY OF OPERATION OR EVERY 500 FEET OF INSTALLED WATER MAIN. CLEANING SHALL BE PERFORMED USING A POWER BROOM OR HYDROSPRAYER, OR AS DIRECTED BY THE ENGINEER.
- 19. THE CONTRACTOR SHALL OBTAIN ALL PERMITS REQUIRED FOR CONSTRUCTION, INCLUDING BUT NOT LIMITED TO EXCAVATION AND ROAD OPENINGS. PERMITS SHALL BE OBTAINED FROM THE CITY ENGINEER AND FROM ANY LOCAL GOVERNMENTAL OFFICIALS IN WHICH THE WORK IS BEING PERFORMED.
- 20. CONTRACTOR SHALL NOT BE PERMITTED TO STORE MATERIALS, EQUIPMENT, OR VEHICLES ON PRIVATE PROPERTY.
- 21. THE CONTRACTOR SHALL PROVIDE TEMPORARY WATER MAINS AND SERVICE CONNECTIONS PER SPECIFICATION SECTION 02660. TEMPORARY MAINS SHALL BE LAID IN THE GUTTERLINES AND SHALL CROSS THE STREETS AT INTERSECTIONS. TEMPORARY MAINS SHALL NOT BE LAID ON TREELAWNS.

CONSTRUCTION SEQUENCE

THE PROPOSED WATER MAIN SHALL BE CONSTRUCTED GENERALLY IN ACCORDANCE WITH THE FOLLOWING CONSTRUCTION SEQUENCE:

- INSTALL AND OPERATIONALIZE TEMPORARY WATER SERVICE CONNECTION TO 1103 UNIVERSITY ROAD.
- INSTALL 8-INCH CUT-IN VALVE WITH 8-INCH BY 6-INCH REDUCER AT BASELINE STATION 14+49.2, 13.5' LT AND 6-INCH CUT-IN VALVES ON UNIVERSITY ROAD.
- 3. CLOSE VALVES AT BASELINE STATION 14+49.2, 13.5' LT AND ON UNIVERSITY ROAD TO ISOLATE THE WATER MAIN ON W 11TH STREET BETWEEN BASELINE STATION 14+49.2, 13.5' LT AND UNIVERSITY ROAD.
- 4. BEGINNING AT BASELINE STATION 14+49.2, 13.5' LT, REMOVE EXISTING 6-INCH WATER MAIN AND INSTALL PROPOSED 8-INCH WATER MAIN. INSTALL TEMPORARY END CAPS, DO NOT CONNECT TO EXISTING MAIN AT UNIVERSITY ROAD.
- REMOVE EXISTING 6-INCH BY 6-INCH TEE AND BEND AT BASELINE STATION 13+11.6, 211.8' LT AND INSTALL 22.5' BEND AND 6-INCH SPOOL PIECES TO CONNECT TO EXISTING WATER MAIN. PLUG ABANDONED WATER MAIN ENDS WHERE SHOWN ON PLANS.
- COMPLETE HYDROSTATIC PRESSURE TESTING, DISINFECTION, BACTERIA TESTING, AND FLUSHING OF NEW MAIN.
- INSTALL 6-INCH BY 8-INCH CUT-IN TEE WITH 8-INCH VALVE AT UNIVERSITY RD, AND COMPLETE CONNECTION AT UNIVERSITY RD.
- 8. OPEN LINE VALVES AND OPERATIONALIZE NEW WATER MAIN.
- 9. TAP NEW MAIN, AND REPLACE AND OPERATIONALIZE NEW SERVICE CONNECTION.
- 10. REMOVE TEMPORARY WATER MAIN SYSTEM




WATER MAIN NOTES

PROJECT NO.: SHEET:

SCALE: NO





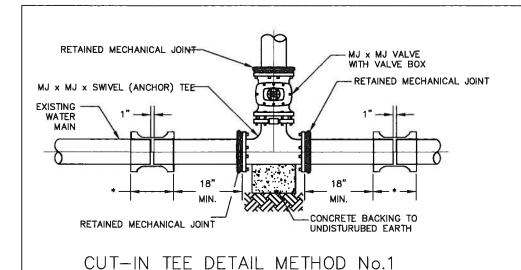

STD-T01

NOT TO SCALE

BRICK BULKHEAD VOIDS TO BE FILLED WITH CEMENT MORTAR 12" CONCRETE OR SAKRETE EXISTING WATER MAIN TO BE ABANDONED METHOD No. 1 2" MIN. BRICK 18"MIN.-24"MAX CONCRETE OR PROPERLY DRAIN MAIN SAKRETE PRIOR TO ABANDONMENT EXISTING WATER MAIN TO BE ABANDONED 40 4

PLUGGING ABANDONED WATER MAIN ENDS

*CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.


MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM-A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No's 38, 138 OR 162 (TRANSITION TYPE), OR SMITH-BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.

ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".


THE DIVISION OF WATER WILL DETERMINE THE FIELD LOCATION OF THE CUT-IN-VALVE ASSEMBLY. THE DIVISION OF WATER WILL ALSO SET THE TIME OF INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY.

THE CONTRACTOR SHALL DO ALL PIPE CUTTING AND INSTALLATION. HOWEVER, THE INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY SHALL BE DONE UNDER THE SUPERVISION OF THE DIVISION OF WATER.

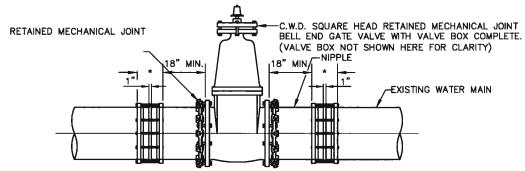

BEFORE CUTTING EXISTING WATER MAIN, THE NIPPLES SHALL BE CONNECTED TO THE MECHANICAL JOINT BELL END GATE VALVE. AFTER CUTTING PIPE, FINAL CONNECTIONS SHALL BE MADE WITH COUPLINGS/SOLID SLEEVES AS SPECIFIED.

CUT-IN-VALVE DETAIL (STD-005)

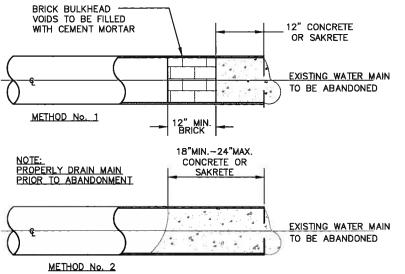

CONTROLLED LOW STRENGTH MATERIAL-AMPLE BELL HOLES IN ROCK IN EARTH SHALL BE FORMED CONTROLLED DENSITY FILL (CLSM-CDF) TO PERMIT PROPER "FLOWABLE FILL" MAY BE USED IN LIEU OF JOINTING PREMIUM BACKFILL.

*COMPACTED BACKFILL

SEE NOTES

AND 2 BELOW

OR CLSM-CDF

BACKFILI

TAMPED SAND

WATER MAIN TRENCH DETAILS (STD-001)

12"

-GRADE

MAX. WIDTH.

2'-0"+0.D.

-lo.p.

1) PREMIUM BACKFILL CONSISTING OF CONTROLLED LOW STRENGTH MATERIAL - CONTROLLED DENSITY FILL (CLSM-CDF) "FLOWABLE FILL" IS REQUIRED:

-GRADE


DEPTH TO

12"

MAX. WIDTH.

2'-0"+0.D.

- A) UNDER ALL EXISTING OR FUTURE PAVEMENTS, SIDEWALKS AND DRIVES
- B) AT ALL LOCATIONS WITHIN THE CITY OF CLEVELAND CORPORATION LIMITS
- C) AS SPECIFIED IN LOCAL MUNICIPALITIES SERVED BY CWD (SEE LOCAL REQUIREMENTS) 2) WHEN PREMIUM BACKFILL IS REQUIRED BY THE LOCAL MUNICIPALITY FOR CASES OTHER THAN THOSE LISTED IN NOTE 1 ABOVE, IT SHALL BE LIMESTONE GRADED PER ODOT 304.02 OR ODOT 411. NO SLAG IS
- 3) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, AND THOROUGHLY COMPACTED SO AS TO PROVIDE A SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.
- 4) MINIMUM COMPACTION FOR ALL SAND BEDDING, BACKFILL AND PREMIUM BACKFILL SHALL BE 95%
- 5) PAVEMENT, SIDEWALK OR DRIVES TO BE INSTALLED IN ACCORDANCE WITH LOCAL MUNICIPALITY'S SPECIFICATIONS.

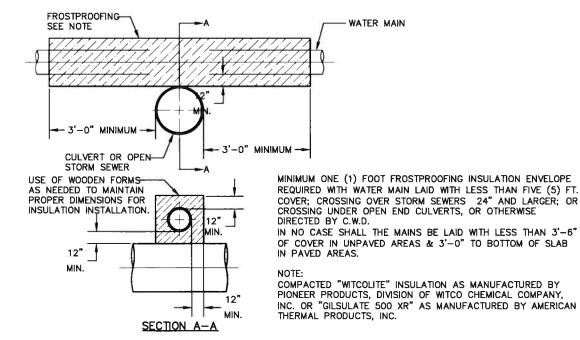

TYPICAL FROSTPROOFING DETAIL (STD-009)

BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.

SHEET CHK'D BY CROSS CHK'D BY: APPROVED BY:. DATE: _ DATE ISSUE REMARKS





This document was originally issued by on XXXXV09. This document is not

considered a sealed


document.


WALWORTH RUN INTERCEPTOR REALIGNMENT

WATER MAIN DETAILS

SCALE: NONE

SHEET NO .:

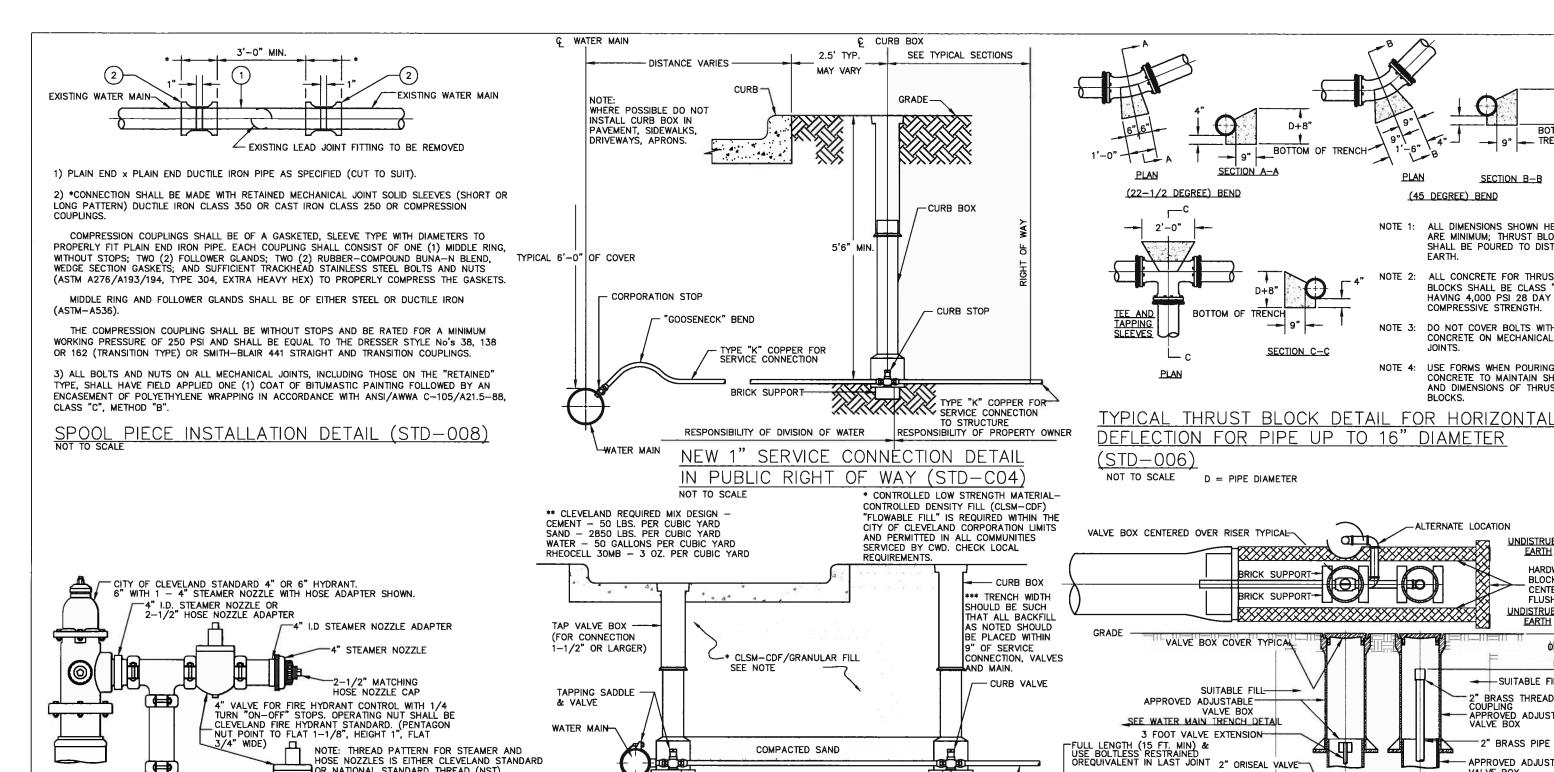

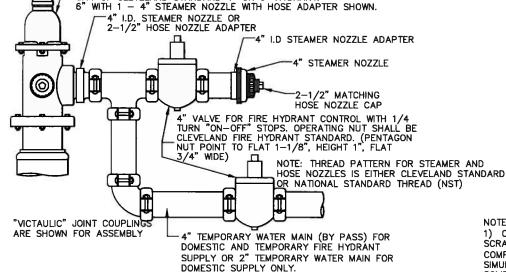

TEMPORARY WATER MAIN & HYDRANT CONNECTION ASSEMBLY-A TO PROVIDE SIMULTANEOUS SERVICE IN EXISTING HYDRANT AND TEMPORARY BYPASS

MAIN (STD-H14)

95% STANDARD PROCTOR.

SERVICE CONNECTION BACKFILL DETAIL NOT TO SCALE

NOT TO SCALE DESIGNED BY: SHEET CHK'D BY APPROVED BY:.. DATE





originally issued by on XX/XX/09. This document is not considered a sealed

This document was

WALWORTH RUN INTERCEPTOR REALIGNMENT

SHEET: WATER MAIN DETAILS SHEET NO.: C-9

-BRICK*

HARDWOOD BLOCKING

SUPPORT

. FLUSHING ASSEMBLY (STD-003)

D+8"

SECTION C-C

BOTTOM OF TRENCH

PLAN

NOTE 2:

(45 DEGREE) BEND

JOINTS.

ALTERNATE LOCATION

BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO

D+8"

BOTTOM OF

TRENCH

SECTION B-B

ALL DIMENSIONS SHOWN HEREON

ARE MINIMUM; THRUST BLOCK

ALL CONCRETE FOR THRUST

BLOCKS SHALL BE CLASS "C"

HAVING 4,000 PSI 28 DAY COMPRESSIVE STRENGTH.

DO NOT COVER BOLTS WITH

CONCRETE ON MECHANICAL

USE FORMS WHEN POURING CONCRETE TO MAINTAIN SHAPE

UNDISTRUBED

<u>EARTH</u>

UNDISTRUBED

EARTH

SUITABLE FILL

2" BRASS PIPE

VALVE BOX

BRASS ELBOW

WITH 16" DRAIN HOLE

2" BRASS THREADED COUPLING - APPROVED ADJUSTABLE VALVE BOX

APPROVED ADJUSTABLE

No. 57

UNDISTRUBED

EARTH

HARDWOOD BLOCKING ON

CENTER OF

FLUSHPIPE

DE MAX

AND DIMENSIONS OF THRUST

SHALL BE POURED TO DISTURBED

APPROVED RESTRAINED PLUG OR CAP WITH TAP TO RECEIVE

WATER MAIN


2" DIA, PIPE

SCALE: NONE

COMPACTED SAND PRIVATE SIDE WATER SERVICE CONNECTION (SIZE VARIES) OF CONNECTION 1) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING BACKFILL, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN

COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, THOROUGHLY COMPACTED SO AS TO PROVIDE A AND SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.

2) MINIMUM COMPACTION FOR ALL SAND BEDDING BACKFILL, BACKFILL AND PREMIUM BACKFILL SHALL BE

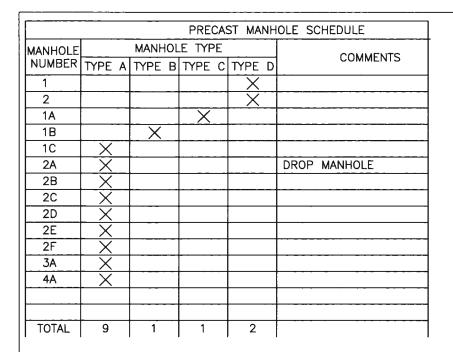



NOTES

DATE

- SECTIONS OF THE PRECAST MANHOLE SHALL BE CAST AND ASSEMBLED WITH EITHER ALL TONGUE OR ALL GROOVE ENDS UP. LIFT HOLES MAY BE PROVIDED IN EACH SECTION FOR HANDLING.
- 2. BASES FOR MANHOLES ARE SHOWN WITH MONOLITHIC FLOOR AND RISERS WHICH MAY BE CAST IN ONE OR TWO OPERATIONS, A PERMISSIBLE ALTERNATE IS TO CAST AND SHIP THE FLOOR AND BARREL SEPARATELY OPENINGS FOR INLET AND OUTLET PIPES SHALL BE PROVIDED, EITHER WHEN THE UNIT IS CAST OR LATER, TO MEET PROJECT REQUIREMENTS, BOTTOM CHANNELS MAY BE FORMED OF CONRETE PRECAST IN THE BASE OR INSTALLED BY FIELD CONSTRUCTION, FLOORS MAY ALSO BE POURED IN PLACE.
- 3. OPENINGS IN RISER SECTIONS SHALL BE PREFABRICATED. FLEXIBLE CONNECTIONS SHALL BE PROVIDED FOR SANITARY AND STORM SEWERS. PREMIUM SEALS SHALL MEET ASTM C-923.
- JOINT SEALS BETWEEN PRECAST MANHOLE SECTIONS SHALL BE RESILENT AND FLEXIBLE GASKET JOINTS. JOINTS SHALL MEET ASTM C-443, FEDERAL SPECIFICATION SS-S-00210 (210 A), AND AASHTO
- 5. MANHOLE JOINTS SHALL BE SEALED BY A FLEXIBLE SEALANT, CONSEAL CS-202 AS MANUFACTURED BY CONSEAL CONCRETE SEALANTS, INC., OR APPROVED
- MANHOLE GRADE RINGS SHALL BE SEALED EXTERNALLY AND BETWEEN GRADE RINGS WITH A LAYER OF MASTIC COMPOUND SUCH AS FABERLITE, KENT SEAL, OR EQUAL.
- PRECAST MANHOLES SHALL CONFORM TO THE REQUIREMENTS OF ASTM C-478.
- 8. SEAL ALL LIFT HOLES WITH APPROVED CONCRETE PLUGS.
- 9. SEE PLANS FOR FRAME AND COVER ELEVATIONS.
- 10. TOP MANHOLE STEP SHALL BE INSTALLED NOT MORE THAN 2' BELOW TOP OF FRAME.
- APPLY "THOROSEAL" BY THORO SYSTEM PRODUCTS, OR APPROVED EQUAL TO THE INSIDE EXPOSED SURFACES OF ALL MANHOLES.

REMARKS

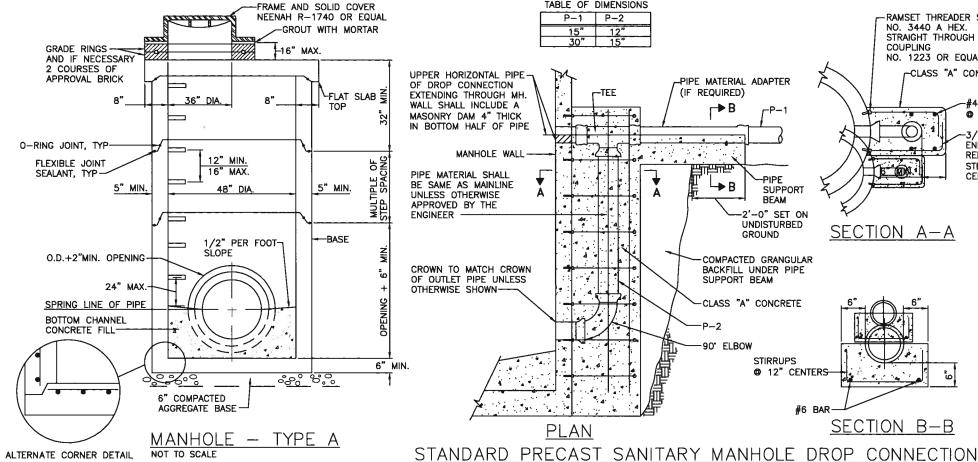

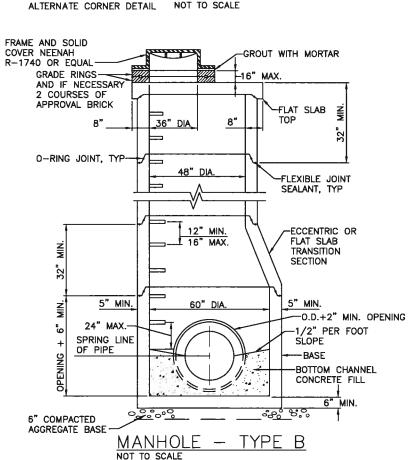



SHEET CHK'D BY:

CROSS CHK'D RY-

APPROVED BY:



This document was originally issued by on XXXXX/09. This document is not considered a sealed document.

WALWORTH RUN INTERCEPTOR REALIGNMENT

TABLE OF DIMENSIONS

-TEE

PLAN

36" DIA

12" MIN.

16", MAX.

48" DIA.

NOT TO SCALE

MANHOLE WALL

GRADE RINGS

2 COURSES OF

APPROVAL BRICK

AND IF NECESSARY

O-RING JOINT, TYP

5" MIN.

PIPE MATERIAL ADAPTER

-PIPE

BEAM

UNDISTURBED

STIRRUPS

4 12" CENTERS

#6 BAR

GROUND

COMPACTED GRANGULAR

BACKFILL UNDER PIPE

CLASS "A" CONCRETE

SUPPORT BEAM

90° ELBOW

-FRAME AND SOLID COVER NEENAH R-1740 OR EQUAL

-16" MAX

-GROUT WITH MORTAR

-FLAT SLAB TOP

-FLEXIBLE JOINT SEALANT, TYP

-FLAT SLAB TRANSITION LL

5" MIN.

-0" SET ON


SUPPORT

(IF REQUIRED)

L→ B

P-1 P-2

PRECAST CONCRETE MANHOLE **DETAILS**



DIM "B"

DIM "A"

MH TYPE

RAMSET THREADER STUD

-CLASS "A" CONCRETE

#4 BARS

9 12" CENTERS

END SMOOTH

REINFORCING

STEEL @ 12"

CENTERS

/8" THREADED

NO. 3440 A HEX.

COUPLING

SECTION A-A


SECTION B-B

STRAIGHT THROUGH

NO. 1223 OR EQUAL




8" MIN. DIM "B" DIM "A" DIM "B" O.D. + 2 MIN. /2" PER FOOT SLOPE -BASE 24" MAX.-BOTTOM CHANNEL CONCRETE FILL-BAR IS ONE INCH ON ORIGINAL DRAWING 6" COMPACTED ್ಮ್ಯಾಂಡಿ AGGREGATE BASE-MANHOLE - TYPE C AND D NOT TO SCALE

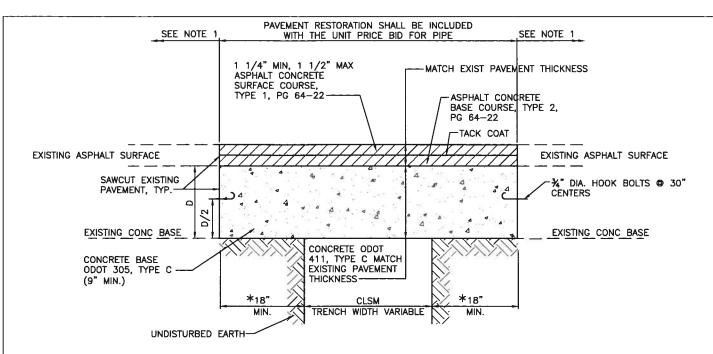

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR ASPHALT PAVEMENT WITH CONCRETE BASE

NOT TO SCALE

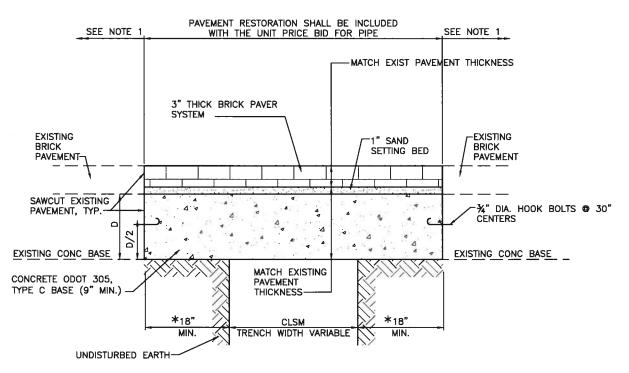

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR BRICK PAVEMENT WITH CONCRETE BASE NOT TO SCALE

DESIGNED RY: SHEET CHK'D BY PPROVED BY: DATE REMARKS





This document was originally issued by on XXXXX/09. This document is not considered a sealed

NOT TO SCALE

WALWORTH RUN INTERCEPTOR REALIGNMENT

PAVEMENT WITH BRICK BASE

TYPICAL TRENCH DETAIL FOR ASPHALT

TRENCH REPAIR DETAILS

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

BAR IS ONE INCH ON

PAVEMENT WHERE SHOWN ON THE DRAWINGS. PAYMENT SHALL BE INCLUDED WITH THE UNIT PRICE BID

FOR PAVEMENT MILLING AND

RESURFACING

PROJECT NO.: SHEET:

SCALE: NONE SHEET NO.: C-11

OR TO EXISTING CURB SÉALANT, TYP. EXIST. CONCRETE EXIST. CONCRETE PAVEMENT PAVEMENT SAWCUT EXIST. 3/4" DIA. HOOK BOLTS @ 30" CENTERS. PAVEMENT, TYP OMIT HOOK BOLTS FOR SIDEWALKS WHERE "D" IS 6" OR LESS. UNDISTURBED EARTH MINIMUM PAVEMENT THICKNESS SHALL BE AS FOLLOWS: *18" 1. 9" MIN. FOR ROADWAY MIN. RENCH WIDT 2. 6" MIN. FOR DRIVEWAYS OR PARKING AREAS VARIABI F 3. 4" MIN. FOR SIDEWALKS *CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE

MATCH EXIST.
PAVEMENT THICKNESS

UNLESS OTHERWISE SHOWN

MIN. D/4" DEEP X 1/4"

W/ODOT ITEM 705.04

WIDE JOINT TO BE SÉALED

-CONCRETE ODOT 452, TYPE C

4F 5'-0" OR LESS


REMOVE TO PAVEMENT JOINT


SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB


TYPICAL TRENCH DETAIL FOR CONCRETE PAVEMENT NOT TO SCALE

PAVEMENT RESTORATION SHALL BE INCLUDED SEE NOTE SEE NOTE 1 WITH THE UNIT PRICE BID FOR PIPE NOTE: -MATCH EXIST PAVEMENT THICKNESS 1. MILL AND RESURFACE ASPHALT 1 1/4" MIN, 1 1/2" MAX ASPHALT CONCRETE -ASPHALT CONCRETE BASE COURSE, TYPE 2, SURFACE COURSE, PG 64-22 TYPE 1, PG 64-22 **EXISTING** -EXISTING TACK COAT **ASPHALT ASPHALT** SURFACE-SURFACE SAWCUT EXISTING PAVEMENT, TYP. EXISTING BRICK BASE EXISTING BRICK BASE MATCH EXISTING CONCRETE ODOT 305, PAVEMENT TYPE C BASE (9" MIN.) THICKNESS *18 MIN. TRENCH WIDTH VARIABLE UNDISTURBED EARTH

> *CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

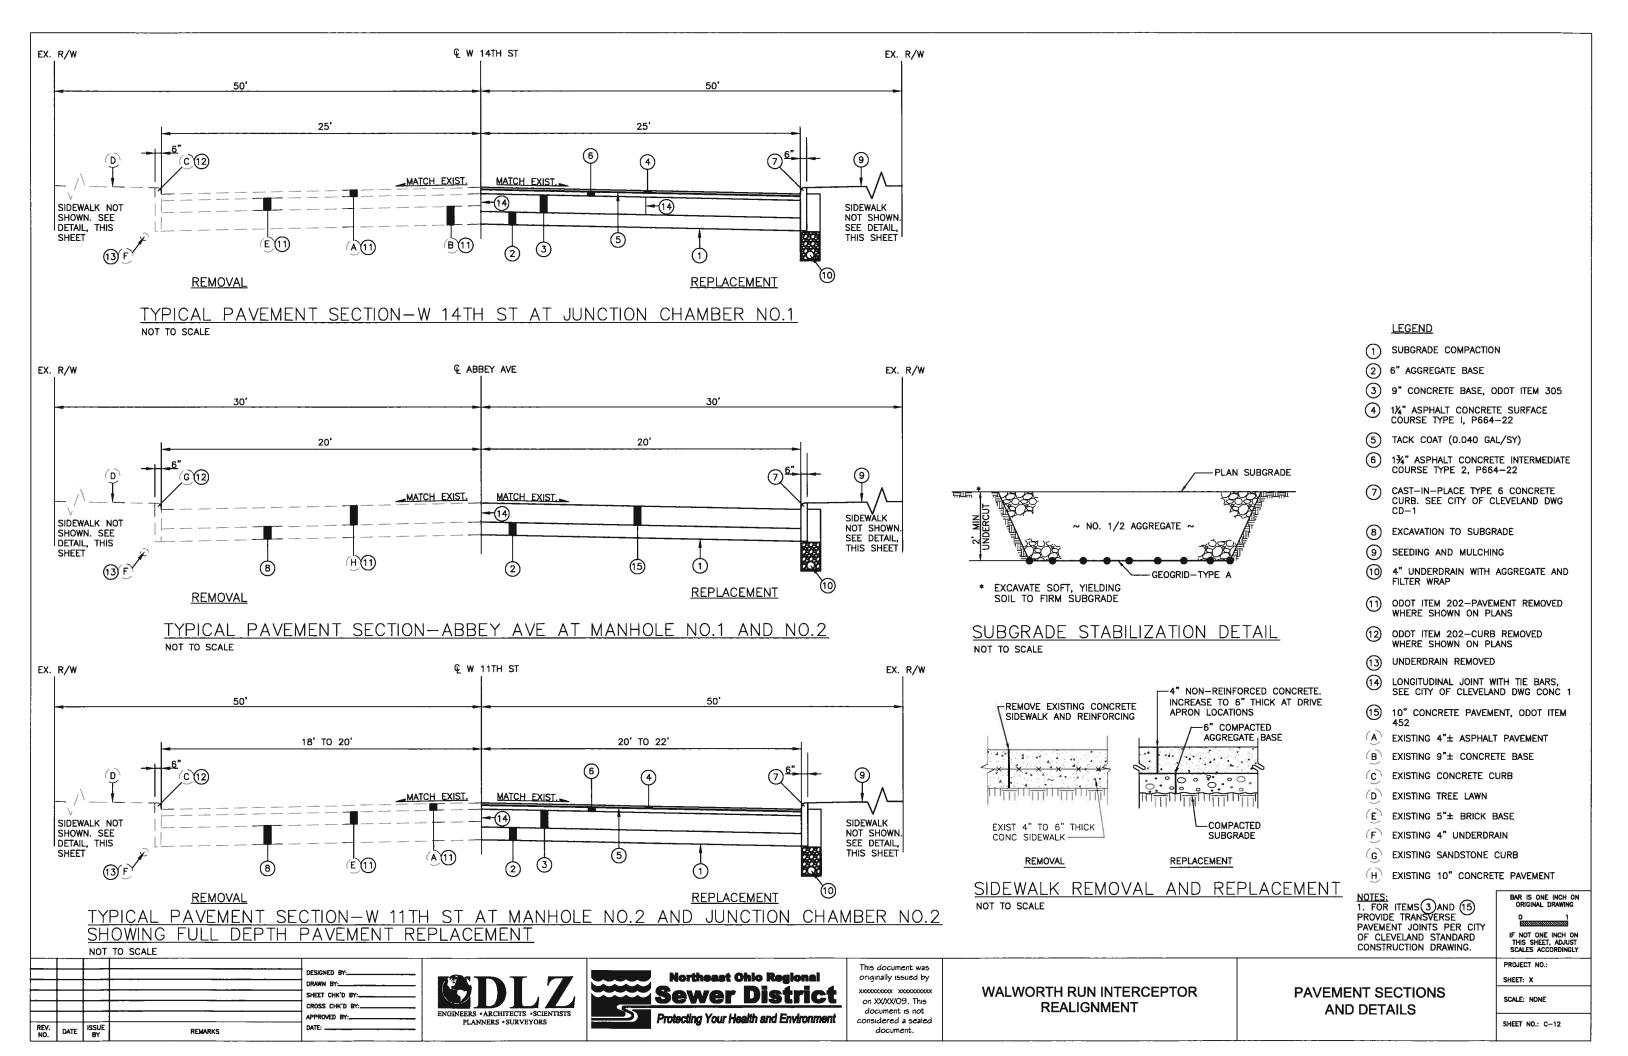

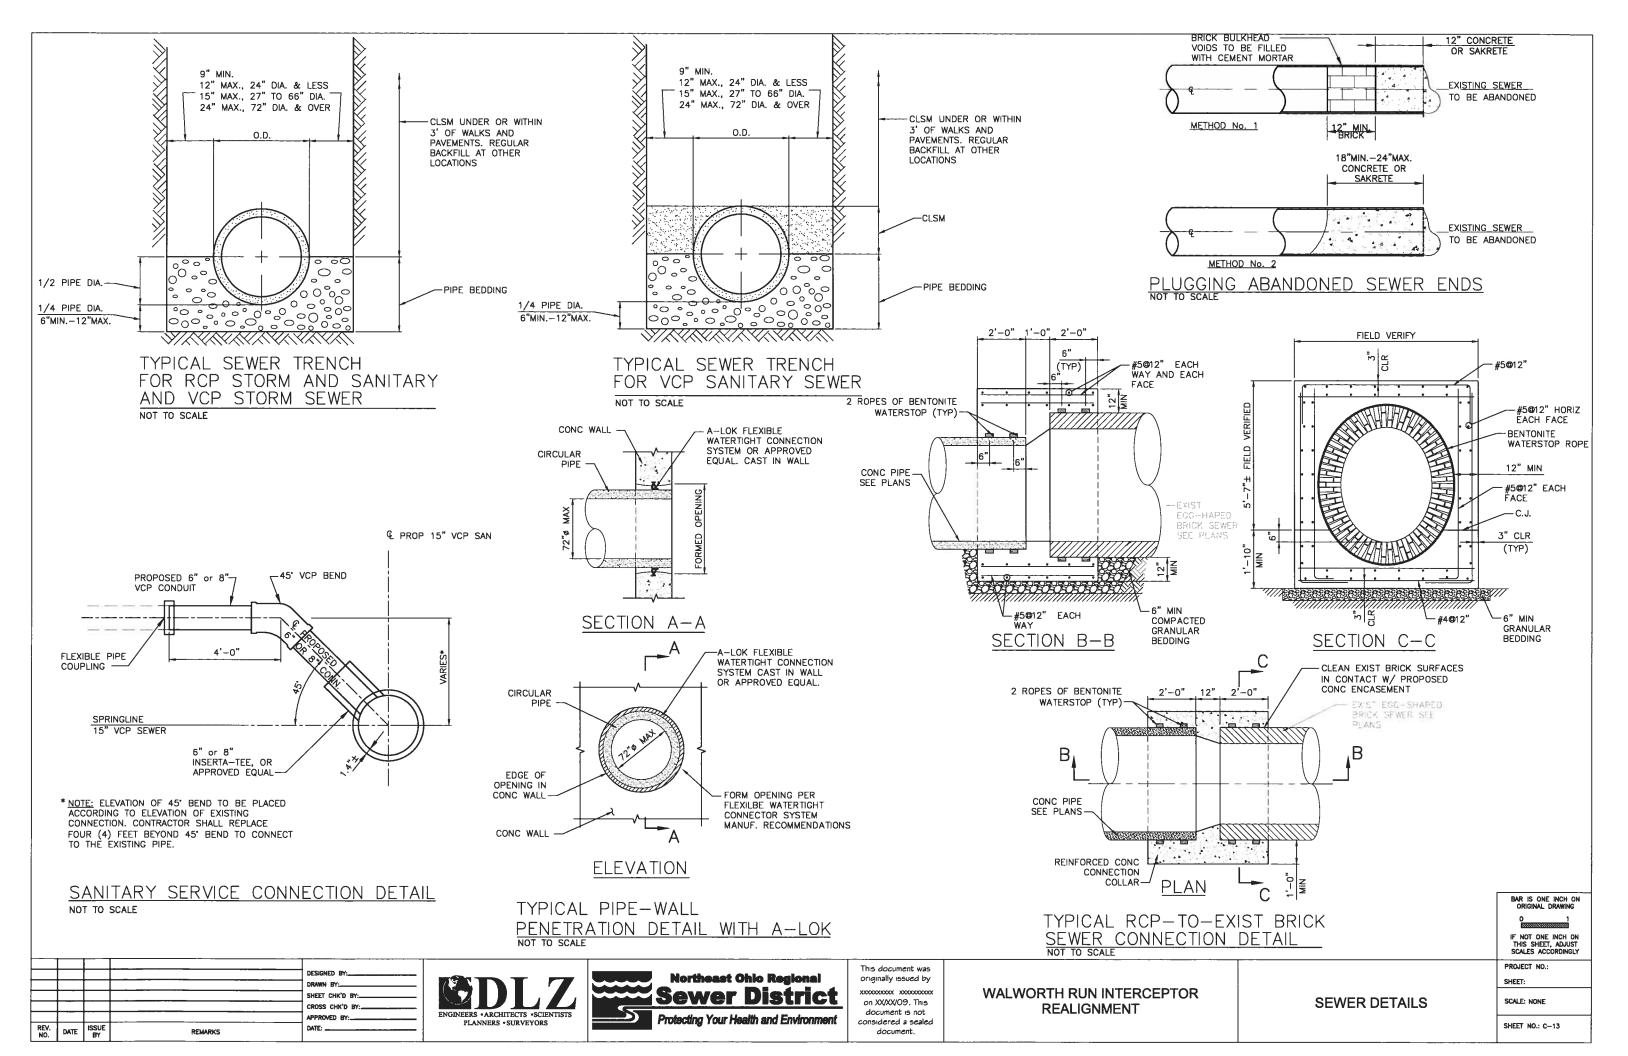

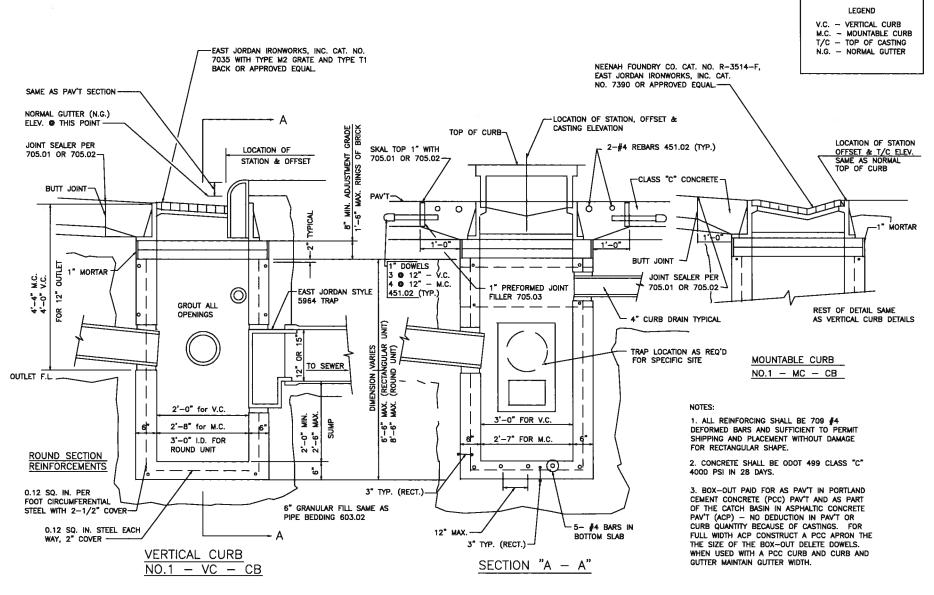

ALTERNATE BASIN SHAPE

A ROUND PRECAST CONCRETE UNIT MAY BE USED IN LIEU OF RECTANGULAR UNIT. THE ROUND SECTION SHALL BE A 36" I.D. UNIT WITH INTEGRAL BASE AND PRECAST TOP TRAN-SITION (ROUND TO RECTANGULAR) SECTION TO FIT CASTING BEING USED. TRANSITION UNIT REQUIRES A #5 REBAR AT CORNERS OF REC-TANGULAR SHAPED SECTION AND 3 x 8 W6 X X W5 WELDED WIRE FABRIC IN VERTICAL

CITY OF CLEVELAND STANDARD CATCH BASIN CB-1

NOT TO SCALE

DESIGNED BY: SHEET CHK'D BY: APPROVED BY:_ DATE





This document was originally issued by on XX/XX/09. This document is not considered a sealed

WALWORTH RUN INTERCEPTOR **REALIGNMENT**


CITY OF CLEVELAND **CATCH BASIN CB-1 DETAIL**

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO .:

BAR IS ONE INCH ON ORIGINAL DRAWING

SHEET: SCALE: NONE

SHEET NO.: C-14

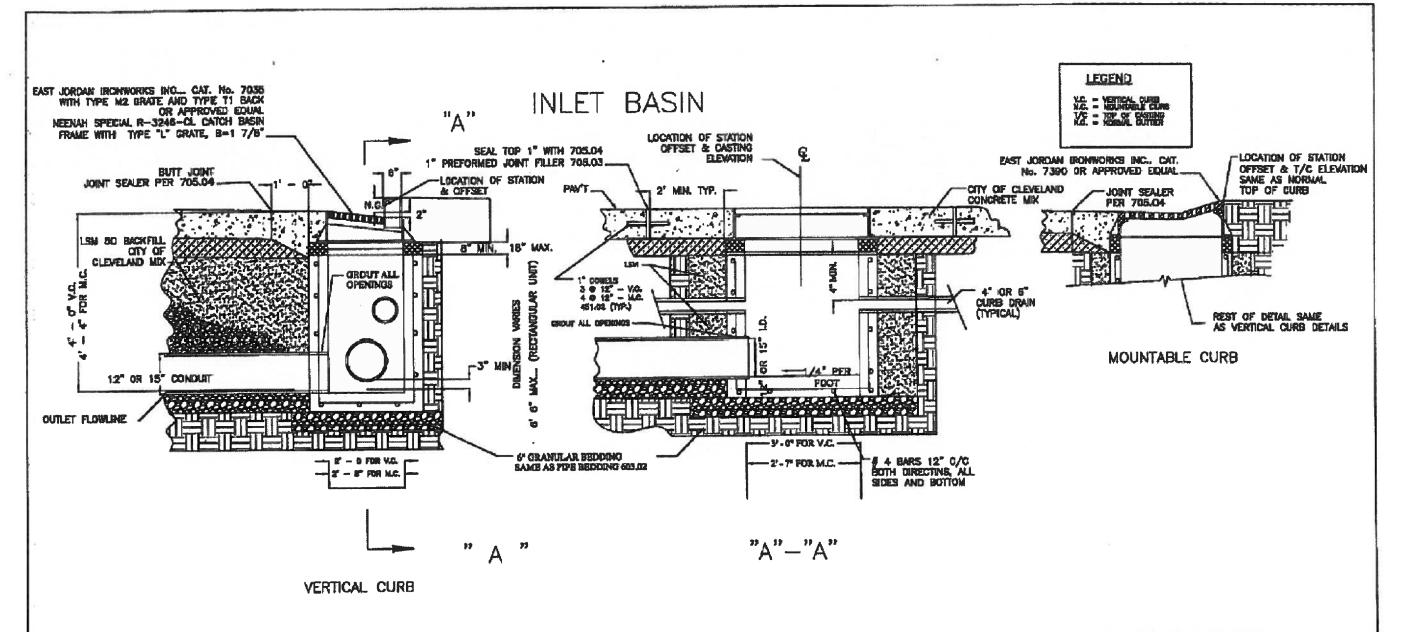

NOTES

DATE

- ALL REINFORCING SHALL BE # 4 DEFORMED BARS, AS PER ODOT 709, AND SUFFICIENT TO PERMIT SHIPPING AND PLACEMENT WITHOUT DAMAGE TO RECTANGULAR SHAPE.
- CONCRETE SHALL BE ODOT 499 CLASS "C" 4000 PSI IN 28 DAYS.
- BOX-OUT SHALL BE PAID FOR AS PAVEMENT IN PORTLAND CEMENT CONCRETE PAVEMENT AND AS PART OF THE CATCH BASIN IN ASPHALTIC CONCRETE PAVEMENT WITH NO REDUCTION IN PAVEMENT OR CURB QUANTITY BECAUSE OF CASTING.
- FOR FULL WIDTH ASPHALTIC CONCRETE PAVEMENT- CONSTRUCT A PORTLAND CEMENT CONCRETE APRON.
- MINIMUM WALL THISKNESS B" FOR CAST IN PLACE AND 6" FOR PRECAST



DEPARTMENT OF PUBLIC SERVICE DIVISION OF ENGINEERING & CONSTRUCTION JONARIE WASIK-DIRECTOR OF PUBLIC SERVICE STANDARD CONSTRUCTION DRAWING STANDARD RECTANGULAR PRECAST CONCRETE INLET BASIN NOT TO SCALE

DRAWN BY: R. PLIODZINSKAS

DATE: 4/8/08

DATE: 4/8/08

DATE: 7-8-09

COMMISSIONER OF ENGINEERING & CONSTRUCTION

FILE NO. CB-1

SHEET 2/7

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

BAR IS ONE INCH ON ORIGINAL DRAWING

DESIGNED BY: SHEET CHK'D BY:. CROSS CHK'D BY: APPROVED BY:





onginally issued by WALWORTH RUN INTERCEPTOR XXXXXXXXXXX XXXXXXXXXXXX on XXXXX/09. This REALIGNMENT considered a sealed

This document was

document is not

document.


CITY OF CLEVELAND **INLET BASIN DETAIL**


(27)

PROJECT NO.: SHEET:

SCALE: NONE

SHEET NO.: C-15

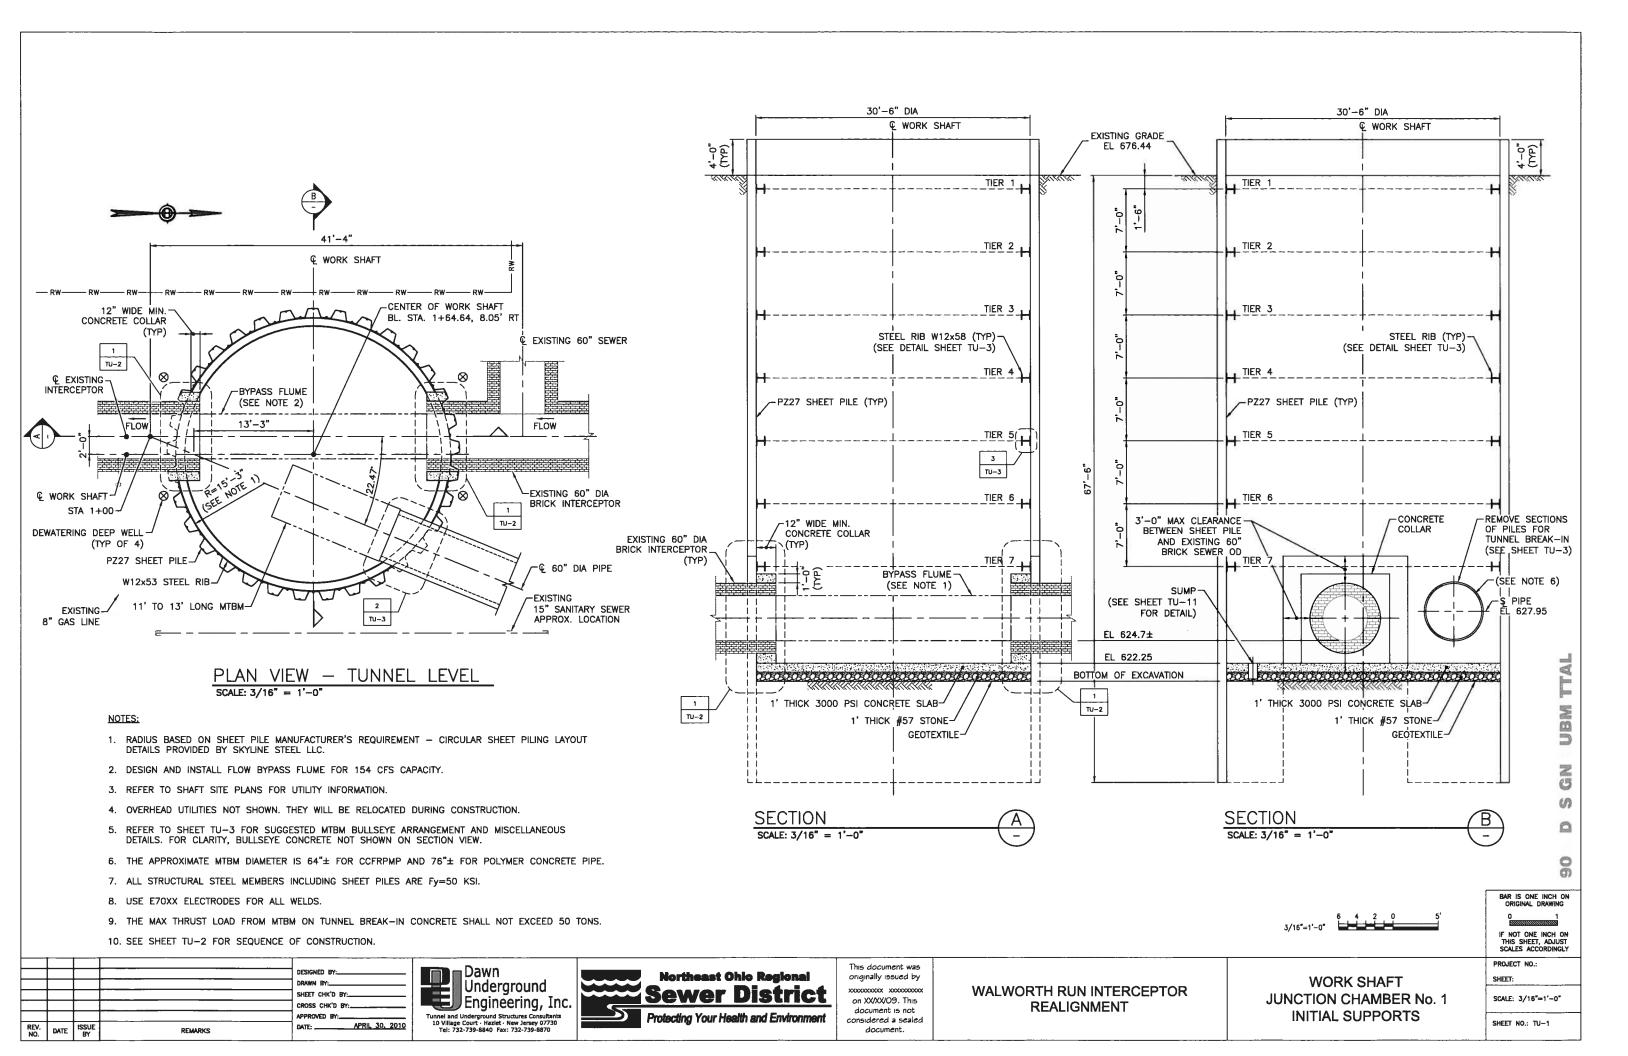

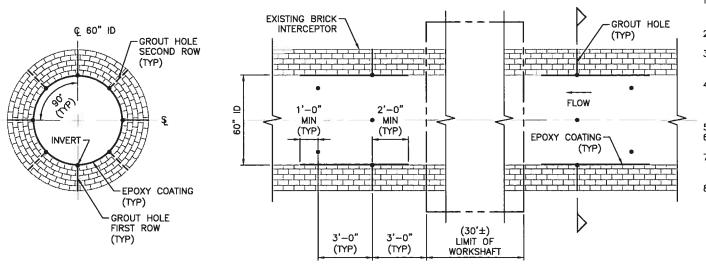

NOTE: GROUT HOLE PATTERN FOR CUT-OFF & CONTACT GROUTING FROM EXISTING INTERCEPTOR.

GROUT HOLE PATTERN

SCALE: 3/8" = 1'-0"

SEQUENCE OF CONSTRUCTION FOR WORK SHAFT AT JUNCTION CHAMBER NO. 1

1. INSTALL SHEET PILES TO THE DEPTH SHOWN. IN PROXIMITY OF THE EXISTING INTERCEPTOR, TERMINATE THE SHEET PILES MINIMUM THREE (3) FEET ABOVE AND ON BOTH SIDES OF THE INTERCEPTOR'S EXTERIOR LIMITS.

2. INSTALL SECOND (OUTER) ROW OF SHEET PILES AT THE TUNNEL BREAK-IN LOCATION WITHIN LIMITS INDICATED.

FROM WITHIN THE INTERIOR OF THE EXISTING INTERCEPTOR PERFORM CUT-OFF /CONTACT GROUTING OF THE INTERCEPTOR'S EXTERIOR IN A PATTERN SHOWN

INSTALL DEWATERING DEEP WELLS. LOCATE THE WELLS AS CLOSE AS PRACTICAL TO THE EXTERIOR OF THE SHEET PILING AND THE EXISTING INTERCEPTOR TO MINIMUM DEPTH OF TEN (10) FEET BELOW THE LIMIT OF EXCAVATION WITHIN THE WORK SHAFT.

START OPERATING DEWATERING WELLS ON 24 HOURS/DAY 7 DAYS/WEEK BASIS. EXCAVATE WORK SHAFT TO MAXIMUM OF 2 FEET DEPTH BELOW TIER 1 LEVEL

AND INSTALL TIER 1 STEEL SUPPORTS.

CONTINUE TO EXCAVATE SHAFT IN STEPS TO MAXIMUM OF 2 FEET DEPTH BELOW EACH TIER LEVEL AND SUBSEQUENTLY INSTALL EACH TIER STEEL

SUPPORTS (FROM TIER 2 THROUGH TIER 6).
AFTER INSTALLATION OF THE TIER 6, CONTINUE TO EXCAVATE THE SHAFT TO A
MAXIMUM OF 2 FEET DEPTH BELOW TIER 7 LEVEL. DURING THE EXCAVATION EMPLOY STEEL POLLING AND LAGGING PLATES TO COVER THE GAP AND TO CONTROL SOIL INFLOW FROM WITHIN THE GAP BETWEEN THE SHEET PILING AND THE OUTSIDE OF EXISTING INTERCEPTOR. DRIVE THE PLATES BELOW THE EXCAVATION TO MAINTAIN STABLE CONDITIONS AT ALL TIMES. WELD STEEL POLING/LAGGING PLATES TOGETHER AND TO SHEET PILING TO COMPLETELY CLOSE THE GAP. INSTALL TIER 7 STEEL SUPPORTS (STEEL RIB WALER).

CONTINUE TO EXCAVATE THE SHAFT TO THE SPRING LINE LEVEL OF THE EXISTING INTERCEPTOR BY INSTALLING STEEL LAGGING/POLING PLATES WITHIN THE GAP BETWEEN THE SHEET PILING AND EXISTING INTERCEPTOR TO CONTROL SOIL AND WATER INFILTRATION. PROVIDE WATER TIGHT SEAL AND FILL VOIDS IN THIS AREA BY EMPLOYING FOAM, CHEMICAL AND OTHER GROUTING METHODS. WELD ALL STEEL PLATES TOGETHER AND TO SHEET PILES.

10. DURING LOW FLOW CONDITION, SAW CUT THE INTERCEPTOR UP TO ITS SPRING LINE AT FUTURE CONCRETE COLLAR LIMIT AND DEMOLISH AND REMOVE THE TOP HALF OF EXISTING INTERCEPTOR. PROVIDE A FLOW BYPASS SYSTEM FOR

THE SEWER FLOW.

11. CONTINUE TO EXCAVATE THE SHAFT TO THE BOTTOM OF THE EXCAVATION BY INSTALLING STEEL LAGGING/POLING PLATES WITHIN THE GAP BETWEEN THE SHEET PILING AND EXISTING INTERCEPTOR TO CONTROL SOIL AND WATER INFILTRATION. PROVIDE WATER TIGHT SEAL AND FILL VOIDS IN THIS AREA BY EMPLOYING FOAM, CHEMICAL AND OTHER GROUTING METHODS. WELD ALL STEEL PLATES TOGETHER AND TO SHEET PILES.

DEMOLISH BOTTOM HALF (BELOW SPRING LINE) OF THE EXISTING INTERCEPTOR. PROVIDE SUPPORT TO FLOW BYPASS SYSTEM AS NECESSARY. INSTALL STEEL POSTS ON BOTH SIDES OF THE EXISTING SEWER FROM TIER 7 INTO FUTURE CONCRETE SLAB AS SHOWN ON THE DRAWINGS. CLEAN THE BOTTOM OF EXCAVATION AND PLACE GEOTEXTILE, CRUSHED STONE BASE AND CONCRETE

13. PROVIDE SUMP PIT AS SHOWN ON THE DRAWINGS. PLACE CONCRETE COLLAR AROUND THE EXISTING INTERCEPTOR. ALLOW THE CONCRETE SLAB AND COLLAR TO GAIN THE DESIGN STRENGTH. STOP OPERATING DEWATERING WELLS. IF THE AREA AROUND THE EXISTING INTERCEPTOR SHOWS LEAKAGE. CORRECT THE PROBLEM BY WELDING, GROUTING AND SEALING UNTIL TOTAL STABILITY IS

. CONTINUOUSLY PUMP OUT THE WATER FROM THE SUMP PIT FOR THE ENTIRE DURATION OF WORK.


PROCEDURE FOR BREAK-IN FOR DRIVE 1

- 15. PLACE SUITABLE GROUT BETWEEN THE TWO ROWS OF SHEET PILING AT TUNNEL BREAK-IN LOCATION TO PREVENT GROUNDWATER OR SOIL INFILTRATION WHEN MAIN SHEET PILES ARE CUT FOR MICROTUNNEL BORING MACHINE (MTBM) BULL'S
- 16. TEST THE BULL'S EYE AREA FOR WATER TIGHTNESS BY DRILLING TEST PORTS. PROVIDE ADDITIONAL GROUTING AS NECESSARY TO ELIMINATE ANY LEAKAGE WHEN ACCEPTABLE, CUT THE MAIN SHEET PILES (INSTALLED FOR THE SHAFT) IN THE MICROTUNNEL BREAK-IN AREA (BULL'S EYE). IF DURING CUTTING OF SHEET PILES, GROUNDWATER OR SOIL INFILTRATION IS OBSERVED, PROVIDE SECONDARY GROUT TO COMPLETELY SEAL THE BULL'S EYE ZONE AS NECESSARY. APPLY A BOND BREAKER AGAINST SHEET PILES IN THE BULL'S EYE ZONE.

. PLACE CONCRETE FOR AND INSTALL STEEL BULL'S EYE SEAL PLATE AT THE TUNNEL BREAK—IN FOR DRIVE 1. ALLOW THE CONCRETE TO GAIN THE DESIGN STRENGTH. PULL THE SECOND (OUTER) ROW OF SHEET PILES JUST ENOUGH TO

CLEAR THE MICROTUNNEL BORING MACHINE (MTBM) FOR DRIVE 1.

18. RECEIVE THE MTBM IN THE SHAFT AND GROUT THE ANNULUS AROUND THE CARRIER PIPE THROUGH THE PIPE GROUT PORTS BEFORE THE SEALS ARE

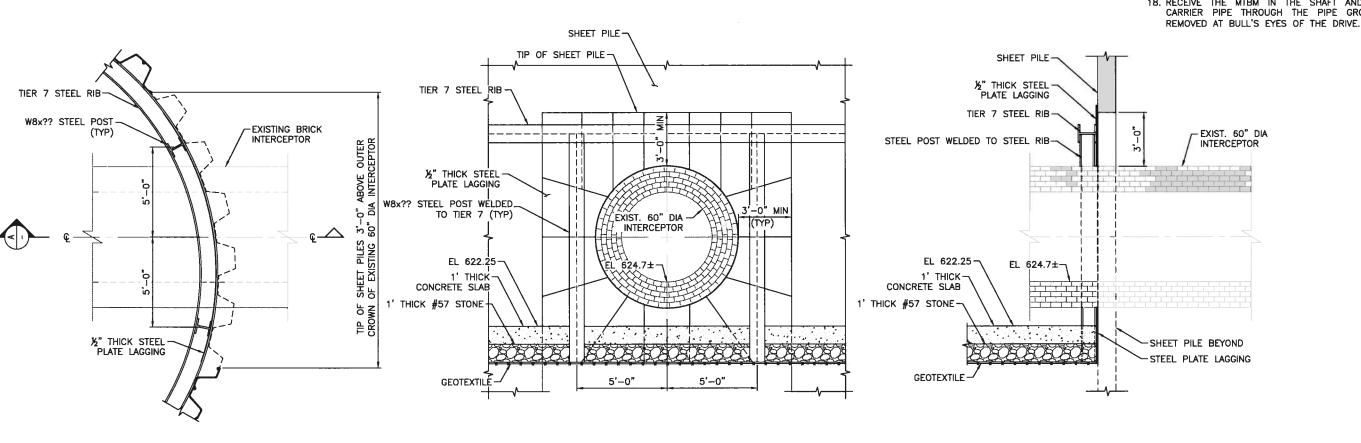

FRONT ELEVATION

SCALE: 3/8" = 1'-0'

SECTION SCALE: 3/8" = 1'-0'

BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

SUBMITTAL

DES GN

0

SHEET CHK'D BY:. CROSS CHK'D B APRIL 30, 2010

PLAN VIEW

SCALE: $3/8^{\circ} = 1'-0'$






originally issued by on XXXXXVO9. This document is not considered a sealed document.


WALWORTH RUN INTERCEPTOR REALIGNMENT

JUNCTION CHAMBER No. 1 SUPPORTS AT EXISTING **INTERCEPTOR**


PROJECT NO .: SHEET: SCALE: 3/16"=1'-0"


SHEET NO .: TU-2

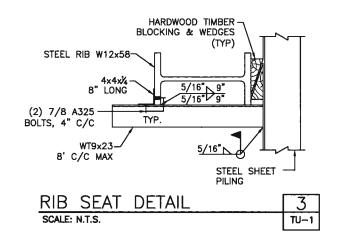

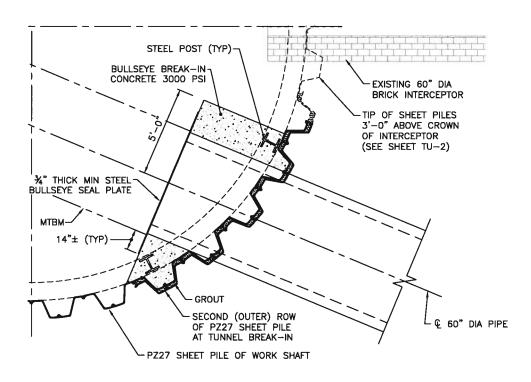



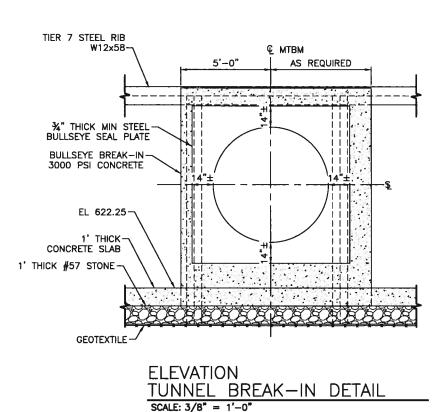

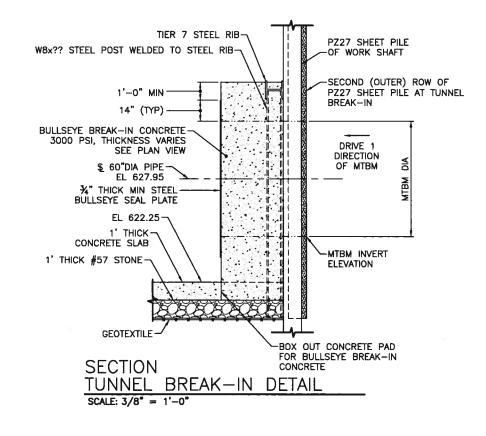

NOTE:
NO DEWATERING IS REQUIRED FOR TUNNEL BREAK-IN.

3/8"=1'-0" 12" 0 1 2 4'


90% DESIGN SUBMITTAL








WALWORTH RUN INTERCEPTOR REALIGNMENT


JUNCTION CHAMBER No. 1 BULLSEYE AND MISCELLANEOUS DETAILS PROJECT NO.:
SHEET:
SCALE: 3/16"=1'-0"

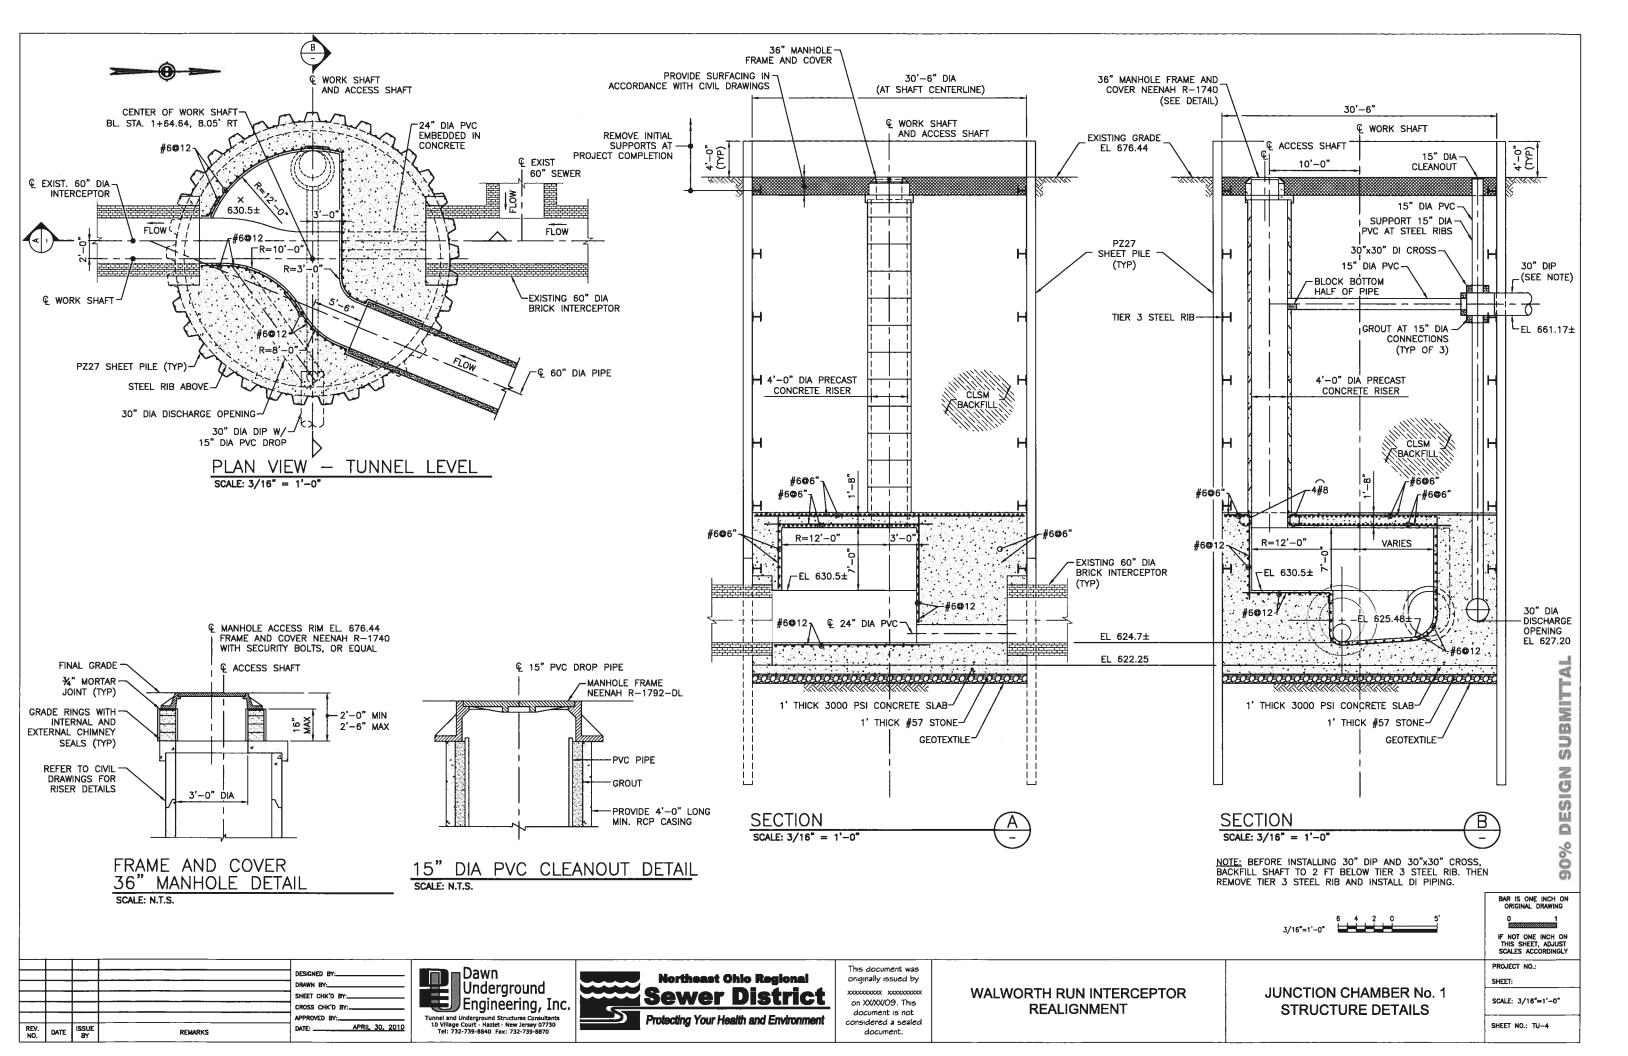


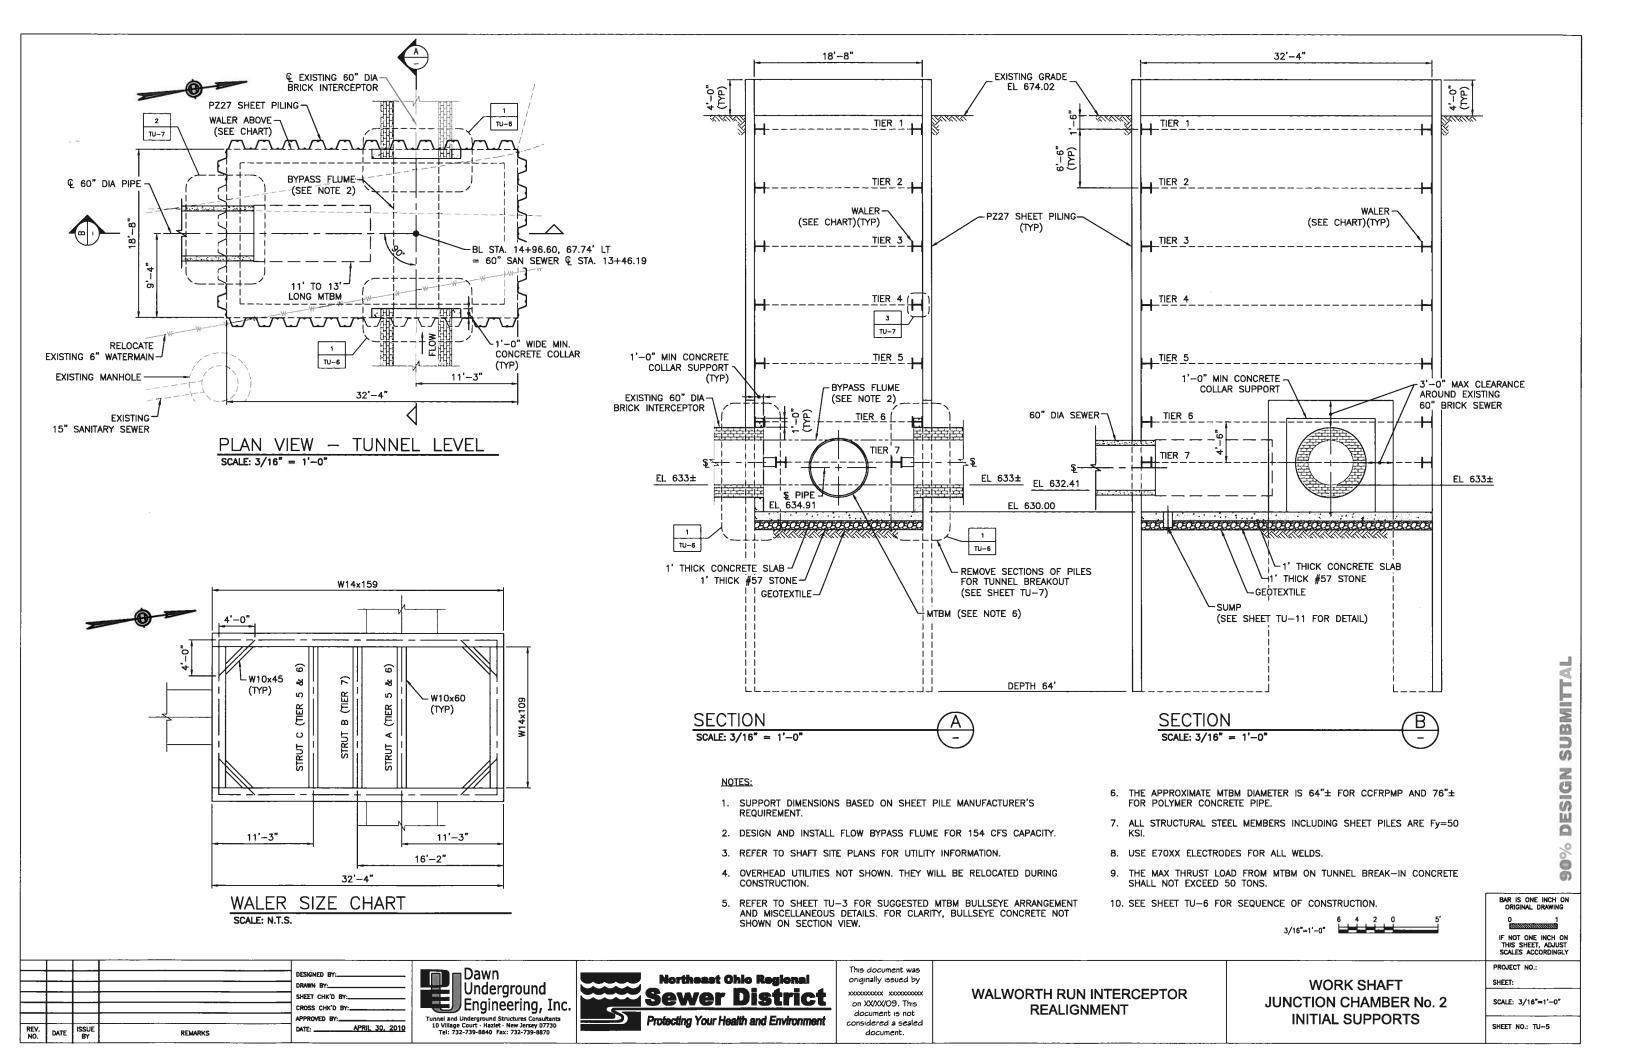

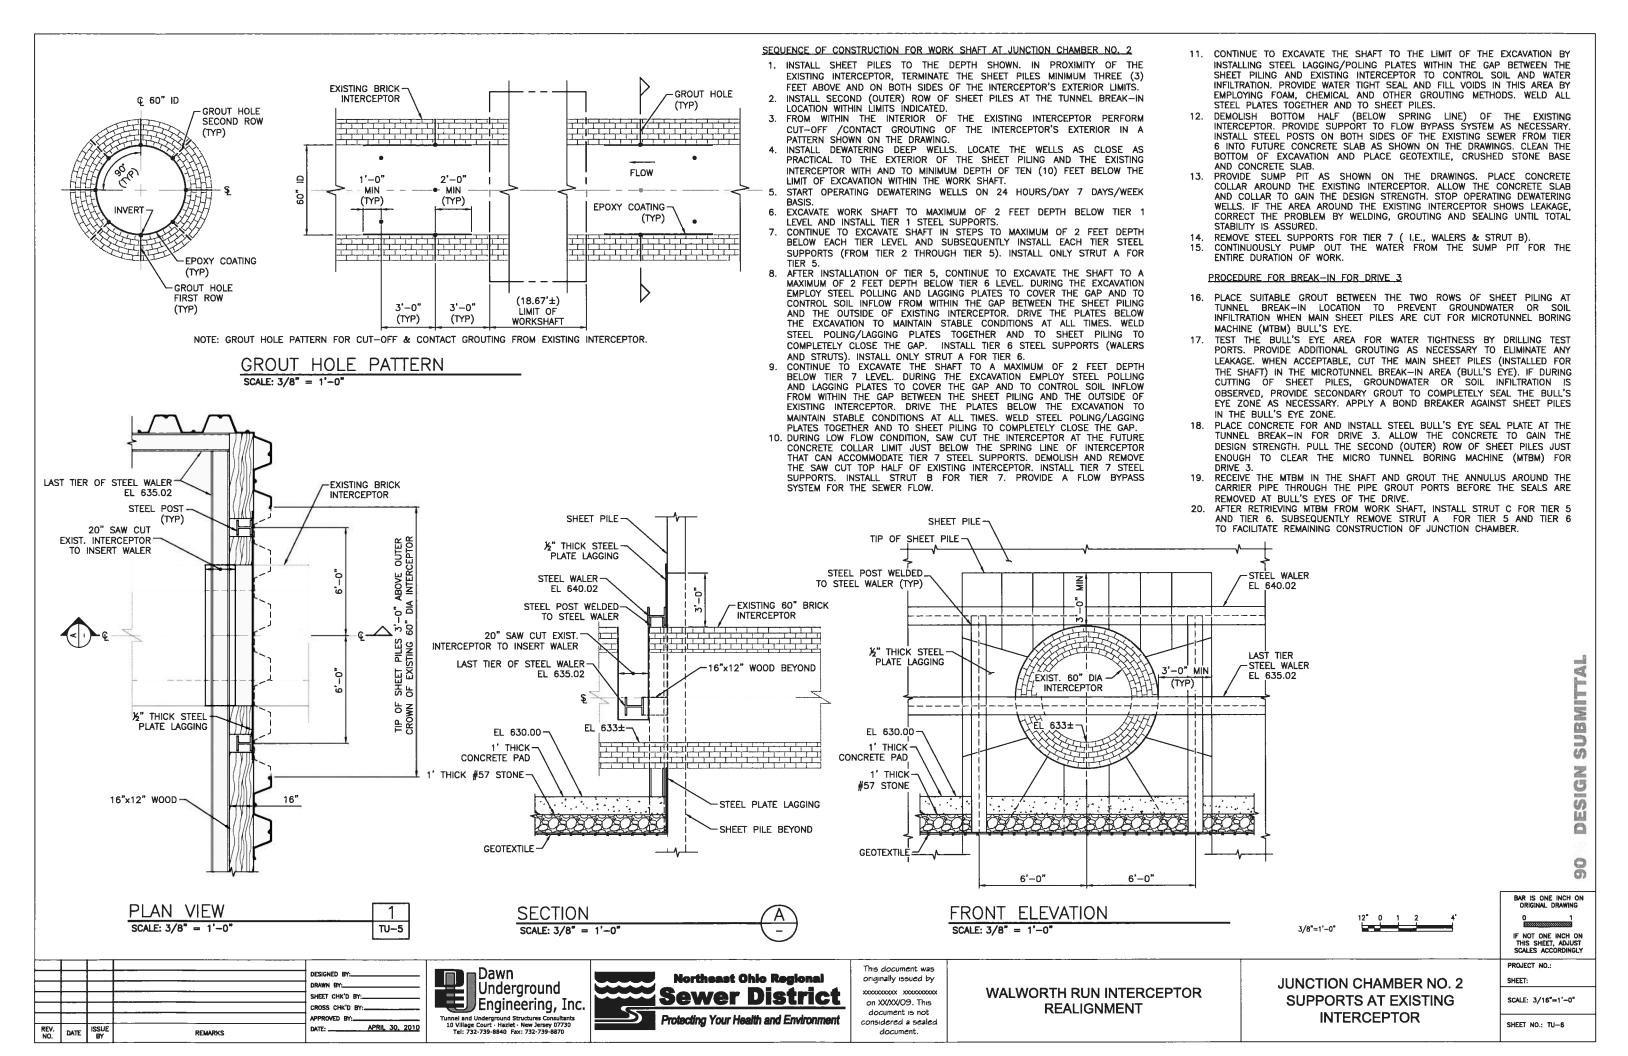

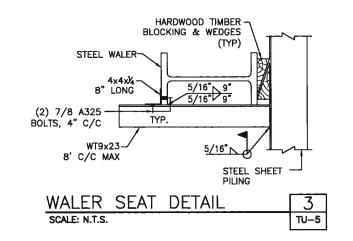

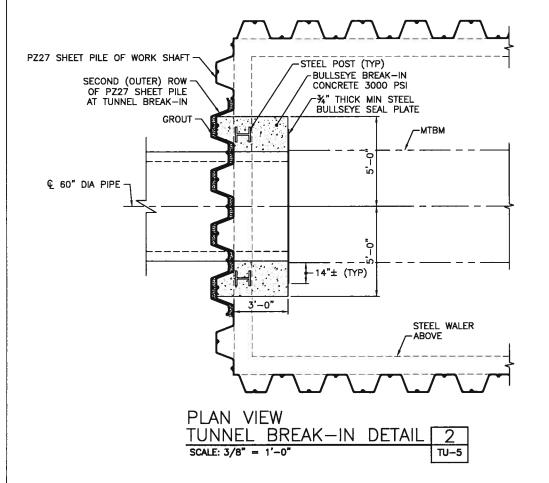


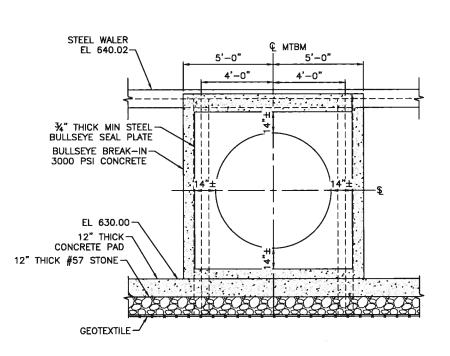

ELEVATION
TUNNEL BREAK-IN DETAIL

SCALE: 3/8" = 1'-0"

NOTE: NO DEWATERING IS REQUIRED FOR TUNNEL BREAK-IN.

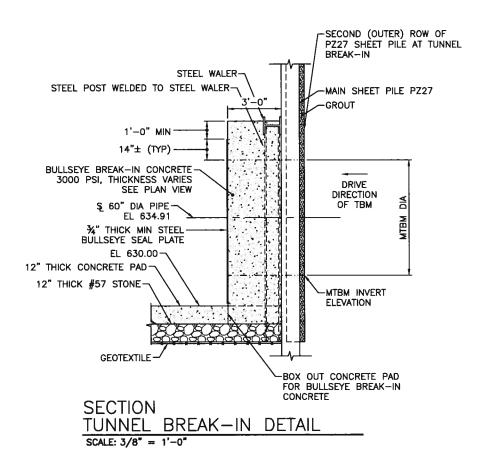



BAR IS ONE INCH ON ORIGINAL DRAWING

O 1
SIMPLE STATE OF THE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

90% DESIGN SUBMITTAL

| DESIGNED BY:
| DRAWN BY:
| SHEET CHK'D BY:
| CROSS CHIK'D BY:
| APPROVED BY:
| APPROVED BY:
| APRIL 30, 2010





WALWORTH RUN INTERCEPTOR REALIGNMENT

JUNCTION CHAMBER No. 2
BULLSEYE AND MISCELLANEOUS
DETAILS


SCALES ACCORDI


PROJECT NO.:


SHEET:

SCALE: 3/16"=1'-0"


SHEET NO.: TU-7

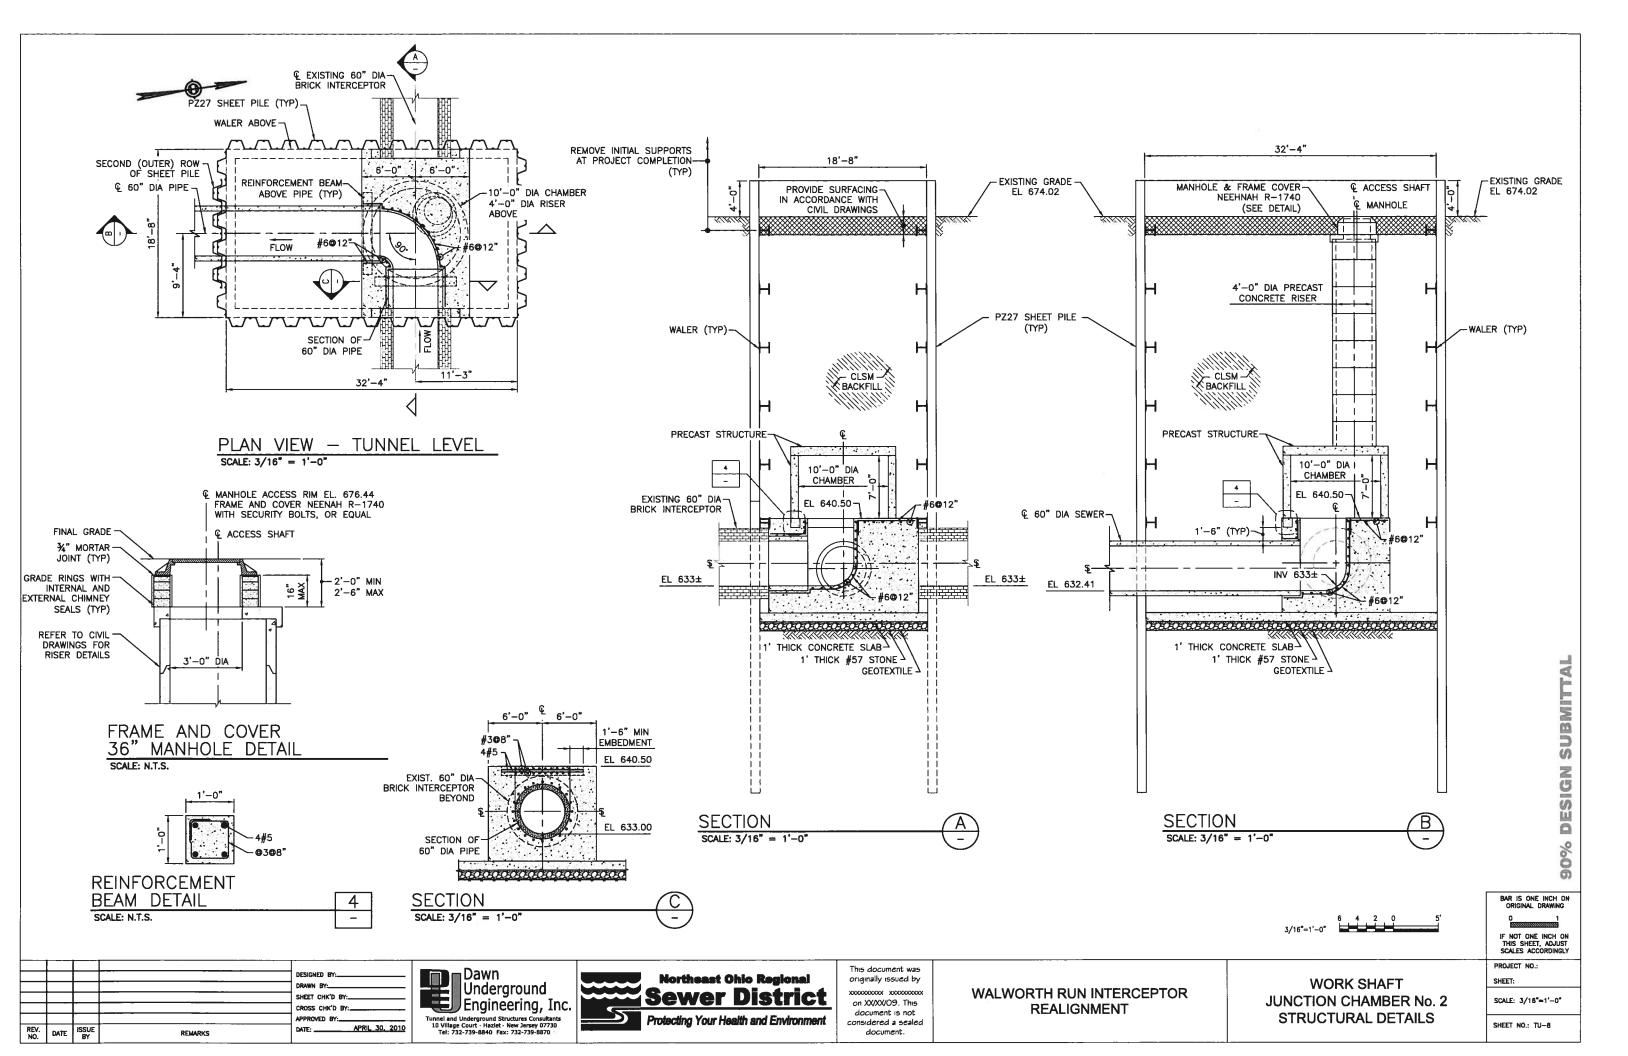

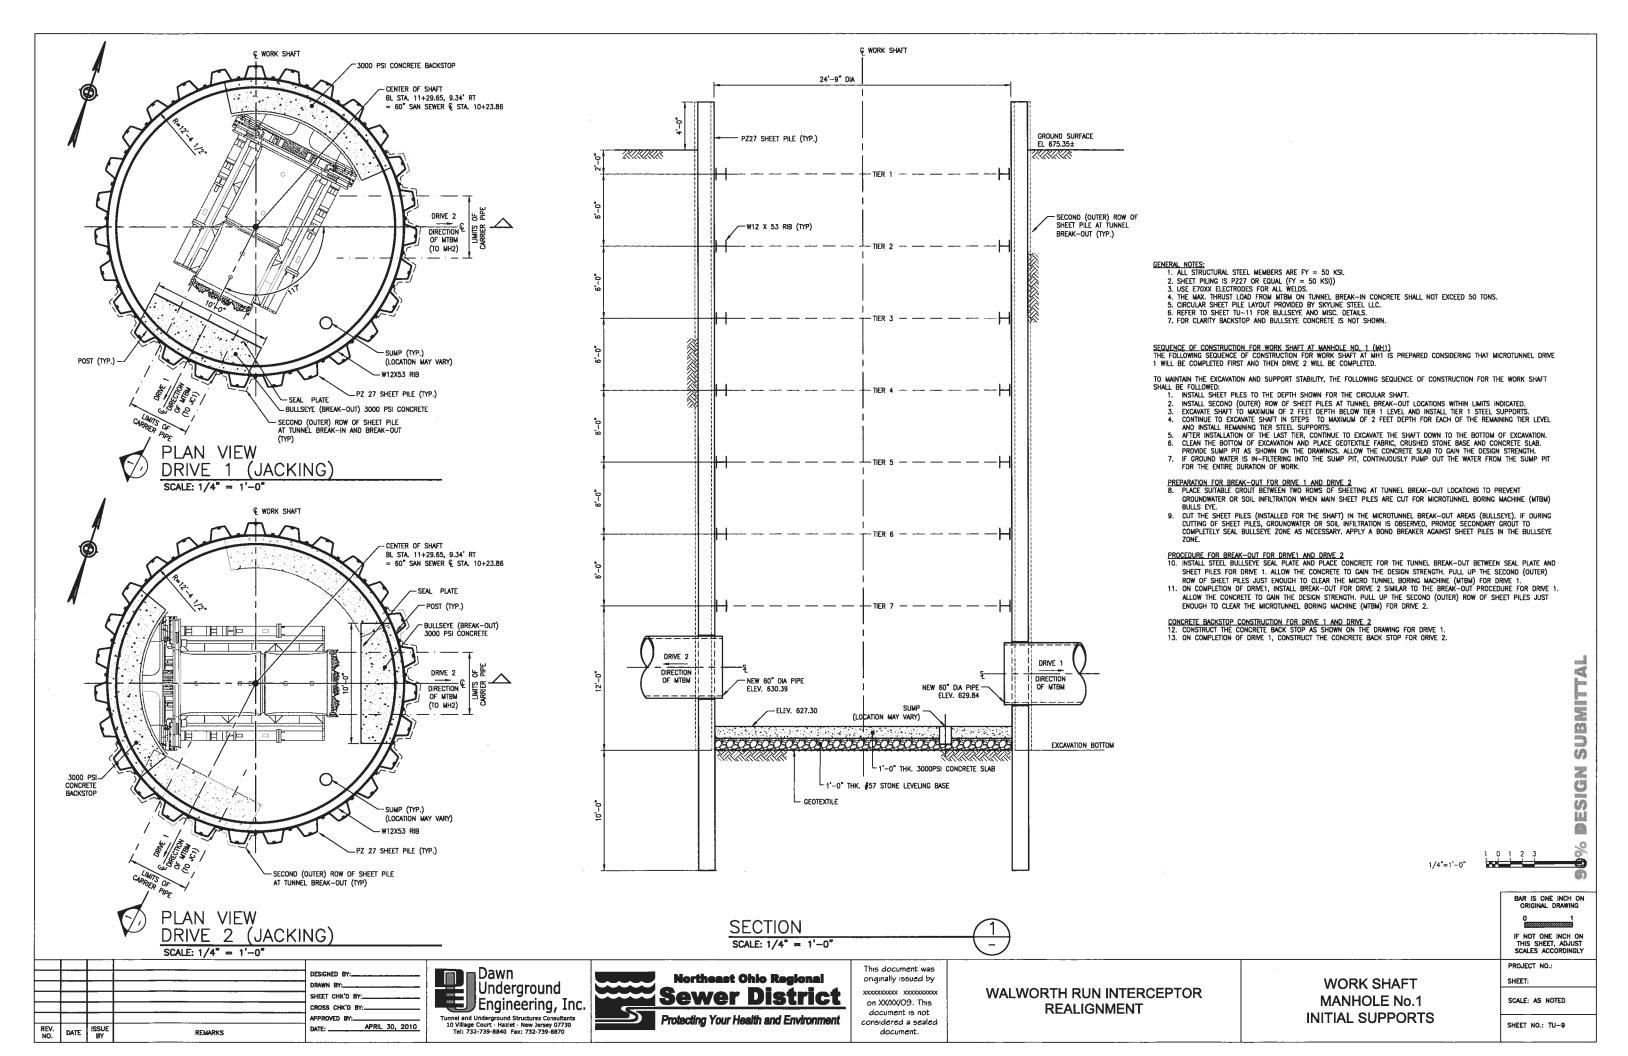

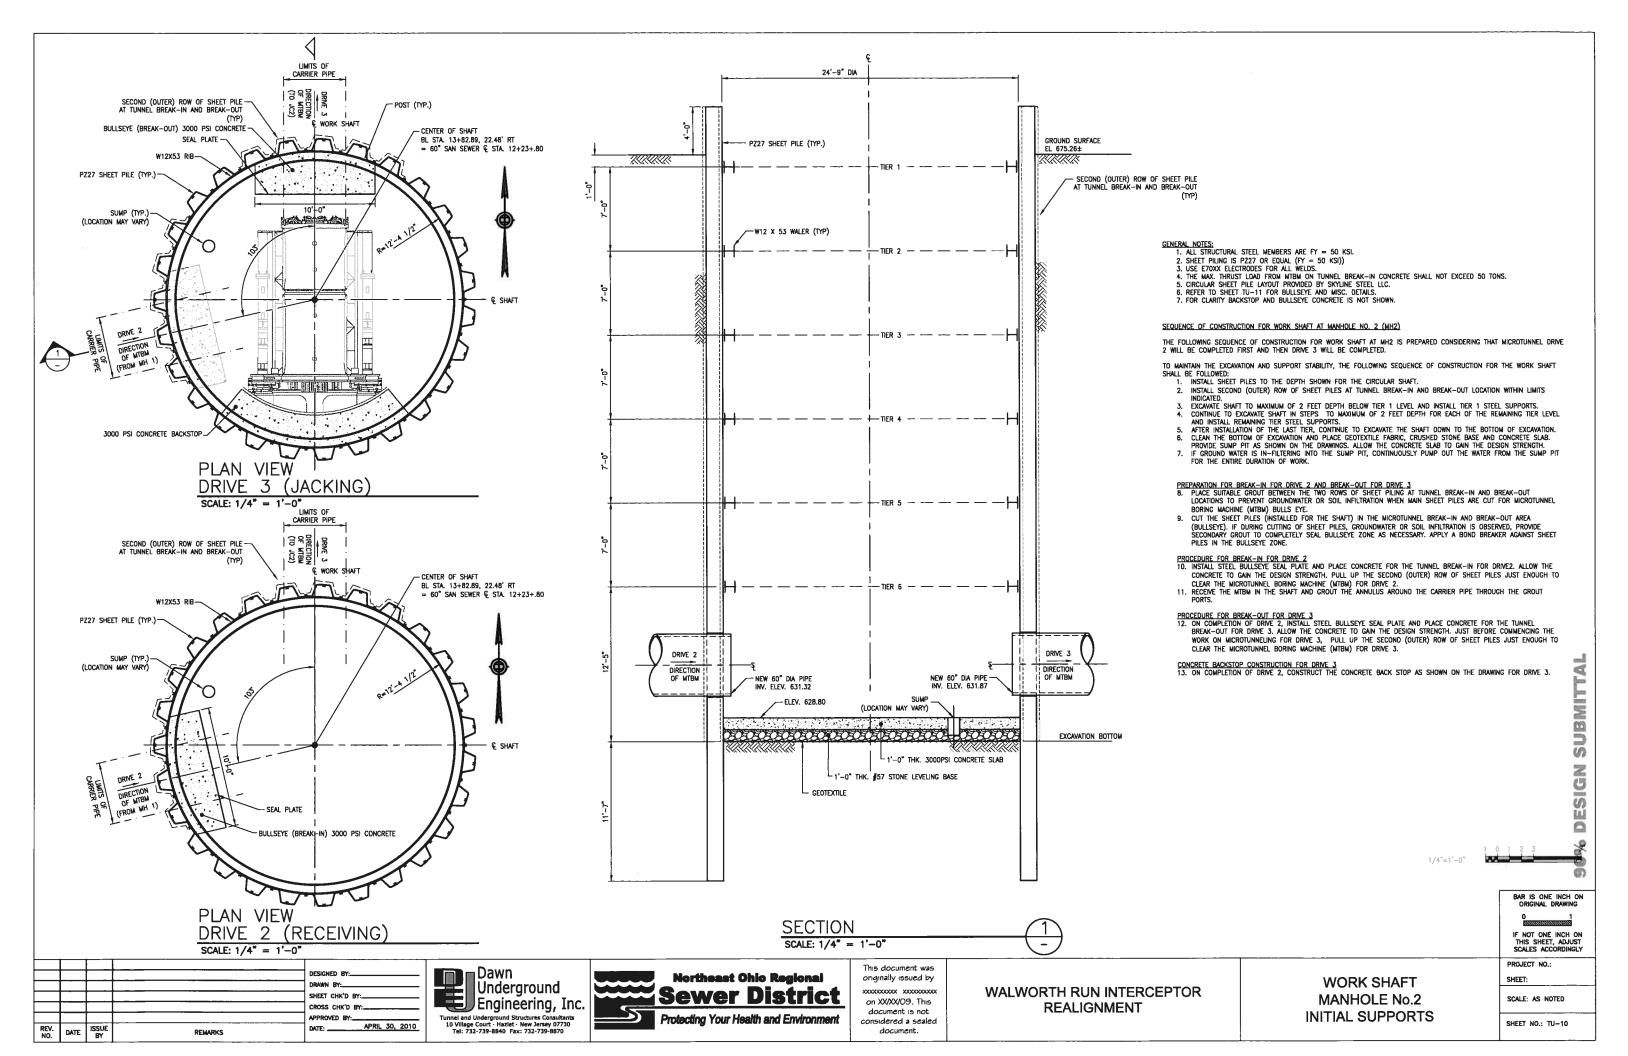



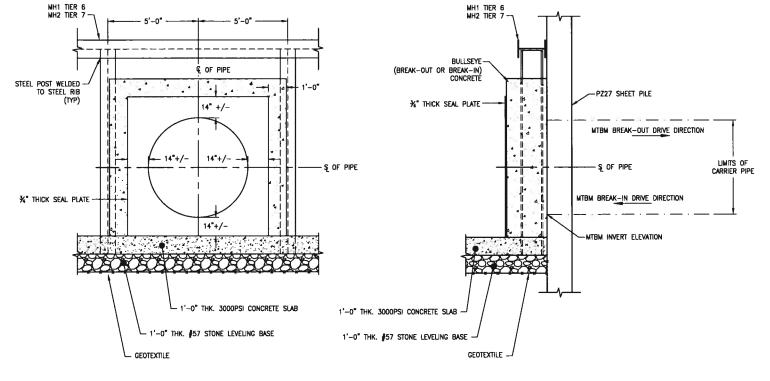


BULLSEYE DETAIL SCALE: N.T.S.


SHEET CHK'D BY:

DATE ISSUE BY

REMARKS

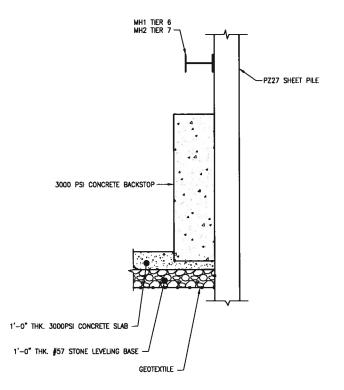

BACKSTOP DETAIL SCALE: N.T.S.



MANHOLE No. 1 AND MANHOLE No. 2

BREAK-IN, BREAK-OUT, BACKSTOP

AND SUMP DETAILS

SUMP DETAIL SCALE: N.T.S.

BAR IS ONE INCH ON ORIGINAL DRAWING

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO .:

SCALE: AS NOTED


SHEET NO.: TU-11

Dawn Underground Engineering, Inc.



originally issued by on XX/XX/09. This document is not considered a sealed

WALWORTH RUN INTERCEPTOR REALIGNMENT

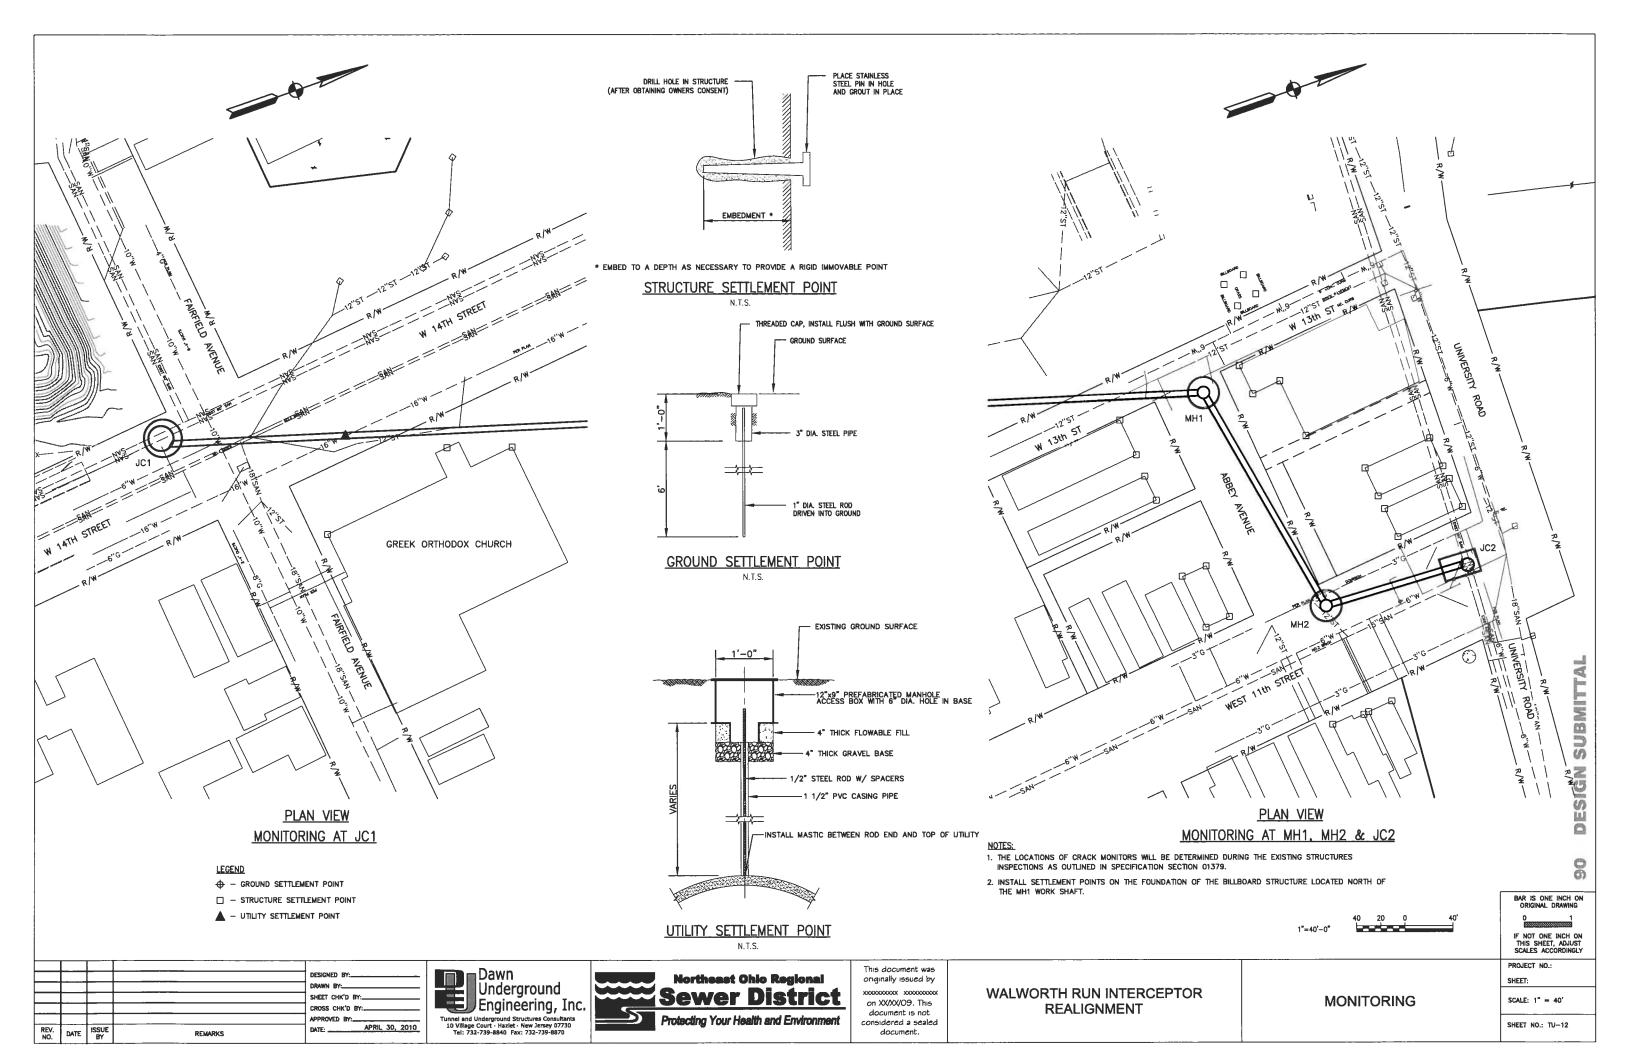

GENERAL

- QUALITY OF CONSTRUCTION REQUIRED, PERFORMANCE LEVELS OF WORMANSHIP, MANUFACTURING AND INDUSTRY STANDARDS, STRENGTH AND PHYSICAL REQUIREMENTS OF MATERIALS, CONFORMANCE TO CODES AND REGULATIONS, GUARANTEES AND OTHER PROJECT REQUIREMENTS ARE SPECIFIED IN THE SPECIFICATIONS.
- 2. IF MATERIALS, QUANTITIES, STRENGTHS OR SIZES INDICATED BY THE DRAWINGS OR SPECIFICATIONS ARE NOT IN AGREEMENT WITH THESE NOTES, THE BETTER QUALITY AND/OR GREATER QUANTITY, STRENGTH OR SIZE INDICATED, SPECIFIED, OR NOTED SHALL BE PROVIDED.
- 4. IT IS SOLELY THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE ERECTION PROCEDURE AND SEQUENCE TO ENSURE THE SAFETY OF THE STRUCTURE AND ITS COMPONENT PARTS DURING ERECTION. THIS INCLIDES, BUT IS NOT LIMITED TO, THE ADDITION OF WHATEVER TEMPORARY BRACING, GUYS OR TIE-DOWNS THAT MAY BE NECESSARY. SUCH TEMPORARY MATERIAL SHALL BE REMOVED AND SHALL REMAIN THE PROPERTY OF THE CONTRACTOR AFTER COMPLETION OF THE PROJECT.
- 5. FACILITIES HAVE BEEN DESIGNED FOR DESIGN LOADS SHOWN OR SPECIFIED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FACILITIES SUBJECT TO CONSTRUCTION LOADS EXCEEDING THE DESIGN LOADS AND SHALL NOTIFY THE ENGINEER OF ANY SUCH ADDITIONAL LOADS.
- 6. DURING CONSTRUCTION, STRUCTURE MAY BE BUOYANT WHEN EMPTY. IN THE EVENT THAT THE EXCAVATION BECOMES FLOODED OR THE SURROUNDING GROUND BECOMES SATURATED, ALL NECESSARY PRECAUTIONS SHALL BE TAKEN TO PREVENT FLOATATION OF THE STRUCTURE.

FOUNDATIONS

- THE CONTRACTOR SHALL BECOME FAMILIAR WITH THE SURVEY AND THE SUBSURFACE INVESTIGATION REPORT BEFORE BEGINNING CONSTRUCTION.
- NOTIFY THE ENGINEER AS SOON AS POSSIBLE OF ANY UNUSUAL SOLI CONDITIONS, OR SOIL CONDITIONS IN VARIANCE WITH TEST BORNINGS, SUCH AS UNEXPECTED SPRING OR SEEPAGE WATER, MATERIAL DIFFERING FROM TEST BORNINGS, OR SOIL OF QUESTIONABLE BEARING
- 3. SET FOUNDATIONS AT FLEVATIONS SHOWN. THE CONTRACTOR SHALL VERIFY WITH THE ENGINEER THAT EACH FOOTING PLACED IS BEARING ON DESIGN MATERIAL.
- 4. LEVELS OF BACKFILL AGAINST CONCRETE WALLS SHALL NOT DIFFER BY MORE THAN 2"-0" ON EITHER SIDE OF WALLS LUNESS ADEQUATELY BRACED OR ALL FLOOR FRAMING IS IN PLACE UP TO AND INCLUDING GRADE LEVEL

STANDARD HOOKS

UNLESS OTHERWISE SHOWN OR NOTED, ALL 90', 135' AND 180' HOOKS FOR REINFORCING SHALL BE IN ACCORDANCE WITH THE STANDARD HOOK DETAILS SHOWN IN ACI DETAILING MANUAL

CAST-IN-PLACE CONCRETE

CONCRETE SHALL HAVE THE FOLLOWING MINIMUM COMPRESSIVE STRENGTH AT 2B DAYS:

+3,000 psi

-5,000 psl

- 2. ALL CONCRETE WORK NOT COVERED UNDER ACI 350 SHALL BE IN ACCORDANCE WITH "THE BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE" ACI 318. TOLERANCES SHALL BE IN ACCORDANCE WITH ACI 347, SECTION 3.3.1, TOLERANCES FOR REINFORCED CONCRETE BUILDING.
- ALL REINFORCING STEEL SHALL BE NEW DOMESTIC DEFORMED BILLET STEEL CONFORMING TO ASTM-615 GRADE 60.
- 4. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A-185 DELIVERED IN FLAT SHEETS.
- 5. ALL REINFORCING DETAILS SHALL CONFORM TO "DETAILS AND DETAILING OF CONCRETE REINFORCEMENT", ACI 315, UNILESS DETAILED OTHERWISE ON THE STRUCTURAL
- 8. CONTRACTOR SHALL REVIEW ALL DRAWINGS FOR SIZE AND LOCATION OF EMBEDDED ITEMS, SLEEVES, SLAB DEPRESSIONS. THESE ITEMS SHALL BE FURNISHED AND INSTALLED PRIOR TO PLACEMENT OF CONCRETE.
- WHERE BAR LENGTHS ARE GIVEN ON THE DRAWINGS, THE LENGTH OF ANCHOR HOOK, IF REQUIRED, IS NOT INCLUDED.
- B. ALL BEAMS, SPANDRELS AND SLABS SHALL BE CAST MONOLITHICALLY, EXCEPT FOR REQUIRED CONSTRUCTION JOINTS. CONTRACTOR SHALL SUBMIT ANY AND ALL ALTERNATE AND ADDITIONAL CONSTRUCTION JOINT LOCATIONS AND DETAILS.
- 9. CONSTRUCTION JOINTS REQUIRED BY THE ENGINEER ARE SHOWN ON THE DRAWNOS. ADDITIONAL CONSTRUCTION JOINTS SHALL BE PROVIDED AS QUITLINED IN SPECIFICATIONS. REINFORCEMENT SHALL BE CONTINUOUS ACROSS CONSTRUCTION JOINTS. SUBBIT ALL CONSTRUCTION JOINTS. SUBBIT ALL CONSTRUCTION GUNT LOCATIONS WITH REINFORCING STEEL
- 10. CONTRACTOR SHALL PROVIDE % INCH CHAMFER USING WOOD CHAMFER STRIPS ON ALL EXPOSED CORNERS OF COLUMNS, BEAMS AND WALLS, OR AS REQUIRED TO MATCH EXISTING.

- PROVIDE WATERSTOPS AT ALL CONSTRUCTION JOINTS IN SLABS AND WALLS.
 PROVIDE 6* WIDE PVC WATERSTOP AT ALL HORIZONTAL AND VERTICAL CONSTRUCTION JOINTS IN SLABS AND WALLS OF NEW CONCRETE CONSTRUCTION.
 - CONSTRUCTION.

 PROVIDE BENTONITE (HYDROPHILIC) WATERSTOP AT PIPE-WALL-PENETRATIONS, PRECAST CONCRETE RISERS AND AT JOINTS BETWEEN EXISTING STRUCTURE AND NEW CONCRETE CONSTRUCTION.
- 13. ALL EXPANSION JOINTS SHALL HAVE WATERSTOPS, UNLESS NOTED OTHERWISE.
- 14. WELDING OF REINFORCING STEEL IS NOT PERMITTED, UNLESS SPECIFICALLY SHOWN ON THE DRAWINGS.
- 15. CALCIUM CHLORIDE SHALL NOT BE PERMITTED NOR SHALL ANY ADMIXTURE CONTAINING CALCIUM CHLORIDE BE PERMITTED THAT RESULTS IN A TOTAL CONCRETE MIX IN WHICH THE PRESENCE OF CHLORIDE IONS EXCEED 0.15 PERCENT BY WEIGHT OF CEMENT.
- 16. CONCRETE SHALL BE DISCHARGED AT THE SITE WITHIN 90 MINUTES AFTER WATER HAS BEEN ADDED TO THE CEMENT AND AGGREGATES. ADDITION OF WATER TO THE MIX AT THE PROJECT SITE WILL NOT BE ALLOWED. ALL WATER MUST BE ADDED AT THE BATCH PLANT.
- 17. REINFORCING BARS REQUIRED FOR PROPER SUPPORT OF PRINCIPAL REINFORCING SHALL BE DETAILED AND SUPPLIED BY THE CONTRACTOR WHETHER OR NOT THEY ARE INDICATED ON THE DRAWINGS.
- 18. ONLY MOISTURE CURING METHODS SHALL BE USED ON CONCRETE WHICH WILL BE COVERED WITH WATERPROOFING SYSTEM, A CONCRETE TOPPING, OR A MATERIAL SET IN A MORTAR BED, BOTH OF WHICH REQUIRE A BOND TO THE FIRST CAST CONCRETE.
- 19. REINFORCING BAR LAP SPLICES AND ANCHORAGE LENGTH SHALL CONFORM WITH "LAP SPLICE AND EMBEDMENT LENGTH TABLE".
- 20. POSITIVE CONNECTION SPLICES: MECHANICAL CONNECTIONS SHALL DEVELOP 125 PERCENT OF THE YELD STRENGTH OF THE REINFORCING BAR. ALL SPLICES WILL BE VISUALLY INSPECTED BY THE ENGINEER TO VERIFY THAT THE SPLICE HAS BEEN MADE PROPERLY.
- 21. BOND BREAKER MATERIAL SHALL BE 15 POUNDS FELT PAPER, UNLESS NOTED OTHERWISE.


REINFORCEMENT BAR DEVELOPMENT


UNLESS OTHERWISE INDICATED ON THE DRAWINGS,
 REINFORCING BARS SHALL BE DEVELOPED AND/OR SPLICED
 N ACCORDANCE WITH THE FOLLOWING TABLE:


	MIN. LAP LENGTHS MIN. LAP LENGTHS FOR BEAMS * SLABS AND WALLS **			LENGTHS FOR	MIN. LAP	MIN. E.	MIN. EMBEDMENT LENGTHS			MINL STD. HOOKS		
BAR				ND WALLS **	LENGTHS				90.	13	5.	
SIZE	CL	ASS B	CLAS	S B	FOR	STRAIGHT BARS*		STANDARD		A 0D 0		
	TOP***	OTHERS	TOP***	OTHERS		TOP***	OTHERS	HOOKS	A UK G	A OR G	'	
#3	25	19	16	15	12	19	15	5	6	4	2.	
#	33	25	20	16	15	25	19	7	8	4.5	3	
# 5	41	31	25	19	19	31	24	9	10	5.5	3.	
#6	49	37	29	23	23	37	29	10	12	8	4.	
#7	71	54	43	33	27	54	42	12	14	9	5.	
#8	B1	62	49	37	30	62	48	14	16	10.5	6	
#9	91	70	60	48	34	70	54	15	19	-	-	
#10	102	79	74	57	39	79	61	17	22	_	Ξ	
#11	114	87	89	69	43	87	67	19	24	-	_	

DEINFORCEMENT LAD SOLICE EMPERMENT LENGTH AND STANDARD HOOKS

- 2. REINFORCEMENT LAP SPLICE, EMBEDMENT LENGTH AND STANDARD HOOKS TABLE IS BASED ON A MINIMUM CONCRETE COMPRESSIVE STRENGTH OF 4000 PSI AND 50,000 PSI REINFORCEMENT (WITH NO EPOXY COATING).
- 3. ALL LAP SPLICES SHALL BE CLASS B SPLICES.
- THE MINIMUM LAP LENGTH FOR BEAMS AND STRAIGHT EMBEDMENTS ARE BASED ON A 3 BAR DIAMETER MINIMUM CENTER TO CENTER BAR SPACING AND A 2 INCH BAR COVER. IF THE SPLICE AND/OR EMBEDMENT DOES NOT CONFORM TO THESE REQUIREMENTS, THEN CONTRACTOR SHALL APPLY APPROPRIATE FACTORS IN COMPLIANCE WITH ACI 318 WITH APPROVAL BY ENGINEER.
- THE MINIMUM LAP LENGTH FOR SLABS AND WALLS IS BASED ON A 6 INCH BAR SPACING AND A 2 INCH BAR COVER. IF THE LAP CONDITION DOES NOT CONFORM TO THESE REQUIREMENTS, THENUSE BEAM LAP LENGTHS; OR COMPLY WITH LAP REQUIREMENTS OF ACI 318 WITH APPROVAL BY ENGINEER.
- *** TOP BARS ARE DEFINED AS ALL HORIZONTAL BARS, EXCLUDING WALL BARS, WITH 12° OR MORE FRESH CONCRETE BENEATH.
- . Where splices are indicated between bars of different sizes, the splice length shal be based on the smaller bar size.



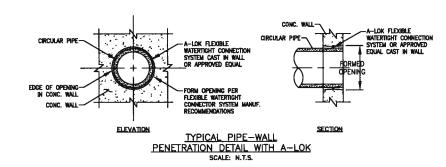


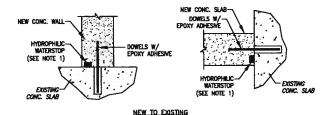


TYPICAL CONSTRUCTION JOINT DETAILS AT NEW TO EXISTING SCALE: N.T.S.

NOTES:

1. PROVIDE HYDROPHILIC WATERSTOP AT ALL NEW CONCRETE TO EXISTING CONCRETE CONSTRUCTION JOINTS BELOW GRADE AND IN WATER CONTAINING STRUCTURES.

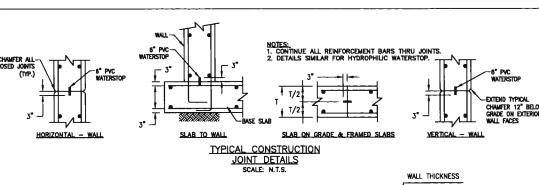


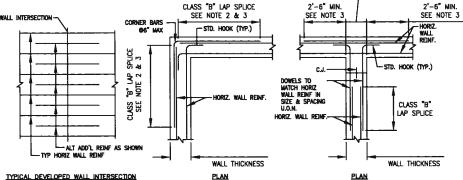

TYPICAL REINFORCEMENT DETAIL AT WALL INTERSECTIONS SCALE: N.T.S.

<u>klotes:</u> 1. Provide additional reinforcing at wall intersections as shown above unless noted otherwise on drawings.


- 2. PROVIDE CORNER BAR REINFORCING AT SIX INCHES SPACING. UNLESS OTHERWISE NOTED ON DRAWINGS, AT ALL CORNERS. CORNER BAR REINFORCEMENT SHALL MATCH TYPICAL HORIZONTAL WALL REINFORCEMENT IN SIZE. DIMENSIONS SHALL BE 0.25 TIMES THE CLEAR SPAN DISTANCE BETWEEN WALL INTERSECTIONS MEASURED HORIZONTALLY, BUT SHALL NOT BE LESS THEN TYPE "B" LAP SPLICE NOR GREATER THEN 6'-0".
- Additional reinforcement shall match size and spacing of wall horizontal reinforcement, unless otherwise noted. Alternate additional reinforcement with horizontal wall reinforcement.

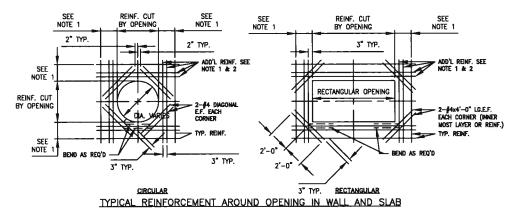

NOTES:

1. PROVIDE ADDITIONAL REINFORCEMENT AT ALL OPENINGS EQUAL IN AREA TO TYPICAL REINFORCEMENT CUT BY OPPENING IN EACH DIRECTION. ADDITIONAL REINFORCEMENT TO MATCH SIZE AND LENGTH OF TYPICAL REINFORCEMENT (MIN. 2 BAR'S E.F.) AND PLACED BETWEEN TYPICAL REINFORCEMENT ON EACH SIDE OF OPPENING.

PROVIDE MATCHING DOWELS. WHERE REQUIRED TO PROVIDE CLASS "B" LAP WITH ADDITIONAL REINFORCEMENT.

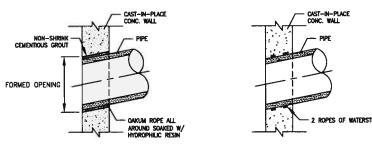

W/O FORMED OPENING TYPICAL PIPE—WALL

PENETRATION DETAIL WITH WATERSTOP
SCALE: N.T.S.

BAR IS ONE INCH ON

SUBMITTAL

DESIGN

0

0

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

WALWORTH RUN INTERCEPTOR REALIGNMENT

STRUCTURAL DETAILS AND NOTES

PROJECT NO .: SCALE: 3/16"=1'-0"

SHEET NO.: TU-13

SESIGNED BY: SHEET CHK'D RY-PPROVED BY:___ APRIL 30, 2010 DATE





This document was originally issued by on XXXXVO9. This document is not considered a sealed document.



NORTHEAST OHO REGIONAL SEWER DISTRICT WALWORTH RUN INTERCEPTOR REALIGNMENT (WRIR)

WRIR

NORTHEAST OHIO REGIONAL SEWER DISTRICT

BOARD OF TRUSTEES

DARNELL BROWN, PRESIDENT GARY W. STARR, VICE PRESIDENT DEAN DEPIERO, SECRETARY MAYOR JACK BACCI SHEILA J. KELLY WALTER O' MALLEY RONALD D. SULIK

JULIUS CIACCIA, JR., EXECUTIVE DIRECTOR

ACCEPTED BY:

JULIUS CIACCIA, JR. EXECUTIVE DIRECTOR DATE


DATE

KELLIE C. ROTUNNO DIRECTOR OF ENGINEERING AND CONSTRUCTION

NORTHEAST OHIO REGIONAL SEWER DISTRICT

DLZ OHIO, INC.

DATE

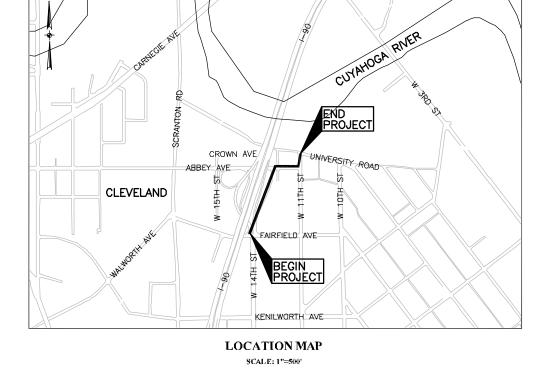

ENGINEERS • ARCHITECTS • SCIENTISTS PLANNERS • SCRVEYORS

SUBMITTED BY:

DLZ OHIO, INC

50% SUBMITTAL MARCH 19, 2010



<u>NOTES</u>

- 1. BASIS OF BEARING AND ELEVATION: HORIZONTAL AND VERTICAL CONTROL IS BASED ON THE OHIO NORTH ZONE STATE PLANE COORDINATE SYSTEM NAD 83 AND THE NAVD 88 VERTICAL DATUM.
- 2. EXISTING STRUCTURES, GRADES, PIPING ETC., ARE SHOWN IN APPROXIMATE LOCATIONS ON THE PLANS. THE INFORMATION SHOWN IS NOT GUARANTEED TO BE CORRECT OR COMPLETE. THE DATA SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR.
- 3. THE CONTRACTOR SHALL COORDINATE HIS OPERATIONS WITH THE WORK OF THE UTILITY OWNERS OR OTHERS WHO MAY RELOCATE EXISTING UTILITIES, AND SHALL NOTIFY OWNERS OF THE UTILITIES OF HIS SCHEDULE SUFFICIENTLY IN ADVANCE TO PERMIT THEM TO MAKE THE NECESSARY
- 4. INFORMATION ON EXISTING UTILITIES AND OTHER SUB-STRUCTURES WAS OBTAINED FROM APPROPRIATE AGENCIES. EXISTING UTILITIES SHALL BE MAINTAINED IN PLACE BY THE CONTRACTOR UNLESS OTHERWISE SHOWN ON THE PLANS OR STATED IN THE SPECIFICATIONS. THE LOCATIONS OF EXISTING UTILITIES AND SUB-STRUCTURES SHOWN ON THE DRAWINGS ARE APPROXIMATE ONLY. THE CONTRACTOR SHALL VERIFY EXACT LOCATIONS, ELEVATIONS, AND DIMENSIONS IN THE FIELD PRIOR TO CONSTRUCTION IN THE AREA OF THE SPECIFIC SUB-STRUCTURE.
- 5. THE LENGTH OF PIPE SHOWN ON THE DRAWINGS IS GIVEN FROM CENTER—TO—CENTER OF STRUCTURE FOR STRUCTURES UP TO 6—FT INSIDE DIAMETER, AND TO THE INSIDE FACE OF STRUCTURE FOR STRUCTURES OVER 6-FT INSIDE DIAMETER.


LEGEND


		LLOLI	<u> </u>		
0	_	EXISTING MANHOLE		_	POST (SQUARE)
	_	EXISTING CATCH BASIN	~^^	_	POST (ROUND)
Ω	_	EXISTING HYDRANT	8.5	_	TREE
ᡯ᠘ᡀᡐᡮᠿᡐᠿᡐ	-	EXISTING/PROPOSED VALVE LIGHT POLE	9	_	SHRUB
7	_	TELEPHONE POLE	0	_	BENCH MARK
₽ Æ	_	POWER POLE	X	_	CHISELED BENCH MARK
Ψ	_		M	_	EXISTING MONUMENT BOX
γ Æ	_	UTILITY POLE	0	_	IRON PIN/PIPE FOUND
Ψ_=	_	LIGHT & POWER POLE	0	_	IRON PIN/PIPE SET
φ	-	TELEPHONE & POWER POLE	•	_	TACKED HUB
	_	TELEPHONE & LIGHT POLE	0	_	DRILL HOLE
,	_	GUY ANCHOR	٠	_	PKNAIL
Q	-	SIGN (1 POST)	٥	_	RAILROAD SPIKE
-	_	SIGN (2 POST)	E	_	ELECTRICAL BOX
(S)	-	EXISTING SANITARY MANHOLE			
Ш	_	STORM INLET/ CATCH BASIN	(£) 	-	EXISTING ELECTRICAL MANHOLE
===	_	STORM INLET/ CATCH BASIN	- 	-	BORING LOCATION

CONCRETE

GROUT

DATE ISSUE





ABBREVIATIONS

	ABBREVIA	<u>HUNS</u>		
ADH ADHESIVE AB - ANCHOR BOLT ADD'L - ADDITIONAL ALT ALTERNATE ALUM - ALUMINUM & - AND ASS'Y - ASSEMBLY @ - AT BITUM BITUMINOUS BOTTOM OF OR BOTTOM BELDG BUILDING BLDG BUILDING BLK BLOCK BOT - BOTTOM B PL - BASE PLATE BRG BEARING BT PLATE CCFRPMP - CENTRIFUGALLY CAST FIBER-REINFORCED POLYMER MORTAR PIPE C.J CONSTRUCTION JOINT Q - CENTER TO CENTER CLS CIRCULAR CLR - CLEAR CLSM - CONTROLED LOW-STRENGTH MATERIAL CMU - CONCRETE MASONRY UNIT COL - COLUMN COMB CONCRETE CONT CONSTRUCTION COMB CONCRETE CONT CONTROLE CONT CONTROL CONTR	EQ	XPANSION XTERIOR DUNDATION INISH INISH LINE LOOR AR FACE DOTING IAS IASE RADE ROUND IORIZONTAL IIGH POINT IIGH HIGH POINT IANDRAIL IIGH STRENGTH ISIDE FACE VITERIOR VIVERT OINT IIP (1000 POUNDS) IVE LOAD ONG LEG IACK—TO—BACK ONG LEG HORIZONTAL ONG LEG HORIZONT	PROP PSISFOC RELIGION TO RELIGION TO MITS PPYR. REPORT W DE TONE TO ME T	PROPERTY LINE/PLATE PROPOSED POUNDS PER SQUARE INCH POUNDS PER SQUARE FOOT POLYWIYL CHLORIDE RISER REINFORCED CONCRETE PIPE REINFORCING REQUIRED RIGHT RIGHT—OF—WAY SANITARY SEWER SCHEDULE SECTION SQUARE FEET SIMILAR STEEL JOIST SHORT LEG BACK—TO—BACK SHORT LEG VERTICAL SPACES OR SPACING SPREAD DISTAINLESS STEEL STAINLON STAINLESS STEEL STAINDARD STEEL STRUCTURAL SUPPORT STORM WATER TREAD TOP OF TOP AND BOTTOM TEMPORARY THICK TOP OF MASONRY TYPICAL UNLESS OTHERWISE NOTED VITRIFIED CLAY PIPE VERTICAL WATER WITH WEST WATER MAIN WITHOUT WORK POINT WATERSTOP WELDED WIRE FABRIC

SHEET INDEX


			SHEET INDEX
	SHEET NO	<u>).</u>	SHEET TITLE
			TITLE
	G-1	_	LEGEND, SHEET INDEX, AND GENERAL NOTES
	G-2	_	SURVEY CONTROL
E			MAINTENANCE OF TRAFFIC
			PLAN & PROFILE
	P-1	_	WALWORTH RUN INTERCEPTOR STA 1+00 TO STA 5+00
	P-2	_	WALWORTH RUN INTERCEPTOR STA 5+00 TO STA 10+00
	P-3	_	WALWORTH RUN INTERCEPTOR STA 10+00 TO STA 15+00
	P-4	-	WEST 15TH ST SEWER CONNECTION
			CIVIL
	C-1	_	NORTHERN SEWER ABANDONMENT PLAN
	C-2	_	SOUTHERN SEWER ABANDONMENT PLAN
	C-3	_	JUNCTION CHAMBER NO. 1 SITE PLAN
	C-4	_	MANHOLE NO. 1 SITE PLAN
	C-5	_	MANHOLE NO. 2 AND JUNCTION CHAMBER NO.2 SITE PLAN
	C-6	-	WATER MAIN RELOCATION PLAN AND NOTES
	C-7	_	WATER MAIN NOTES AND DETAILS
	C-8		WATER MAIN DETAILS
	C-9		PRECAST CONCRETE MANHOLE DETAILS
	C-10		
			CIVIL DETAILS
	C-12	_	CITY OF CLEVELAND CATCH BASIN DETAIL
			THNNFI


<u>TUNNEL</u>

TU-1 - WORK SHAFT JUNCTION CHAMBER NO.1 INITIAL SUPPORTS TU-2 - JUNCTION CHAMBER NO.1 FINAL SUPPORTS TU-3 - WORK SHAFT JUNCTION CHAMBER NO.2 INITIAL SUPPORTS TU-4 - JUNCTION CHAMBER NO.2 FINAL SUPPORTS

TU-5 - WORK SHAFT MANHOLE NO.1 INITIAL SUPPORTS
TU-6 WORK SHAFT MANHOLE NO.2 INITIAL SUPPORTS TU-7 - BREAK-IN, BREAK-OUT, BACKSTOP AND SUMP DETAIL

SECTION CUTS





BAR IS DNE INCH ON ORIGINAL DRAWING

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.:

SHEET: X

SCALE: 1"=10' SHEET NO.: G-1



DESIGNED BY:


SCREENED GRAVEL

UNDISTURBED EARTH



This document was

document.

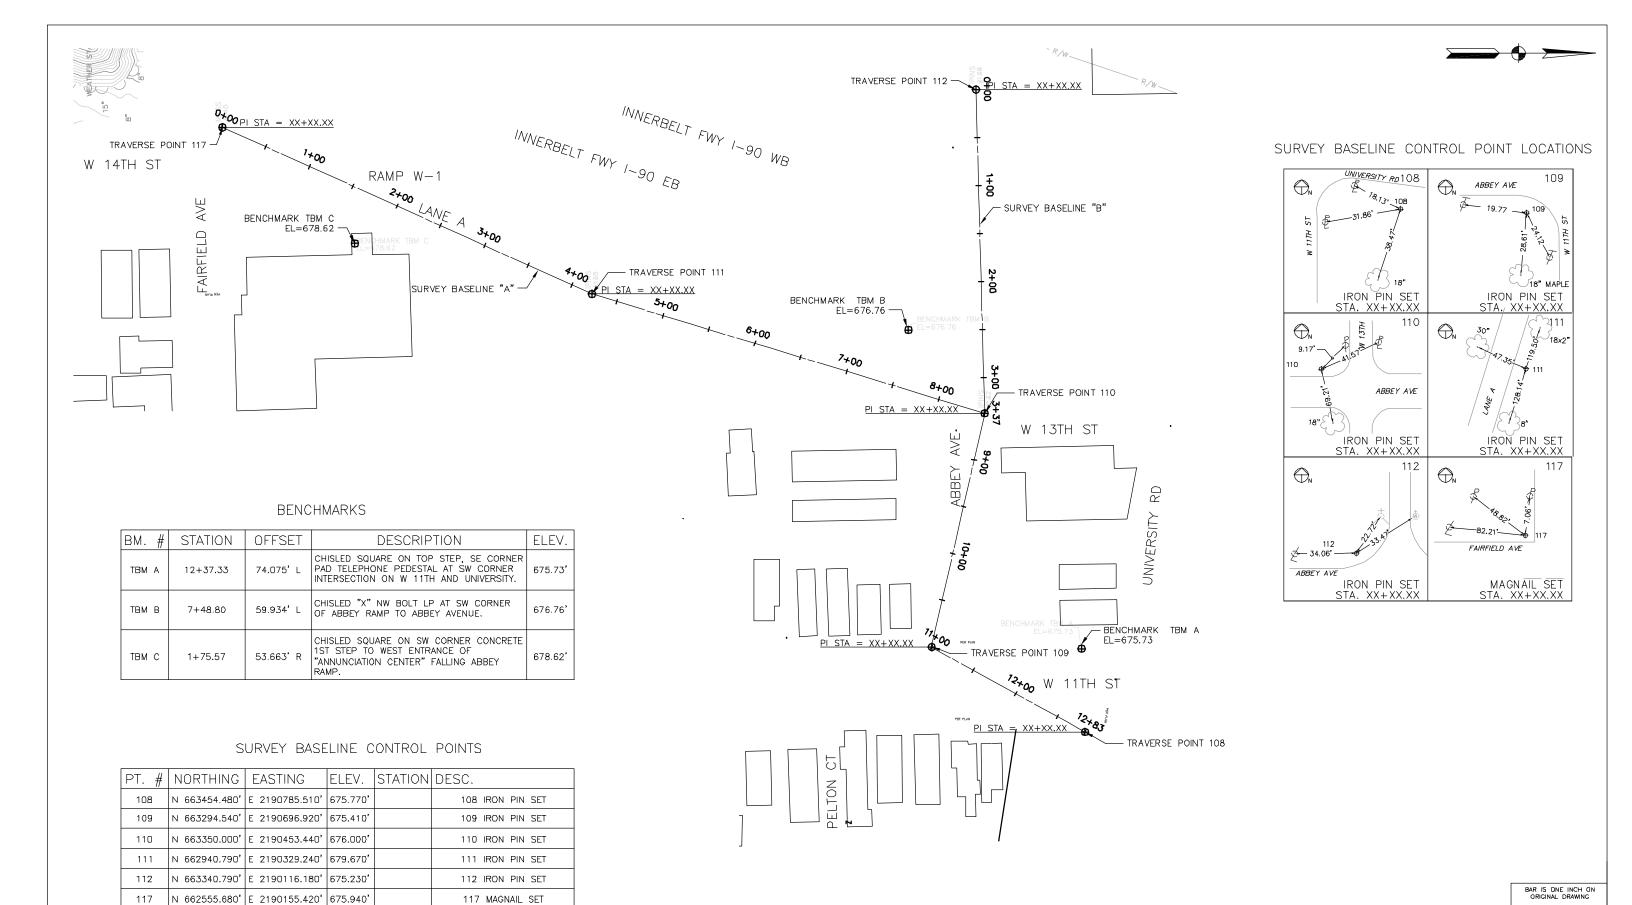

				DESIGNED BY:
				DRAWN BY:
				SHEET CHK'D BY:
				CROSS CHK'D BY:
				APPROVED BY:
REV.	DATE	ISSUE BY	REMARKS	DATE:





This document was onginally issued by on XX/XX/09. This

document.

document is not considered a sealed

WALWORTH RUN INTERCEPTOR REALIGNMENT


SURVEY CONTROL


HORIZ. SCALE IN FEET


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO .: SHEET:


SCALE: 1"=50"


SHEET NO.: G-2

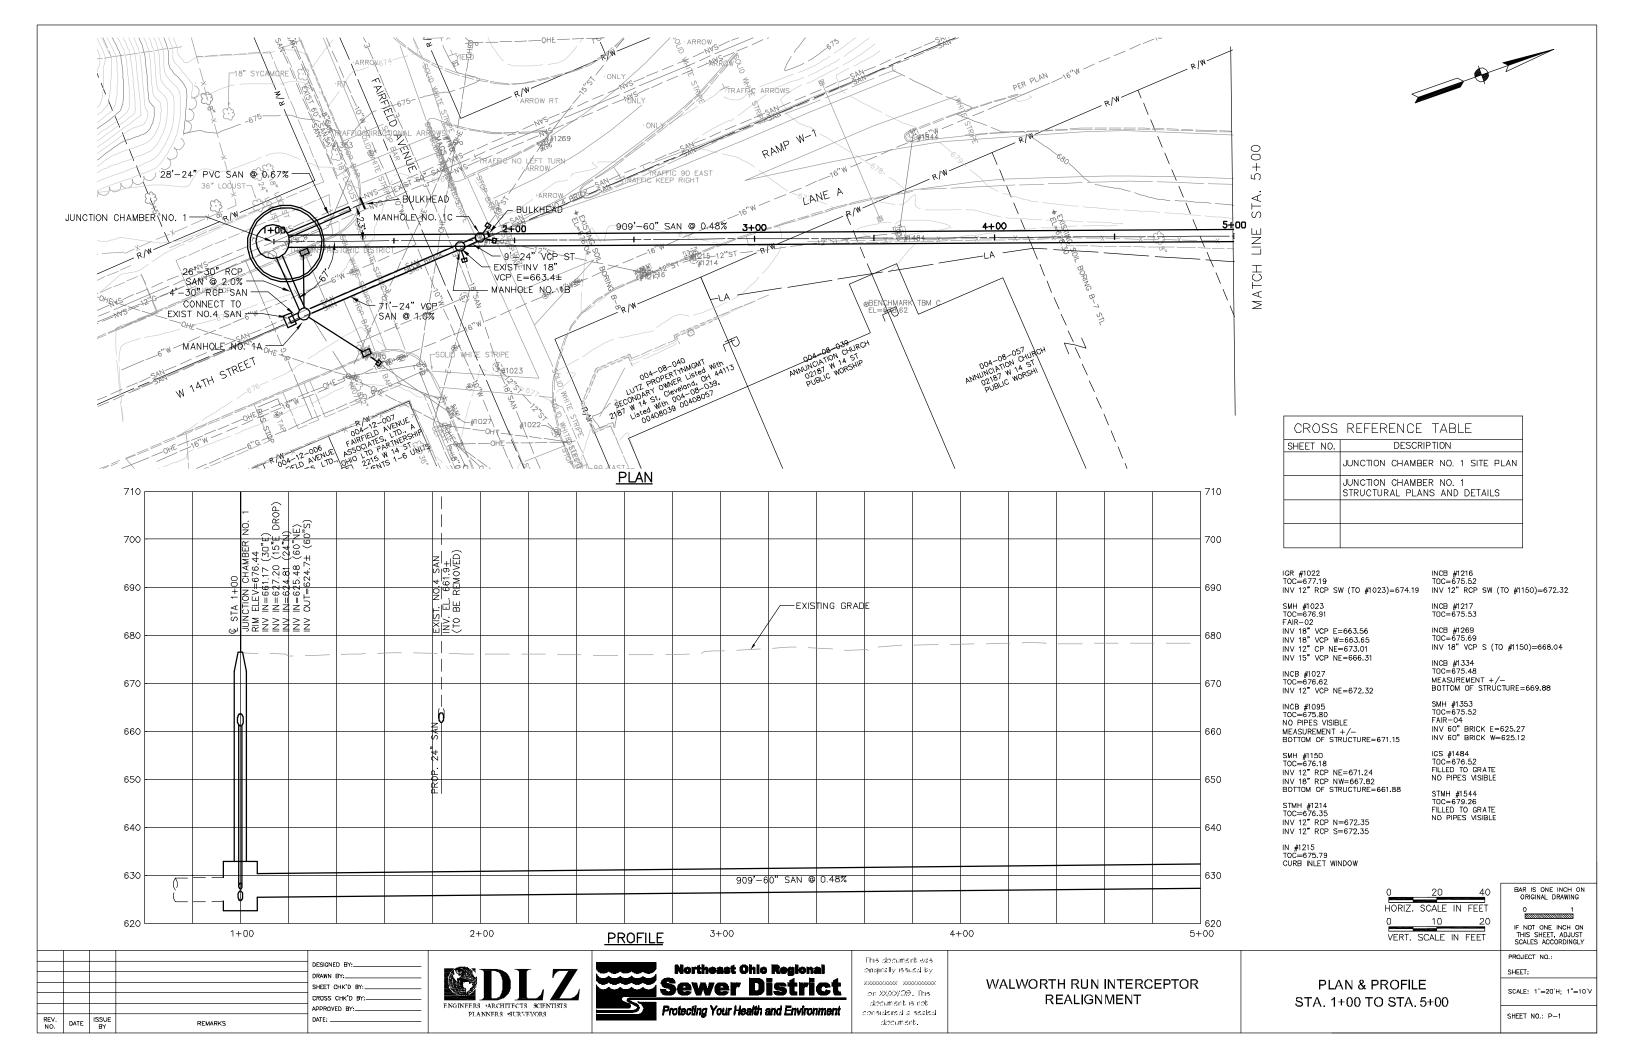


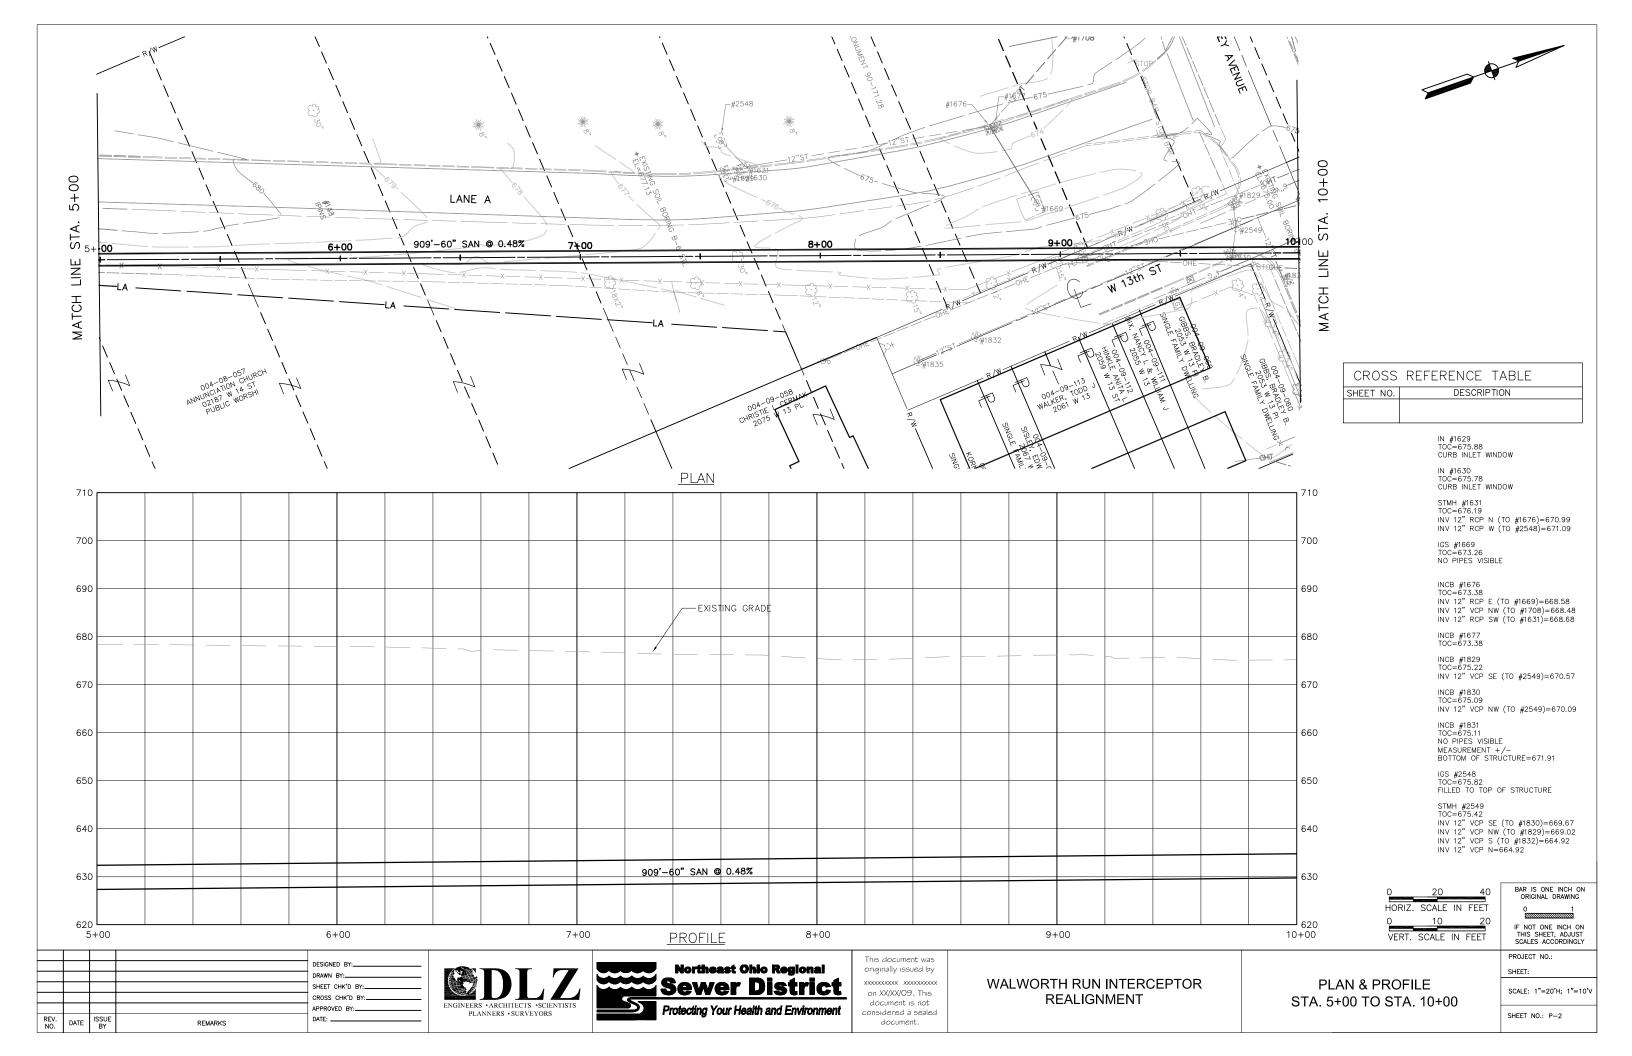


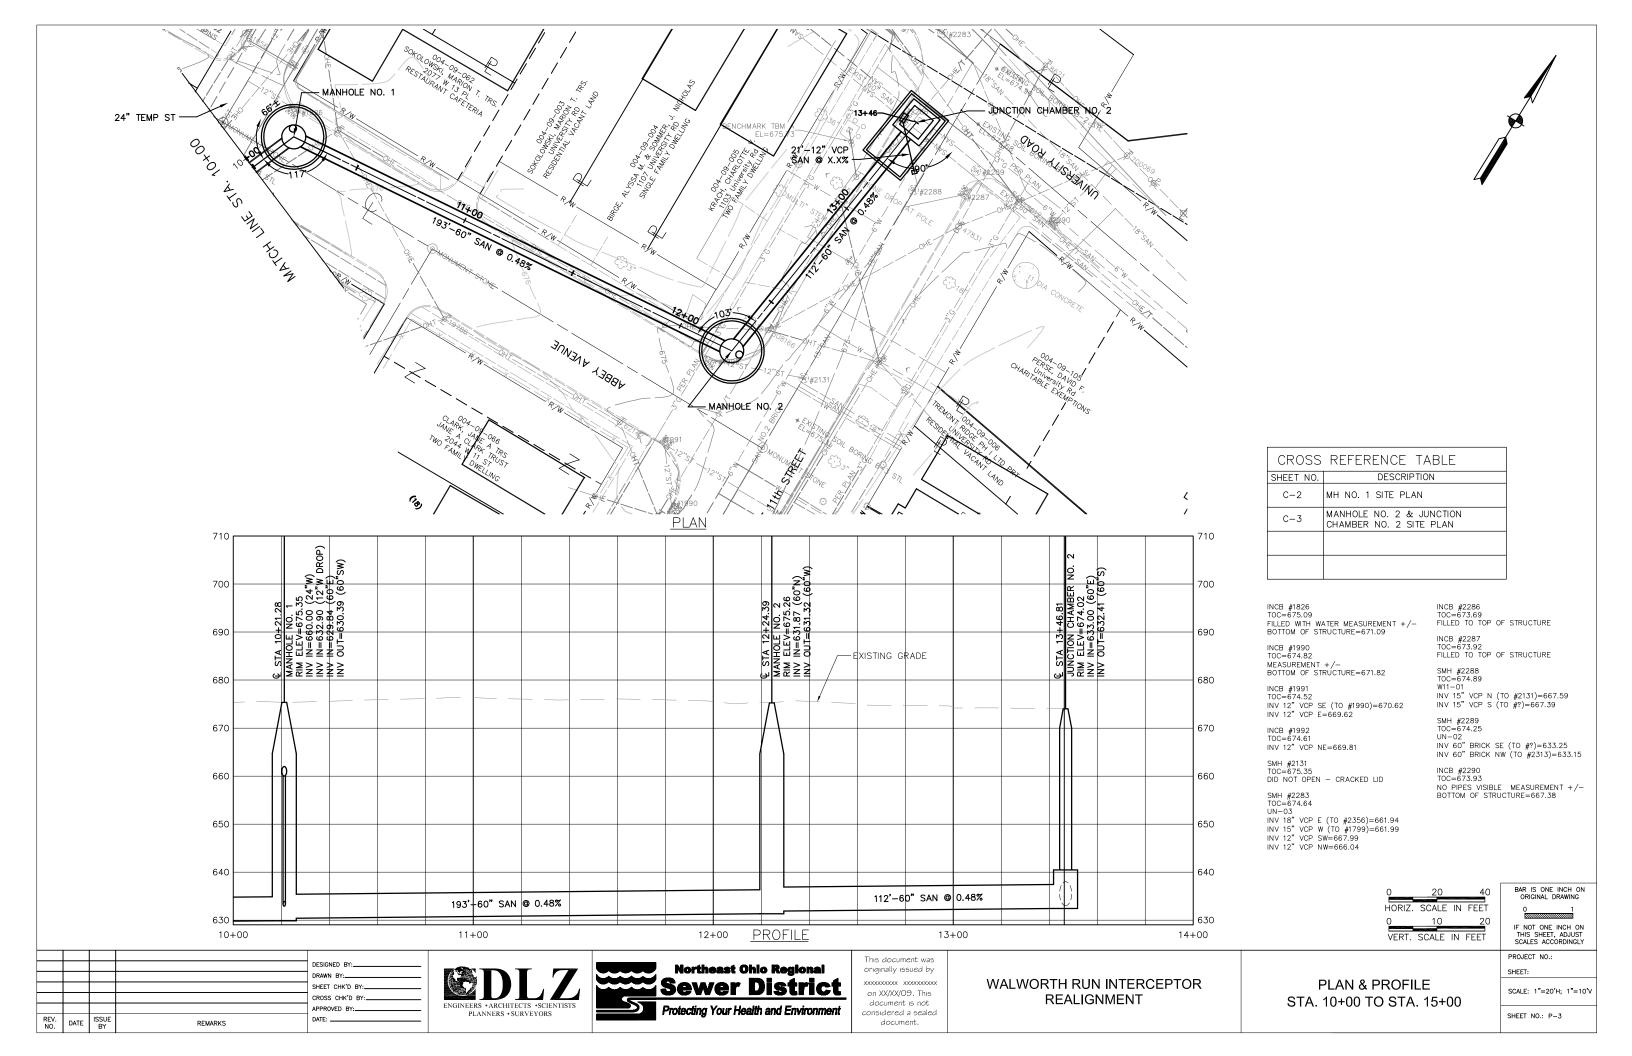


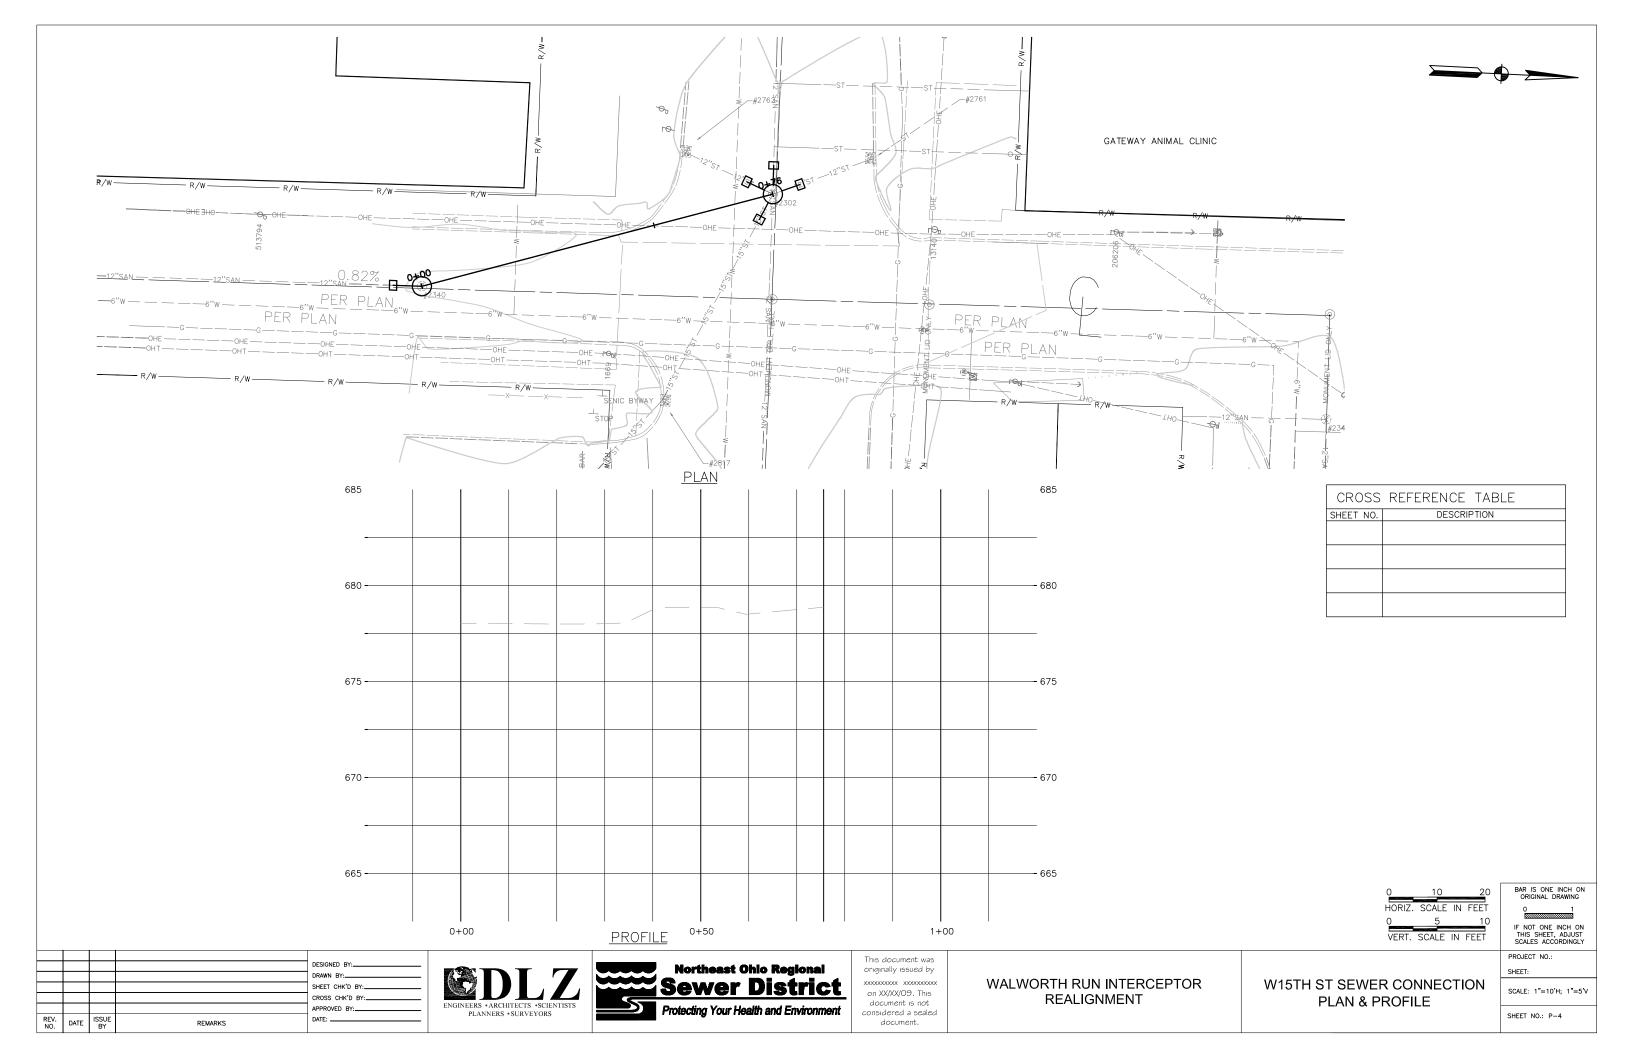


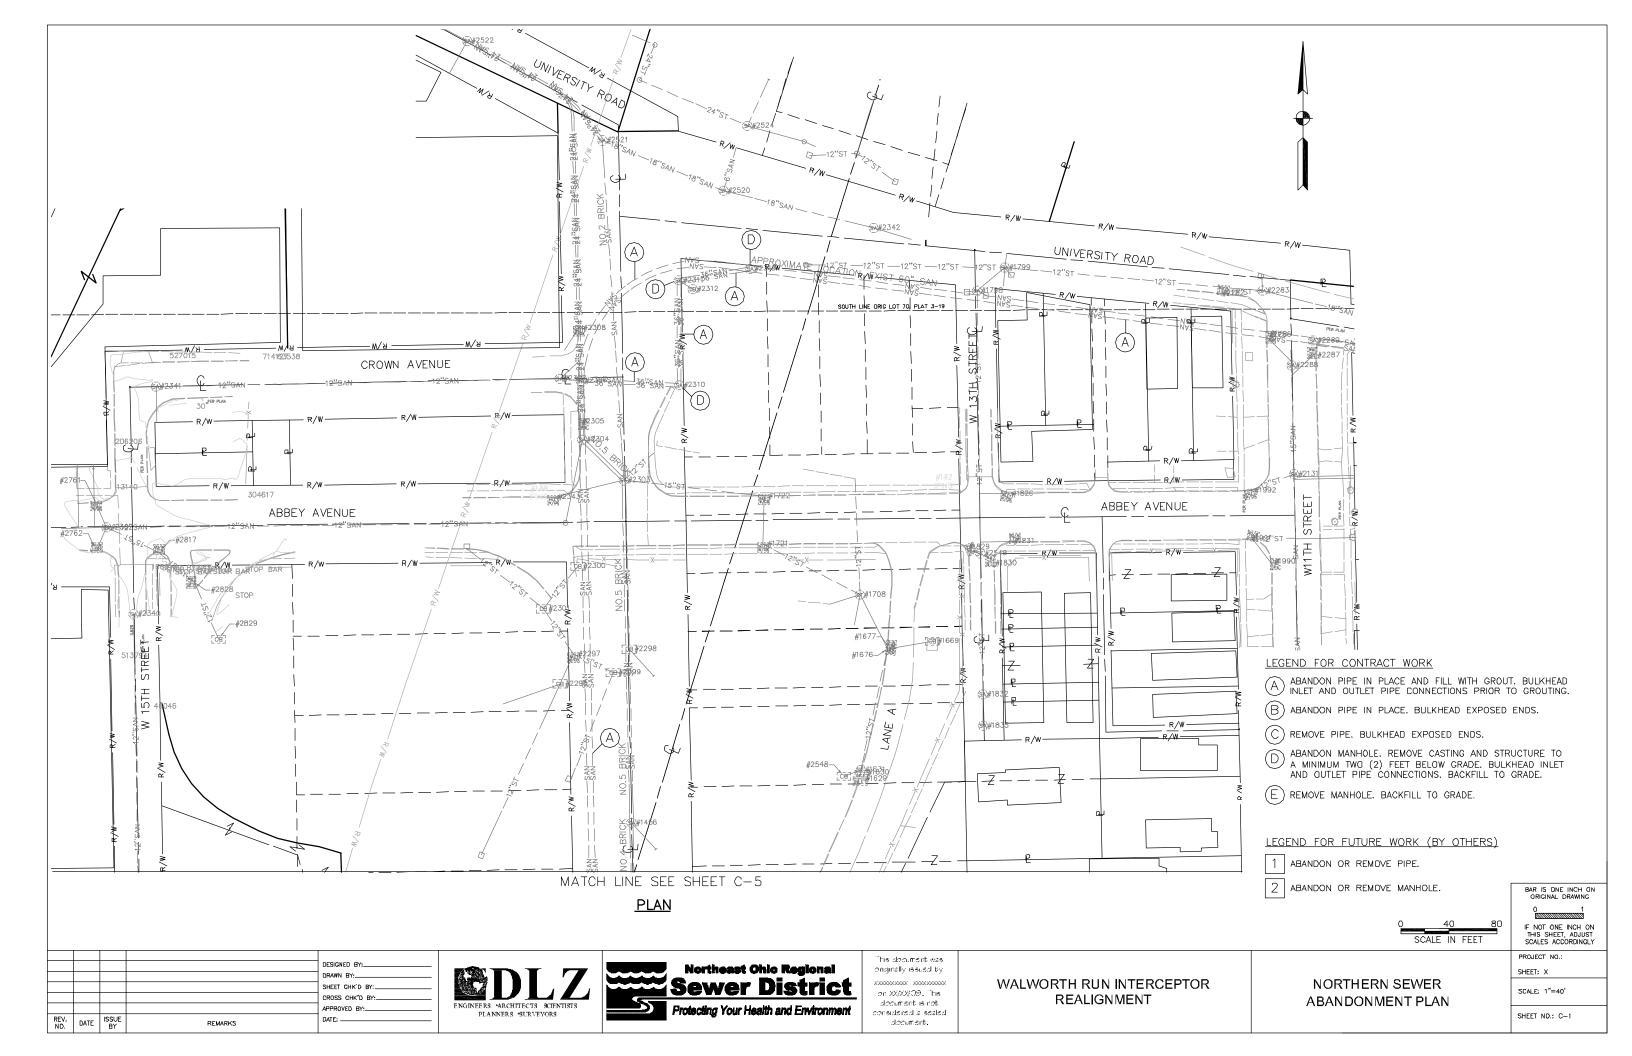

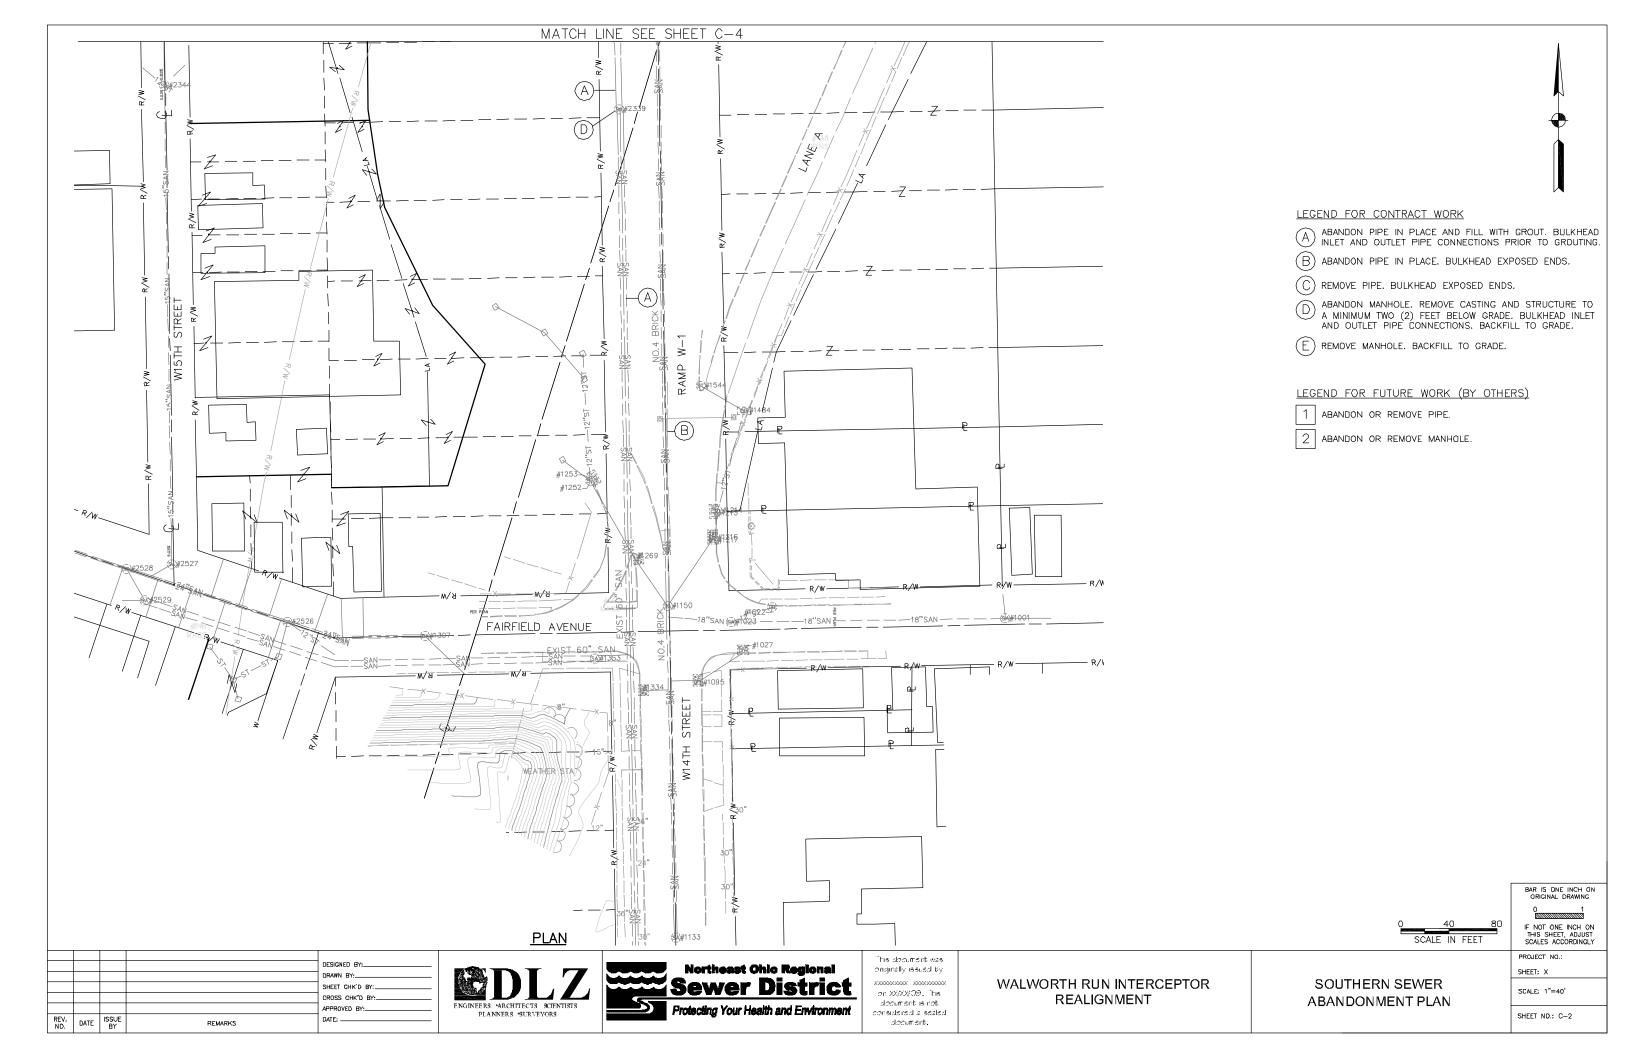

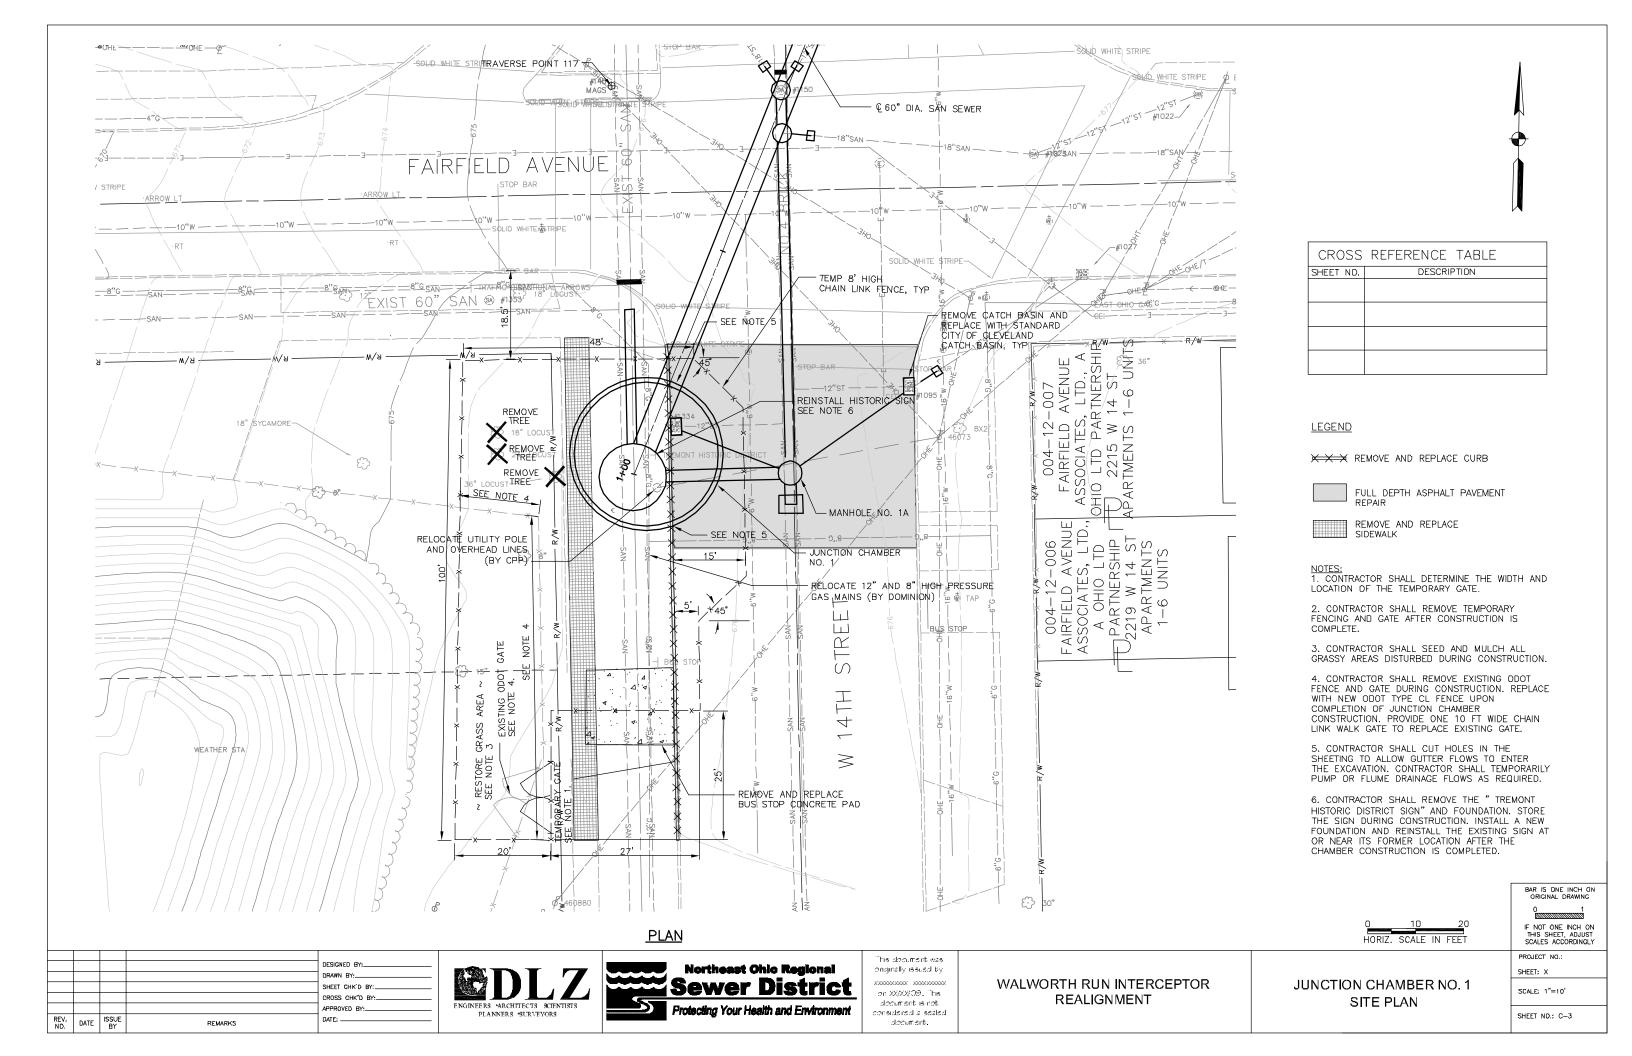

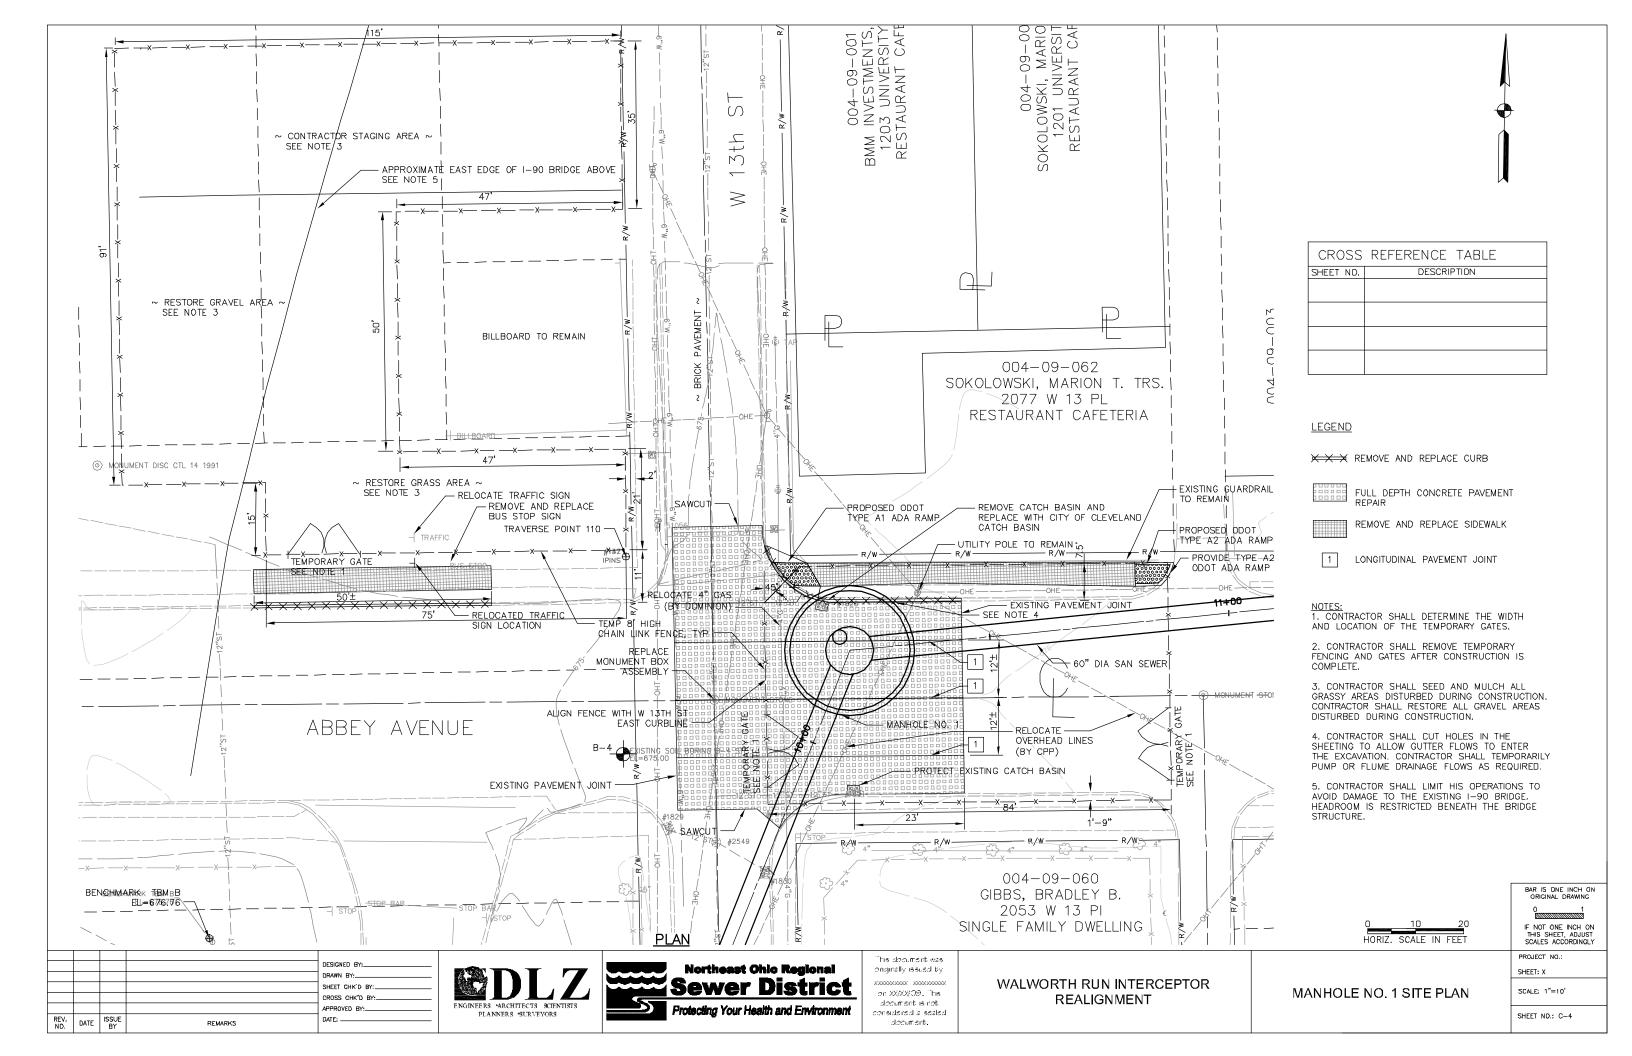

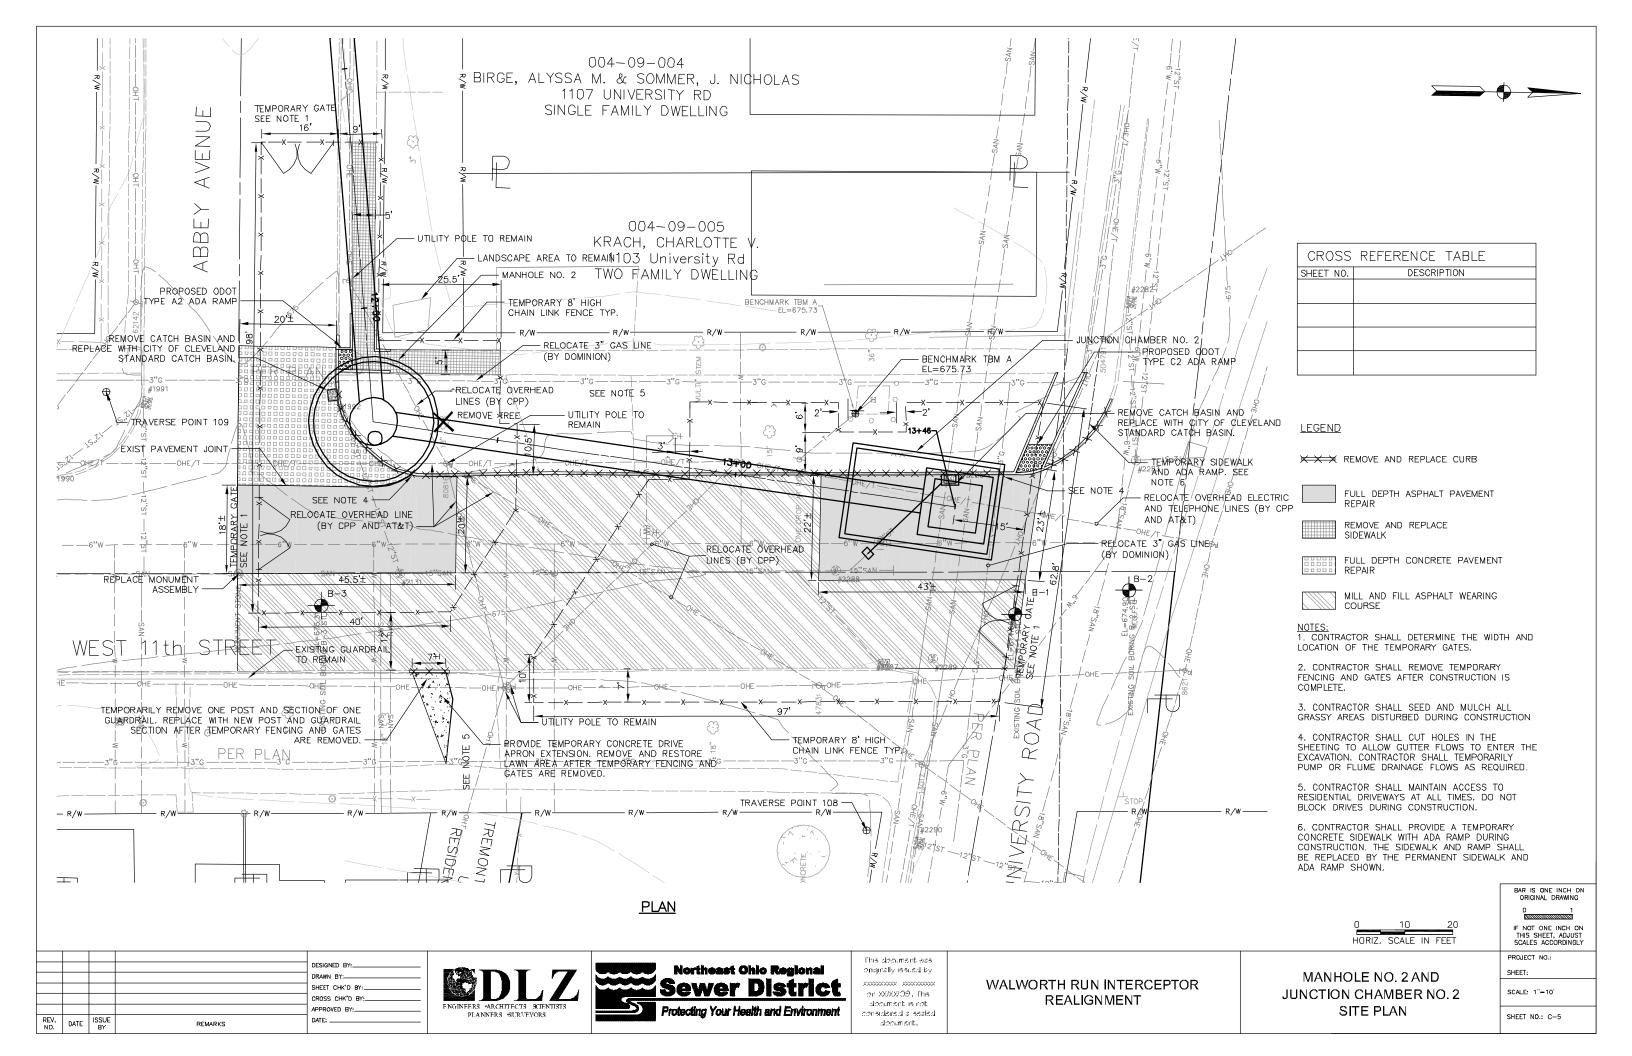

CLEVELAND DIVISION OF WATER NOTES FOR NEW WATER MAIN INSTALLATION

CONTRACTOR IS TO ABIDE BY THE MOST CURRENT VERSION OF THE CLEVELAND, DIVISION OF WATER NOTES AND DETAILS. THE MOST UP-TO-DATE VERSION CAN BE FOUND AT WWW.CLEVELANDWATER.COM.

- THE INFORMATION SHOWN ON THE CLEVELAND DIVISION OF WATER'S SUMMARY OF WORK/CHARGE LETTER AND STRIP MAPS ARE TAKEN FROM EXISTING AVAILABLE RECORDS, AND THEIR ACCURACY IS NOT GUARANTEED.
- CALL THE INSPECTION AND ENFORCEMENT UNIT AT 216-664-2342 TO SCHEDULE A PRECONSTRUCTION MEETING. THE OPERATION OF ANY VALVE OR ALTERATION OF ANY PART OF THE WATER SYSTEM BY CONTRACTORS OR THEIR EMPLOYEES IS PROHIBITED THE SUPERVISION OF THE CLEVELAND DIVISION OF WATER INSPECTOR.
- THE MUNICIPALITY SHALL REQUIRE THAT THE PROJECT'S PROFESSIONAL ENGINEER OBTAIN ACTUAL FIFLD MEASUREMENTS OF THE MAIN DURING INSTALLATION AND SHALL FURNISH THE CWD INSPECTOR WITH RECORD PRINTS IN A FORM ACCEPTABLE TO THE DIVISION OF WATER. THE CLEVELAND DIVISION OF WATER WILL REQUIRE THE DELIVERY AND ACCEPTANCE OF TWO COPIES OF RECORD (AS BUILT) PRINTS. STAMPED BY A PROFESSIONAL ENGINEER, BEFORE THE PRESSURE TEST AND CHLORINATION OF THE MAIN
- . FOR THE PURPOSES OF CHIORINATION AND BACTERIOLOGICAL TESTING OF THE WATER MAINS THE CONTRACTOR SHALL PROVIDE AND INSTALL, AT EACH OF THE CHLORINATION PIT LOCATIONS SHOWN AND AT OTHER LOCATIONS DETERMINED BY THE DIVISION OF WATER, FLUSHING/SAMPLING TAPS OF SIZES TO BE DETERMINED BY THE DIVISION OF WATER. CHLORINATION PITS SHALL BE SIX (6) FOOT SQUARE MEETING OSHA STANDARDS. 15.
- 5. A TWO YEAR WARRANTY, COMMENCING FROM THE DATE OF ACCEPTANCE OF THE FINAL CHLORINATION OF THE WATER MAIN INSTALLATION, SHALL BE PROVIDED BY THE BUILDER/DEVELOPER AND/OR CONTRACTOR FOR ALL WATER MAINS AND SERVICE CONNECTION WORK PERFORMED BY THE CONTRACTOR, INCLUDING RETAPS, SHOULD LEAKS OCCUR AND REPAIRS BE REQUIRED DUE TO DEFECTIVE MATERIAL OR POOR SHOULD ANY WORKMANSHIP.
- . USE BACKFILL MATERIAL AS SPECIFIED AND COMPACT SUFFICIENTLY IN THOSE AREAS WHERE EXISTING MAINS AND WATER SERVICE CONNECTIONS ARE EXPOSED.
- ALL MATERIALS, INCLUDING BUT NOT LIMITED TO WATER MAINS, FIRE HYDRANTS, VALVES, CONNECTION MATERIALS AND OTHER WATER APPURTENANCES, SHALL BE NEW AND UNUSED AND SHALL CONFORM TO THE MOST CURRENT DIVISION OF WATER SPECIFICATIONS. ALL MATERIAL SHALL BE INSTALLED IN ACCORDANCE WITH DIVISION OF WATER'S STANDARDS.
- 3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING WATER MAINS AND APPURTENANCES THEREOF WHEN CONNECTING THE NEW WATER MAIN FOR THE HYDROSTATIC TEST. ALL REPAIRS TO DAMAGED EXISTING FACILITIES SHALL BE MADE BY THE CONTRACTOR, AT THE CONTRACTOR'S EXPENSE, TO THE SATISFACTION OF THE DIVISION OF WATER. (REFER TO THE THE ALTERNATE TEST DETAIL STD-002 AS NEEDED)
- ALL HYDROSTATIC PRESSURE TESTING SHALL BE DONE BY THE CONTRACTOR IN THE PRESENCE OF THE DIVISION OF WATER'S INSPECTOR. THE HYDROSTATIC TEST PRESSURE SHALL BE 75 PSI ABOVE THE STATIC PRESSURE PREVAILING AT THE SITE, BUT IN NO CASE LESS THAN 150 PSI. THE PRESSURE TEST SHALL BE FOR A DURATION OF TWO (2) HOURS WITH THE PRESSURE BEING MAINTAINED WITHIN 5 PSI OF THE REQUIRED TEST PRESSURE. SHOULD THE PRESSURE TEST FAIL THE CONTRACTOR SHALL FIND AND CORRECT THE DEFICIENCY(IES) TO THE SATISFACTION OF THE DIVISION OF WATER AND REPEAT THE TWO (2) HOUR PRESSURE TEST.
- OA. ALL PIPE, UNLESS OTHERWISE CALLED FOR, SHALL BE DUCTILE IRON, MINIMUM CLASS 52, CEMENT LINED HAVING PUSH-ON JOINTS WITH RADIALLY COMPRESSED RUBBER RING GASKET AND INSTALLED AS PER THE MOST CURRENT REVISION OF AWWA C600.
- UNLESS OTHERWISE CALLED FOR, SHALL BE APPROVED DUCTILE IRON CLASS 350, CEMENT LINED OR FUSION BONDED EPOXY COATED, ALL FITTINGS AND PIPE CONNECTED TO FITTINGS SHALL BE RESTRAINED USING A "RETAINED" MECHANICAL JOINT CONFORMING TO THE MATERIAL AND PERFORMANCE REQUIREMENTS OF ANSI/AWWA -110/A21.10 AND ANSI/AWWA C-111/A21.11, OR "COMPACT" FITTINGS IN ACCORDANCE WITH ANSI/AWWA C-153/A21.53 EXCEPT FOR ANCHOR TEES REDUCERS OR OTHER SPECIAL CIRCUMSTANCES WHEN DIRECTED BY CLEVELAND DIVISION OF WATER, ALL FITTINGS ARE TO HAVE BELL ENDS.
- OC. ALL BOLTS AND NUTS ON ALL "RETAINED" MECHANICAL JOINTS SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C". METHOD "B"
- OD. WHERE SHOWN ON THE PLANS, OR WHEN OTHERWISE CALLED FOR, PIPE AND FITTINGS SHALL HAVE AN APPROVED "TYPE I" OR "TYPE II" BOLTLESS RESTRAINED PUSH-ON JOINTS TO THE LIMITS SHOWN ON THE DRAWINGS.
- DE. AT THE END OF EACH WORKDAY, THE CONTRACTOR SHALL PLUG ALL OPEN PIPE ENDS WITH WATER TIGHT PLUGS AS PER THE "PREVENTITIVE AND CORRECTIVE MEASURES DURING CONSTRUCTION" SECTION OF THE MOST CURRENT REVISION OF AWWA C-651 AS TO PREVENT THE INFILITRATION OR INTRUSION OF ANY FOREIGN OBJECTS OR MATERIALS.

 DATE STAMPED DIGITAL PHOTOS SHALL BE PROVIDED FOR EACH WORKDAY

 DEMONSTRATING THAT PROPER AWWA C-651 METHODS WERE USED TO PLUG ALL OPEN

 WATER MAIN ENDS. EACH PHOTO SHALL CLEARLY IDENTIFY THE STATION AT WHICH THE

 PIPE IS PLUGGED. THE STATIONING SHALL BE SHOWN BY THE USE OF A STATION

 MARKER PLACED AT THE PLUGGED PIPE END.

PHOTOS SHALL BE SUBMITTED ON A DAILY BASIS UNLESS OTHERWISE DEFINED BY THE CWD INSPECTOR OR ENGINEER. ALL PHOTOS TAKEN OVER THE COURSE OF THE PROJECT SHALL BE SUBMITTED BY THE CONTRACTOR AS PART OF THE AS-BUILT SUMITTAL. AS-BUILTS SHALL BE CONSIDERED INCOMPLETE WITHOUT SAID COLLECTION OF DIGITAL

HYDRANTS:

- IN ALL HYDRANT INSTALLATIONS THE CONTRACTOR SHALL FACE ALL HYDRANT'S 4" (STEAMER) NOZZLE TOWARD THE PAVEMENT PRIOR TO TESTING AND CHLORINATION OF WATER MAINS. CONTRACTOR SHALL CONSULT WITH THE LOCAL MUNICIPALITY'S ENGINEERING OR SERVICE DEPARTMENT TO OBTAIN HYDRANT MODEL AND NOZZLE THREAD REQUIREMENTS IF NOT INDICATED ON THE APPROVED PLANS.
- 12. ALL VALVES SHALL BE AN APPROVED MODEL RESILIENT SEATED GATE VALVES AS PER THE MOST CURRENT VERSION OF AWWA C509 OR C515.

CONNECTIONS:

- 13. WATER CONNECTIONS SHOWN ON THESE DRAWINGS ARE FOR REFERENCE ONLY AND ARE NOT PART OF THE WATER MAIN APPROVAL. ADDITIONAL PERMITS FOR SERVICE CONNECTIONS MUST BE OBTAINED FROM THE DIVISION OF WATER PRIOR TO INSTALLATION OF ANY PORTION OF THE SERVICE CONECTION(S). IT IS THE CONTRACTORS
 RESPONSIBILITY TO ARRANGE FOR PERMITS FOR ALL SIZE WATER SERVICE CONNECTIONS BEFORE PERFORMING ANY WORK, THE AMOUNT OF THE CHARGES CAN BE OBTAINED FROM THE DIVISION OF WATER, PERMITS AND SALES SECTION AT 216-664-2444 X5203.
- 14. ONE INCH SERVICE CONNECTIONS SHALL BE PERMITTED TO SERVICE HOMES BASED ON
- PEAK FLOW DEMANDS DO NOT EXCEED 25 GPM FOR AN INDIVIDUAL HOME/UNIT. INCLUSIVE OF ALL USAGE (FIRE, DOMESTIC AND/OR IRRIGATION) AND
- * LENGTH OF ONE INCH CONNECTION DOES NOT EXCEED 75 FEET AS MEASURED FROM

THE MAIN TO THE POINT OF ENTRY INTO THE PROPOSED HOME/UNIT.

ANY SERVICE REQUESTS DIFFERING FROM THE STATED CRITERIA SHALL REQUIRE THE SUBMITTAL OF A COMPLETE WATER SERVICE APPLICATION. PEAK DEMANDS ARE TO BE ASSESSED ON APPLICATION AND SETBACKS ARE TO SHOWN ON AN ACCOMPANYING SITE PLAN SITE PLANS SHALL SHOW WATER METER VAULTS IN THE RIGHT OF WAY OR IN AN EASEMENT CONTIGUOUS TO THE RIGHT OF WAY FOR ANY HOMES/UNITS WITH SETBACKS GREATER THAN 150 FEET. EASEMENTS ARE TO BE PROVIDED WITH THE SERVICE CONNECTION APPLICATION SUBMITTAL.

ALL WATER MAIN CURB VALVE BOXES & METER VAULTS WILL BE INSTALL IN GRASS AREAS WHEN POSSIBLE.

EMERGENCIES:

IF A WATER MAIN OR SERVICE CONNECTION BREAK OCCURS DURING CONSTRUCTION AND EMERGENCY ASSISTANCE IS REQUIRED, PLEASE NOTIFY THE DIVISION OF WATER AT 216-664-3060.

UTILITIES:

1. THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES AT LEAST TWO (2) WORKING DAYS THE CONTRACTOR SHALL NOTIFY UTILITY COMPANIES AT LEAST IWO (2) WORKING DAYS (NOT INCLUDING SATURDAYS AND LEGAL HOLIDAYS) PRIOR TO CONSTRUCTION TO HAVE UTILITIES STAKED, MARKED OR OTHERWISE DESIGNATED IN THE CONSTRUCTION AREA IN SUCH A MANNER AS TO INDICATE THEIR COURSE TOGETHER WITH THE APPROXIMATE DEPTH AT WHICH THEY WERE INSTALLED. THE MARKING OR LOCATION SHALL OCCUR APPROXIMATELY TWO DAYS AHEAD OF THE PLANNED CONSTRUCTION.

OHIO UTILITIES PROTECTION SERVICE	
CITY OF SHAKER HEIGHTS SERVICE DEPARTMENT	
CLEVELAND WATER - ROBERT SMITH	
NORTHEAST OHIO REGIONAL SEWER DISTRICT	
AT&T — ERIC WESTERBURG	
DOMINION EAST OHIO GAS — JOE HINTON	
TIME WARNER CABLE - LARRY BOCK	
AMERICAN FIBER SYSTEMS - BRYCE BASISTA	
THE ILLUMINATING COMPANY - JASON R. STEC	
XO COMMUNICATIONS	

- 2. THE LOCATION OF THE EXISTING UNDERGROUND UTILITIES ARE SHOWN ON THE PLANS AND BELIEVED TO ESSENTIALLY CORRECT. THE LOCATIONS WERE OBTAINED FROM THE OWNERS OF THE UTILITIES AS REQUIRED BY SECTION 153.64 O.R.C. NO GUARANTEE IS MADE RELATIVE TO THE COMPLETENESS OR ACCURACY AND THE CONTRACTOR IS REQUIRED TO CONTACT THE REGISTERED UTILITY PROTECTION SERVICE AND THE OWNERS OF EACH UNDERGROUND UTILITY FACILITY SHOWN ON THE PLANS AT LEAST TWO WORKING DAYS PRIOR TO COMMENCING CONSTRUCTION IN ANY AREA.
- 3. ALL EXISTING UTILITIES, SERVICES, POLES AND CONNECTIONS SHALL BE PROTECTED AT THE CONTRACTOR'S EXPENSE. IF DAMAGE IS CAUSED BY CONSTRUCTION TO ANY EXISTING UTILITY, THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OR RESTORATION OF SAME AT HIS EXPENSE IN ACCORDANCE WITH DIRECTIONS OF THE ENGINEERS, AND FOR ANY RESULTING CONTINGENT DAMAGES. EXISTING UTILITIES INCLUDE, BUT ARE NOT LIMITED TO WATER MAINS, STORM SEWERS, SANITARY SEWERS, GAS, ELECTRICAL, TELEPHONE, FIBER OPTIC CABLE, TELEVISION CABLE, AND INDIVIDUAL
- 4. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL EXPOSE ALL EXISTING UTILITIES SERVICES, OR STRUCTURES TO VERIFY THE VERTICAL AND HORIZONTAL LOCATION OF THE UTILITY, SERVICE, OR STRUCTURE AND ITS EFFECT ON THE PROPOSED CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE HIS WORK WITH THE UTILITY OWNER.
- 5. INDIVIDUAL STORM, SANITARY, GAS, WATER, ELECTRICAL, TELEPHONE AND CABLE SERVICE CONNECTIONS MAY NOT BE SHOWN. THE CONTRACTOR SHALL LOCATE AND PROTECT SERVICE CONNECTIONS THROUGHOUT THE COURSE OF THE WORK. IN THE EVENT SERVICE CONNECTIONS INFOOGNOOF THE COURSE OF THE WORK. IN THE EVENT SERVICE CONNECTIONS ARE BROKEN OR DISTURBED, THE CONTRACTOR SHALL REPAIR OR REPLACE THE SERVICE CONNECTIONS TO THE SATISFACTION OF THE ENGINEER AT NO ADDITIONAL COST TO THE OWNER. THE CONTRACTOR SHALL EXPECT EACH RESIDENCE/COMMERCIAL PROPERTY ALONG THE ROUTE TO HAVE AT LEAST ONE SERVICE CONNECTION FOR EACH UTILITY.
- 6. EXISTING LATERAL CONNECTIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL LOCATE TO DETERMINE LOCATION AND NUMBER OF LATERALS. NOT ALL LATERALS MAY BE SHOWN.
- 7. THE COST OF RELOCATION AND/OR SECURING ANY UTILITY POLES AS NECESSARY TO COMPLETE THE WORK SHALL BE INCLUDED IN THE BID PRICE PER LINEAL FOOT OF WATER MAIN. THE UTILITY MUST BE INFORMED BY THE CONTRACTOR OF THE PROPOSED METHODS BEFOREHAND TO VERIFY THE ADEQUACY OF SUCH SUPPORTS. NOTE THE OSHA REGULATIONS PROHIBIT CRANE/ BACKHOE OPERATIONS WITHIN TEN FEET OF THE ENERGIZED PRIMARY CONDUCTORS. CONTRACTOR MAY ELECT TO PAY THE UTILITY TO PERFORM THIS WORK AT NO ADDITIONAL COST TO OWNER.
- 8. STORM SEWER, SANITARY SEWER, AND CULVERT INVERTS SHOWN ON THE PLANS ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY DEPTHS AND LOCATIONS PRIOR TO CONSTRUCTION.
- 9. THE CONTRACTOR SHALL REPAIR AT HIS OWN COST ANY DAMAGE TO TRAFFIC SIGNAL LOOP DETECTORS. CONTRACTOR SHALL FIELD VERIFY ALL LOOP DETECTORS WITHIN PROJECT AREA.
- 10. THE CONTRACTOR MAY DAMAGE EXISTING CATCH BASINS WHILE INSTALLING THE WATER MAIN. THE CONTRACTOR SHALL REPAIR OR REPLACE DAMAGED CATCH BASINS TO THE SATISFACTION OF THE CITY OF SHAKER HEIGHTS.

PAVEMENTS AND WALKS:

- ROADWAYS, DRIVES, AND PAVEMENTS DISTURBED BY CONSTRUCTION SHALL BE REPLACED. SEE DETAILS ON PLANS AND SPECIFICATIONS. TEMPORARY PAVEMENT SHALL BE USED WHEN HOT MIX ASPHALT IS NOT AVAILABLE OR WHEN WEATHER FOR PAVEMENT IS UNACCEPTABLE. SIDEWALKS AND DRIVEWAY APRONS SHALL BE
- 2 THE CONTRACTOR MAY DAMAGE EXISTING ROADWAY CURRING WHILE INSTALLING THE WATER MAIN. THE CONTRACTOR SHALL REPLACE ANY DAMAGED CURBING ALONG ALL ROADS WITH ODOT 609 CURBING. CURB REPLACEMENT SHALL MATCH EXISTIN CURB, AND LIMITS OF REPLACEMENT SHALL BE TO THE NEAREST CONTROL JOINT ON EITHER SIDE OF THE AREA DAMAGED.
- 3. THE CONTRACTOR MAY DAMAGE EXISTING DRIVE APRONS WHILE INSTALLING THE WATER MAIN, DRIVE APRONS SHALL BE REMOVED AND REPLACED TO THE NEAREST JOINT. PAVEMENT TYPE AND THICKNESS SHALL MATCH EXISTING.
- 4. EXISTING SANDSTONE WALKS THAT MAY BE AFFECTED BY CONSTRUCTION SHALL BE SALVAGED AND RESET IF STONE WALKS ARE DAMAGED DURING CONSTRUCTION THEY SHALL BE REMOVED TO THE NEAREST JOINT AND REPLACED IN KIND WITH
- 5. WHERE NECESSARY TO DISTURB PAVEMENTS OR DRIVES, PAVEMENT SHALL BE CUT

SUPPLEMENTAL WATER MAIN NOTES:

- 1. ALL NEW VALVES SHALL OPEN BY TURNING CLOCKWISE. VALVES SHALL BE SAME SIZE AS THE WATER MAIN. ALL VALVE BOXES SHALL BE INSTALLED FLUSH TO GRADE.
- THE MAXIMUM TRENCH OPENING SHALL NOT EXCEED 100 LINEAL FEET. WHERE ACCESS TO DRIVES AND PARKING LOTS IS HINDERED OR BLOCKED FOR AN EXTENDED PERIOD OF TIME, THE CONTRACTOR SHALL PROVIDE TEMPORARY BITUMINOUS PAVEMENT TO MAINTAIN ACCESS. CONTRACTOR SHALL KEEP ALL WORK WITHIN THE RIGHT-OF-WAY.
- 3. THE CONTRACTOR SHALL INSTALL DETECTABLE TRACER TAPE IN THE SAME TRENCH WITH ALL WATER MAINS. TAPE SHALL BE 3" WIDE, BLUE CODED POTABLE ON BOTH-SIDES. TRACER TAPE SHALL BE INCLUDED IN THE PRICE BID PER LINEAL FOOT OF
- 4. UNLESS OTHERWISE NOTED. THE NEW WATER MAIN SHALL HAVE 6' MINIMUM COVER OVER THE TOP OF PIPE.
- 5. A MINIMUM OF 35 PSI SHALL BE MAINTAINED TO THE CURB STOP DURING NORMAL OPERATING CONDITIONS.
- 6. BOOSTER PUMPS ARE NOT PERMITTED ON SERVICE CONNECTIONS
- 7 PIPE JOINTS SHALL BE DEFLECTED TO MAINTAIN HORIZONTAL ALIGNMENT AND VERTICAL ELEVATIONS UNLESS OTHERWISE INDICATED. DEFLECTIONS SHALL NOT EXCEED THE PIPE MANUFACTURERS RECOMMENDATIONS.
- 8. CONTRACTOR SHALL ESTABLISH AND STAKE OUT THE WATER MAIN ALIGNMENT FOR CONSTRUCTION FROM THE HORIZONTAL AND VERTICAL CONTROL AS REFERENCED ON THE DRAWINGS.
- ALL COSTS ASSOCIATED WITH ABANDONING AND/OR REMOVING THE EXISTING WATER MAIN, LINE VALVES, OR SERVICE CONNECTIONS SHALL BE INCLUDED IN THE BID PRICE PER LINEAL FOOT OF WATER MAIN.
- 10. NEW FIRE HYDRANTS SHALL BE BAGGED UNTIL THE NEW WATER MAIN IS INSTALLED
- 11. THE WATER MAIN SHALL BE PRESSURE TESTED AND DISINFECTED PRIOR TO PERFORMING CORPORATION STOP TAPS.
- 12. FIRE HYDRANT PLACEMENT SHALL BE ESTABLISHED BY GOVERNING FIRE
- 13. CONTRACTOR SHALL PRESSURE TEST AND DISINFECTION TEST WITHIN 15 DAYS OF WATER MAIN INSTALLATION.
- 14. ANY EXISTING UTILITIES OR APPURTENANCES INSIDE OR OUTSIDE OF THI CONSTRUCTION LIMITS DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
- 15. GROUNDWATER CONTROL MEASURES SHALL BE IN PLACE PRIOR TO THE TIME THE EXCAVATION REACHES THE GROUNDWATER LEVEL TO MAINTAIN INTEGRITY OF THE IN—SITU MATERIALS. WHILE THE EXCAVATION IS OPEN, THE GROUNDWATER LEVEL SHALL BE MAINTAINED CONTINUOUSLY AT 2 FEET OR MORE BELOW THE WORKING
- 16 UNSTABLE OR UNSUITABLE PIPE FOUNDATION CONDITIONS THAT RESULT FROM INADEQUATE OR INAPPROPRIATE DEWATERING METHODS SHALL BE CORRECTED BY THE CONTRACTOR AT NO COST TO THE OWNER.
- THE CONTRACTOR SHALL REMOVE ALL GUARDRAIL AND FENCE AS NECESSARY TO FACILITATE CONSTRUCTION OF THE PROPOSED WATER MAIN, ANY GUARDRAIL OR FENCE DAMAGED DURING CONSTRUCTION BY THE CONTRACTOR SHALL BE REPLACED IN COMPLETE LENGTH AND KIND BY THE CONTRACTOR AT NO ADDITIONAL COST TO
- 18. ANY EXISTING PROPERTY CORNER PINS OR MONUMENTS DAMAGED OR DESTROYED BY THE CONSTRUCTION SHALL BE RESET BY A REGISTERED SURVEYOR UPON COMPLETION OF THE PROJECT PRIOR TO FINAL PAYMENT. A CERTIFICATION SHALL BI FURNISHED BY A REGISTERED SURVEYOR, STATING THAT SAID DAMAGES HAVE BEEN RESTORED. THE COST SHALL BE INCLUDED IN THE PRICE BID PER LINEAL FOOT OF
- 19. CONTRACTOR SHALL GRADE AND RESLOPE ALL DITCHES DISTURBED DURING CONSTRUCTION. THE COST SHALL BE INCLUDED IN THE PRICE BID PER LINEAL FOOT OF WATER MAIN.
- 20. ACCESS TO ADJOINING PROPERTIES SHALL BE MAINTAINED AT ALL TIMES.
- 21. UNLESS MARKED FOR REMOVAL, SPECIAL CARE SHALL BE TAKEN TO AVOID DAMAGE TO TREES AND THEIR ROOT SYSTEMS. IN GENERAL, WHERE THE TRENCH FALLS WITHIN THE LIMITS OF THE LIMB SPREAD, THE LEAVING OF HEADERS ACROSS TO PROTECT ROOTS WILL BE REQUIRED. THE OPERATION OF ALL EQUIPMENT, PARTICULARLY WHEN EMPLOYING BOOMS, THE STORAGE OF MATERIALS, AND DEPOSITION OF EXCAVATION SHALL BE CONDUCTED IN A MANNER WHICH WILL NOT INJURE TREE TRUNKS, BRANCHES, OR ROOTS UNLESS SUCH TREES ARE DESIGNATED BY THE MUNICIPALITY'S CHEENINGTON OF CREETING FOR PROVING BY THE MUNICIPALITY'S SUPERINTENDENT OF FORESTRY FOR REMOVAL.

This document was


originally issued by

on XX/XX/09. This

document is not

considered a sealed

document.

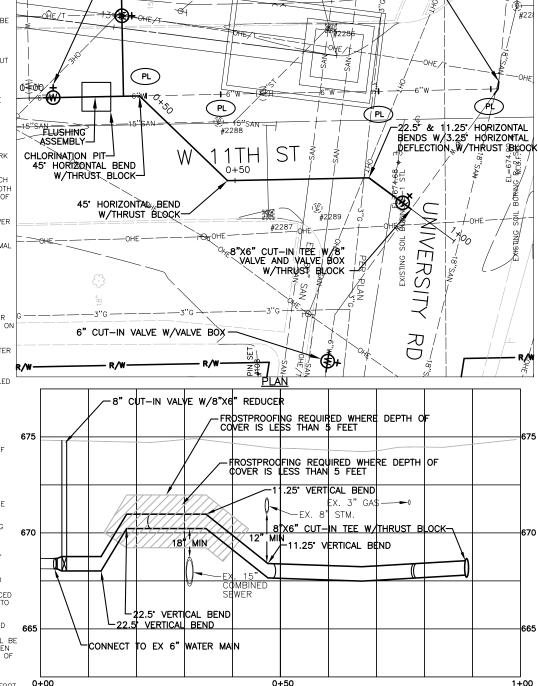

6" CUT-IN VALVE W/VALVE BOX-

REMOVE EX. 6"X6" TEE_AND/

12.51

INSTALL 6" \$POOL PIECES
W/22.5" BEND W/THRUST BLOCK

TO CONNECT TO EX 6" WATER MAIN

CR-1 REPLACE EXISTING CONNECTION, SHORT SIDE, (1" AND UNDER) WITH 1" COPPER CONNECTION, INCLUDING CURB VALVE AND VALVE BOX PL PLUG EXISTING WATER MAIN END

REALIGNMENT

(CR-1)

ADDRESS #1103 UNIVERSITY

I'CUT−IN VALVE W∕VALVÉ

BDX W/8"X6" REDUCER

RETAP AND RECONNECT

' WSC #4775

WATER MAIN RELOCATION PLAN AND WALWORTH RUN INTERCEPTOR

PROFILE ALONG WATER MAIN/ W 11TH ST

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO. SCALE:

SHEET NO .:

BAR IS ONE INCH ON

1"=10"

NOTES

DESIGNED BY: RAWN BY HEET CHK'D BY CROSS CHK'D BY:_ PPROVED BY:___ DATE: _ DATE REMARKS





(800) 362-2764

(216) 491-1490 (216) 664-2444

(216) 881-6600

(216) 476-6142

(800) 362-755


(440) 974–3401

(419) 756-7117 (440) 717-6808


SUPPLEMENTAL WATER MAIN NOTES: (CONTINUED)

- 22. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING MAIL SERVICE IN THE CONSTRUCTION AREA. PRIOR TO DISTURBING ANY MAIL BOXES, THE CONTRACTOR SHALL CONTACT THE POSTAL AUTHORITIES AND SHALL TEMPORARILY RELOCATE MAIL BOXES IN ACCORDANCE WITH THEIR REQUIREMENTS. THE CONTRACTOR SHALL RESTORE MAIL BOXES TO THEIR ORIGINAL CONDITION AND LOCATION. COST OF SAME SHALL BE INCLUDED IN THE UNIT PRICE PER LINEAL FOOT OF WATER MAIN.
- 23. RIGHT-OF-WAY AND PROPERTY LINES SHOWN WERE PREPARED FROM RECORD INFORMATION AND DO NOT REPRESENT A BOUNDARY SURVEY.
- 24. THE BIDDER SHALL MAKE HIS OWN INVESTIGATIONS OF THE SITE CONDITIONS PRIOR TO SUBMITTING HIS PROPOSAL. IF THE BIDDER DESIRES TO OBTAIN ADDITIONAL INFORMATION AS TO SOIL CONDITIONS, HE MUST DO SO AT HIS OWN EXPENSE AND SECURE ALL APPLICABLE APPROVALS AND PERMITS.
- 25. CONTRACTOR SHALL KEEP ALL WORK WITHIN THE RIGHT-OF-WAYS AND EASEMENTS.
- 26. THE CONTRACTOR IS RESPONSIBLE FOR DISPOSAL OF ALL CONSTRUCTION DEBRIS INCLUDING BUT NOT LIMITED TO EXCESS SOIL, ROCK, OR ANY OTHER TYPE OF MATERIALS. THE CONTRACTOR SHALL NOT FILL ANY WETLANDS, LOWLANDS, FLOOD PLAINS, OR DRAINAGE WAYS WITH SAID DEBRIS.
- . THE CONTRACTOR SHALL REMOVE AND REINSTALL CULVERT AND/OR DRAINAGE PIPE AS NECESSARY TO FACILITATE CONSTRUCTION OF THE PROPOSED WATER MAIN. PROPER DRAINAGE MUST BE MAINTAINED AT ALL TIMES. ANY CULVERT OR DRAINAGE PIPE DAMAGED OR BROKEN DURING THE CONSTRUCTION BY THE CONTRACTOR SHALL BE REPLACED, COMPLETE IN LENGTH AND KIND BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
- 28. CONTRACTOR SHALL CLEAN THE ROADWAY AT THE END OF EACH DAY OF OPERATION OR EVERY 500 FEET OF INSTALLED WATER MAIN. CLEANING SHALL BE PERFORMED USING A POWER BROOM OR HYDROSPRAYER, OR AS DIRECTED BY THE ENGINEER.
- 29. THE CONTRACTOR SHALL OBTAIN ALL PERMITS REQUIRED FOR CONSTRUCTION, INCLUDING BUT NOT LIMITED TO EXCAVATION AND ROAD OPENINGS. PERMITS SHALL BE OBTAINED FROM THE CITY ENGINEER AND FROM ANY LOCAL GOVERNMENTAL OFFICIALS IN WHICH THE WORK IS BEING PERFORMED.
- 30. CONTRACTOR SHALL PERFORM ALL CLEAN-UP, ROCK REMOVAL, FINAL GRADING, AND SEEDING TO AREAS DISTURBED BY WORK ASSOCIATED WITH INSTALLATION OF NEW
- 31. CONTRACTOR SHALL PROPERLY NOTIFY PROPERTY OWNERS OF CONSTRUCTION ACTIVITIES THAT WILL IMPACT THEM.
- 32. CONTRACTOR SHALL NOT BE PERMITTED TO STORE MATERIALS, EQUIPMENT, OR VEHICLES ON PRIVATE PROPERTY.
- 33. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING LANDSCAPE ITEMS SUCH AS SHRUBBERY, RAILROAD TIES, ETC. IN A MANNER SUITABLE FOR REPLANTING OR RELOCATION BY THE CONTRACTOR, OR AT THE OPTION OF THE PROPERTY OWNER, SHALL REMOVE AND DISPOSE OF THE LANDSCAPE ITEMS. THE COST FOR THE ABOVE RESTORATION SHALL BE INCLUDED IN THE BID PRICE PER LINEAL FOOT OF WATER
- 34. THE CONTRACTOR SHALL PROVIDE TEMPORARY WATER MAINS AND SERVICE CONNECTIONS PER SPECIFICATION SECTION D-45. TEMPORARY MAINS SHALL BE LAID IN THE GUTTERLINES AND SHALL CROSS THE STREETS AT INTERSECTIONS. TEMPORARY MAINS SHALL NOT BE LAID ON TREELAWNS.

CONSTRUCTION SEQUENCE

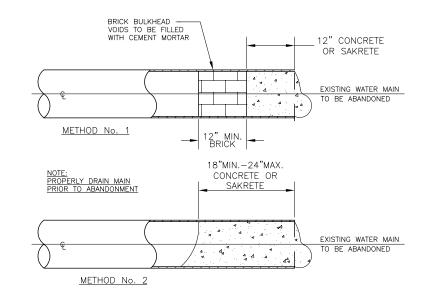


PLUGGING ABANDONED WATER MAIN ENDS (STD-004) - NOT TO SCALE -

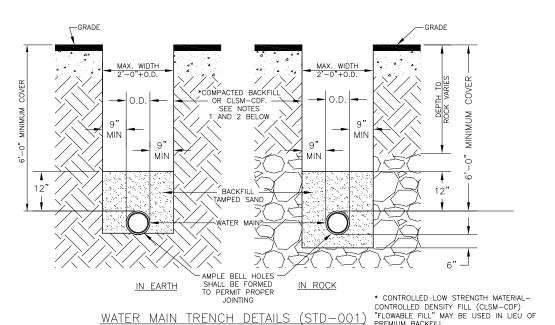

1) PREMIUM BACKFILL CONSISTING OF CONTROLLED LOW STRENGTH MATERIAL - CONTROLLED DENSITY FILL (CLSM-CDF) "FLOWABLE

- NOT TO SCALE -

- A) UNDER ALL EXISTING OR FUTURE PAVEMENTS, SIDEWALKS AND DRIVES
- B) AT ALL LOCATIONS WITHIN THE CITY OF CLEVELAND CORPORATION LIMITS
- C) AS SPECIFIED IN LOCAL MUNICIPALITIES SERVED BY CWD (SEE LOCAL REQUIREMENTS)
- 2) WHEN PREMIUM BACKFILL IS REQUIRED BY THE LOCAL MUNICIPALITY FOR CASES OTHER THAN THOSE LISTED IN NOTE 1 ABOVE, IT SHALL BE LIMESTONE GRADED PER ODOT 304.02 OR ODOT 411. NO SLAG IS PERMITTED.*
- 3) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, AND THOROUGHLY COMPACTED SO AS TO PROVIDE A SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.
- 4) MINIMUM COMPACTION FOR ALL SAND BEDDING BACKFILL AND PREMIUM BACKFILL SHALL BE 95% STANDARD PROCTOR
- 5) PAVEMENT, SIDEWALK OR DRIVES TO BE INSTALLED IN ACCORDANCE WITH LOCAL MUNICIPALITY'S SPECIFICATIONS.

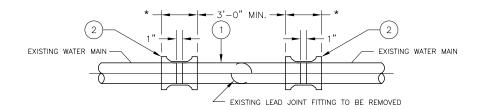

- 1) PLAIN END x PLAIN END DUCTILE IRON PIPE AS SPECIFIED (CUT TO SUIT).
- 2) *CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS

MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF FITHER STEEL OR DUCTUE IRON (ASTM-A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No's 38, 138 OR 162 (TRANSITION TYPE), OR SMITH-BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.

3) ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".

SPOOL PIECE INSTALLATION DETAIL (STD-008)

*CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.


MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM-A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No's 38, 138 OR 162 (TRANSITION TYPE), OR SMITH-BLAIR 441 STRAIGHT AND

ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".

THE DIVISION OF WATER WILL DETERMINE THE FIELD LOCATION OF THE CUT-IN-VALVE ASSEMBLY. THE DIVISION OF WATER WILL ALSO SET THE TIME OF INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY.

THE CONTRACTOR SHALL DO ALL PIPE CUTTING AND INSTALLATION. HOWEVER, THE INSTALLATION OF THE CUT-IN-VALVE ASSEMBLY SHALL BE DONE UNDER THE SUPERVISION OF THE DIVISION OF WATER.

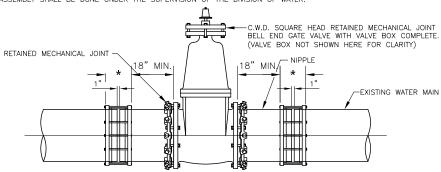

BEFORE CUTTING EXISTING WATER MAIN, THE NIPPLES SHALL BE CONNECTED TO THE MECHANICAL JOINT BELL END GATE VALVE. AFTER CUTTING PIPE, FINAL CONNECTIONS SHALL BE MADE WITH COUPLINGS/SOLID SLEEVES AS

> CUT-IN-VALVE DETAIL - NOT TO SCALE -

BAR IS ONE INCH ON IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DESIGNED BY: RAWN BY HEET CHK'D BY: CROSS CHK'D BY: PPROVED BY:__ ATE: DATE REMARKS





This document was originally issued by on XX/XX/09. This document is not considered a sealed

document.


WALWORTH RUN INTERCEPTOR REALIGNMENT

WATER MAIN NOTES AND DETAILS

PROJECT NO.

SCALE: NTS

SHEET NO .:

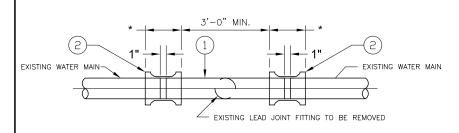

- 1) PLAIN END x PLAIN END DUCTILE IRON PIPE AS SPECIFIED (CUT TO SUIT).
- 2) *CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.

MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM-A536).

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No'S 38, 138 OR 162 (TRANSITION TYPE), OR SMITH-BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.

3) ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWWA C-105/A21.5-88, CLASS "C", METHOD "B".

CITY OF CLEVELAND STANDARD 4" OR 6" HYDRANT. 6" WITH 1 - 4" STEAMER NOZZLE WITH HOSE ADAPTER SHOWN.

-4" I.D STEAMER NOZZLE ADAPTER

(PENTAGON NUT POINT TO FLAT 1-1/8", HEIGHT 1", FLAT 3/4" WIDE)

4" TEMPORARY WATER MAIN (BY PASS) FOR DOMESTIC AND

TEMPORARY FIRE HYDRANT SUPPLY OR 2" TEMPORARY WATER MAIN FOR DOMESTIC SUPPLY ONLY.

-4" VALVE FOR FIRE HYDRANT CONTROL WITH

TEMPORARY WATER MAIN & HYDRANT CONNECTION ASSEMBLY-A

TO PROVIDE SIMULTANEOUS SERVICE IN EXISTING HYDRANT AND TEMPORARY BYPASS MAIN (STD-H14)

- NOT TO SCALE -

1/4 TURN "ON-OFF" STOPS. OPERATING NUT SHALL BE CLEVELAND FIRE HYDRANT STANDARD.

4" STEAMER NOZZLE

2-1/2" MATCHING HOSE NOZZLE CAP

NOTE: THREAD PATTERN FOR STEAMER AND


HOSE NOZZLES IS EITHER CLEVELAND STANDARD OR NATIONAL STANDARD THREAD (NST)

-4" LD. STFAMER NO77LF OR

"VICTAULIC" JOINT COUPLINGS ARE SHOWN FOR ASSEMBLY

2-1/2" HOSE NOZZLE ADAPTER

SPOOL PIECE INSTALLATION DETAIL (STD-008)

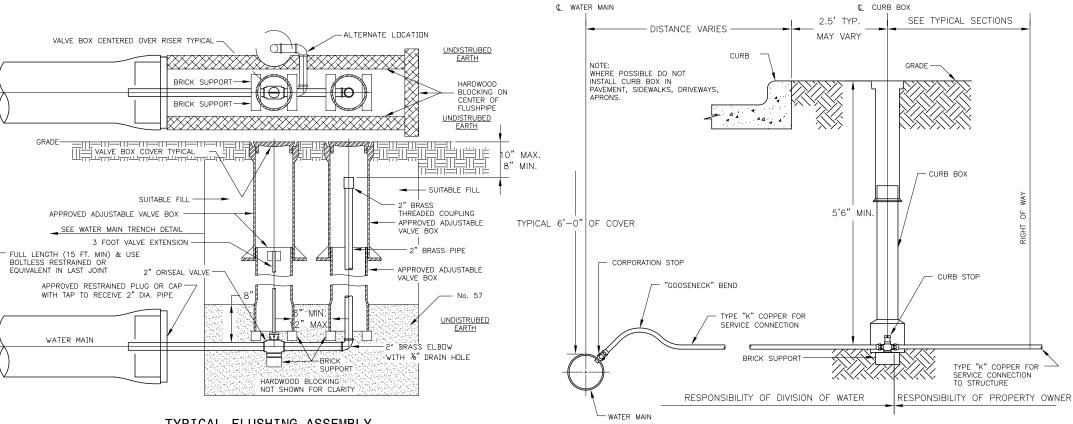

TYPICAL FLUSHING ASSEMBLY


* CONNECTION SHALL BE MADE WITH RETAINED MECHANICAL JOINT SOLID SLEEVES (SHORT OR LONG PATTERN) DUCTILE IRON CLASS 350 OR CAST IRON CLASS 250 OR COMPRESSION COUPLINGS.

COMPRESSION COUPLINGS SHALL BE OF A GASKETED, SLEEVE TYPE WITH DIAMETERS TO PROPERLY FIT PLAIN END IRON PIPE. EACH COUPLING SHALL CONSIST OF ONE (1) MIDDLE RING, WITHOUT STOPS; TWO (2) FOLLOWER GLANDS; TWO (2) RUBBER-COMPOUND BUNA-N BLEND, WEDGE SECTION GASKETS; AND SUFFICIENT TRACKHEAD STAINLESS STEEL BOLTS AND NUTS (ASTM A276/A193/A194, TYPE 304, EXTRA HEAVY HEX) TO PROPERLY COMPRESS THE GASKETS.

MIDDLE RING AND FOLLOWER GLANDS SHALL BE OF EITHER STEEL OR DUCTILE IRON (ASTM-A536)

THE COMPRESSION COUPLING SHALL BE WITHOUT STOPS AND BE RATED FOR A MINIMUM WORKING PRESSURE OF 250 PSI AND SHALL BE EQUAL TO THE DRESSER STYLE No'S 38, 138 OR 162 (TRANSITION TYPE), OR SMITH—BLAIR 441 STRAIGHT AND TRANSITION COUPLINGS.


ALL BOLTS AND NUTS ON ALL MECHANICAL JOINTS, INCLUDING THOSE ON THE "RETAINED" TYPE, SHALL HAVE FIELD APPLIED ONE (1) COAT OF BITUMASTIC PAINTING FOLLOWED BY AN ENCASEMENT OF POLYETHYLENE WRAPPING IN ACCORDANCE WITH ANSI/AWAYA C-105/A21.5-88. CLASS "C". METHOD "B".

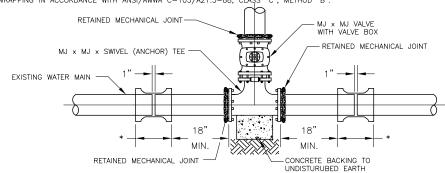

CUT-IN TEE DETAIL METHOD No.1 STD-T01

NEW 1" SERVICE CONNECTION DETAIL IN PUBLIC RIGHT OF WAY (STD-CO4)

** CLEVELAND REQUIRED MIX DESIGN — CEMENT — 50 LBS. PER CUBIC YARD SAND — 2850 LBS. PER CUBIC YARD WATER — 50 GALLONS PER CUBIC YARD RHEOCELL 30MB — 3 OZ. PER CUBIC YARD * CONTROLLED LOW STRENGTH MATERIAL— CONTROLLED DENSITY FILL (CLBM-CDF) "FLOWABLE FILL" IS REQUIRED WITHIN THE CITY OF CLEVELAND CORPORATION LIMITS AND PERMITTED IN ALL COMMUNITIES SERVICED BY CWD. CHECK LOCAL REQUIREMENTS.

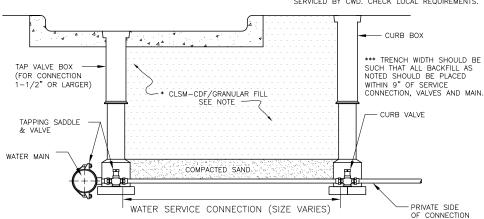

NOTES:

- 1) CONTRACTOR SHALL USE SPECIAL CARE IN PLACING THE SAND BEDDING BACKFILL, SO AS TO AVOID SCRAPING OF THE EXTERIOR COATING, INJURING THE PIPE, DISTORTING OR MOVING THE PIPE WHEN COMPACTING THE SAME. THE SAND BEDDING BACKFILL SHALL BE TAMPED IN SIX (6) INCH LAYERS, SIMULTANEOUSLY ON EACH SIDE OF THE PIPE, AND THOROUGHLY COMPACTED SO AS TO PROVIDE A SOLID BACKING AGAINST THE EXTERNAL SURFACE OF THE PIPE.
- 2) MINIMUM COMPACTION FOR ALL SAND BEDDING BACKFILL, BACKFILL AND PREMIUM BACKFILL SHALL BE 95% STANDARD PROCTOR.

SERVICE CONNECTION BACKFILL DETAIL (STD-023)



WALWORTH RUN INTERCEPTOR REALIGNMENT

WATER MAIN RELOCATION DETAILS


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.:
SHEET:

SCALE:
NTS


SHEET NO.:
C-8


BAR IS ONE INCH ON

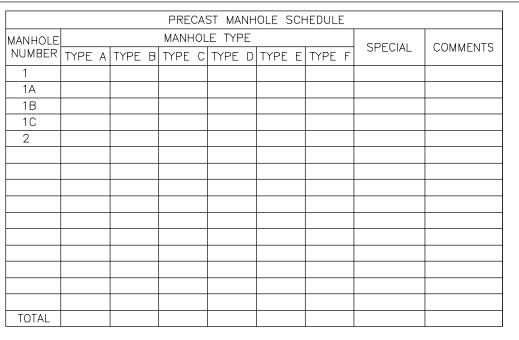



NOTES

- SECTIONS OF THE PRECAST MANHOLE SHALL BE CAST AND ASSEMBLED WITH EITHER ALL TONGUE OR ALL GROOVE ENDS UP. LIFT HOLES MAY BE PROVIDED IN EACH SECTION FOR HANDLING.
- 2. BASES FOR MANHOLES ARE SHOWN WITH MONOLITHIC FLOOR AND RISERS WHICH MAY BE CAST IN ONE OR TWO OPERATIONS, A PERMISSIBLE ALTERNATE IS TO CAST AND SHIP THE FLOOR AND BARREL SEPARATELY. OPENINGS FOR INLET AND OUTLET PIPES SHALL BE PROVIDED, EITHER WHEN THE UNIT IS CAST OR LATER TO MEET PROJECT REQUIREMENTS, BOTTOM CHANNELS MAY BE FORMED OF CONRETE PRECAST IN THE BASE OR INSTALLED BY FIELD CONSTRUCTION. FLOORS MAY ALSO BE POURED IN PLACE.
- 3. OPENINGS IN RISER SECTIONS SHALL BE PREFABRICATED. FLEXIBLE CONNECTIONS SHALL BE PROVIDED FOR SANITARY AND STORM SEWERS. PREMIUM SEALS SHALL MEET ASTM C-923.
- JOINT SEALS BETWEEN PRECAST MANHOLE SECTIONS SHALL BE RESILENT AND FLEXIBLE GASKET JOINTS. JOINTS SHALL MEET ASTM C-443, FEDERAL SPECIFICATION SS-S-00210 (210 A), AND AASHTO
- MANHOLE JOINTS SHALL BE SEALED BY A FLEXIBLE SEALANT, CONSEAL CS-202 AS MANUFACTURED BY 5. CONSEAL CONCRETE SEALANTS, INC., OR APPROVED
- 6. MANHOLE GRADE RINGS SHALL BE SEALED EXTERNALLY AND BETWEEN GRADE RINGS WITH A LAYER OF MASTIC COMPOUND SUCH AS FABERLITE, KENT SEAL, OR EQUAL
- 7. PRECAST MANHOLES SHALL CONFORM TO THE REQUIREMENTS OF ASTM C-478.
- 8. SEAL ALL LIFT HOLES WITH APPROVED CONCRETE PLUGS
- 9. SEE PLANS FOR FRAME AND COVER ELEVATIONS.
- 10. TOP MANHOLE STEP SHALL BE INSTALLED NOT MORE THAN 2' BELOW TOP OF FRAME.
- 11. APPLY "THOROSEAL" BY THORO SYSTEM PRODUCTS, OR APPROVED EQUAL TO THE INSIDE EXPOSED SURFACES OF ALL MANHOLES.

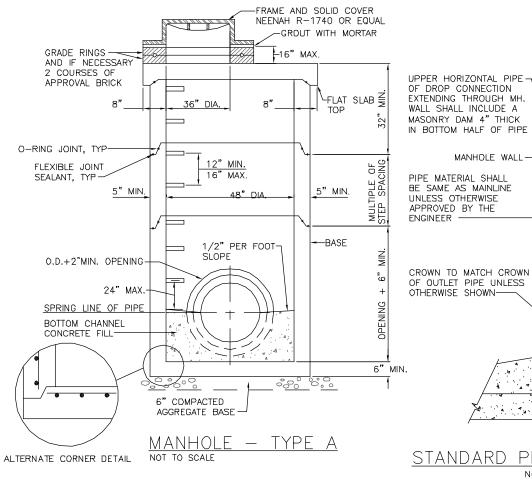

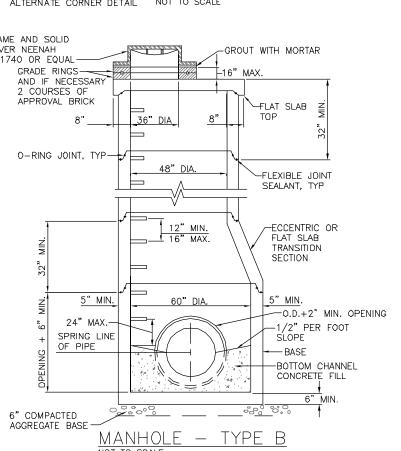

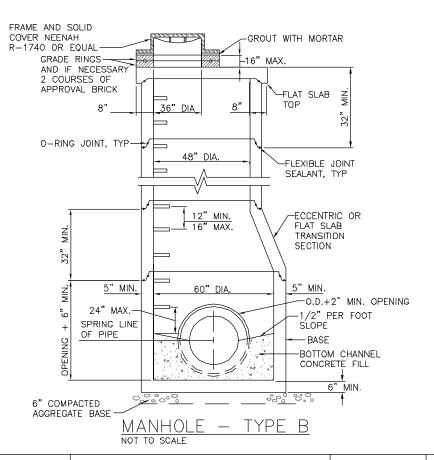

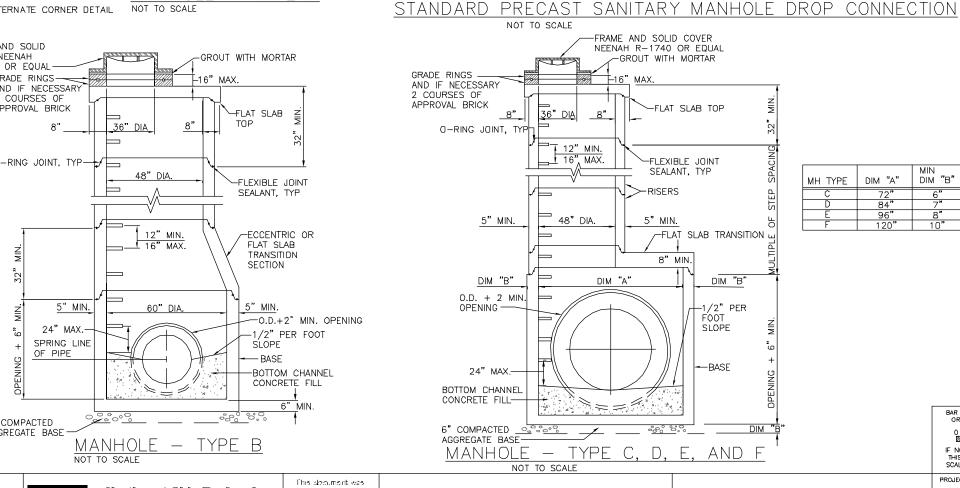







onginally issued by on XX/XX/09. This document is not considered a sealed

-document.

WALWORTH RUN INTERCEPTOR REALIGNMENT

TABLE OF DIMENSIONS

-TEE

PLAN

MANHOLE WALL

PIPE MATERIAL ADAPTER

-PIPE

RFAM

2'-0" SET ON

UNDISTURBED

STIRRUPS

@ 12" CENTERS-

#6 BAR

GROUND

COMPACTED GRANGULAR

BACKFILL UNDER PIPE SUPPORT BEAM

CLASS "A" CONCRETE

90° ELBOW

SUPPORT

→ B

⊸ В

(IF REQUIRED)

PRECAST CONCRETE MANHOLE DETAILS

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.: SHEET:

DIM "B"

-RAMSET THREADER STUD

-CLASS "A" CONCRETE

#4 BARS

@ 12" CENTERS

END SMOOTH

REINFORCING

STEEL @ 12"

CENTERS

NO. 3440 A HEX. STRAIGHT THROUGH

NO. 1223 OR EQUAL

COUPLING

6 (AD) 1

SECTION A-A

SECTION B-B


DIM "A"

MH TYPE

SCALE: NONE

BAR IS DNE INCH ON ORIGINAL DRAWING


SHEET NO.: C-9

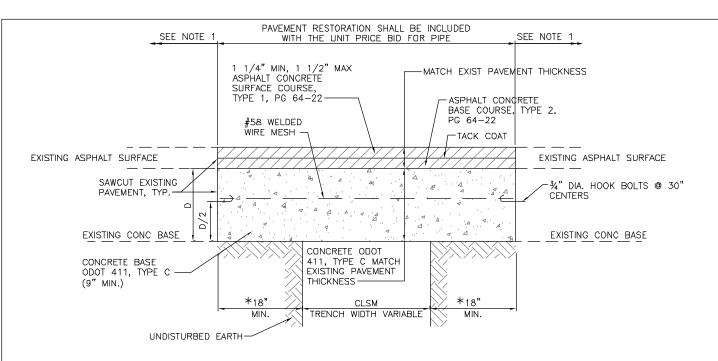

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR ASPHALT PAVEMENT WITH CONCRETE BASE

NOT TO SCALE

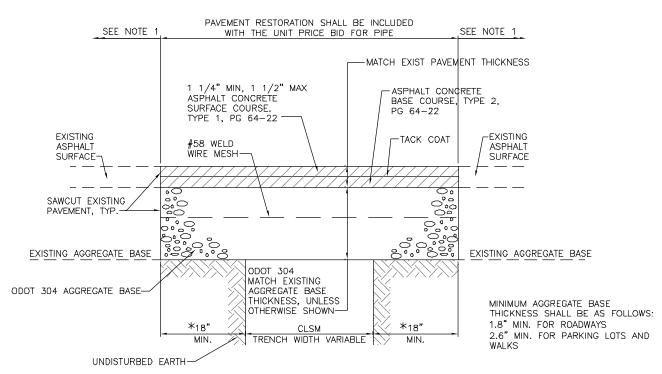

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

TYPICAL TRENCH DETAIL FOR ASPHALT PAVEMENT WITH AGGREGATE BASE

NOT TO SCALE

DESIGNED BY: DRAWN BY:_ SHEET CHK'D BY: CROSS CHK'D BY APPROVED BY: REV. DATE ISSUE BY





This about eas originally issued by decument is not considered a sealed

decument.

NOT TO SCALE

REMOVE EXISTING CONCRETE

SIDEWALK AND REINFORCING

WALWORTH RUN INTERCEPTOR REALIGNMENT

PAVEMENT WITH BRICK BASE

TYPICAL TRENCH DETAIL FOR ASPHALT


SHEET: SCALE: NONE

EXISTING 4" TO 6" -COMPACTED SUBGRADE REPLACEMENT REMOVAL THICK CONCRETE SIDEWALK SIDEWALK REMOVAL AND REPLACEMENT -CONCRETE ODOT 411, TYPE C MATCH EXIST. MIN. D/4" DEEP X 1/4" PAVEMENT THICKNESS -IF 5'-0" OR LESS WIDE JOINT TO BE SÉALED UNLESS OTHERWISE SHOWN REMOVE TO PAVEMENT JOINT W/ODOT ITEM 705.04 OR TO EXISTING CURB SÉALANT, TYP.-#58 WFLDED WIRE MESH-EXIST. CONCRETE EXIST. CONCRETE PAVEMENT PAVEMENT SAWCUT EXIST. 3/4" DIA. HOOK BOLTS @ 30" CENTERS. PAVEMENT, TYP. OMIT HOOK BOLTS FOR SIDEWALKS WHERE "D" IS 6" OR LESS. UNDISTURBED EARTH MINIMUM PAVEMENT THICKNESS SHALL BE AS FOLLOWS: *18" 1. 9" MIN. FOR ROADWAY MIN. RENCH WIDTH MIN 6" MIN. FOR DRIVEWAYS OR PARKING AREAS VARIABLE 4" MIN. FOR SIDEWALKS

4" FIBER REINFORCED

CONCRETE

TYPICAL TRENCH DETAIL FOR CONCRETE PAVEMENT

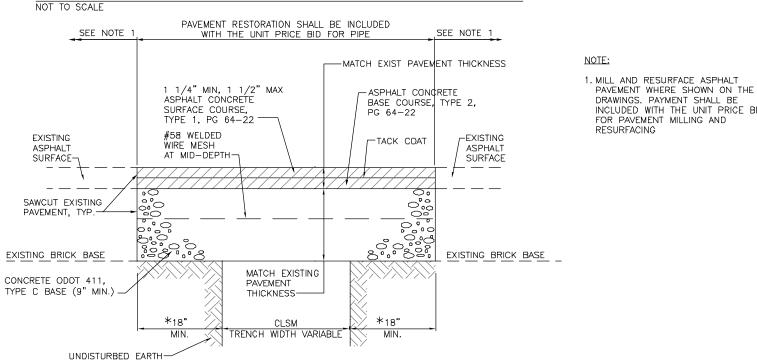

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

BAR IS ONE INCH ON ORIGINAL DRAWING

DRAWINGS, PAYMENT SHALL BE

FOR PAVEMENT MILLING AND

RESURFACING

INCLUDED WITH THE UNIT PRICE BID

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PROJECT NO.:

SHEET NO.: C-10


TRENCH REPAIR DETAILS

LEVELING COURSE DEPTH AS

REQUIRED TO ESTABLISH

*CONTINUE PAVEMENT REPLACEMENT TO CURB WHERE SAWCUT OCCURS LESS THAN 3' FROM FACE OF CURB

GRADES

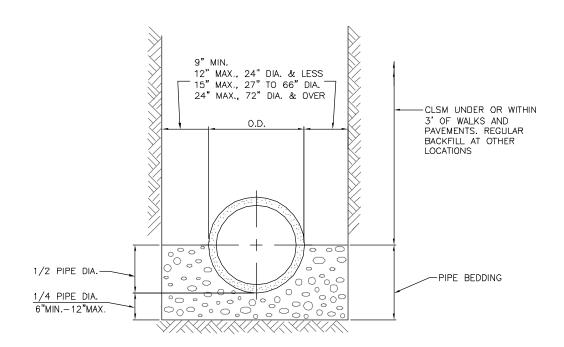

TYPICAL SEWER TRENCH FOR RCP AND VCP

NOT TO SCALE

DESIGNED BY:__ DRAWN BY:___ SHEET CHK'D BY:-CROSS CHK'D BY:_ APPROVED BY:_ REV. DATE ISSUE BY DATE: ___





This aboutment was originally issued by xxxxxxxxxxxxxxxxxxxxxxxxxxxx on XXXXX/09. This document is not considered a sealed document.

WALWORTH RUN INTERCEPTOR REALIGNMENT

CIVIL DETAILS

IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY


PROJECT NO.:

BAR IS ONE INCH ON ORIGINAL DRAWING

SHEET:

SCALE: NONE

SHEET NO.: C-11

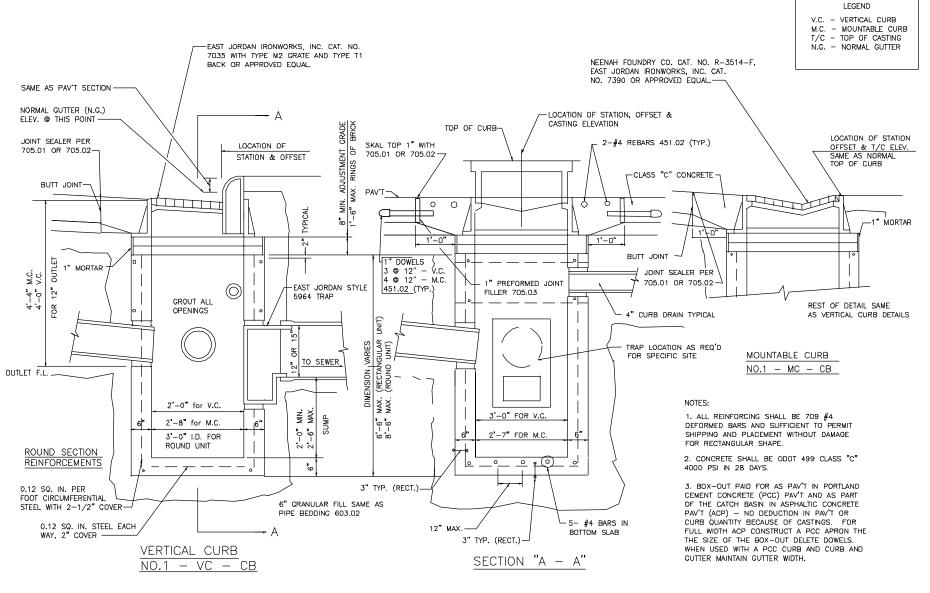

ALTERNATE BASIN SHAPE

A ROUND PRECAST CONCRETE UNIT MAY BE USED IN LIEU OF RECTANGULAR UNIT. THE ROUND SECTION SHALL BE A 36" I.D. UNIT WITH INTEGRAL BASE AND PRECAST TOP TRANSITION (ROUND TO RECTANGULAR) SECTION TO FIT CASTING BEING USED. TRANSITION UNIT REQUIRES A #5 REBAR AT CORNERS OF RECTANGULAR SHAPED SECTION AND 3 x 8 W6 X X W5 WELDED WIRE FABRIC IN VERTICAL SECTION.

CITY OF CLEVELAND STANDARD CATCH BASIN NOT TO SCALE





considered a sealed

WALWORTH RUN INTERCEPTOR REALIGNMENT CITY OF CLEVELAND CATCH BASIN DETAIL


IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY PROJECT NO.:

BAR IS ONE INCH ON ORIGINAL DRAWING


SHEET:

SCALE: NONE


SHEET NO.: C-12

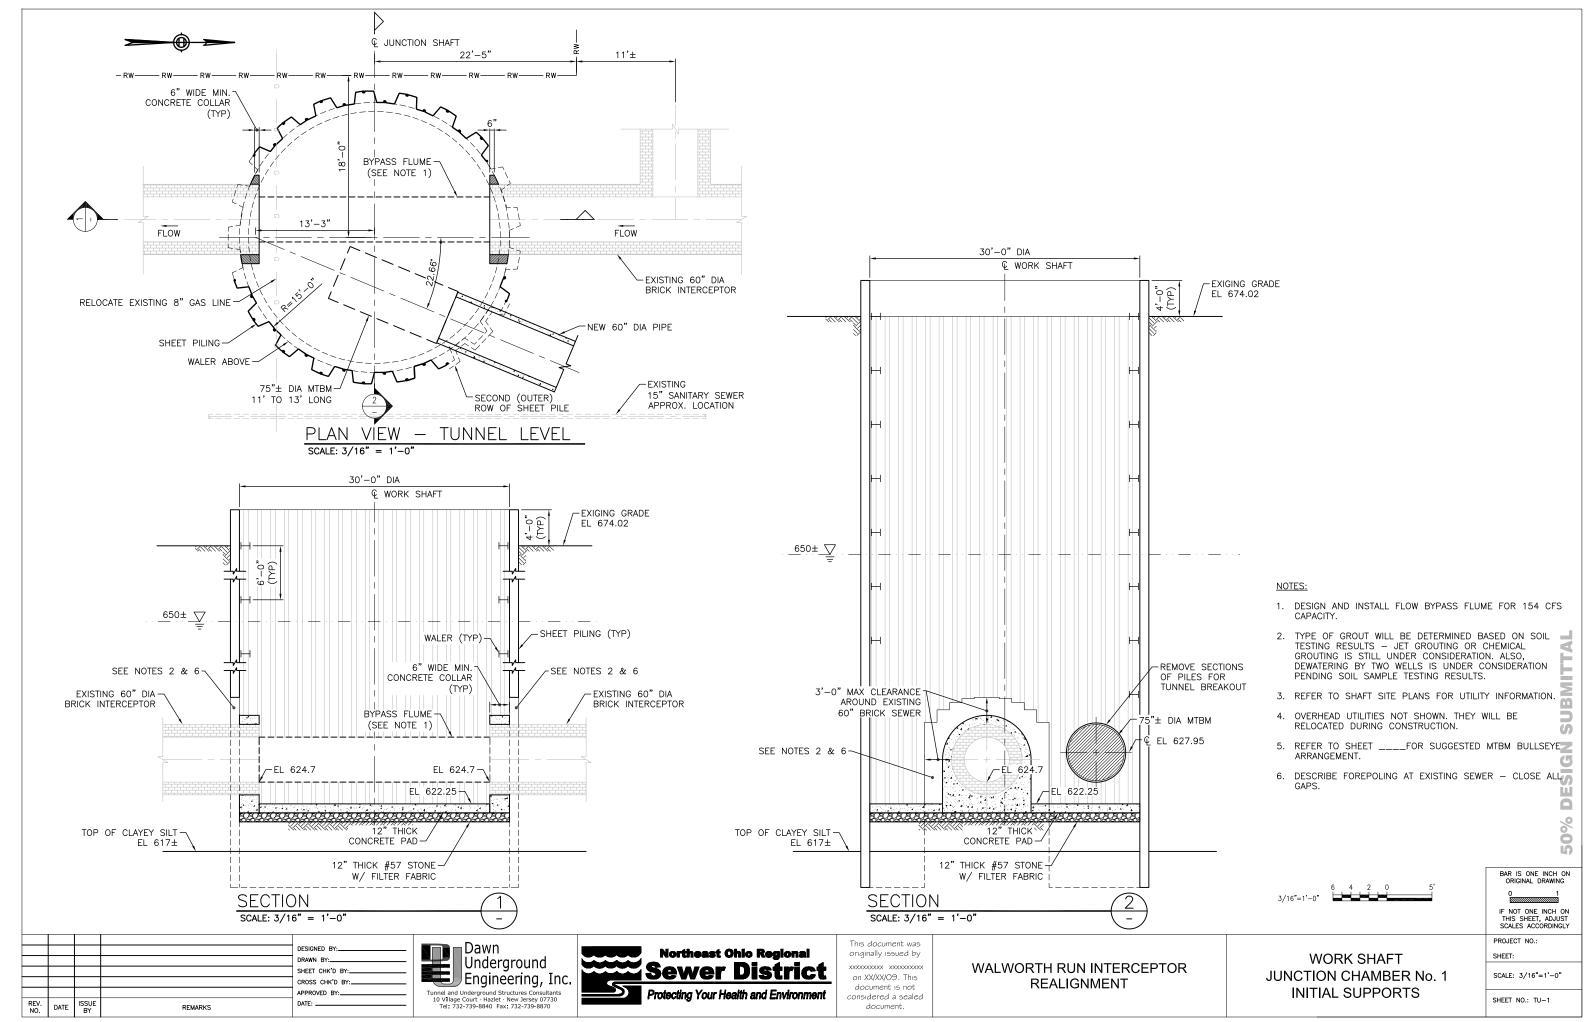


Z-IDUEIDUE Projects/2009/D2920 - WRIRICurrent/JUNCTION CHAMBER No 1.dwg, 3/16/2010 3:01:11 PM, T

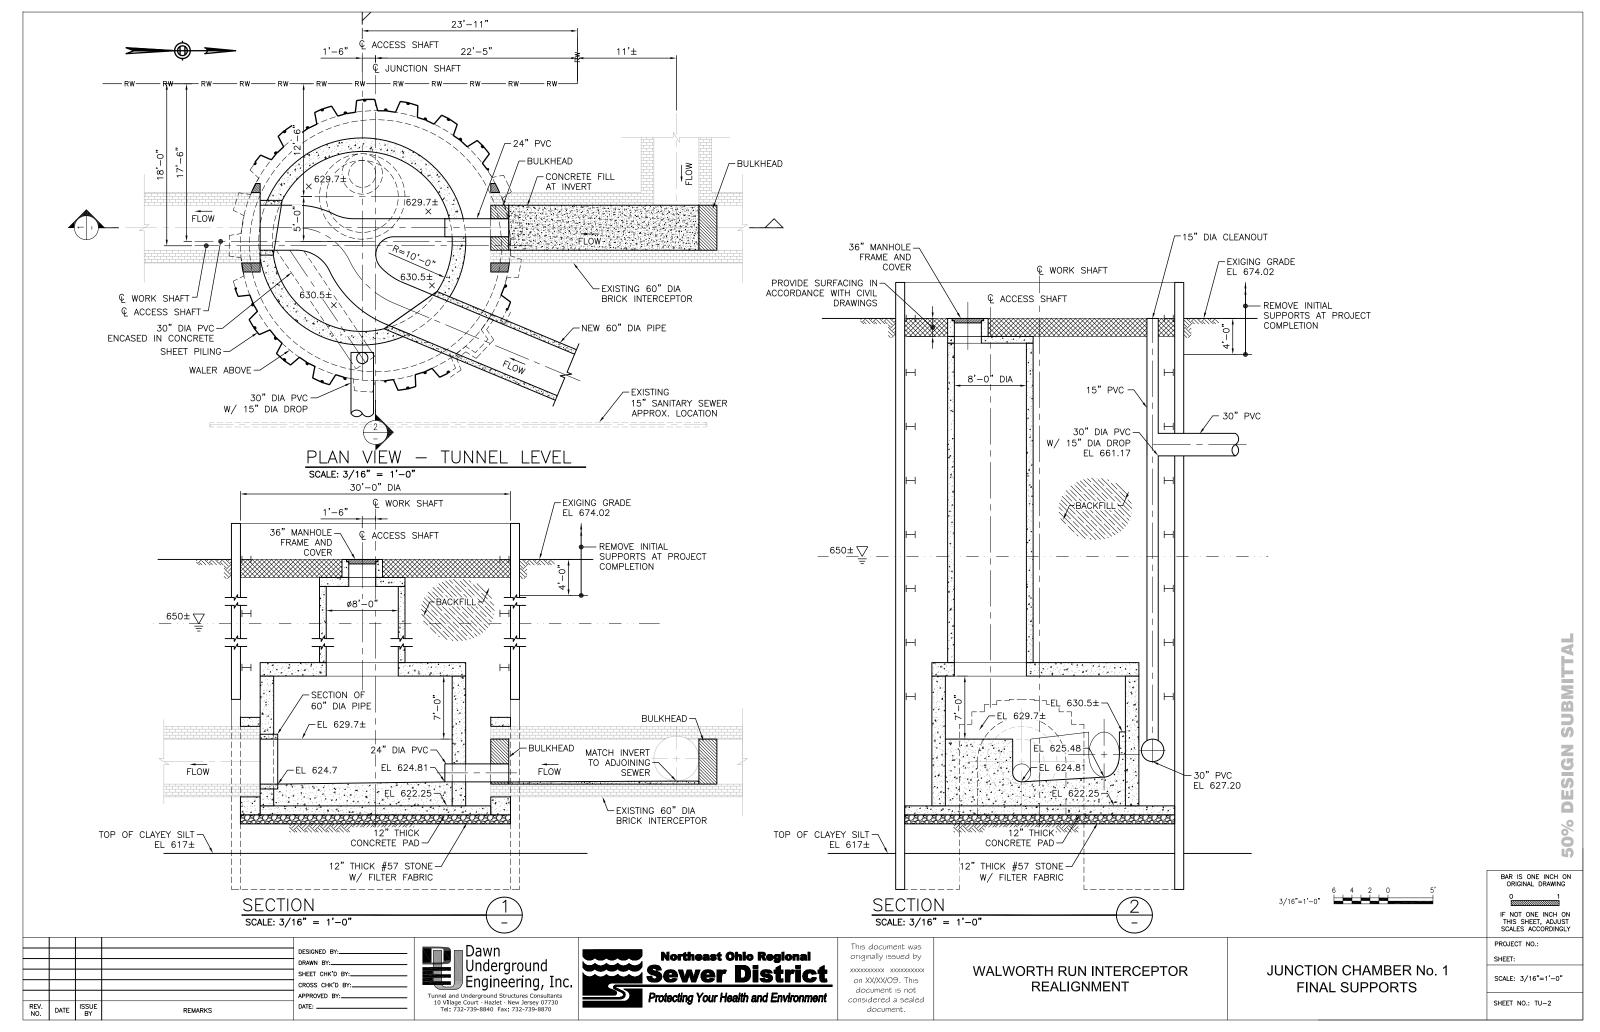


2:DUEIDUE Projects/2009/D2920 - WRIR/Current/UNCTION CHAMBER No 1,4wg, 3/18/2010 3:00:52 PM, Thomas

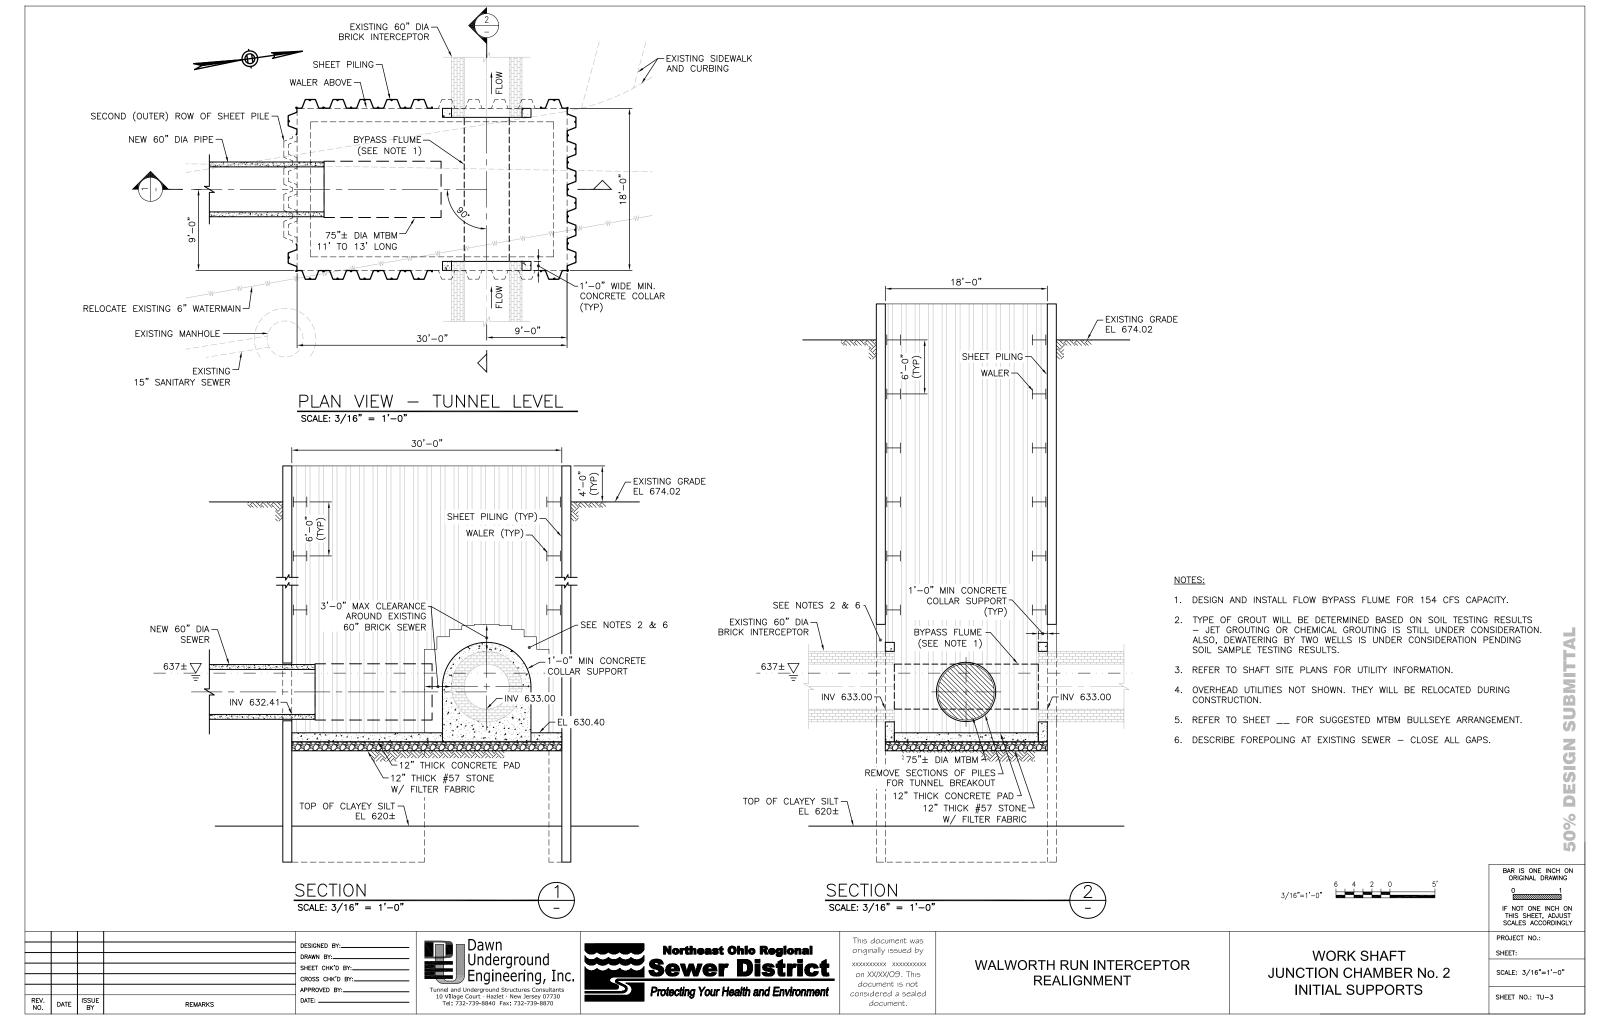


2:DUEIDUE Projects/2009/D2920 - WRIRICurrent/JUNCTION CHAMBER No 2.dwg, 3/16/2010 2:51:56 PM, Thomas

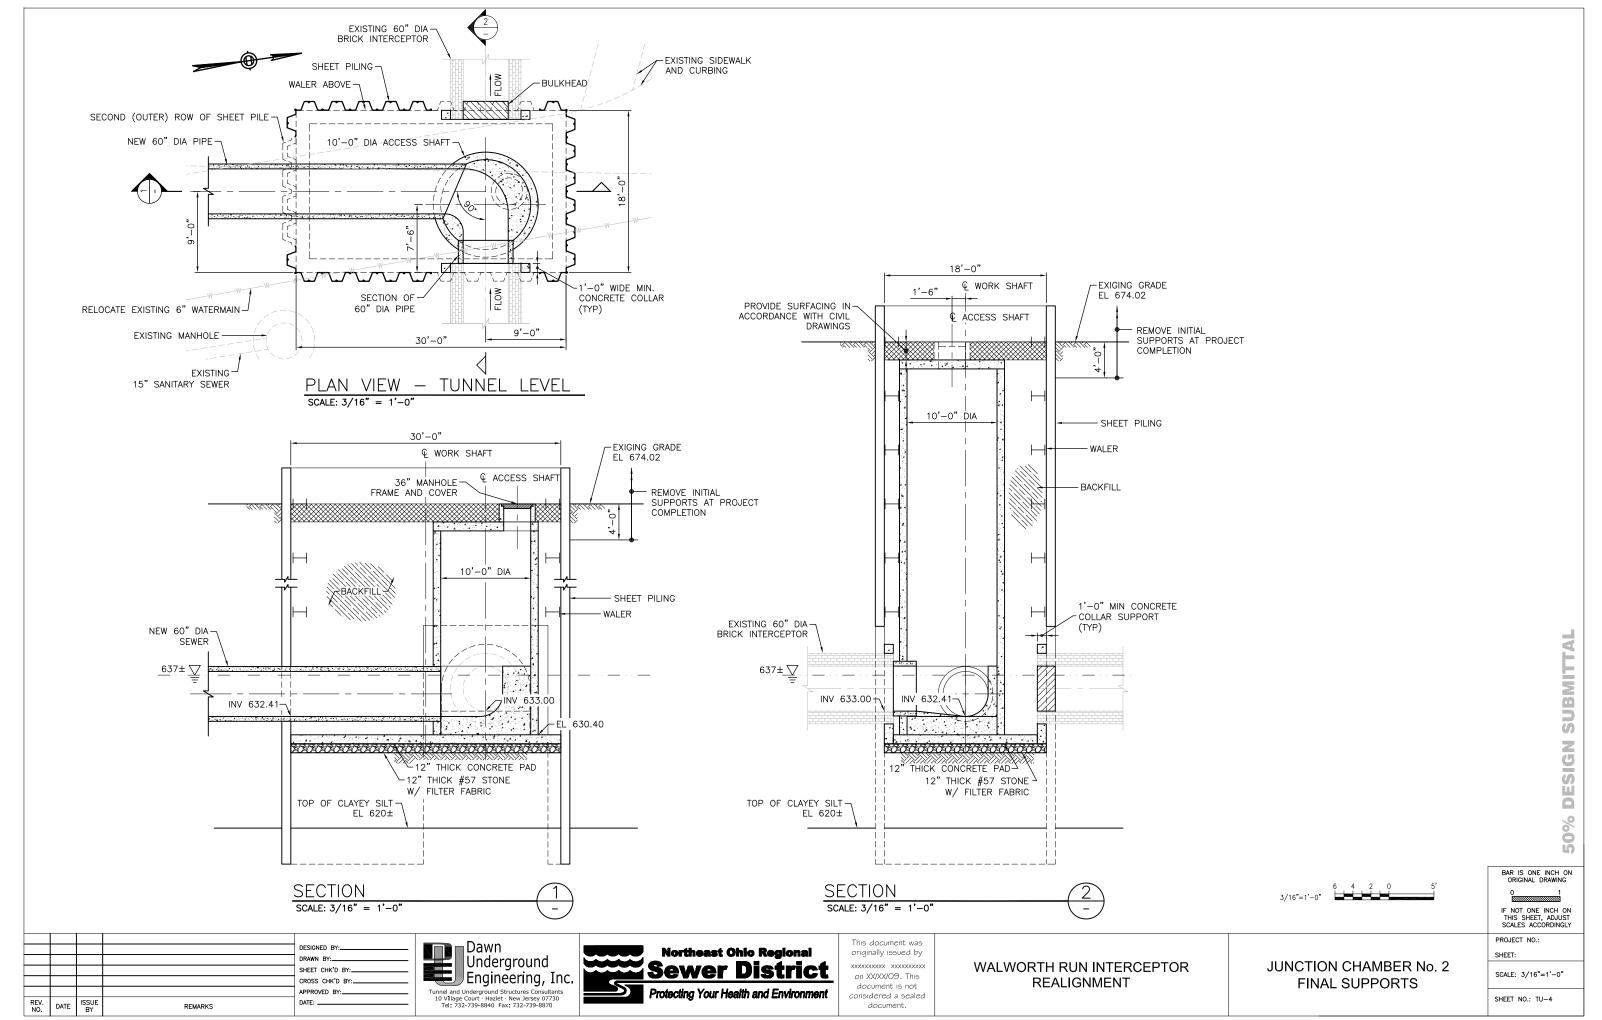

Z:IDUEIDUE Projects/2009/D2920 - WRIR/Current/JUNCTION CHAMBER No. 2.dwg, 3/16/2010 2:53:13 PM, T

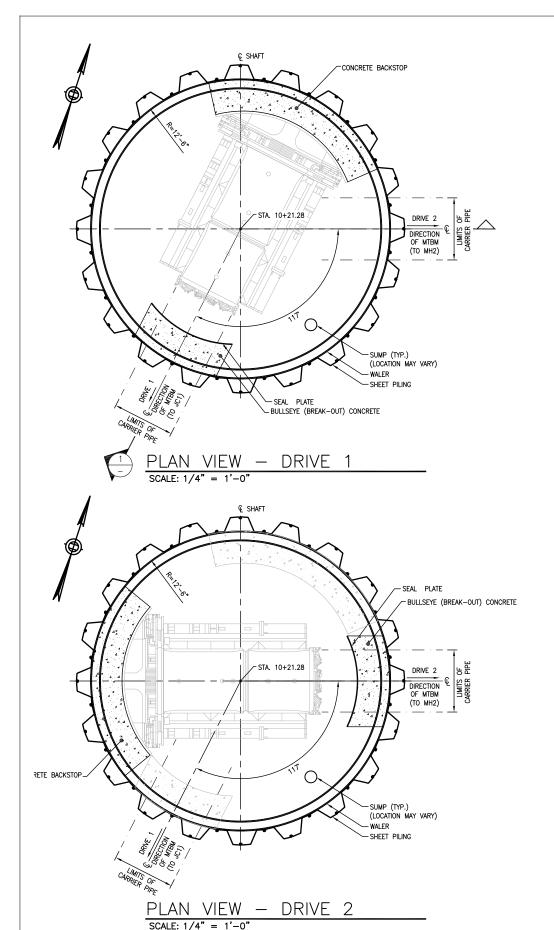

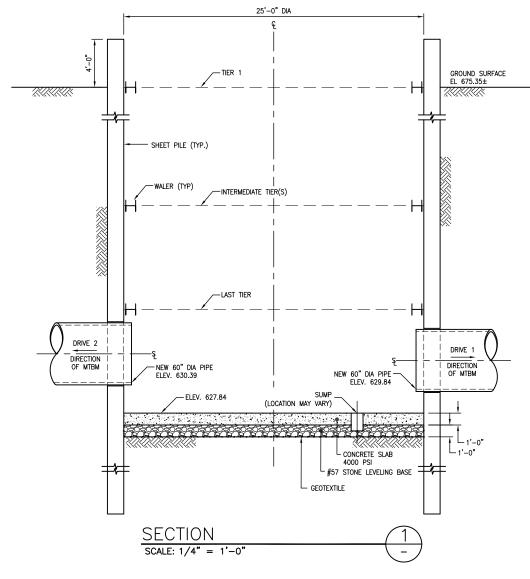

GENERAL NOTES:

1. ALL STRUCTURAL STEEL MEMBERS ARE FY = 50 KSI.

2. STEEL SHEETING IS PZ27 OR EQUAL (FY = 50 KSI))
3. USE E70XX ELECTRODES FOR ALL WELDS.
4. THE MAX. THRUST LOAD FROM MTBM ON TUNNEL BREAK-IN CONCRETE SHALL NOT EXCEED 50 TONS.

SEQUENCE OF CONSTRUCTION FOR WORK SHAFT AT MANHOLE NO. 1 (MH1)
THE FOLLOWING SEQUENCE OF CONSTRUCTION FOR WORK SHAFT AT MH1 IS PREPARED CONSIDERING THAT MICROTUNNEL DRIVE 1 WILL BE COMPLETED FIRST AND THEN DRIVE 2 WILL BE COMPLETED.

TO MAINTAIN THE EXCAVATION AND SUPPORT STABILITY, THE FOLLOWING SEQUENCE OF CONSTRUCTION FOR THE WORK SHAFT

TO MAINTAIN THE EXCAVATION AND SUPPORT STABILITY, THE FOLLOWING SEQUENCE OF CONSTRUCTION FOR THE WORK SHAFT SHALL SECOND (OUTER) ROW OF SHEET PILES AT TUNNEL BREAK-OUT LOCATIONS WITHIN LIMITS INDICATED.

3. EXCAVATE PIT "IN DRY" TO MAXIMUM OF 2 FEET DEPTH BELOW TIER 1 LEVEL AND INSTALL TIER 1 STEEL SUPPORTS.

4. CONTINUE TO EXCAVATE PIT "IN DRY" IN STEPS TO MAXIMUM OF 2 FEET DEPTH FOR EACH OF THE REMAINING TIER LEVEL AND INSTALL REMAINING TIER TIES SUPPORTS.

5. AFTER INSTALLATION OF THE LAST TIER, CONTINUE TO EXCAVATE THE PIT "IN DRY" DOWN TO THE BOTTOM OF FYCAVATION.

EXCAVATION.

EXAMATION.

C. CLEAN THE BOTTOM OF EXCAVATION AND PLACE GEOTEXTILE FABRIC, CRUSHED STONE BASE AND CONCRETE SLAB. PROVIDE SUMP PIT AS SHOWN ON THE DRAWINGS. ALLOW THE CONCRETE SLAB TO GAIN THE DESIGN STRENGTH.

J. IF GROUND WATER IS IN-FILTERING INTO THE SUMP PIT, CONTINUOUSLY PUMP OUT THE WATER FROM THE SUMP PIT.

FOR THE ENTIRE DURATION OF WORK.

PREPARATION FOR BREAK-OUT FOR DRIVE 1 AND DRIVE 2

8. PLACE SUITABLE GROUT BETWEEN TWO ROWS OF SHEETING AT TUNNEL BREAK-OUT LOCATIONS TO PREVENT GROUNDWATER OR SOIL INFILTRATION WHEN MAIN SHEET PILES ARE CUT FOR MICROTUNNEL BORING MACHINE (MTBM) BULLS EYE.

CUT THE SHEET PILES (INSTALLED FOR THE SHAFT) IN THE MICROTUNNEL BREAK-OUT AREAS (BULLSEYE). IF DURING CUTTING OF SHEET PILES, GROUNDWATER OR SOIL INFILTRATION IS OBSERVED, PROVIDE SECONDARY GROUT TO COMPLETELY SEAL BULLSEYE ZONE AS NECESSARY. APPLY A BOND BREAKER AGAINST SHEET PILES IN THE BULLSEYE

PROCEDURE FOR BREAK-OUT FOR DRIVE1 AND DRIVE 2

10. INSTALL STEEL BULLSEYE SEAL PLATE AND PLACE CONCRETE FOR THE TUNNEL BREAK-OUT BETWEEN SEAL PLATE AND SHEET PILES FOR DRIVE 1. ALLOW THE CONCRETE TO GAIN THE DESIGN STRENGTH. PULL UP THE SECOND (OUTER) ROW OF SHEET PILES JUST ENOUGH TO CLEAR THE MICRO TUNNEL BORING MACHINE (MTBM) FOR DRIVE 1.

11. ON COMPLETION OF DRIVE1, INSTALL BREAK-OUT FOR DRIVE 2 SIMILAR TO THE BREAK-OUT PROCEDURE FOR DRIVE 1.

ALLOW THE CONCRETE TO GAIN THE DESIGN STRENGTH. PULL UP THE SECOND (OUTER) ROW OF SHEET PILES JUST ENOUGH TO CLEAR THE MICROTUNNEL BORING MACHINE (MTBM) FOR DRIVE 2.

CONCRETE BACKSTOP CONSTRUCTION FOR DRIVE 1 AND DRIVE 2

12. CONSTRUCT THE CONCRETE BACK STOP AS SHOWN ON THE DRAWING FOR DRIVE 1.

13. ON COMPLETION OF DRIVE1, CONSTRUCT THE CONCRETE BACK STOP FOR DRIVE 2.

DESIGN 1/4"=1'-0"

> BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

SUBMIT

SHEET CHK'D BY: CROSS CHK'D BY:_

DESIGNED BY:.

APPROVED BY:__

DRAWN BY

DATE: _

ISSUE BY

REMARKS

DATE

Dawn Underground Engineering, Inc.




This document was originally issued by on XX/XX/09. This document is not considered a sealed document.


WALWORTH RUN INTERCEPTOR REALIGNMENT


WORK SHAFT MANHOLE No.1 **INITIAL SUPPORTS**


PROJECT NO .: SHEET: SCALE: AS NOTED

SHEET NO.: TU-5

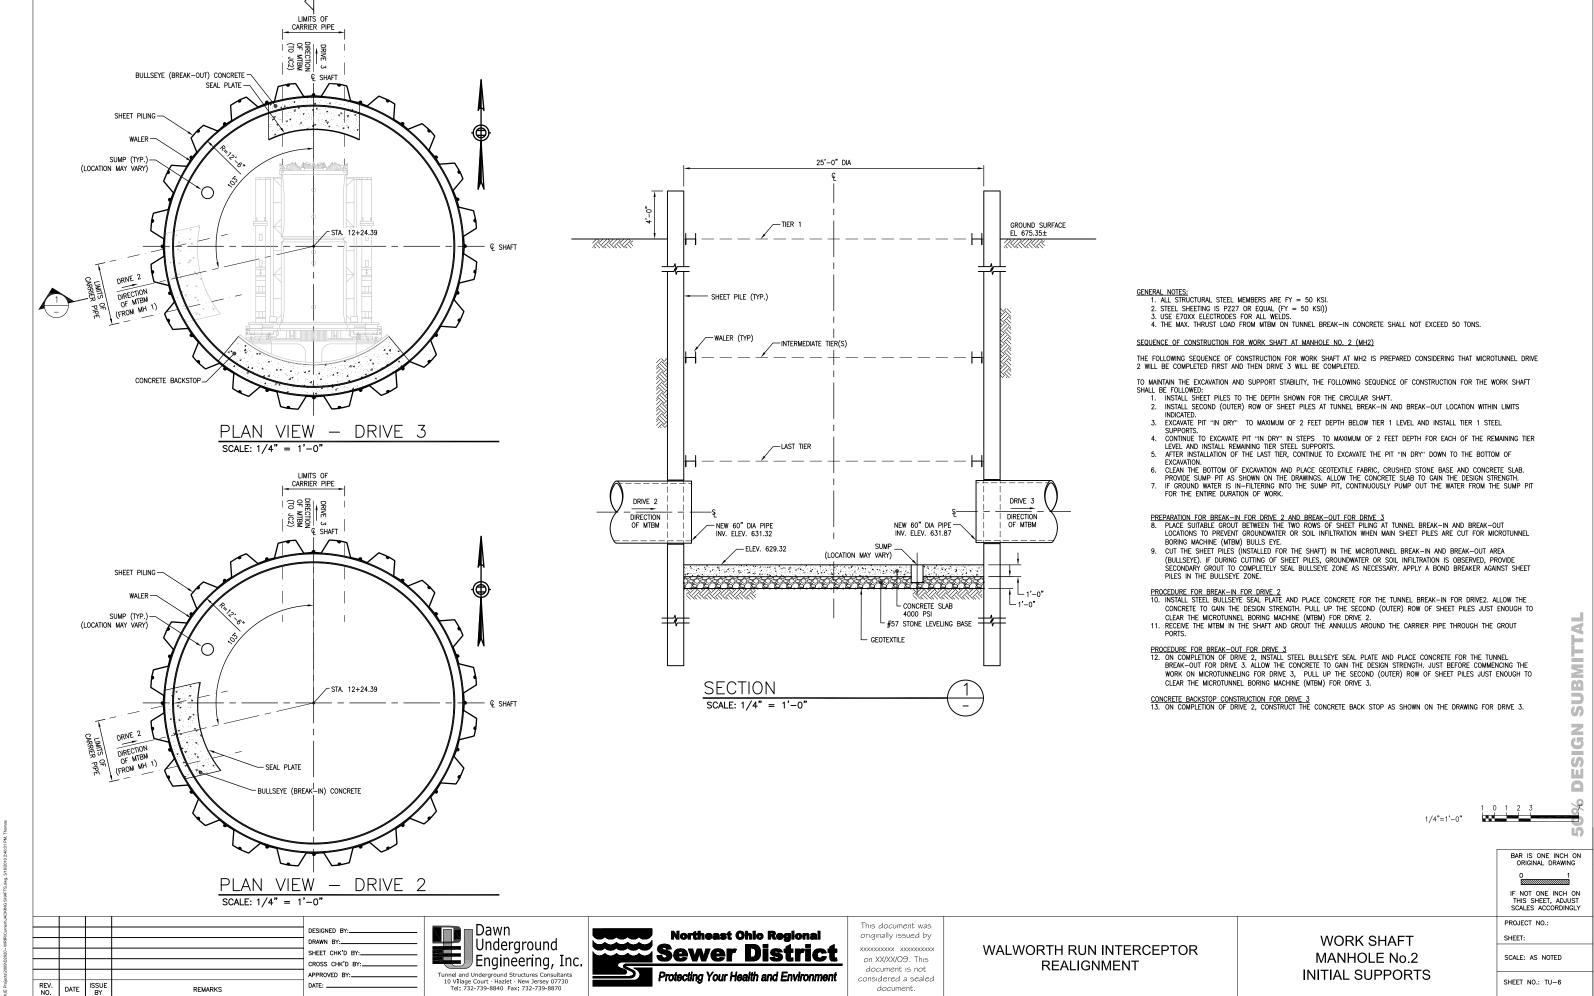

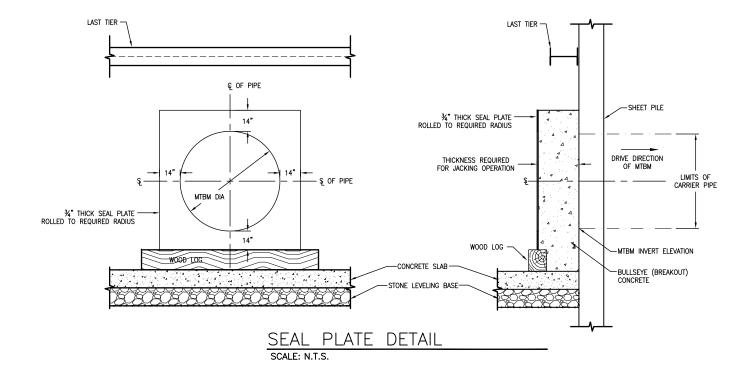

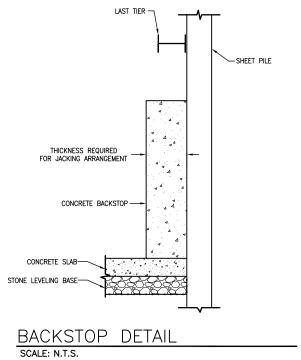

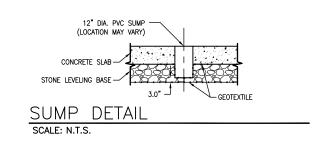

BAR IS ONE INCH ON ORIGINAL DRAWING IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

WALWORTH RUN INTERCEPTOR REALIGNMENT

BREAK-IN, BREAK-OUT, BACKSTOP AND SUMP DETAIL

SCALES ACCORD
PROJECT NO.:
CUEET.

SCALE: AS NOTED SHEET NO.: TU-7

DATE ISSUE BY

Dawn Underground Engineering, Inc.

DESIGNED BY:

CROSS CHK'D BY:__

APPROVED BY:__

DATE: ___

REMARKS



document.

WALWORTH RUN INTERCEPTOR REALIGNMENT PROJECT - CONTRACT WRIR



MAR 1 6 2010
PRODUCTION DEPT.

DRAFT BASIS OF DESIGN REPORT

February 4, 2010

Prepared for

Northeast Ohio Regional Sewer District

Prepared by

DLZ Ohio, Inc. in Conjunction with Dawn Underground Engineering, Inc.



TABLE OF CONTENTS

1.0 BACKROUND

- 1.1 General
- 1.2 Background Information
- 1.3 Existing Walworth Run Interceptor (WRI)
 - 1.3.1 Alignment
- 1.4 Walworth Run Interceptor Realignment (WRIR)
 - 1.4.1 Option Evaluation
 - 1.4.2 Alignment
 - 1.4.3 Interceptor and Regulator Structures

2.0 PERMIT REQUIREMENTS

2.1 General

3.0 LOCAL SEWERS AND HYDRAULICS

- 3.1 Local Sewers
- 3.2 Local Sewer Regulators
- 3.3 Flow Characteristics

4.0 GEOTECHNICAL CONSIDERATIONS

- 4.1 Project Geologic Setting
- 4.2 Subsurface Conditions Along the Tunnel
- 4.3 Tunnel Support
- 4.4 Additional Borings
- 4.5 Long-Term Ground Water Observations

5.0 RIGHT OF WAY AND PROPERTY ACQUISITION

5.1 General

LIST OF TABLES

Table 1.3.1: Existing WRI Design Criteria

Table 1.4.3: Proposed WRIR Design Summary

Table 3.1: WRIR Sewer Impacts

Table 3.2: WRI Regulator Impacts

LIST OF FIGURES

Figure 1: Vicinity Plan

Figure 2: Proposed Future Work at West Bank of Cuyahoga River at the I-90 Bridge

Figure 3: Walworth Run Interceptor – Branch A

Figure 4: WRIR General Route

Figure 5: Boring Location Map

LIST OF APPENDICES

Appendix A: Draft Technical Memorandum

Appendix B: Draft Boring Logs





1.0 Background

1.1 General

This Basis of Design Report summarizes the features of the Walworth Run Interceptor Realignment (WRIR) Project. This project involves the relocation of the Walworth Run Interceptor (WRI) to accommodate the future Interstate 90 Innerbelt Bridge Project by the Ohio Department of Transportation (ODOT). The affected segment of the WRI commences at Regulator WR-27A at the intersection of University Road and West 10th Street. The section to be realigned is from Regulator WR-27A to Regulator WR-24 at Fairfield Avenue. The relocated WRI will be constructed entirely within the City of Cleveland.

1.2 **Background Information**

The Interstate 90 Innerbelt Bridge Project provides for the phased replacement of the existing Central Viaduct (Innerbelt Bridge) through the construction of a new westbound bridge to the north of the existing bridge, followed by the construction of a new eastbound bridge on essentially the same alignment as the existing bridge. The project requires the relocation of the 5 ft diameter Walworth Run Interceptor (WRI) and several local sewer utilities in the area of the new I-90 bridge replacement. Figure 1 shows the general location of the WRI relocation.


The area where the I-90 bridge replacement will impact the NEORSD utilities is located at the west bank of the Cuyahoga River under the existing Innerbelt Bridge, approximately north of Fairfield Avenue between West 15th and West 11th Streets.

In general, the new I-90 Innerbelt Bridge is to be located approximately 210 ft west of the existing I-90 bridge at the west bank of the Cuyahoga River. ODOT anticipates one of the first construction activities being the slope stabilization of the west bank of the Cuyahoga River. The stabilization consists of cutting and benching the existing slope starting just north of Abbey Avenue between West 13th and West 15th Streets.

Figure 2 depicts the proposed re-grading plan of the west bank of the Cuyahoga River at the I-90 Bridge.



BASIS OF DESIGN FOR THE WALWORTH RUN INTERCEPTOR REALIGNMENT (WRIR)

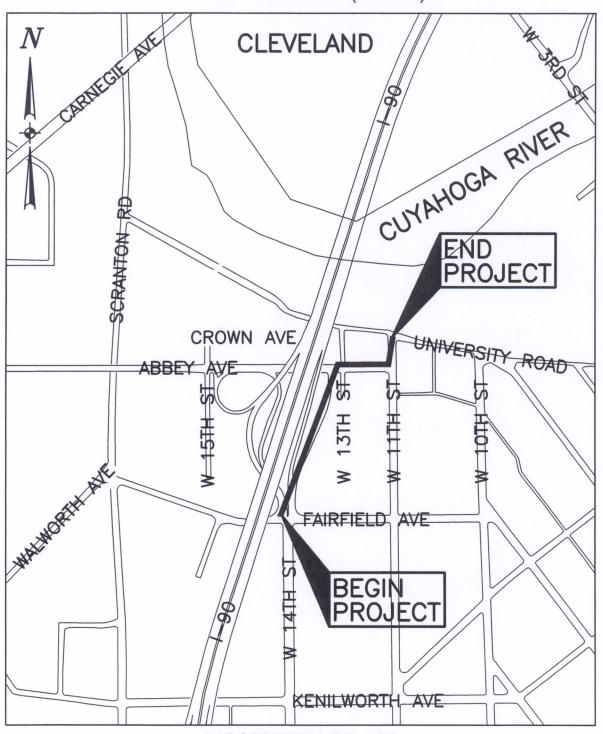

VICINITY PLAN

SCALE: 1"=500"



FIGURE 1





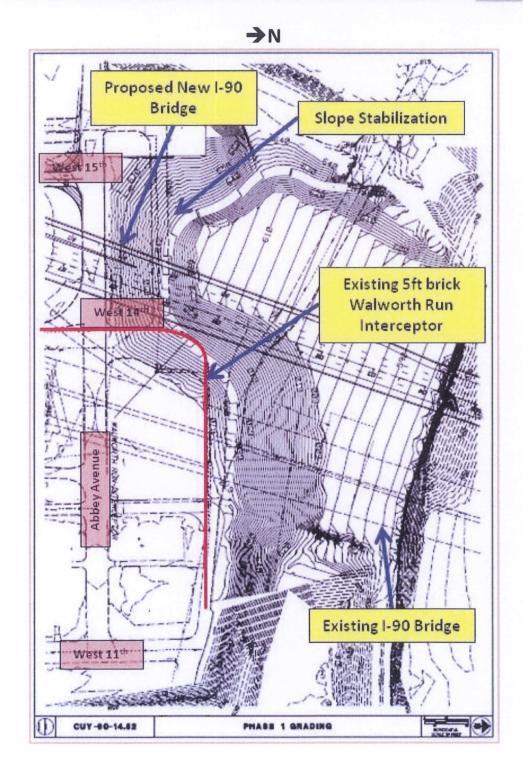


FIGURE 2 PROPOSED FUTURE WORK AT WEST BANK OF CUYAHOGA RIVER AT THE I-90 BRIDGE





1.3 Existing Walworth Run Interceptor (WRI)

1.3.1 Alignment

Most of the combined sewer overflow during both dry and wet weather goes to the WRI. The WRI is the oldest of the four interceptors in the Westerly District. The initial purpose of the interceptor was to collect the combined sewer overflow from the local sewers and transport that flow to the Cuyahoga River.

The affected WRI segment begins at the dry weather outlet Regulator WR-27A. The regulator directs flow from the Tremont Bluff area to either the head of the WRI or CSO 81. The interceptor runs down University Road as a 5 ft tunnel to West 14th Street. After turning south on West 14th Street, flow from the local sewer drops in at Crown Avenue through the leaping weir regulator WR-25. The interceptor continues on West 14th Street to Kenilworth Avenue. WRI then turns west onto Kenilworth Avenue, crosses Scranton Avenue, where Kenilworth Avenue becomes Willey Avenue and heads down the hill. Near the Animal Protective League facility, the interceptor turns south and then west along the route that used to be Shay Court and Brevier Avenue. The interceptor then turns west continuing to Train Avenue.

WRI reaches the bottom of the hill and turns southwest, crossing over the larger Walworth Run Overflow sewer (CSO 080). A 24 inch pipe connects the interceptor and the overflow pipe at the turn. The connection was constructed to relieve surcharging in the interceptor.

Once on Train Avenue, the interceptor decreases from a 5 ft circular sewer to a No 4 egg-shaped sewer and accepts dry weather flow from the regulator WR-22. The WRI continues on a southerly path, picking up flow from regulator WR-21 on West 25th Street. The interceptor stays on Train Avenue until turning north at West 30th Street. WRI enters the intersection of Train Avenue and West 30th Street and combines with dry weather flows from other sewer branches. Figure 3 shows the alignment of the WRI within Branch A of the sewer system.





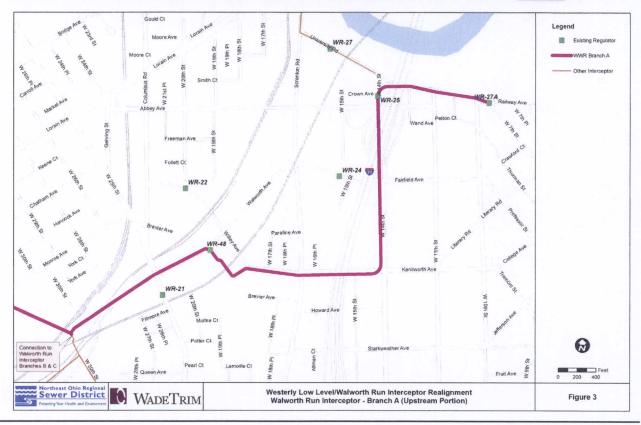


FIGURE 3

WALWORTH RUN INTERCEPTOR - BRANCH A

Table 1.3.1 summarizes existing design criteria for the Walworth Run Interceptor.

Table 1.3.1 – Existing WRI Design Criteria

Interior Diameter	5 ft
Maximum Flow (manning's full pipe capacity)	185 cfs flowing full
10-yr, 6-hr flow ⁽¹⁾	109 cfs
Dry Weather Flow (DWF) flow ⁽¹⁾	6.85 cfs
Slope	0.43%
Pipe Material	Brick
Average Invert Depth at the Project Area	Approx. 45 ft

Estimates based on Westerly CSO Phase II Facilities Plan models (Feb 2000)





Walworth Run Interceptor Realignment (WRIR) 1.4

1.4.1 **Option Evaluation**

Five (5) conceptual relocation options for a portion of the WRIR were considered to accommodate the future design of the Interstate 90 Innerbelt Bridge. Options 1 and 2 were presented by NEORSD during the proposal stage. Options 3 through 5 were developed by DLZ as potential alternates and included in the proposal submission. Based on project goals, cost and schedule, DLZ concurred with the original NEORSD recommendation that Option 2 be selected as the preferred alternate for the WRIR. The updated WRIR Draft Technical Memorandum dated January 11, 2010 and February 4, 2010 (Revision No. 1), prepared by DLZ, is included as Appendix A.

1.4.2 Alignment

The WRIR begins by connecting to the existing WRI at the intersection of University Road and West 11th Street. Approximately 140' of 60" tunneled pipe runs southbound from the connection point along West 11th Street to an installed manhole at the intersection of Abbey Avenue. The alignment of the 60" tunneled pipe then runs westbound approximately 275' along Abbey Avenue to an installed manhole at the West 14th Street intersection. From this point, the alignment of the 60" tunneled pipe proceeds along the West 14th connector ramp within the ODOT limited access (LA) for approximately 900' to the intersection of West 14th Street and Fairfield Avenue. At this point, the 60" tunneled pipe connects to the existing WRI with a connecting structure.







FIGURE 4 WRIR GENERAL ROUTE

1.4.3 Interceptor and Regulator Structures

The WRIR design includes four (4) major interceptor structures to be constructed within tunnel/work shafts. Two of the structures will be cast in place concrete junction chambers constructed to temporarily bypass flow from WRI. The junction chambers will be located at University Road and West 11th Street and Fairfield Avenue and West 14th Street. The two remaining structures at the turning points will be manholes and will be located at Abbey Avenue & West 11th Street and at Abbey Avenue & West 14th Street. DLZ will determine if the manholes will be entirely pre-cast or have cast-in-place components. Additionally, Regulator WR-25 at Crown Avenue & West 14th Street will be abandoned and Regulator WR-24 on Fairfield Avenue will be rebuilt.

Table 1.4.3 shows the proposed design summary for the Walworth Run Interceptor Realignment Project.





Table 1.4.3 – Proposed WRIR Design Summary

Interior Diameter ⁽¹⁾	60 inches		
Full Flow Capacity ⁽²⁾	187 cfs		
Design Slope ⁽³⁾	0.51%		
Pipe Material	To be determined		
Average Invert Depth at the Project Area	Approximately 45 ft		

⁽¹⁾ Interior diameter may need to increase if surveyed inverts are different than what has been presented in the RFP.

⁽²⁾ Full Flow Capacity is based on $60^{\prime\prime}$ diameter pipe with a Manning's n=0.013, and 0.51%

⁽³⁾ Design Slope is based on inverts determined by field investigation and record data. Additional field information is necessary at the WRI downstream connection point for verification of all design assumptions.





2.0 Permits

2.1 General

The WRIR alignment will require significant permitting coordination. Construction permits will be required from the City of Cleveland for work located within city street right-of-way such as University Road, West 11th Street, Abbey Avenue, Crown Avenue, West 14th Street, and Fairfield Avenue. These construction permits will require considerations for traffic control and other potential construction disturbances.

In addition to permitting coordination normally associated with the City of Cleveland, there will be activity associated with acquiring a permit from ODOT. All portions of the WRIR in the Interstate 90 LA will require the acquisition of an ODOT MR 509 Permit for permission to perform the necessary work.

Additional permitting will be necessary to meet the Ohio EPA regulations for the Permit to Install, and it may become necessary to apply for coverage under a National Pollutant Discharge Elimination System (NPDES) general permit if one or more acres of land is disturbed. Additional agencies may become involved as the work is better defined.





3.0 Local Sewers and Hydraulics

3.1 **Local Sewers**

Local sewers are impacted by the proposed Innerbelt work. Table 3.1 lists the impacted sewers and their disposition. DLZ will contact the appropriate agencies to coordinate the necessary work on the impacted sewers. This work will require the re-direction of flows at MH No. 5 and at the Crown Avenue Animal Hospital, and the assessment of pipe capacities.

Table 3.1 – WRIR Sewer Impacts

Identification	Impacted Section	
No 4 - No 5 existing 48" diameter brick combined sewer running north along West 14th Street.	Remove or Abandon from MH 5 located at the intersection West 14th Street and Fairfield Avenue to regulator WR 27 located at intersection of University Road and the Walworth Run overflow sewer (CSO 080).	
12" diameter existing combined sewer running east along Abbey Avenue from approximately West 15th to West 14th Street.	The complete sewer line is to be abandoned.	
12" diameter existing combined sewer running east along Crown Avenue from approximately West 15th to West 14th Street.	The complete sewer line is to be abandoned.	
36" diameter existing combined sewer - Running west along University Road.	Remove or abandoned from MH located at the intersection of West 13th and University Road. to regulator WR-25 located at the intersection of West 14th Street and Crown Avenue.	
Existing Storm sewer draining into MH 5 located at the intersection of West 14th Street and Fairfield Avenue.	Abandon or remove all of this sewer line. This storm sewer runs in a southeast direction and ends at MH 5.	
Existing 12" storm sewer draining into MH 3. This storm sewer runs in a northwest direction and ends at MH 3.	Abandon or remove the complete sewer line.	
Existing storm sewers running east and draining into MH 2.	Abandon or remove all the storm sewers connected to MH 2.	





Table 3.1 – WRIR Sewer Impacts (Continued)

Identification	Impacted Section	
Existing 12" storm sewer running west and draining into MH 2.	Abandon or remove all the storm sewers connected to MH 2.	
Existing 15" storm sewer running west along Abbey Avenue and draining into MH 1.	Abandon or remove all of this sewer line.	
Existing 18" storm sewer running west along University Road. This 18" storm line connects to the 24" combined sewer at the intersection of West 14th Street and University Road.	To be removed by the stabilization works of the east bank slope.	
Existing storm sewers north of the intersection between West 14th Street and University Road discharging on the Cuyahoga River.	These sewers v. will be removed during the stabilization of the Cuyahoga River west bank.	
Dry weather outlet from WR-24 to West 14th Street.	May need to be upsized.	
Combined sewer on Fairfield Avenue connecting to Regulator WR-24.	May need to be upsized.	

3.2 **Local Sewer Regulators**

There are two regulators in the project area that are impacted by the Innerbelt Bridge project.

Table 3.2 – WRI Regulator Impacts

Regulator ID	Location	DWO Destination	Wet Weather Destination	Regulator Type	Proposed Dispensation
WR-24	West 15 th Place – 1515 Fairfield Avenue	WRI – Branch A	Regulator WR-27	Leaping Weir	Modify and Rebuild
WR-25	Crown Ave at West 14 th Street	WRI – Branch A	Westerly Low Level Interceptor	Leaping Weir	Abandon







Regulator WR-24



Regulator WR-25

3.3 Flow Characteristics

The relocated segment of Walworth Run Interceptor is required to convey the flows contained in Table 1.2 of the RFP including the maximum flow of 185 cfs. The surveying work has been completed, and the inverts and slopes of the existing Walworth Run Interceptor have been confirmed, except at the proposed downstream connection point. Apparently, there is no existing structure at the connection of the 60" overflow from WR-24 at the Interceptor. Based on the confirmed inverts, a conservative approximation of the invert of the proposed connection point using existing drawings, and an anticipated length of 1,315 lineal feet, it has been determined that the relocated segment of Walworth Run Interceptor can be designed at a slope of 0.51% (6.81 feet of drop over 1,315 lineal feet), which is greater than the slope of 0.47% that was listed in the RFP. The full-flow capacity of the relocated segment using a Manning's nfactor of 0.013 would be approximately 187 cfs, which is greater than the maximum design flow of 185 cfs. Once the proposed connection point invert is confirmed, the design slope will be updated accordingly.





4.0 Geotechnical Considerations

4.1 **Project Geologic Setting**

The Walworth Interceptor Realignment Project (WRIR) is within the northern section of the Cuyahoga River Valley. Geologically, most of this area is classified as "made land" composed of fill materials of variable source, composition and depth.

A total of eight (8) soil borings have been taken along the Option 2 alignment at this writing. Figure 5 shows the locations of the borings. The draft boring logs are included as Appendix "B." The borings reveal that the fill layer varies from a couple of feet to as much as 19 feet (Boring B -7). Brick pieces were recovered while sampling the fill layer in this boring. Beneath the fill materials, alluvium deposits extend consisting mostly of very loose to medium dense sands and silts; and medium stiff silty clay lenses (Boring B-3 and B-8). Most of the deposits show a stratified or inter-layered structure containing fine sands and silts. The alluvium materials were deposited prior to the Cuyahoga River. Beneath the alluvium deposits, lacustrine deposits start approximately 55 feet below the surface and consist mostly of medium stiff to very stiff silty clays stratified with silt layers.

Based on preliminary information, the ground water table has been estimated to be between 30 to 35 feet below ground surface.

4.2 **Subsurface Conditions Along the Tunnel**

The proposed tunnel construction will be below ground water and through sandy and silty soils. In the past, these soil deposits were most troublesome for tunneling projects in Cleveland. In the WRIR case, soils within the tunnel zone will be dense to very dense and below ground water. This setting will make the soil susceptible to uncontrollable flow unless proper tunnel techniques for supporting the tunnel



Microtunneling from a caisson

face are employed. Slurry shields with one-pass concrete segmental linings or microtunneling





with pipe jacking will be evaluated given the subsurface conditions anticipated at the site. Based on the short length of the project and the 90 degree turns required to negotiate the alignment, it appears that microtunneling will be the most cost effective solution.

Shafts for the WRIR will be constructed through all of the soil deposits mentioned above. Shafts at Borings B-1, B-3 and B-4 will terminate in silt deposits and the Shaft at B-8 (the down stream connection) will terminate in silty clay or clay. Excavating shafts below the water table through the upper deposits of lose sands and silts may present unstable side and bottom conditions unless water tight supports are employed. These supports must be pre-installed ahead of the shaft excavations and extend deep enough to prevent boiling and bottom heave. Currently, the design team is investigating the use of pre-driven steel sheet piles, secant piles, precast concrete caissons, slurry walls and jet grouting as methods for excavating the shafts.

A soil profile of the WRIR is shown on Sheets 1-6 of 6 following Section 4.5 of this report. A jacking pit concept plan is also included following Section 4.5.

4.3 **Tunnel Support**

Based on microtunneling appearing to be the most effective tunneling method for the replacement sewer installation, reinforced concrete pipe, centrifugally cast fiberglass reinforced polymer mortar pipe (CCFRPM) such as produced by HOBAS, and clay pipe can be suitable candidates for this project since they are all specifically designed and produced for installation by jacking. Microtunneling methods of tunneling provide immediate initial support for the tunnel since the final carrier pipes are jacked behind a TBM or MTBM.



CCFRPM Pipe



Reinf. Conc. Jacking Pipe





4.4 Additional Borings


Boring B-7 shows 19 feet of fill. Two adjacent borings (B-6 and B-8) show only a couple feet of fill. This indicates that the fill depth may vary greatly within the project area. Currently it is contemplated that the downstream connection may be moved to the south-west corner of the Fairfield Avenue and West 14th Street intersection. This will require the shaft construction to place a connection structure and also to retrieve the MTBM or TBM. If the connection point is moved, DUE recommends that an additional boring be taken near the new location. Sampling in this boring may only extend to the bottom of fill or the first 25 feet (whichever is greater) and the remainder of the boring extended only for placement of the piezometer.


4.5 Long-Term Ground Water Observation


The Design Team recommends that long term observation of ground water levels be conducted at each shaft location. Currently there are only two piezometers at the site – one near boring B-3 marked W-1 and one near boring B-5 marked W-2. Additional piezometers should be installed near the planned connection point on University Road, near Boring B-4 and near the connection point downstream at Fairfield Avenue and W 14th Street (three additional piezometers). The piezometers should be located where they will not be damaged later by construction. This will allow the Design Team to monitor the ground water during construction should the need arise to confirm design assumptions. Water levels should be monitored on a monthly basis until the project bidding period. The Design Team will coordinate the location of the piezometer tip elevations and location of the screens.

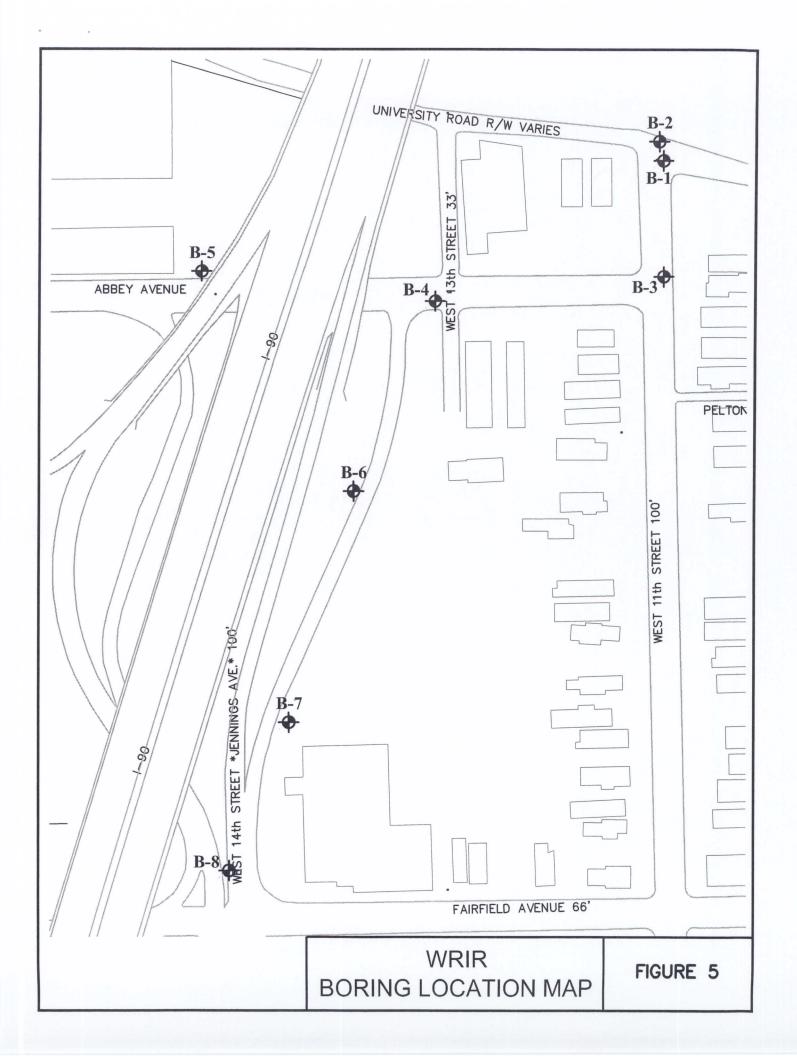


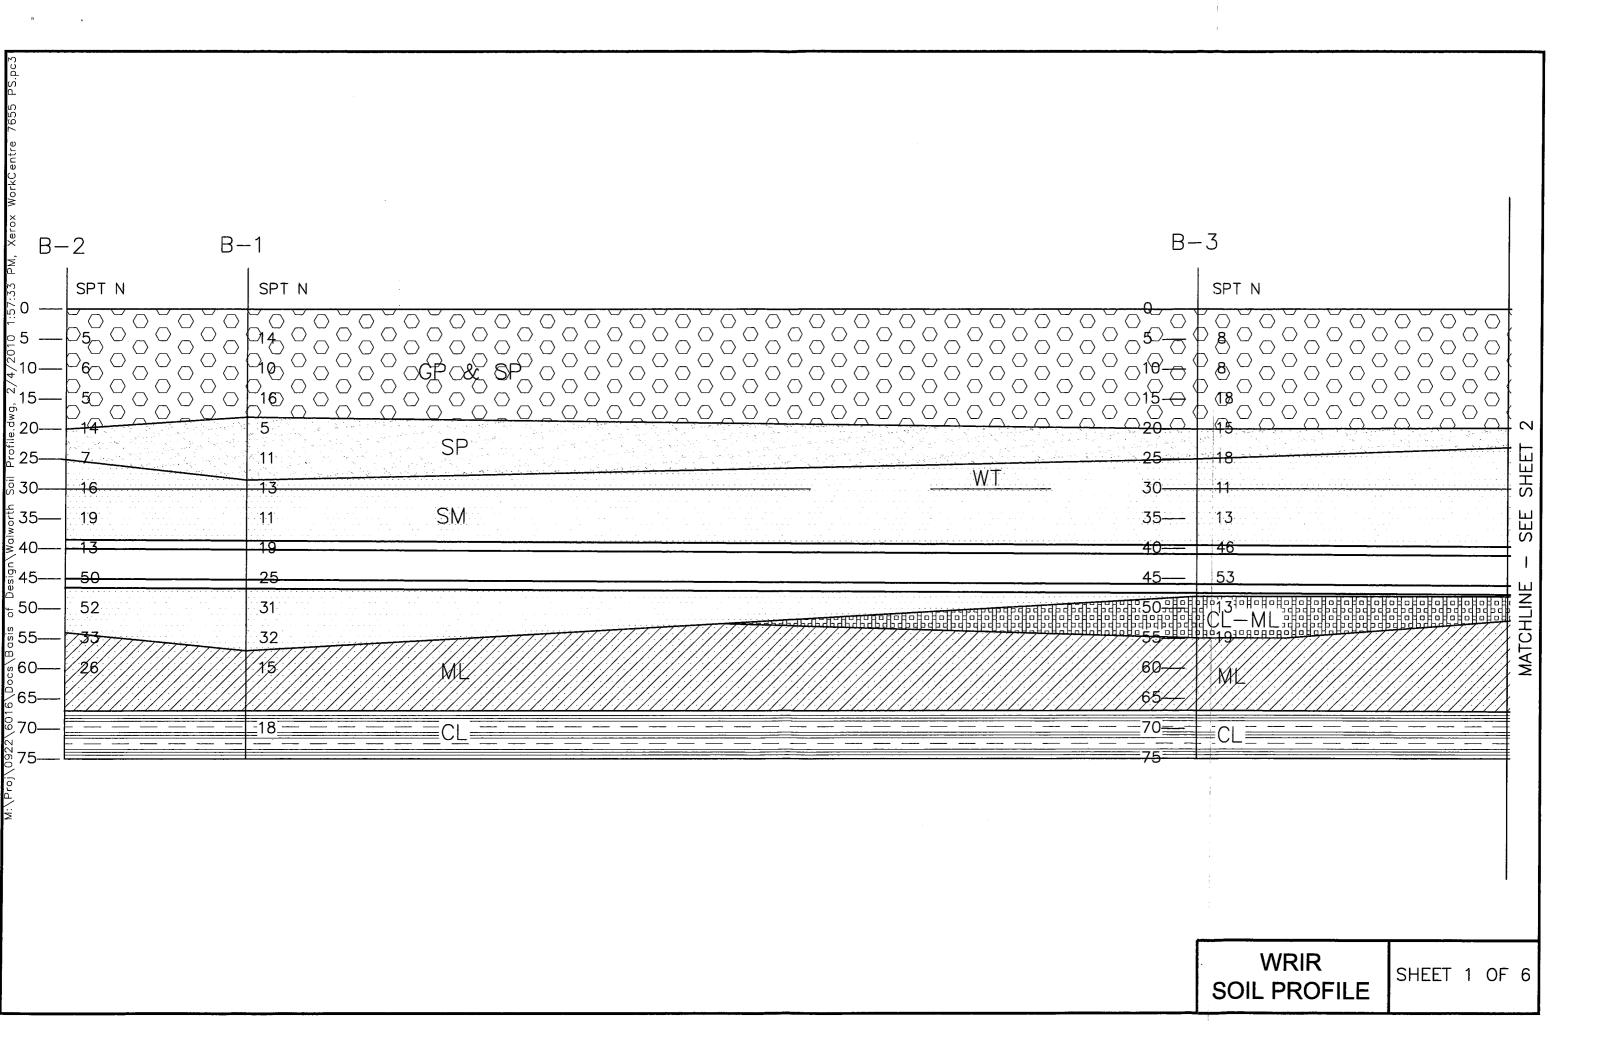


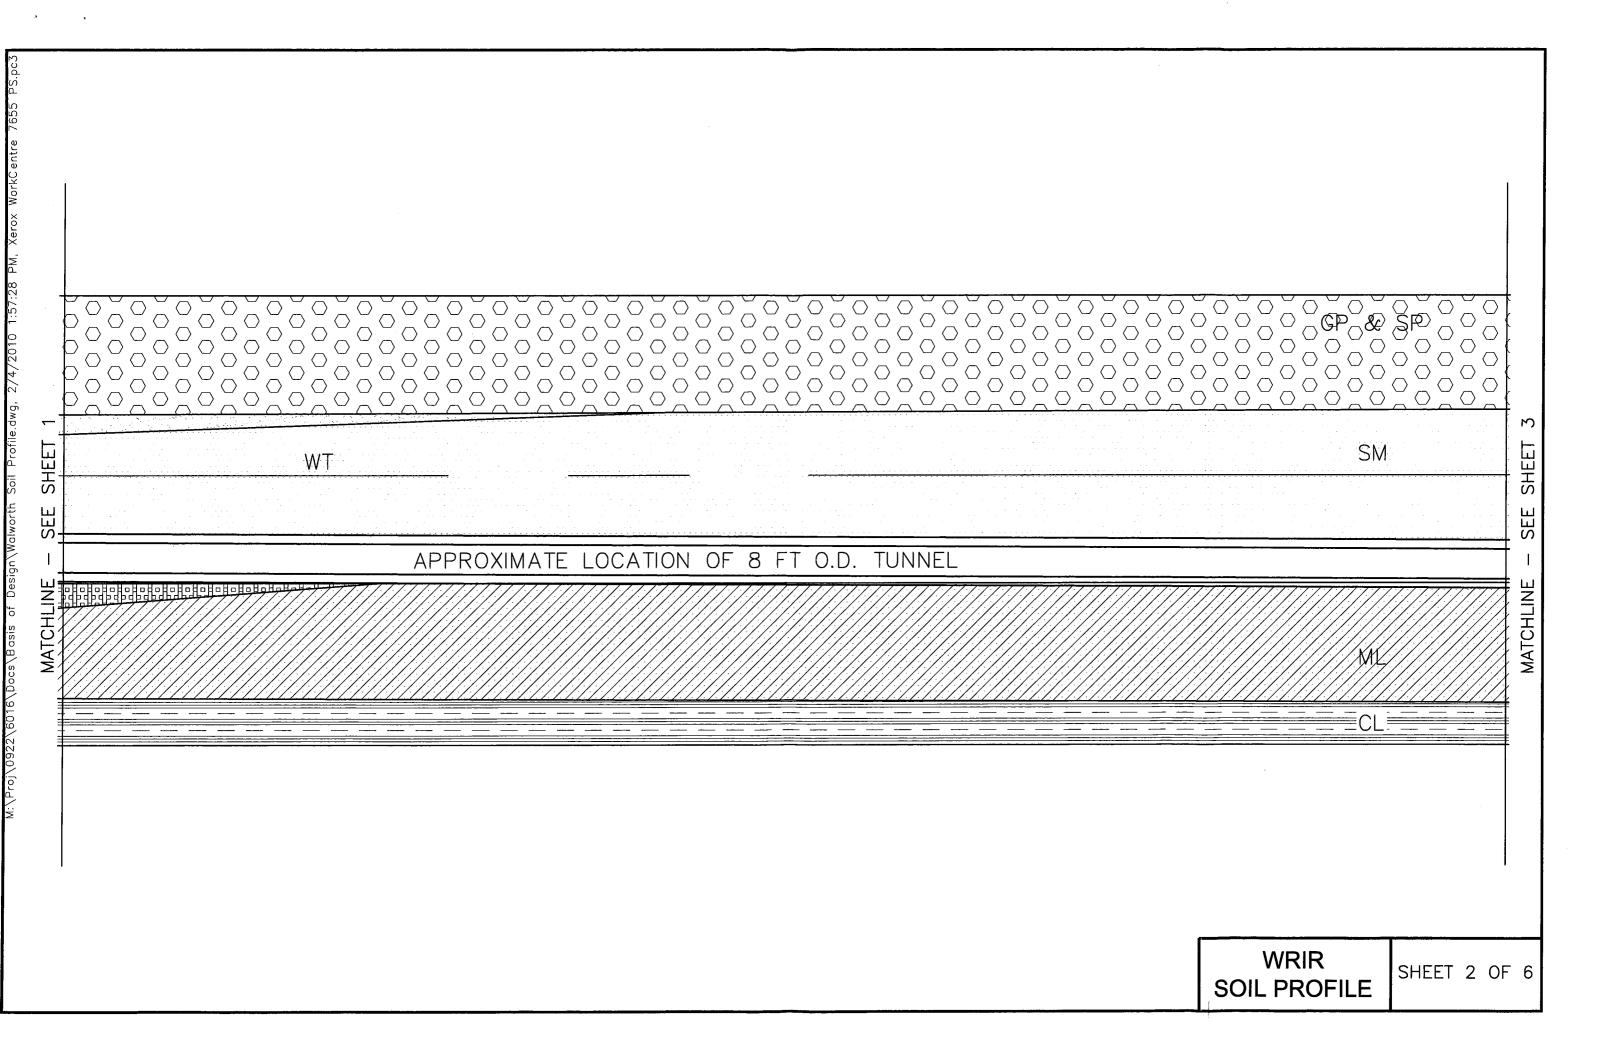

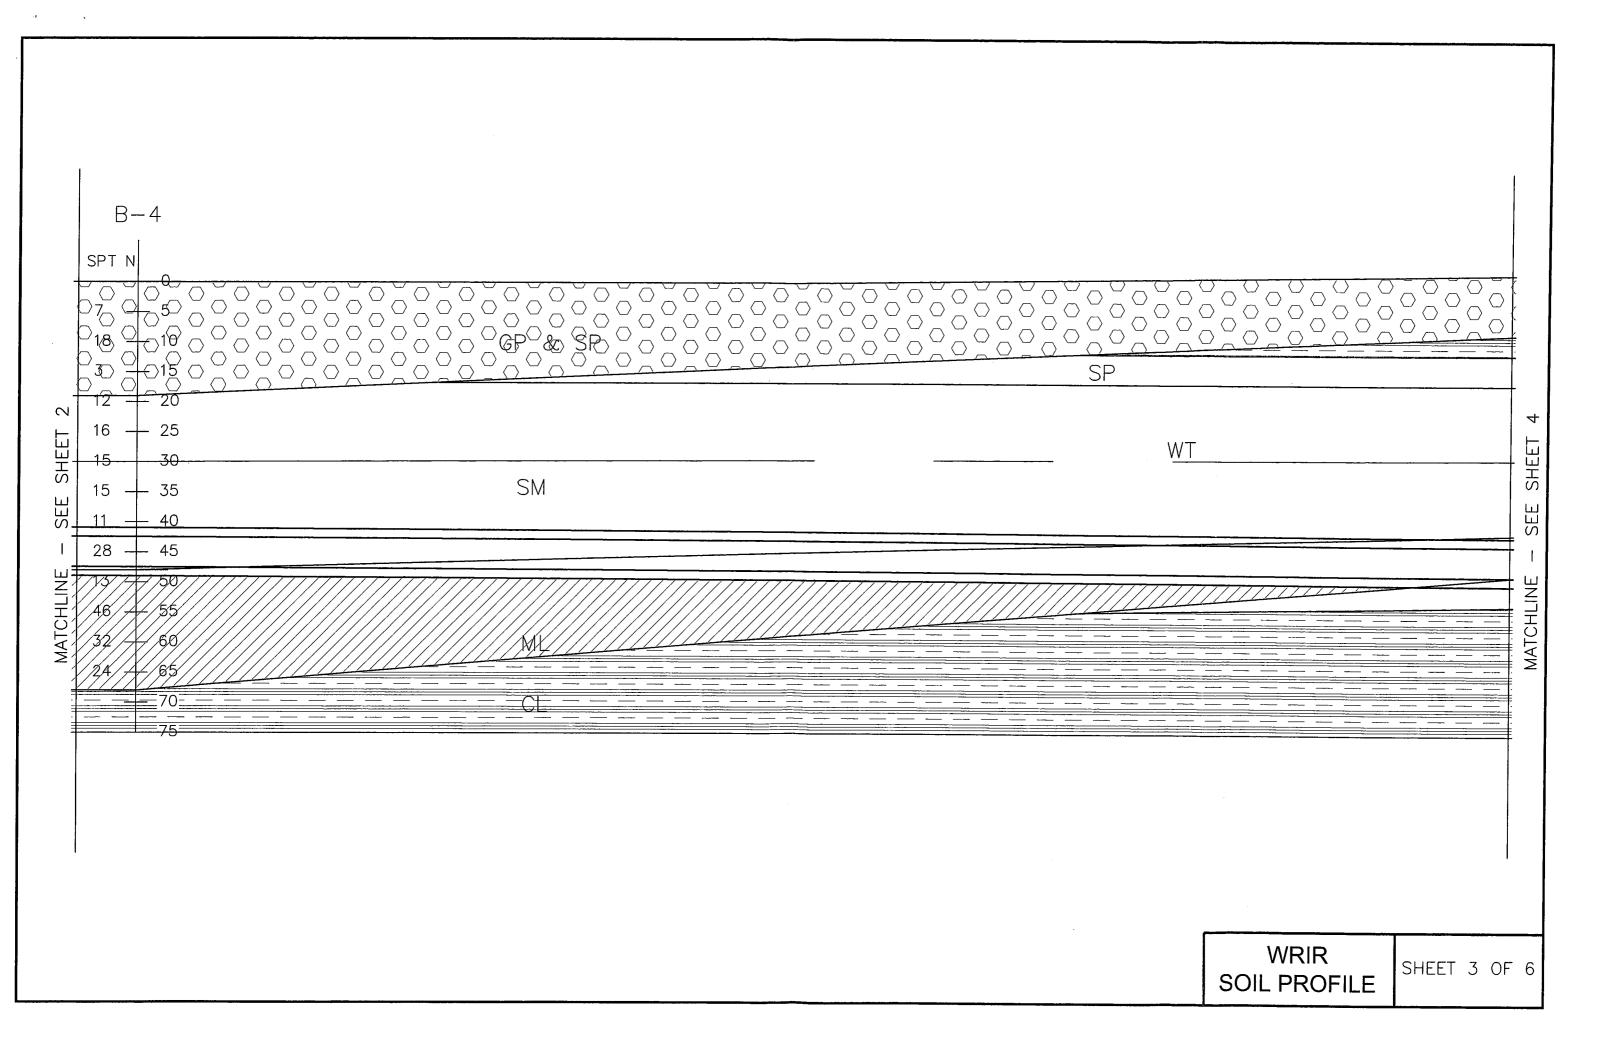

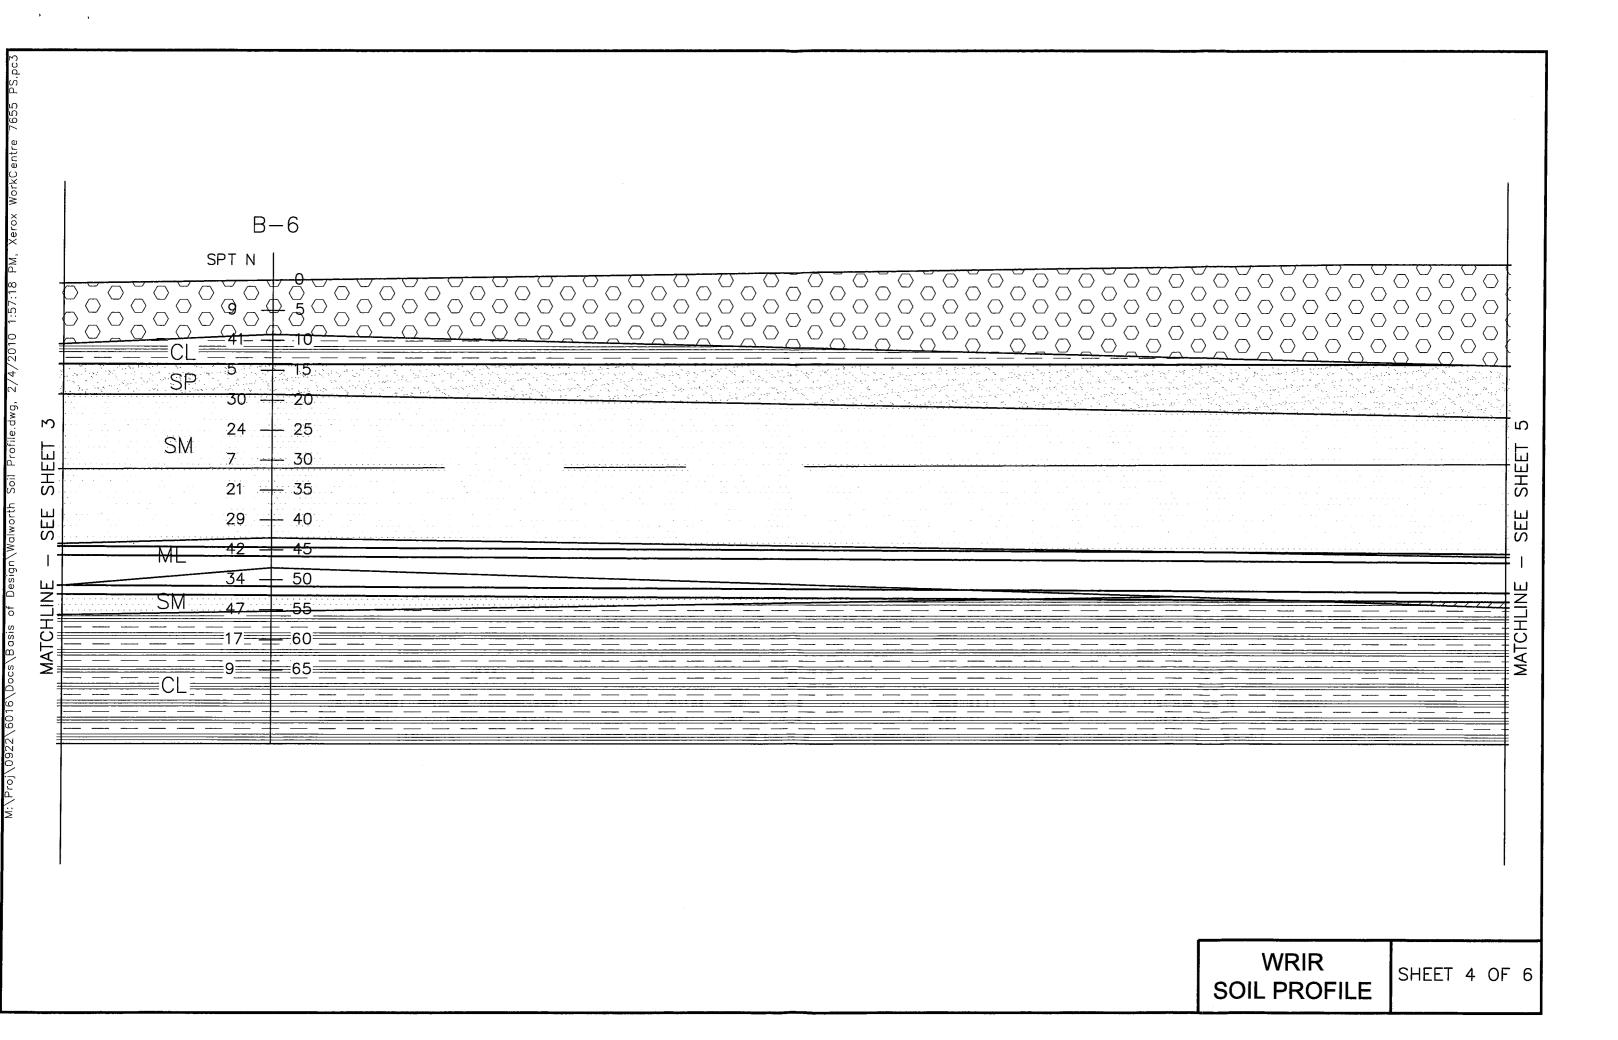


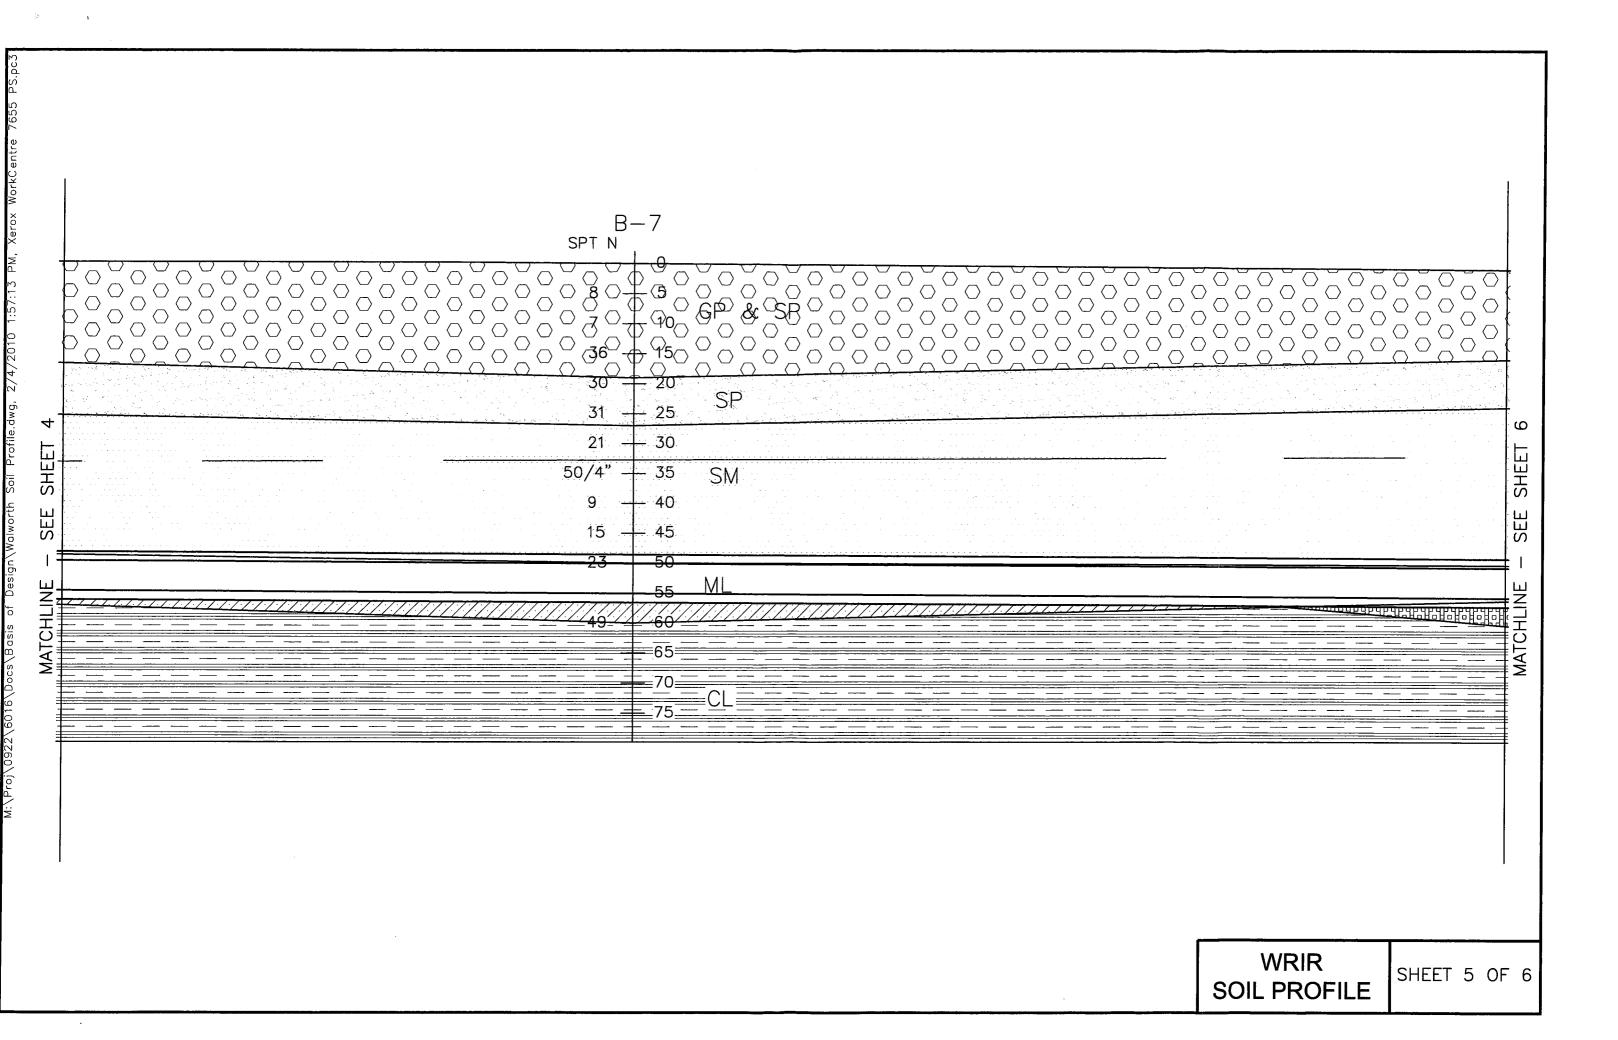

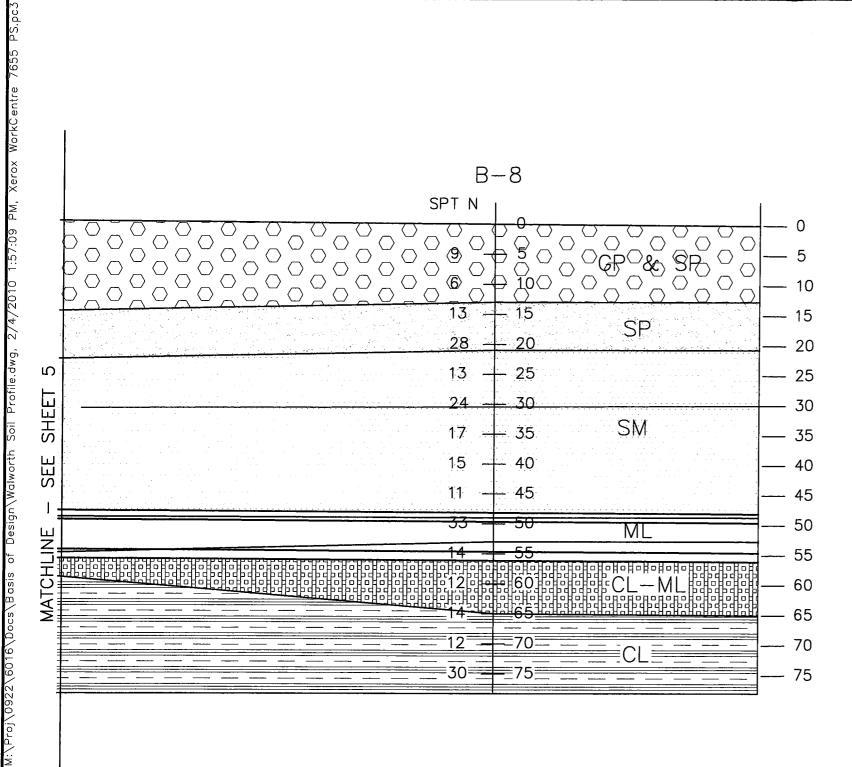

WRIR SOIL PROFILE

SHEET 6 OF 6

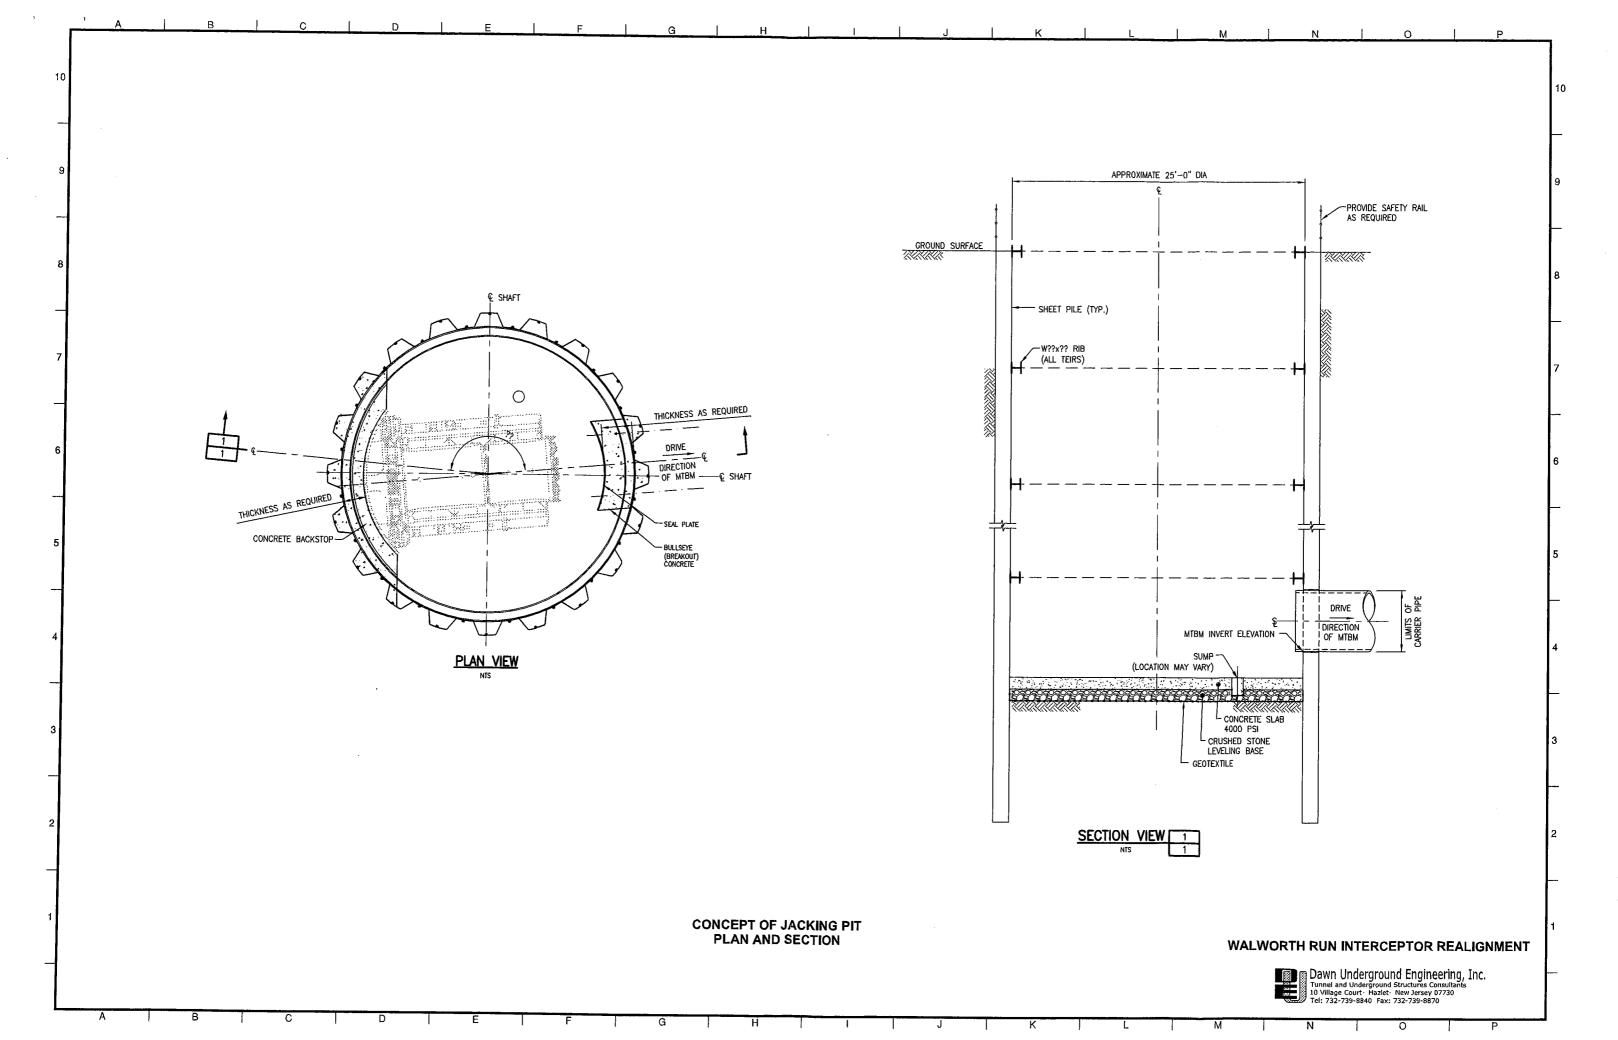

APPENDIX "A"

Draft Technical Memorandum



DRAFT TECHNICAL MEMORANDUM

To:

Mr. Brian Page, PE

From:

Mr. Thomas Hessler, PE, PS

Date:

January 11, 2010 (1st Issue)

February 4, 2010 (Revision No. 1)

Subject:

Walworth Run Interceptor Relocation Alignment Option Evaluation

Section 1 - Project Description

The Ohio Department of Transportation (ODOT) is designing the future Interstate 90 Innerbelt Bridge Project. The design of the new westbound structure adversely impacts the existing Walworth Run Interceptor (WRI) and several local storm and sanitary sewers in the project area. The new Innerbelt Bridge will require the regrading of the west bank of the Cuyahoga River. This regrading work requires the relocation of the WRI. ODOT is also evaluating several options with respect to the existing Innerbelt Bridge that will impact the WRI relocation.

The WRI is divided into three (3) branches; A, B, and C. This project involves the relocation of a section of Branch A. Branch A commences at Regulator WR-27A at the intersection of University Road and West 10th Street. The area to be evaluated is from Regulator WR-27A to Regulator WR-24 at Fairfield Avenue.

Section 2 - Option Evaluations

The relocation options for a portion of the WRI Branch A must consider the future design of the Interstate 90 Innerbelt Bridge. Five (5) conceptual options are discussed in this section. Options 1 and 2 were presented by NEORSD during the proposal stage. Options 3 through 5 were developed by DLZ as potential alternates and included in our proposal submission.



2.1 Option 1

Conceptual Option 1, shown in Figure A, consists of approximately 900' of 60" diameter tunneled pipe and three (3) major interceptor structures. This option would begin at a connection to the existing WRI at the intersection of University Road and West 11th Street. Approximately 200' of 60" tunneled pipe would run southbound from the connection point along West 11th Street to the intersection of Abbey Avenue where a manhole would be installed. The 60" tunneled pipe alignment would then run westbound for a distance of approximately 700' along Abbey Avenue to the West 14th Street intersection. At this point, it would tap into the existing WRI alignment with a connecting structure.

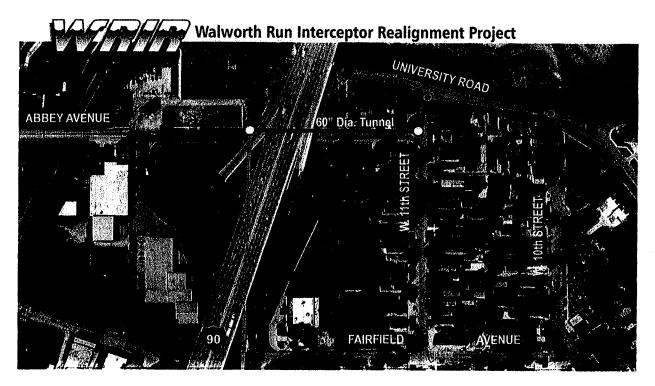


Figure A - Conceptual Option 1

Several local sewers will be removed or abandoned with this option. Additionally, Regulator WR-25 at Crown Avenue and West 14th Street would be abandoned and Regulator WR-24 on Fairfield Avenue would be rebuilt. The existing 190' run of 12" sanitary sewer on Crown



Avenue for the Animal Hospital will be relocated. Also, the combined sewer on Fairfield Avenue connecting to Regulator WR-24 may need to be upsized. The dry weather outlet from Regulator WR-24 to West 14th Street may also need to be upsized.

Option 1 removes the WRI from the westbound Innerbelt bridge slope regrading area, and provides a relatively short relocation run of tunnel to the connection at Abbey Avenue and West 14th Street. However, a significant portion of the relocated WRI is still in the footprint of the eastbound Innerbelt Bridge and passes under the current Innerbelt alignment. This alignment maintains a section of existing WRI along West 14th Street under the current Innerbelt Bridge and therefore limits options regarding the potential alignment or subsurface needs of a future eastbound bridge.

2.2 **Option 2**

Conceptual Option 2 is shown in Figure B. This option consists of approximately 1,400′ of 60″ diameter tunneled pipe and four (4) major interceptor structures. This option would begin by connecting to the existing WRI at the intersection of University Road and West 11th Street. Approximately 140′ of 60″ tunneled pipe would run southbound from the connection point along West 11th Street to the intersection of Abbey Avenue where a manhole would be installed. The alignment of the 60″ tunneled pipe would then run westbound approximately 275′ along Abbey Avenue to the West 14th Street intersection where a manhole would be installed. From this point, the alignment of the 60″ tunneled pipe would proceed along the West 14th connector ramp within the ODOT limited access for approximately 900′ to the intersection of West 14th Street and Fairfield Avenue. At this point, the 60″ tunneled pipe would connect to the existing WRI at a connecting structure.

As with Option 1, several local sewers will be removed or abandoned. Additionally, Regulator WR-25 at Crown Avenue and West 14th Street would be abandoned and Regulator WR-24 on Fairfield Avenue would be rebuilt. The existing 190' run of 12" sanitary sewer on Crown



Avenue for the Animal Hospital will be relocated. Also, the combined sewer on Fairfield Avenue connecting to Regulator WR-24 may need to be upsized. The dry weather outlet from Regulator WR-24 to West 14th Street may also need to be upsized.

Option 2 provides for the complete removal of the WRI from the Innerbelt project footprint. The relocated WRI will not be in conflict with any slope modifications that may be necessary for the existing eastbound Innerbelt Bridge along Abbey Avenue or West 13th Street. This Option meets the objectives of the WRI relocation.

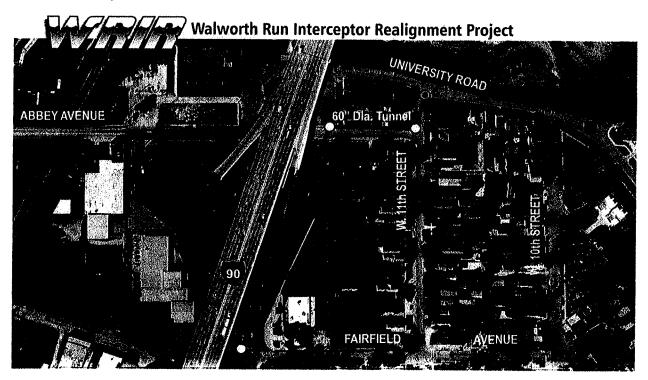


Figure B - Conceptual Option 2

2.3 Option 3

Figure C shows Conceptual Option 3, which is a variation of Option 2. This option consists of approximately 1,000' of 60" diameter tunneled pipe and three (3) major interceptor structures. It would begin at a connection to the existing WRI on University Road near West 13th Street. The alignment of the 60" tunneled pipe would then run south approximately 200' to the



intersection of Abbey Avenue and West 14th Street where a work shaft and a manhole would be installed. The 60" tunneled pipe would then run southwest along the West 14th St. / Abbey Avenue access ramp for a distance of approximately 800' to the intersection of Fairfield Avenue and West 14th Street where it would connect to the existing WRI with a connecting structure.

As with Options 1 and 2, several sewer pipes would be removed or abandoned with this option. Additionally, Regulator WR-25 at Crown Avenue and West 14th Street would be abandoned and Regulator WR-24 on Fairfield Avenue would be rebuilt. The existing 190' run of 12" sanitary sewer on Crown Avenue for the Animal Hospital will be relocated. Also, the combined sewer on

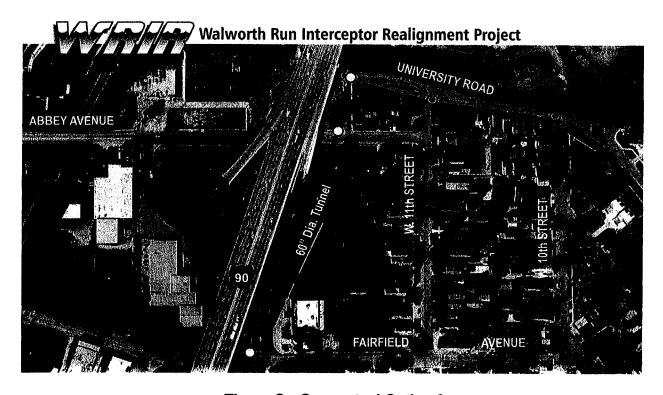


Figure C - Conceptual Option 3

Fairfield Avenue connecting to Regulator WR-24 may need to be upsized. The dry weather outlet from Regulator WR-24 to West 14th Street may also need to be upsized.

The major advantage of Option 3 is only one shaft is needed as the drive shaft for the microtunnel (tunnel) operation. This shaft would be located at Abbey Avenue. Also, this option



only has two (2) tunnel shafts, therefore reducing the number of tunnel shafts necessary for the run when compared to the other options. Option 3 meets the requirement to remove the WRI from the future Innerbelt Project area. This alternative also has less traffic conflicts.

However, there are some disadvantages with Conceptual Option 3. The existing WRI would remain along a longer portion of University Road, which may be a concern regarding future slope failures or movements. Another disadvantage is that the starting point of Option 3 is very close to the final Innerbelt grading at the corner of University Road and West 13th Street and may conflict with the future grading plan for the eastbound bridge.

2.4 Option 4

Conceptual Option 4 is shown in Figure D, and is a variation of Option 1. Conceptual Option 4 consists of 500' of 60" diameter tunneled pipe and three (3) structures. The 60" tunneled pipe would begin by connecting to the existing WRI at University Road and West 13th Street and run south approximately 200' to Abbey Avenue near West 13th Street in to a manhole. The alignment would then travel westbound along Abbey Avenue for a distance of approximately 300' to the intersection of Abbey Avenue and West 14th Street. At this point, the 60" tunneled pipe would connect to the existing WRI with a connecting structure.

As with the other options, several sewer pipes would be removed or abandoned with this option. Additionally, Regulator WR-25 at Crown Avenue and West 14th Street would be abandoned and Regulator WR-24 on Fairfield Avenue would be rebuilt. The existing 190' run of 12" sanitary sewer on Crown Avenue for the Animal Hospital will be relocated. Also, the combined sewer on Fairfield Avenue connecting to Regulator WR-24 may need to be upsized. The dry weather outlet from Regulator WR-24 to West 14th Street may also need to be upsized.

Option 4 removes the WRI from the westbound Innerbelt Bridge slope regrading area, and similar to Option 1 provides a relatively short relocation run of tunnel to the connection at Abbey Avenue and West 14th Street. However, a significant portion of the relocated WRI is still



in the footprint of the eastbound Innerbelt Bridge and passes under the current Innerbelt alignment. This alignment maintains a section of existing WRI along West 14th Street under the current Innerbelt Bridge and therefore limits options regarding the potential alignment or subsurface needs of a future eastbound bridge. The existing WRI would remain along a longer portion of University Road, which may be a concern regarding future slope failures or movements. Another disadvantage is that the starting point of Option 4 is very close to the final Innerbelt grading at the corner of University Road and West 13th Street and may conflict with the future grading plan for the eastbound bridge.

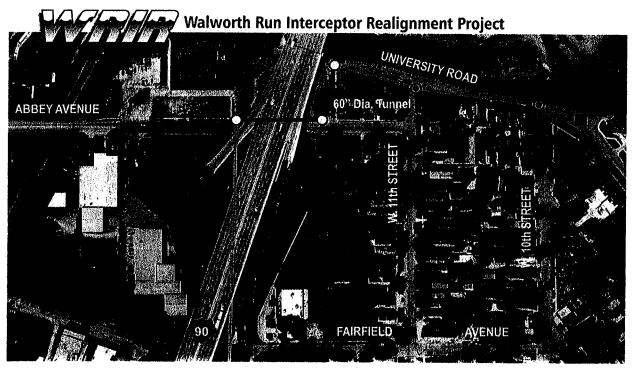


Figure D - Conceptual Option 4

2.5 **Option 5**

Conceptual Option 5 is shown in Figure E. This option consists of approximately 1,900' of 60" diameter tunneled pipe and four (4) major interceptor structures. The 60" tunneled pipe would begin by connecting to the existing WRI near Regulator WR-27A located on University Road, close to West 10th Street. From this point, the alignment would run southwest for



approximately 200' in to a manhole located on West 10th Street. From this point, the 60" tunneled pipe alignment would run southward along West 10th Street for a distance of approximately 600' to the intersection of West 10th Street and Fairfield Avenue. At this intersection, a manhole would be installed. From this structure, the alignment would run westbound for approximately 1,100' along Fairfield Avenue to the connection point at the intersection of Fairfield Avenue and West 14th Street. At this point, the 60" tunneled pipe would connect to the existing WRI with a connecting structure. As with the other options, several sewer pipes would be removed or abandoned with this option. Additionally, Regulator WR-25 at Crown Avenue and West 14th Street would be abandoned and Regulator WR-24 on Fairfield Avenue would be rebuilt. The existing 190' run of 12" sanitary sewer on Crown Avenue for the Animal Hospital will be relocated. Also, the combined sewer on Fairfield Avenue connecting to Regulator WR-24 may need to be upsized. The dry weather outlet from Regulator WR-24 to West 14th Street may also need to be upsized.

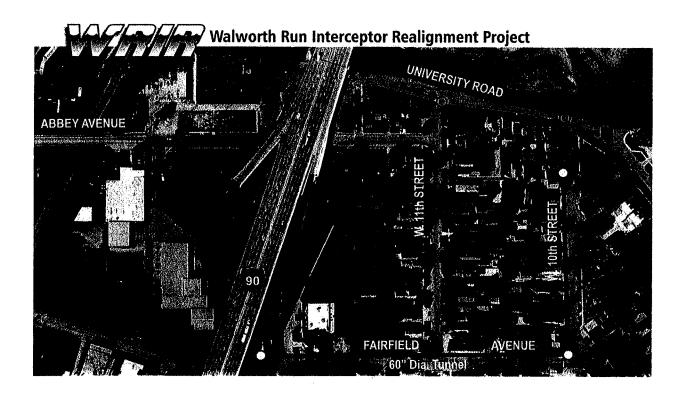


Figure E - Conceptual Option 5



Option 5 completely removes the WRI from the University Road area, which may be a long term slope failure concern. There could also be a possible reduction in flow to CSO-081, near the Cuyahoga River, based on favorable hydraulic evaluations. In addition, Option 5 meets the requirement to remove the WRI from the future Innerbelt Project area.

Option 5 is estimated to be the most costly option. It has a total length of 1,900 feet. Because the beginning and ending inverts are controlled by the existing WRI sewer, the proposed pipe may need to be larger than 60" diameter due to a lesser slope. The proposed diameter of the pipe would need to be evaluated. Additional soil borings would be required, adding to the total design cost. Also, two of the work shafts for Option 5 would be located in the Tremont neighborhood and may have stakeholder concerns. This option exceeds the original intent of the WRI relocation project.

Section 3 – Table 3.1 - Estimate of Probable Construction Cost (2010 Dollars)

Table 3.1 on the following pages lists estimated probable construction costs for the proposed WRI construction options. These costs are preliminary budgetary estimates based on comparison with recently completed projects. They do not include design engineering, construction administration, field inspection, legal review, easement acquisition, or property procurements costs that may be associated with the construction project.



Option 1	Qty.	Unit	Unit Cost	Total
Mobilization	1	LS	\$200,000	\$200,000
Tunnel Shaft w/Junction Chamber No. 1	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/ Manhole	1	Ea.	\$400,000	\$400,000
Tunnel Shaft w/Junction Chamber No. 2	1	Ea.	\$750,000	\$750,000
60" Tunneled Pipe	900	LF	\$2,500	\$2,250,000
Utility Relocations	1	LS	\$250,000	\$250,000
Remove / Abandon Sewer Pipes 24" & Smaller	3,400	LF	\$100	\$340,000
Remove / Abandon Sewer Pipes 30" & Larger	1,100	LF	\$200	\$220,000
Remove / Abandon Exist. 64" WRI	800	LF	\$500	\$400,000
Abandon Regulator WR-25	1	Ea.	\$20,000	\$20,000
Rebuild Existing Regulator WR-24	1	Ea.	\$30,000	\$30,000
Upsize WR-24 DWO Alignment	450	LF	\$200	\$90,000
Relocate Exist. 12" Sanitary to Animal Hospital	190	LF	\$150	\$28,500
Upsize Combined Sewer to WR-24	260	LF	\$200	\$52,000
Subtotal				\$5,780,500
Contingency (30%)				\$1,734,150
Option 1 Total				\$7,514,650
			USE	\$7.5 M

Option 2	Qty.	Unit	Unit Cost	Total
Mobilization	1	LS	\$200,000	\$200,000
Tunnel Shaft w/Junction Chamber No. 1	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/Junction Chamber No. 2	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/ Manhole No. 1	1	Ea.	\$400,000	\$400,000
Tunnel Shaft w/ Manhole No. 2	1	Ea.	\$400,000	\$400,000
60" Tunneled Pipe	1,400	LF	\$2,500	\$3,500,000
Utility Relocations	1	LS	\$250,000	\$250,000
Remove / Abandon Sewer Pipes 24" & Smaller	3,400	LF	\$100	\$340,000
Remove / Abandon Sewer Pipes 30" & Larger	1,100	LF	\$200	\$220,000
Remove / Abandon Exist. 64" WRI	1,500	LF	\$500	\$750,000
Abandon Regulator WR-25	1	Ea.	\$20,000	\$20,000
Rebuild Existing Regulator WR-24	1	Ea.	\$30,000	\$30,000
Upsize WR-24 DWO Alignment	450	LF	\$200	\$90,000
Relocate Exist. 12" Sanitary to Animal Hospital	190	LF	\$150	\$28,500
Upsize Combined Sewer to WR-24	260	LF	\$200	\$52,000
Subtotal				\$7,780,500
Contingency (30%)				\$2,334,150
Option 2 Total				\$10,114,650
			USE	\$10.1 M



Option 3	Qty.	Unit	Unit Cost	Total
Mobilization	1	LS	\$200,000	\$200,000
Tunnel Shaft w/Junction Chamber No. 1	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/Junction Chamber No. 2	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/ Manhole	1	Ea.	\$400,000	\$400,000
60" Tunneled Pipe	1,000	LF	\$2,500	\$2,500,000
Utility Relocations	1	LS	\$250,000	\$250,000
Remove / Abandon Sewer Pipes 24" & Smaller	3,400	LF	\$100	\$340,000
Remove / Abandon Sewer Pipes 30" & Larger	1,100	LF	\$200	\$220,000
Remove / Abandon Exist. 64" WRI	1,200	LF	\$500	\$600,000
Abandon Regulator WR-25	1	Ea.	\$20,000	\$20,000
Rebuild Existing Regulator WR-24	1	Ea.	\$30,000	\$30,000
Upsize WR-24 DWO Alignment	450	LF	\$200	\$90,000
Relocate Exist. 12" Sanitary to Animal Hospital	190	LF	\$150	\$28,500
Upsize Combined Sewer to WR-24	260	LF	\$200	\$52,000
Subtotal				\$6,230,500
Contingency (30%)				\$1,869,150
Option 3 Total				\$8,099,650
			USE	\$8.1 M

Option 4	Qty.	Unit	Unit Cost	Total
Mobilization	1	LS	\$200,000	\$200,000
Tunnel Shaft w/Junction Chamber No. 1	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/Junction Chamber No. 2	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/ Manhole	1	Ea.	\$400,000	\$400,000
60" Tunneled Pipe	500	LF	\$2,500	\$1,250,000
Utility Relocations	1	LS	\$250,000	\$250,000
Remove / Abandon Sewer Pipes 24" & Smaller	3,400	LF	\$100	\$340,000
Remove / Abandon Sewer Pipes 30" & Larger	1,100	LF	\$200	\$220,000
Remove / Abandon Exist. 64" WRI	400	LF	\$500	\$200,000
Abandon Regulator WR-25	1	Ea.	\$20,000	\$20,000
Rebuild Existing Regulator WR-24	1	Ea.	\$30,000	\$30,000
Upsize WR-24 DWO Alignment	450	LF	\$200	\$90,000
Relocate Exist. 12" Sanitary to Animal Hospital	190	LF	\$150	\$28,500
Upsize Combined Sewer to WR-24	260	LF	\$200	\$52,000
Subtotal				\$4,580,500
Contingency (30%)				\$1,374,150
Option 4 Total				\$5,954,650
		to don't commence to the company of the sec	USE	\$6.0 M



Option 5	Qty.	Unit	Unit Cost	Total
Mobilization	1	LS	\$200,000	\$200,000
Tunnel Shaft w/Junction Chamber No. 1	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/Junction Chamber No. 2	1	Ea.	\$750,000	\$750,000
Tunnel Shaft w/ Manhole No. 1	1	Ea.	\$400,000	\$400,000
Tunnel Shaft w/ Manhole No. 2	1	Ea.	\$400,000	\$400,000
60" Tunneled Pipe	1,900	LF	\$2,500	\$4,750,000
Utility Relocations	1	LS	\$250,000	\$250,000
Remove / Abandon Sewer Pipes 24" & Smaller	3,400	LF	\$100	\$340,000
Remove / Abandon Sewer Pipes 30" & Larger	1,100	LF	\$200	\$220,000
Remove / Abandon Exist. 64" WRI	2,000	LF	\$500	\$1,000,000
Abandon Regulator WR-25	1	Ea.	\$20,000	\$20,000
Rebuild Existing Regulator WR-24	1	Ea.	\$30,000	\$30,000
Upsize WR-24 DWO Alignment	450	LF	\$200	\$90,000
Relocate Exist. 12" Sanitary to Animal Hospital	190	LF	\$150	\$28,500
Upsize Combined Sewer to WR-24	260	LF	\$200	\$52,000
Subtotal				\$9,280,500
Contingency (30%)				\$2,784,150
Option 5 Total				\$12,064,650
			USE	\$12.1 M

Section 4 – Comparison of Sewer Construction Options

Five (5) general WRI construction options were described and evaluated. Table 4.1 summarizes these options and presents estimated probable construction costs, advantages, and disadvantages associated with each option.



Table 4.1 – Summary of WRI Construction Options

Description	Estimated Probable Construction Cost (2010 Dollars)	Advantages	Disadvantages
Option 1	\$7.5 Million	 Removes WRI from westbound bridge grading area. Relatively short tunnel run Meets required schedule 	Relocated WRI is in the eastbound Innerbelt Bridge footprint and may conflict with future eastbound bridge needs.
Option 2	\$10.1 Million	 Relocated WRI is completely removed from the Innerbelt footprint Meets required schedule 	Longer project length with respect to other options (except Option 5)
Option 3	\$8.1 Million	 Relocated WRI is completely removed from the Innerbelt footprint. Only 2 tunnel shafts necessary Only 1 drive shaft needed Minimal traffic conflicts Meets required schedule 	 Long length of existing WRI run on University Rd. may be future concern for slope failures Connection point very close to final Innerbelt grading at University Rd. and West 13th St.
Option 4	\$6.0 Million	 Removes WRI from westbound bridge grading area. Minimal traffic conflicts Meets required schedule 	 Long length of existing WRI run on University Rd. may be future concern for slope failures Connection point very close to final Innerbelt grading at University Rd. and West 13th St.
Option 5	\$12.0 Million	 WRI not in conflict with future Innerbelt Project area Completely removes WRI from University Rd. area, thus easing future slope failure concern Possible reduction in flow to CSO-081 based on favorable hydraulic evaluation Most likely will have schedule implications 	 2 work shafts located in Tremont neighborhood may have Stakeholder concerns May need larger diameter pipe than 60" due to long length of run and pipe grades. Additional soil borings required Most costly option



Section 5 – ODOT's Comments and Concerns

ODOT reviewed DLZ's Technical Memorandum dated Jan 11, 2010 and provided comments. DLZ's responses are as follows:

ODOT District 12 Comments (By David Lastovka): Comments Dated 1/20/2010

1. Alignment Recommendation

<u>Comment 1A:</u> ODOT concurs with the recommended Option #2 alignment (University-W11th-Abbey-frontage road between Abbey & Fairfield)

DLZ Response: Comment Noted.

2. Phasing

<u>Comment 2A:</u> During detail design, ODOT requests consideration for project phasing that considers earlier abandonment/removal of the Westerly Low Level Interceptor between Abbey and the NS overpass in the project construction schedule. If the Westerly Low Level Interceptor can be abandoned early, then the ODOT project can begin removal of the Cold Storage building, along with initial slope excavation, in advance of completion of the Walworth Run Interceptor relocation. This strategy would allow some overlap in both ODOT's and NEORSD's construction schedules.

<u>DLZ Response:</u> DLZ will investigate the hydraulic impacts of abandoning or removing the Westerly Low Level Interceptor between Abbey Avenue and the NS overpass as an early phase of construction. Please note that earlier abandonment/removal would require an elaborate bypass pumping plan.

3. Right of Way

<u>Comment 3A:</u> As previously discussed, early identification of any needed project right of way is critical to maintaining the project schedule.

<u>DLZ Response</u>: DLZ understands that early identification of any needed project right-of-way is critical to maintaining the project schedule. As of this report, it appears that the main sewer tunnel will be constructed without the need of right-



of-way. However, it should be noted that as the project progresses it may become necessary to obtain additional right-of-way for construction staging areas or other reasons.

<u>Comment 3B:</u> Additionally, since this relocation is within the Tremont Historic District, any additional RW needs may require additional Environmental coordination with the Federal Highway Administration (FHWA). If at all possible, the relocation work should be designed within the existing public right of way.

DLZ Response: Comment Noted.

<u>Comment 3C:</u> ODOT's record right of way plans were emailed to DLZ on 1-15-2010.

DLZ Response: DLZ has received ODOT's record right of way plans.

4. Access Shaft Locations

<u>Comment 4A:</u> Maintenance of Traffic (MOT) - During detail design, consideration should be given to minimizing local traffic impacts.

<u>DLZ Response:</u> DLZ will investigate ways to minimize local traffic impacts. One example is the relocation of the downstream connection away from the Fairfield Avenue/West 14th Street intersection to a location in the ODOT property on the southwest corner.

<u>Comment 4B</u>: W14th/Fairfield Shaft Location - ODOT's record information for the existing 60" Walworth run interceptor reflects that the sewer is east of the location shown on the Conceptual Plan graphic. Depending on the exact location of the existing sewer, consideration should be given to moving the access shaft either north or south of the Fairfield/W14th intersection, in order to minimize the work area's impact on traffic. See attached screen capture from the project's DGN basemap file.

<u>DLZ Response:</u> The field survey recently completed by DLZ shows the WRI on the west side of West 14th Street in the tree lawn. Currently it is contemplated that the downstream connection may be moved to the southwest corner of the Fairfield Avenue and West 14th Street intersection.



5. City of Cleveland Coordination

<u>Comment 5A:</u> The Innerbelt project has had significant coordination with Cleveland Engineering & Construction (Rob Mavec), Traffic (Andy Cross), and Water Pollution Control (Rachid Zoghaib). These offices should be coordinated with during project development.

<u>DLZ Response:</u> Coordinating with the aforementioned offices is standard operating procedure. DLZ is very familiar with the City of Cleveland and will coordinate as necessary.

6. Interim Condition

Comment 6A: There is a need to coordinate the existing I90 and local storm drainage (mainly west of W13th and north of Fairfield) with the proposed work. As you progress in detail design we will need to determine the disposition of this storm water, both in the interim condition and permanently.

<u>DLZ Response:</u> DLZ will address this issue during the design phase and work with ODOT.

7. Survey Control

<u>Comment 7A:</u> Confirmation that both projects are on the same survey control and all questions related to this topic are resolved.

<u>DLZ Response:</u> DLZ's survey will show elevations and horizontal coordinates referenced to the Ohio State Plane North Zone NAD 83 and NAVD 88 Datums as the primary system with the Cleveland Regional Geodetic Survey (CRGS) Datum as the secondary system.

8. As-Built Plans

<u>Comment 8A:</u> Does NEORSD have as-built plans created for projects? Coordination between the as-constructed NEORSD project and the ODOT design-build team will be very important.

<u>DLZ Response:</u> Yes, the design team will provide ODOT with all available as-builts at the completion of the project.



9. Haul Roads for NEORSD Project

<u>Comment 9A:</u> In coordination with Cleveland, our Design-Build project is not allowing Scranton or West 14th to be project haul roads. These same restrictions should be in place for the NEORSD project.

<u>DLZ Response</u>: DLZ will take these restrictions into account.


10. Vibration Monitoring

<u>Comment 10A:</u> We recommend requiring vibration monitoring of properties adjacent to the NEORSD work locations. Section 9.3.4 of the Design-Build scope addresses ODOT's approach to Vibration Monitoring and Control. This scope language can be provided upon request.

<u>DLZ Response:</u> DLZ will investigate vibration monitoring of properties adjacent to the NEORSD work locations.

Section 6 – Recommendation

Based on the evaluation of the above options, considering the project goals, cost and schedule, DLZ concurs with the original NEORSD recommendation that **Option 2** be selected as the preferred alternate for the WRIR. The estimated probable construction cost for the recommended sewer construction plan is \$10,100,000 (2010 Dollars). This plan is shown on the attached plan view exhibit previously prepared by NEORSD and Wade Trim. This estimate should be regarded as a budgetary planning estimate. The estimate will be revised and updated throughout the project's design as more detailed design information becomes available.

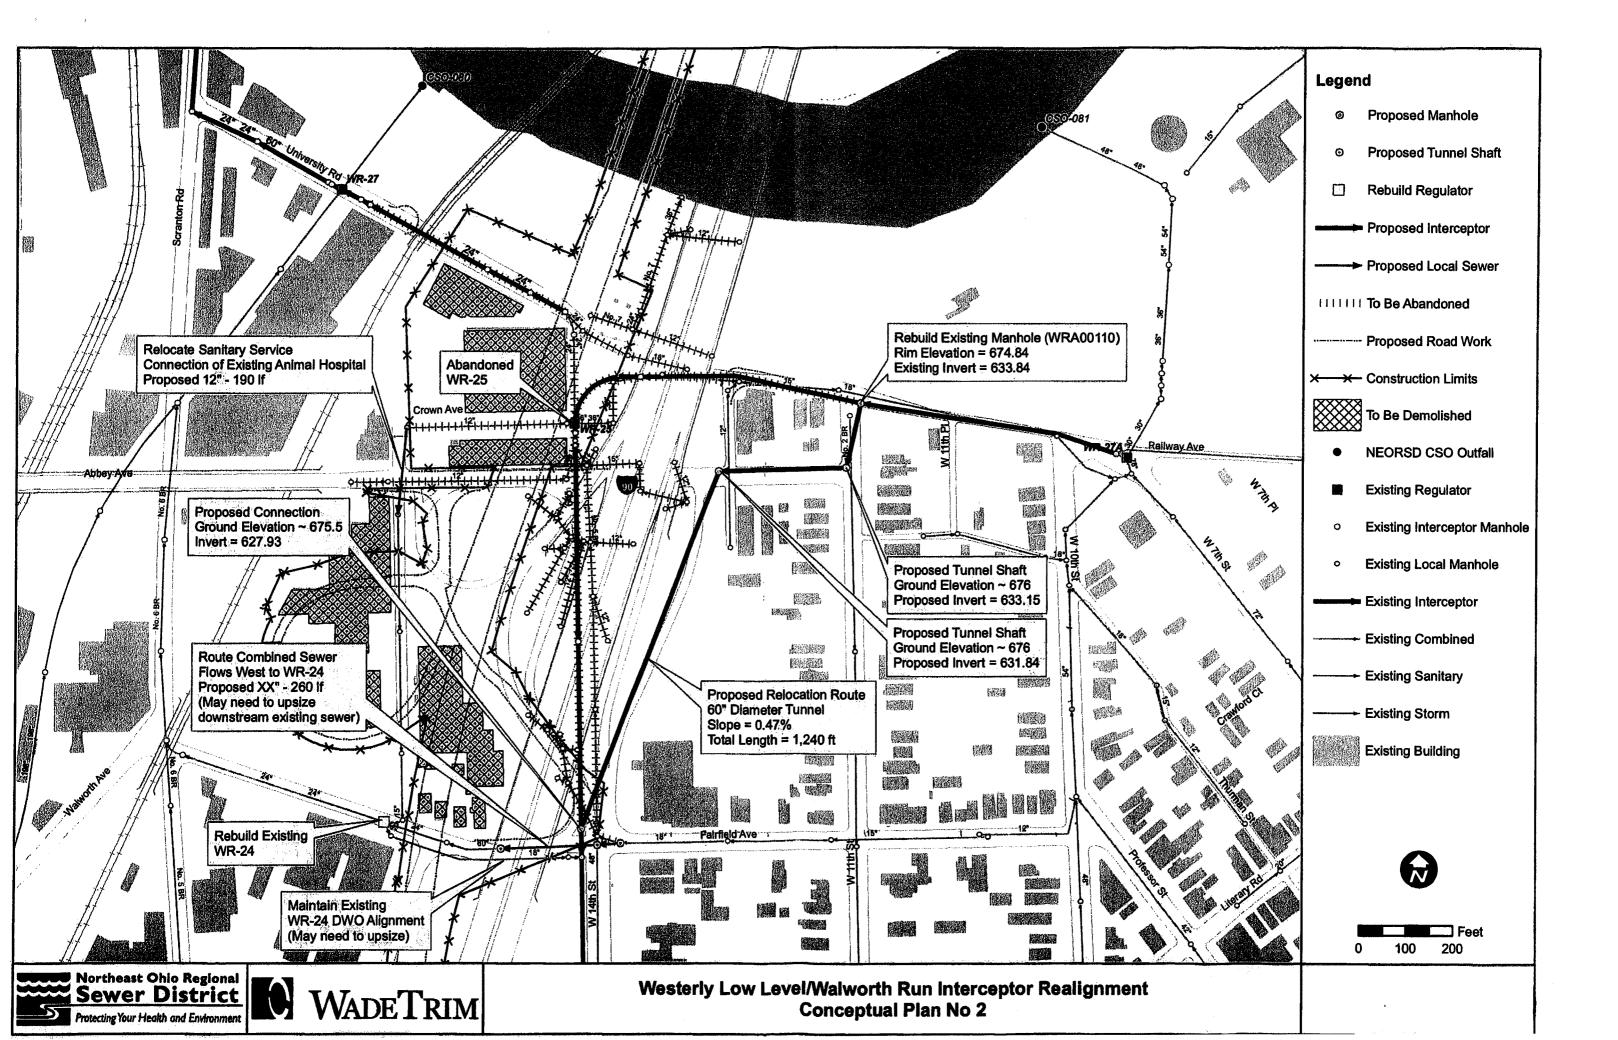

APPENDIX "B"

Draft Soil Boring Logs

M

Solar Testing Laboratories, Inc. 1126 Valley Belt Road Brooklyn Heights, Ohio 44131 Telephone: 216-741-7007

BORING NUMBER B-1

PAGE 1 OF 2

					6-741-7011								PAG)	JF 2	
CLIE	NT _	Northe	east	Ohio	Regional :	Sewer District	PROJECT NAME Walt	worth Run Ir	ntercer	tor Re	alignm	ent (V	/RIR)	Projec	<u>: </u>	
PROJ	ECT	NUM	BER	<u> </u>	09570x10		_ PROJECT LOCATION	W 11th, Ab	bey, V	V 14th	Street	s, Clev	eland,	Ohio		
DATE	STA	RTE) _1	1/18	3/09	COMPLETED _11/18/09	_ GROUND ELEVATION					•				
DRILL	ING	CON.	ΓRΑ	стс	R Solar T	Festing Laboratories, Inc.				<u>v</u>					<u> </u>	1
DRILL	.ING	METH	HOD	<u>H</u>	ollow Stem	Auger	_ GROUND WATER LEVE	ELS:								
						DRILLER J. Deranek		OUNTER 3	8.8 ft							
NOTE							_ WATER ON COM									
HOLE						AUGER SIZE 4.25 l.D.	WATER AFTER									ĺ.
		 IJ		(O					%		6		AT	TERB		
I	}	SAIMPLE 1 YPE	S)	Pog				>2 <u>E</u>	ر ﷺ	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	l ≥	<u> </u>	<u>LIMIT:</u> I≻		ĺ
DEPTH (ft)	i i	4	U.S.C.S.	GRAPHIC		MATERIAL DESCRIP	TION	BLOW COUNTS (N VALUE)	RECOVERY (RQD)	EN I	85	\ <u>\{\bar{g}}{\bar{g}}\</u>	₽⊨	PX	유느	
2	2	<u>}</u>	ວັ	₹				_ <u>∞</u> 8≤	ပြမ္မ	ΘŹ	로	₹``	LIMIT		E AS	
0	Ü	<i>i</i>		👨				·	굔	-0	ST	□		5_	PLASTIC LIMIT	
		<u> </u>		XXX	0,6	3" ASPHALT, 4" BRICK.		1				i				1
_		{		₩	1.4	SOLIDIFIED BASE. FILL: Brown SAND, little gravel, trace	silt brick	445	-							
-	SS			₩	•	CIEE, DIGWII GUIVE, IIIIIE GIAVEI, GAGE	Silt, Drick. (Moist)	4-4-5 (9)								
-		1		₩	1	•		11-17-7-6	1							l
5	SS	,		₩	5.0	•		(24)		4.7						
-				î		Loose to medium dense brown mediu	m to fine SAND, little	2-3-4-4	1							
-	SS					gravel, trace silt.	J.	(7)								
-	-					4" layer of SILTY CLAY at 7.3'.	-GRAILED	4-5-6-9	1							
1	SS				·	4" layer of SILTY CLAY at 7.7'.		(11)						İ		
40							•	3-2-3-4	1							
10	SS							(5)								
1			SP					4407								
	-\$8-							4-4-6-7 (10)								_
+								5000								
۱ ـ ـ ـ ا	\$\$	Ì						5-8-8-9 (16)								
15		i						0007								
4	\$\$							8-6-8-7 (14)		4.2		N. N.				
+	-		=	:11:	17.0	Loose brown PINE SAND, WEST.		2004								
4	SS	((\$М	*		-> LOILTY SAUL	(Moist)	2-2-3-4 (5)		·		,÷				
+			1	313	19.0	Loose to medium dense brown MEDI	IM SAND little									
20	SS					gravel, trace silt.		4-4-4-4 (8)		5.7					.	
+							-CRAINED									
4	ss		SP			,	i	3-4-7-9 (11)								
+														. 4		
ᇨ┨	ss		ļ		05.0		•	6-7-6-8 (13)								
25		ŀ		711	25.0	Medium dense brown MME SAND, so	pre-silt, few sandy									
+	ss					silt layers.	(Moist)	4-5-6-6 (11)	.		.]				.	
+																
4	ss							5-6-5-7 (11)			1					
+				111		SILTY SA	wn				İ				ĺ	
30	ss	1	SM	\mathbb{H}		- 311/35	17 W	6-6-5-6 (11)		9.4	Ì					
+		4	-		_	N,		,	,						ł	
4	ss		. [6	•		6-6-7-7 (13)								
4							٠	(10)				İ				
1	ss							6-6-6-7							j	
35	-		ľ					(12)			.		.			



BORING NUMBER B-1 PAGE 1 OF 2

					JECT NAME Walworth Run Interceptor Realignment (WRIR) Project										
PRO.	IECT NUI	MBEF	₹ _/	A09570x10 PROJ	JECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio										
DATE	STARTI	ED _	11/1	8/09 COMPLETED 11/18/09 GROL	UND ELEVATION										
				OR Solar Testing Laboratories, Inc. BORIN											
DRILI	LING ME	LHOE	<u> </u>	follow Stem Auger GROU											
LOGO	SED BY _	R. S	pella		✓ WATER ON ENCOUNTER 38.8 ft										
NOTE	:s			<u> </u>											
HOLE	SIZE _			AUGER SIZE 4.25 I.D.	WATER AFTER HRS:										
	Щ		<u>ا</u> م		ATTERBERG Superior S										
, DEPTH (#)	SAMPLE TYPE	U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE) RECOVERY % (RQD) MOISTURE CONTENT (%) UN. COMP. STRENGTH (st) DRY UNIT WT. (pcf) LIQUID LIMIT REASTIC PASTIC STRENGTH REASTIC BEASTIC BE										
0	 	+-		0.6 3" ASPHALT, 4" BRICK.											
			\bigotimes	1.4 SOLIDIFIED BASE.											
-	ss		\otimes	FILL: Brown SAND, little gravel, trace silt, brick	k. (Moist) 4-4-5 (9)										
· -	SS				11-17-7-6 (24) 4.7										
<u> </u>	ss		₩	5.0 Loose to medium dense brown medium to fine gravel, trace silt.	SAND, little (Moist) 2-3-4-4										
				4" layer of SILTY CLAY at 7.3'.	4-5-6-9										
	SS			4" layer of SILTY CLAY at 7.7'.	(11)										
10 _	SS	SP			3-2-3-4 (5)										
· -	SS				4-4-6-7 (10)										
. – 15	ss				5-8-8-9 (16)										
	ss			470	8-6-8-7 (14) 4.2										
· -	SS	SM		17.0 Loose brown FINE SAND, little siit.	(Moist) 2-2-3-4 (5)										
20	ss		11.1	19.0 Loose to medium dense brown MEDIUM SAND gravel, trace silt.	D, little (Moist) 4-4-4-4 5.7										
	SS	SP			3-4-7-9										
					6-7-6-8										
25	ss —		11	25.0 Medium dense brown FINE SAND, some silt, fe	(13)										
	SS	4		silt layers.	(Moist) 4-5-6-6 (11)										
	ss				5-6-5-7 (11)										
30	ss	SM			6-6-5-6 (11) 9.4										
	ss				6-6-7-7 (13)										
25	SS				6-6-6-7 (12)										



BORING NUMBER B-1

PAGE 2 OF 2

Fax: 216-741-7011 PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project CLIENT Northeast Ohio Regional Sewer District PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio PROJECT NUMBER A09570x10 **ATTERBERG** UN. COMP.
STRENGTH (tsf)
DRY UNIT WT.
(pcf) MOISTURE CONTENT (%) SAMPLE TYPE GRAPHIC LOG LIMITS U.S.C.S. PLASTICITY INDEX DEPTH (ft) MATERIAL DESCRIPTION aure ytuic 35 Medium dense brown FINE SAND, some silt, few sandy (Moist) 6-8-9-10 silt layers. (continued) SS ям 🕽 (17)Medium dense brown medium to fine, SAND, trace silt. 7-5-6-7 (Wet) SS **CUAINED** (11)39.0 ¥ Medium dense to dense gray SILTY FINE SAND. (Moist) 9-9-10-11 40 20.7 SS (19)10-15-21 SILTY SAND. SS SM 27 (36)10-12-13recomes medium daose with 16 SS (25)45 (Moist) 7-10-11-15 interlayers. SS (21)166 gray FINE SAND, little sill 16-23-27 (Moist) SS 29 BE COMES DEUSE (50)12-14-17 Medium dense to dense gray SILTTFINE SAND, clayey silt interlayers (stratified). 21 (31) SS 3-7-9-11 A SILTY SAND TO SILT. 31 SS (16)10-14-18 20 (32) (Moist) SS 55 12-18-20 (Wet) SS Medium dense graf SILT little sand, trace clay, few silty clay interfavers (stratified). 7-8-9-11 SS (17) 4-6-9-10 60 24.9 25 5 20 SS (15)4-5-7-9 (Wet) SS MŁ (12)8-9-10-12 SS (19)65 27 POSHTH6 19 ST Stiff to very stiff gray SILTY CLAY, little sand, few silt 6-9-9-11 interlayers (laminated) 23 SS (18)8-11-12-14 70 SS Lean Clay (23)6-7-7-9 31 11 20 SS 25.7 (14) 5-6-7-9 SS (13)

Bottom of hole at 75.0 feet,



BORING NUMBER B-1

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

				ဖွ	<u> </u>				%		(st)	F.	ERBE	
35 DEPTH	SAMPI F TYPF		U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	Ý	PLASTIC LIMIT
	SS		SM		37.0	Medium dense brown FINE SAND, some silt, few sandy silt layers. (continued)	(Moist)	6-8-9-10 (17)						
-	SS		SP		39.0 ₹	Medium dense brown medium to fine SAND, trace silt.	(Wet)	7-5-6-7 (11)						
40	SS					Medium dense to dense gray SILTY FINE SAND.	(Moist)	9-9-10-11 (1 9)		20.7				
_	ss		SM					10-15-21- 27 (36)						
 45 _	ss				45.0			10-12-13- 16 (25)						
	SS		SM		47.0	Medium dense gray SILTY FINE SAND, few silt interlayers.	(Moist)	7-10-11-15 (21)						
	SS		SM			Dense gray FINE SAND, little silt.	(Moist)	16-23-27- 29 (50)						
50	ss				49.5	Medium dense to dense gray SILTY FINE SAND, silt and clayey silt interlayers (stratified).	(Wet)	12-14-17- 21 (31)						
	ss		SM					3-7-9-11 (16)						
- - _55	ss		SM- ML				(Moist)	(32)						
	SS				57.0		(Wet)	12-18-20- 25 (38)						
	ss					Medium dense gray SILT, little sand, trace clay, few silty clay interlayers (stratified).	(Moist)	7-8-9-11 (17)						
60	ss							4-6-9-10 (15)		24.9				
 	SS		ML				(Wet)	4-5-7-9 (12)						
65	SS				:		(Moist)	8-9-10-12 (19)						
-		ST			67.0	CHEET AND SHEET THE CHANGE AND SHEET							-	
	SS					Stiff to very stiff gray SILTY CLAY, little sand, few silt interlayers (laminated).	(Moist)	6-9-9-11 (18)		23				
70	ss		CL					8-11-12-14 (23)						
	ss							6-7-7-9 (14)		25.7				
 75	ss				75.0	Rottom of hole at 75.0 fact		5-6-7-9 (13)						

MS.	S 1' Bi Ti
CLIENT North	<u>iea</u>
PROJECT NUM	/IBI

Solar Testing Laboratories, Inc. 1125 Valley Belt Road

22	12	ر د	Tele	phor	Heights, Onio 44131 ne: 216-741-7007 3-741-7011	• •		BC	/Kili	VG I	YU		E 1 C			
CLIE	NT N	orthe	east	Ohio	Regional Sewer District	PROJECT NAME Walk	vorth Run Ir	tercep	tor Re	alignm	ent (V	/RIR) f	² roject			
PRO.	JECT N	MUM	BER	_A	09570x10	PROJECT LOCATION _	W 11th, Ab	bev, V	/ 14th	Streets	, Clev	eland,	Ohio			
DATE	STAI	RTEI) 1	1/19	/09 COMPLETED 11/19/09	GROUND ELEVATION _										
1					R Solar Testing Laboratories, Inc.				<i>!</i>							
ŧ					ollow Stem Auger	GROUND WATER LEVELS:										
					ter DRILLER J. Deranek	· ·		7.0 ft								
NOTE	:s															
HOLE	SIZE				AUGER SIZE 2.25 I.D.	WATER AFTER HRS:										
	Į,	1		ဖွ				%	(9)	Sf)	ı-i		TERBE LIMITS			
DEPTH (ft)	SAMPLE TYPE		U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTIO	ON ON		RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (f	DRY UNIT WT (pcf)		>	PLASTIC LIMIT		
					5" ASPHALT, 4¾" BRICK PAVER, 3" BA CONCRETE.	SE, 6"										
L .	SS		l	\bigotimes	2.5 FILL: CINDERS & SAND.		9-6-5									
	-				Loose brown SAND, little gravel, trace sil interlayers.	t, few silty clay (Moist)	(11)	}								
- ₋ -	SS				iriteriayers.		4-2-3] :								
5					1		(5)									
							4-4-4									
-	SS						(8)									
	Ш								,							
- 40	ss						3-3-3 (6)		7.7							
10	$\vdash \vdash \vdash$		SP				(0)							.		
	1 1					·										
-	1 1				·											
15	ss					·	3-3-2 (5)		6.8							
-																
	i l							ľ								
	<u> </u>		И		18.5 Medium dense brewn SAND, trace silt.		5-6-8									
20	SS				Woodalli derise bretti derise side, ildee sid.	TRACESILT (Moist)	(14)		5.5							
			SP		BECOMES											
			or.													
_			41		Loose brown 5, little gravel, trace sill	, few sifty clay	2-3-4									
25	SS				interlayers.	(Moist)	(7)		11.9					-		
			SP		da a											
_			-		BECOMES.											
					00.5											
					28.5 Medium dense brown FINE SAND little s	filtr (Moist)	5-7-9									
30	SS					- (IXIOISI)	(16)									
													:			
			SM		SILTYS	HVD.										
- -		1	_			-										
	SS				· •		7-8-11									



BORING NUMBER B-2 PAGE 1 OF 2

i .					sewer District											
										/ 14th :	Streets	s, Clev	eland,	<u>Ohio</u>		
ı					COMPLETED 11/19/09					,						
l .					esting Laboratories, Inc.	BORING LOCATION W. 11th & University GROUND WATER LEVELS:										
				Hollow Stem A												
					DRILLER J. Deranek	_										
					AUGER 6127 . 0.05 LP											
HOLE	SIZE		Т		AUGER SIZE _2.25 I.D.	WATERA	FIEK_	nks.					ΙAΤ	RG		
DEPTH (ft)	SAMPLE TYPE	U.S.C.S.		GRAPHIC LOG	MATERIAL DESCRIPT	ION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIMIT	LIMITS		
0_	<u> </u>	+	۱		5" ASPHALT, 4¾" BRICK PAVER, 3" E	ASE, 6"										
-		L		1.6	CONCRETE.											
-	ss	ļ	8	2.5	FILL: CINDERS & SAND.	-,,		9-6-5 (11)								
-					Loose brown SAND, little gravel, trace sinterlayers.	silt, few silty clay	(Moist)									
5	ss				•			4-2-3 (5)								
								(-)	1							
-	SS							4-4-4								
	33							(8)								
-							ļ									
10	ss				•			3-3-3 (6)		7.7						
10		SP					Ì	(-)	1							
-																
		ı														
-		i														
	ss							3-3 - 2 (5)	ŧ	6.8						
15							ŀ	(0)								
-																
		L.		18.5												
	ss				Medium dense brown SAND, trace silt.		(Moist)	5-6-8 (14)		5.5						
_ 20							}							1		
-		SP														
-														.		
-		L.		23.5			4									
	ss				Loose brown SAND, little gravel, trace sinterlayers.	silt, few silty clay	(Moist)	2-3-4 (7)		11.9						
25																
-		SP														
-																
-			:	28.5												
	SS				Medium dense brown FINE SAND, little	silt.	(Moist)	5-7-9 (16)								
30								(10)								
				**												
		SM												, 1		
														. 1		
	SS			捌				7-8-11 (19)								



BORING NUMBER B-2

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project
PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

	ш			တ				8	િહ	St)	ابا	AT	TERBE LIMITS	
	SAMPLE TYPE		S.S.	GRAPHIC LOG	<u> </u>	MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (t	DRY UNIT WT (pcf)	Ο.		
€	MPLS		U.S.C.S.	APH		MATERIAL DESCRIPTION SILTY SAND	N SOR	8	NOIS PNTE	SENG ENG	5.ĕ	LIQUID	PLASTICITY INDEX	PLASTIC
5	δ			ર્જ		3121 3111		꼾	28	STF	占		절=	ď
		1	SM	K		Medium dense brown FINE SAND, little silt. (continued) (Moist)							
4		Ч		Ł	37 <u>.0</u> 🕎	Medium dense brown FINE SAND, trace silt.								
+						-GRAINED								
	SS					-6/49/100	3-5-8 (13)]						
4			SP			·								
-														
				11	43.5	Dense to very dense gray SILTY FINE SAND. (Maint	15-22-28	1						
;	SS					(Moist	(50)	1	23.3					
+						CSILTY SAND.								
						· · · · · · · · · · · · · · · · · · ·								
}	ss		SM				16-22-30	1						
-							(52)	1						
+	l													
1														
-	SS			#	54.0	Medium dense to dense gray SILT, some sand, few thin	11-16-17							
\dashv				$\ $		silty day intertayers. (Moist	(33)							
1			ML											
4														
, -	SS				60.0		10-15-11 (26)		19.8			NP	NP.	. 1
	_			J.L.L	00.0	Bottom of hole at 60.0 feet.		1						
									ļ					
	ļ													
	:													
											,			



BORING NUMBER B-2 PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District	PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project
PROJECT NUMBER A09570x10	PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio
. В В В В В В В В В В В В В В В В В В В	ATTERBERG LIMITS LIMITS

										T				FFODE	
	Į ų	1		90.				wiii	% >	щ®	(tsf)	WT.		rerbe Limits	
DEPTH (ft)	EDWAR E TVDE		U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (ts	DRY UNIT WT (pcf)	₽⊨	PLASTICITY INDEX	DE E
ᆸ -	AMD		U.S	RAP				M O N	15 F)	NO NO NO NO NO NO NO NO NO NO NO NO NO N	ZEN.	JRY (LIQUID	ASTIC INDE)	PLASTIC LIMIT
35		_	_	्र जन्म		Medium dense brown FINE SAND, little silt. (continued)			<u> </u>	_	S			P	_
			SM		07.0	Medium dense brown i nac oanab, nac ona (commuca)	(Moist)								
-				بالبا	37.0 💆	Medium dense brown FINE SAND, trace silt.	(Wet)								
· -	SS							3-5-8							
40	33		SP					(13)							
-															
_					43.5										
-	ss			Ħ	43.5	Dense to very dense gray SILTY FINE SAND.	Moist)	15-22-28 (50)		23.3					
45 _								(50)							
_															
_															
	SS		SM					16-22-30 (52)							
50_								(02)							
-															
_															
-	SS				54.0	Medium dense to dense gray SILT, some sand, few thin	(Moist)	11-16-17 (33)							
55						silty clay interlayers.	(MOISE)								
_			ML												
-															
- 60	ss				60.0			10-15-11 (26)		19.8					
-					30.0	Bottom of hole at 60.0 feet.									
								i	ŀ						
											[

ADD PP - WHERE APPLICABLE.

Solar Testing Laboratories, Inc. 1125 Valley Belt Road Brooklyn Heights, Ohio 44131 Telephone: 216-741-7007

BORING NUMBER B-3 PAGE 1 OF 2

		ı	=ax:	216	3-741-70													
							PROJECT NAME											
PROJ	ECT N	IUME	BER	<u>A</u> (09570x1	<u> </u>	PROJECT LOCA	TION _	W 11th, Abi	oey, W	14th :	Streets	, Cleve	eland,	Ohio			
DATE	STA	RTEC	1_1	1/20	/09	COMPLETED 11/23/09	GROUND ELEVA	TION _										
DRILL	ING (CONT	RA	сто	R Sola	r Testing Laboratories, Inc.	BORING LOCATI	ion <u>w</u>	11th & Abi	ey	-							
DRILL	ING F	/ETH	IOD	Ho	llow Ste	m Auger												
LOGG	ED B	Y _R	. Sp	ellaç	.y	DRILLER J. Deranek												
NOTE	s						WATER ON COMPLETION 60.0 ft											
HOLE	SIZE					AUGER SIZE 4.25 I.D.	ATTERRERO											
DEPTH (ft)	SAMPI E TYPE		U.S.C.S.	GRAPHIC LOG		MATERIAL DESCI	RIPTION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)		LIMITS			
0	Ψ.	;		5		•			_	2	~0	ST	莅		5_	_		
	ss			o .	1.0	2¼" ASPHALT, 4¾" BRICK PAVE SILT. Loose to medium dense brown SA silt.	January Manager and	(Moist)	4-4-4-3 (8)									
 	SS		ST G		-0	HECK.			3-4-4-6 (8)									
	SS			0	7.0				7-9-12-10 (21)		4.4							
- -	SS					Loose to medium dense brown ME gravel, trace silt, few silty clay inter	rlayers./	(Moist)	3-3-3-5 (6)									
10	SS		SP				COUINED		2-3-5-5 (8)									
 - -	SS				13.0			(Wet)	3-6-6-10 (12)									
15	SS			•	10.0	Medium dense brown SAND & GF	RAVEL) trace silt.	(Moist)	7-7-11-8 (18)									
	SS	(SP. GP	0	_ (CHEEVE.			5-8-9-9 (17)									
	SS			a					6-7-8-10 (15)		4.8							
20	SS			0	20.3	Medium dense brown FINE,SAND), trace gravel, silt.	(Moist)	7-7-8-11 (15)									
	SS		SP			- Mr	lined	` .	8-9-11-12 (20)									
25	SS				25.0		4		7-9-9-10 (18)		·							
	SS					Medium dense brown SILTY FINE interlayers of sandy silt.	SAND, few thin	(Moist)	10-11-12- 13 (23)									
	SS		5М			' 5	ily eand		8-8-8-10 (16)									
30	SS				31.0				5-5-6-11 (11)									
	ss	1	M	1	<u> </u>	Medium dense to dense brown SA of FINE SAND, trace silt, stratified	ANDY SILT, intertayers	(Wet)	6-8-9-11 (17)									
ļ .	ss	1	SP	7	/	OHECK.			4-5-8-9 (13)									



BORING NUMBER B-3

PAGE 1 OF 2

CLIEN	NT Nort	neas	Oh	Regional Sewer District PRO	JECT NAME Walv	vorth Run In	tercep	tor Re	alignm	ent (W	/RIR) F	² roject	
PROJ	ECT NUI	/BEI	٦ _	.09570x10 PRO	JECT LOCATION	W 11th, Ab	bey, V	/ 14th	Streets	s, Clev	eland,	Ohio	
DATE	START	D _	11/2	0/09 COMPLETED 11/23/09 GRO	OUND ELEVATION _								
DRILL	ING CO	NTR/	CT	DR Solar Testing Laboratories, Inc. BOR	ING LOCATION W	. 11th & Abl	oey						
DRILL	ING ME	[HOI	<u> </u>	ollow Stem Auger GRC	OUND WATER LEVE	LS:							
LOGG	ED BY	R. S	pella	cy DRILLER J. Deranek \(\sigma\)	WATER ON ENCO	OUNTER 3	2.5 ft		,				
NOTE	s				WATER ON COM	PLETION _6	0.0 ft						
HOLE	SIZE _			AUGER SIZE 4.25 I.D.	WATER AFTER _	HRS:					,		
	Щ		٤				%	@	(g)	F.		TERBE LIMITS	
₹ _	Σ	\ \oldsymbol{o}{\oldsymbol{o}}	15			BLOW COUNTS (N VALUE)	왕(18.5 18.5 18.5	M F F	≥ ≥			
DEPTH (ft)	=	USC	Ī	MATERIAL DESCRIPTION		S S S	S S	SE	25	E G	LIQUID	E 첫	STI
	SAMPLE TYPE	-	GRAPHIC LOG			OZ	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	125	PLASTICITY INDEX	PLASTIC LIMIT
0		┿	L	23/4" ASPHALT, 43/4" BRICK PAVER, 4" Gray	CLAVEY				- 6			<u>-</u>	
		-	À.:	1.0 ₁ SILT.									
ļ -	ss		0.	Loose to medium dense brown SAND & GRA	VEL, trace (Moist)	4-4-4-3 (8)							
			0										
	ss	SP GP	ò			3-4-4-6 (8)							
5			0										
-	ss		0	7.0		7-9-12-10 (21)		4.4					
		\vdash		7.0 Loose to medium dense brown MEDIUM SAN	ID, little (Moist)	3-3-3-5							
-	SS			gravel, trace silt, few silty clay interlayers.	(IVIOISI)	(6)							
10						2-3-5-5							
- 10	SS	SP				(8)							
-					(18/-4)	3-6-6-10							
_	SS	l		13.0	(Wet)	(12)							
	ss		ø.	Medium dense brown SAND & GRAVEL, trac	e silt. (Moist)	7-7-11-8							
15	33		3			(18)							
	ss		O			5-8-9-9							
		SP- GP	0			(17)							
- -	ss): D:::			6-7-8-10		4.8					
			0			(15)							
20	ss		0	20.3		7-7-8-11 (15)							
				Medium dense brown FINE SAND, trace grav	el, silt. (Moist)								
	ss					8-9-11-12 (20)							
		SP											
	ss					7-9-9-10 (18)							
25		\vdash		25.0 Medium dense brown SILTY FINE SAND, fev	v thin	10-11-12-							
	SS			interlayers of sandy silt.	(Moist)	13 (23)							
						8-8-8-10							
	SS	SM				(16)							
20						5-5-6-11							
30	SS			31.0		(11)							
		-	m	Medium dense to dense brown SANDY SILT,	interlayers (Wet)	6-8-9-11							
	SS	Mi.		of FINE SAND, trace silt, stratified.	(**61)	(17)							
		ML- SP				4-5-8-9							
25	SS		Ш			(13)							



BORING NUMBER B-3

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NUMBER A09570x10

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project
PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

	Γ.	<u>. </u>			Τ						6			TERBE	
7	SAMPI F TYPF	:	6	GRAPHIC LOG				ZS LE)	₹ % 	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)		<u>IMITS</u> ≻	
DEPTH (ft)	L	}	U.S.C.S.	웆		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	NS C	IST.	SGT	(pod)	먑	듣낐	STIC
ַ מ	AME	,	J	3RAF				"ÖŽ	RECOVERY (RQD)	CON	TRE.	DRY	LIQUID LIMIT	PLASTICITY INDEX	PLASTIC LIMIT
35			-			Medium dense to dense brown SANDY SILT, interlayers		7.0.00.07			<u> </u>			<u> </u>	
	ss	(ML- SP	Й	37.0	of FINE SAND, trace silt, stratified: (continued)	(wet)	7-8-23-27 (31)							
	SS					Dense gray SILTY FINE SAND, few silt interlayers.	(Moist)	12-20-29- 38							
	33		SM			SILTY SAND		(49) 13-20-26-							
40	ss					(SM) &		32 (46)		/			15	<u>37,17</u>	<i>₹</i>
		,	-	• •	41.0	Very dense gray MEDILING SAND, trace silt.	(Moist)	9-24-32-39		18.4		\checkmark	NP) NP	NP
	SS	(6₽ 	1	43.0	4		(56)		10.4			148	191	
	ss					Medium dense to very dense gray SILT, some sand, with SILTY SAND interlayers.	(Moist)	20-25-28- 31					y l		
45								(53) 17-25-31-							
-	SS		ML- SM	ē	-			34 (56)				·			
	SS							10-14-16- 22							
					49.0	Medium dense to dense grav SIÇT, little clay, sand.		(30)							
50	\$S						(Moist)	5-6-7-9 (13)		22			24	5	19
			u		1	SMYCLAY		5-6-8-9							
_	SS					snry clay		(14)							
-	ss		<u>ا</u> .			.*		4-6-13-14 (19)							
55				H	 		, , ,	(10)							
		ST	ML		>	positive pressures							NP	NP	NP
-	ss	-						10-9-11-14							
[·	33					•		(20) 10-15-17-	ļ						
60	SS				₹.			20 (32)		17					
	-					·		9-12-16-19							
	SS				63.0			(28)							
	SS		SP			Dense gray SAND, trace silt.	(Moist)	J							
65			-		65.0	Dense gray SANDY SILT.		(47) 15-20-23-							
	\$S		ML		67.0	Dense gray SANDY SILT	(Moist)	30 (43)							
			-		107.0	Stiff to very stiff gray SILTY CLAY, little sand, stratified,	(Moist)			23					
	SS					few silt interlayers.	·	(15)							
70	ss					LEAN CLAY	(Wet)	7-9-12-14 (21)		ŀ					
<u> </u>	<u> </u>		CL		<u> </u>	Let you can y		6-9-11-12							
- !	SS							(20)							
	SS							6-7-11-13		25.6		1			
75		<u> </u>			75.0	Dettern of hole at 75.0 feet		(18)		<u></u>		<u> </u>	L	<u> </u>	<u> </u>

Bottom of hole at 75.0 feet.



BORING NUMBER B-3

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

										,	,				
	١	T.		90				, co	%,	ய <u></u> %	(tst)	Å.		TERBE LIMITS	
HTH DEPTH (#)	- GMAQ	SAMPLE I TPE	U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIQUID	PLASTICITY INDEX	PLASTIC LIMIT
	ss		ML- SP		13	Medium dense to dense brown SANDY SILT, interlayers of FINE SAND, trace silt, stratified. (continued) (W.7.0	et)	7-8-23-27 (31)							
	ss		SM			Dense gray SILTY FINE SAND, few silt interlayers. (Mo	ist)	12-20-29- 38 (49)							
40	SS		SIVI		4	1.0		13-20-26- 32 (46)							
	ss		SP	1111	4	3.0	ist)	9-24-32-39 (56)		18.4			,		
45	ss					Medium dense to very dense gray SILT, some sand, with SILTY SAND interlayers. (Mo	ist)	20-25-28- 31 (53)							
- -	SS		ML- SM					17-25-31- 34 (56) 10-14-16-			:				
- 	SS				4	9.0 Medium dense to dense gray SILT, little clay, sand.		22 (30)							
<u>50</u>	SS					(Mo	st)	5-6-7-9 (13) 5-6-8-9		22					
	SS							(14) 4-6-13-14							
55	SS	<u> </u>						(19)							
	ss	ST	ML					10-9-11-14							
 60	ss					T		(20) 10-15-17- 20		17					
	ss			i				(32) 9-12-16-19 (28)			:				
	ss		SP	Ш		3.0 Dense gray SAND, trace silt. (Moi	st)	20-19-28- 34							
_ 65 	ss		ML			5.0 Dense gray SANDY SILT. (Moi	st)	(47) 15-20-23- 30 (43)			,				
	ss				<u> -</u>	Stiff to very stiff gray SILTY CLAY, little sand, stratified, few silt interlayers. (Moi	st)	6-7-8-9 (15)		23					
70	ss		CL			(W	et)	7-9-12-14 (21)							
	SS		GL.					6-9-11-12 (20)							
 75	ss				7:	5.0 Rottom of hole at 75.0 feet		6-7-11-13 (18)		25.6					

Bottom of hole at 75.0 feet.

ADD PP WHERE APPLICABLE

	Sola
	1125
	Broo
The state of the s	Tala

ar Testing Laboratories, Inc. 5 Valley Belt Road oklyn Heights, Ohio 44131 aphone: 216-741-7007

BORING NUMBER B-4 PAGE 1 OF 2

Fax: 216-741-7011	
CLIENT Northeast Ohio Regional Sewer District PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project	
PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio	
DATE STARTED 11/30/09 COMPLETED 11/30/09 GROUND ELEVATION	
DRILLING CONTRACTOR Solar Testing Laboratories, Inc. BORING LOCATION Abbey at W. 14th Ramp	
DRILLING METHOD Hollow Stem Auger GROUND WATER LEVELS:	
LOGGED BY R. Spellacy DRILLER J. Deranek WATER ON ENCOUNTER 34.0 ft	
NOTES WATER ON COMPLETION 34.0 ft	
HOLE SIZE AUGER SIZE 4.25 i.D. WATER AFTER HRS:	
H S ATTERBE	
SAMPLE TYPE U.S.C.S. GRAPHIC LOG GRAPHIC LOG U.S.C.S. GRAPHIC LOG BLOW COUNTS (N VALUE) MOISTURE CONTENT (%) U.N. COMP. STRENGTH (st) DRY UNIT WT. LIMIT LIMIT PLASTICITY RECOVERY % (pcf) LIQUID LIMIT PLASTICITY RECOVERY % (pcf) LIQUID LIQUID LIQUID PLASTICITY RECOVERY % (pcf) LIQUID LIQUID LIQUID PLASTICITY RECOVERY (st) RECOVERY % (pcf) LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID LIQUID RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st) RECOVERY (st)	PLASTIC
1.5 FILL: Brown SAND, little gravel (BASE).	
POSSIBLE FILL: Loose to medium dense brown SAND & (Moist) 4-7-8-7 (15)	
- SS SP OHEERS (7)	
POSSIBLE FILL: Medium dense brown SAND little (Moist) 5-7-9	
(16)	
- 3117 SAND	
Very toose to medium dense brown medium to coarse SS SAND & GRAVEL, trace silt, organics, thin silty day layer. (Moist) ((Mist) 6.4 (18)	
CHECK	
15 SS (GP 7.6	
5.5-7	
SS ML 11 20.0 Medium dense brown SILT, little sand, clay. (Moist) 5-5-7 (12)	
Medium dense brown MAKE STAND; tittle silt. (Moist)	
7 1	
5-6-10	
SILTY SAND HATCH SO	11.
B4 23.5 TO 25 # 7.7.8 WITH BORI	124
30 SS 70 GRAVEL O. 4 (15)	7 4
B=4 23.5 TO 25 FT (WITH BOR) 7. GRAVEL C. 4 (15) 7. SAND 79.1 SAND	
ateek a land a land a land a land a land a land a land a land a land a land a land a land a land a land a land	
SS ML- 33.8 Medium dense brown SILT, little sand, interlayers of silty (Wet) (15)	



BORING NUMBER B-4 PAGE 1 OF 2

CLIEN	IT N	lorthe	ast	Ohio	Regional Sewer District PROJECT N						_			
PROJ	ECT	NUME	3ER	_A	09570x10 PROJECT L	OCATION .	W 11th, Ab	bey, V	/ 14th	Streets	s, Clev	eland,	Ohio	
					/09									
					R Solar Testing Laboratories, Inc. BORING LO			14th Ra	amp					
					ollow Stem Auger GROUND W.									
LOGG	ED B	Y <u>R</u>	t. Sp	ella	_		DUNTER 3							
NOTE	s						PLETION _							
HOLE	SIZE				AUGER SIZE 4.25 I.D. WATE	R AFTER _	HRS:				T		TERBE	.00
DEPTH (ft)	SAMPI F TYPF		U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIQUID	LIMITS	
0	ď.	5		0				٣_		ST	۵		Ы	4
		, i			0.8 9¾" CONCRETE. 1.5 FILL: Brown SAND, little gravel (BASE).									
			<u> </u>	XX	1.5 FILL: Brown SAND, little gravel (BASE). POSSIBLE FILL: Loose to medium dense brown SAN	D &	4-7-8-7	1		İ				
	SS			0.	GRAVEL, trace silt.	(Moist)	(15)							
	ss		SP- GP)			3-4-3-4	1						
5			-	<u>،</u> ((7)	1						
				0.	6.0		ļ.,	∤						
	ss		SM		POSSIBLE FILL: Medium dense brown SAND, little gravel, silt, trace clay.	(Moist)	5-7-9 (16)	1						
	\neg		SIVI		8.5			1						
	ss			0	Very loose to medium dense brown medium to coarse	(Moist)	6-8-10	1	6.4					
10	33			0.1	SAND & GRAVEL, trace slit, organics, thin silty clay la	yer. \	(18)	4						
				ø										
				o. K										
				0.1										
	SS		SP- GP	ø			2-1-2		7.6					
15				o :			(3)	1						
				0.1					1					
				O				İ						
				0										
	ss		ML.	· • · .1	19.2 20.0 Medium dense brown SILT, little sand, clay.	(Moist	5-5-7		21.8					
20					Medium dense brown FINE SAND, little silt.	(Moist)		1						
						(IVIOISI	'							
	:													
								1						
 25	ss						5-6-10 (16)		10.1					
20														
			SM											
-							7-7-8	1						
30	ss						(15)					1		
_														
					33.8 🕌		5-6-9	1						
- 25	ss		ML- SM	HH	Medium dense brown SILT, little sand, interlayers of s	ilty (Wet								



BORING NUMBER B-4

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Watworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

											<u> </u>		
	Į,	1		ဖွ		_	%	(%	tsf)	<u>-</u>	AT	TERBE LIMITS	RG
푠	Σ	=	S.	20		NTS LCE	ERY DERY	INT.	OMP TH (후	ο.	È	ပ္
рертн (ft)	SAMP! E TYPE	<u> </u>	U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf	DRY UNIT WT. (pcf)	LINGUID	PLASTICIT INDEX	PLASTIC LIMIT
	SAN		_	8	CHECK		뿞	≥႘	STR	뚭	3-	A =	굽
35			ML- SM	H	Medium dense brown SILT, little sand, interlayers of silty fine sand. (continued) (Wet)								
					Medium dense gray SILTY FINE SAND, few silt (Wet) interlayers.								
 40	SS					2-4-7 (11)		29.3					
-	_		SM			8-12-16							
45	SS					(28)							
-					48.0	•							
-	SS				Medium dense to dense gray SILT, little sand, trace clay, some clayey silt interlayers. (Wet)	5-5-8 (13)							
50						(10)							
-													
55		TST									NP	NP	NP
	ss					17-19-27 (46)		18.6					
 -					·								
60	SS		ML			13-15-17 (32)		19					
-	1												
-					•	13-14-10							
65	SS		-		-50-11)6 (a) Ca-	(24)		16.9					
-					ACCORDING TO TESTING @ GOSFT								
	-	ŠТ	-	$\parallel \parallel$	R	SHEL	BY	PUS	111	E	28	9	19
70		-	-			SHEL PRE	รรับ	ne	8.				
	-				72.0 Very stiff gray SILTY. CLAY, little sand. (Wet)								
75	SS	-	CL		TLEAN CLAY	7-11-14 (25)	1	22.6					
	ــــــــــــــــــــــــــــــــــــــ			VZZ	Bottom of hole at 75.0 feet.								



BORING NUMBER B-4 PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District	PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project
PROJECT NUMBER A09570x10	PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

					T								A 7	repor	P.C
25 DEPTH (ff)	SAMPLE TYPE		U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	TIMIT CIOUID	PLASTICITY WINDEX	PLASTIC Z
	SS				37.0	Medium dense brown SILT, little sand, interlayers of silty fine sand. (continued) Medium dense gray SILTY FINE SAND, few silt interlayers.	(Wet)			29.3					
45	SS		SM		<u> 48.0</u>		. —	8-12-16 (28)							
50	SS					Medium dense to dense gray SILT, little sand, trace clay some clayey silt interlayers.	, (Wet)	5-5-8 (13)							
55	SS	ST						17-19-27 (46)		18.6					
60	SS		ML					13-15-17 (32)		19					
65	SS	ST						13-14-10 (24)		16.9					
70	00	31	CL		72,0	Very stiff gray SILTY CLAY, little sand.	(Wet)	7-11-14		22.6					
75	SS		<u> </u>		75.0	Bottom of hole at 75.0 feet.		(25)	<u> </u>		L		l		



BORING NUMBER B-5

l						ROJECT NAME Walv			-						
l						ROJECT LOCATION	W 11th, Ab	bey, W	/ 14th	Streets	, Clev	eland,	Ohio		
DATE						ROUND ELEVATION _									
						ORING LOCATION W		bey			· · · · · · · · · · · · · · · · · · ·			—	
DRILL	ING I	METH	HOD	_H		ROUND WATER LEVE									
1		Y F	₹. Sp	ellac	DRILLER J. Deranek	¥ WATER ON ENCO									
NOTE	\$					▼ WATER ON COM									
HOLE	SIZE			-	AUGER SIZE 4.25 I.D.	WATER AFTER	HRS:				r===		TEODE		
1	L L	ı		ဗ္ဂ	·	•		%	ш̂	(F)	Ϋ́.		TERBE LIMITS		
F_	AMAPI E TYPE	-	S.	GRAPHIC LOG			BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%	UN. COMP. STRENGTH (13	يئ ⊒	ا ا	PLASTICITY INDEX	U	
DEPTH (ft)	ā	i :	U.S.C.	품	MATERIAL DESCRIPTION		282≥	58	泛류	28	[5 8	LIMIT	등짓	E TE	
~	M A		~	[8			OS	E E	ĭĕĝ	52	DRY UNIT (pcf)	울리	Ş≅	PLASTIC LIMIT	
0			<u> </u>	Ŭ	OI AODUALT AUDDIOIC DAVED					S .			<u>~</u>	$\vdash \vdash \vdash$	
-			\vdash	XX	0.6 3" ASPHALT, 4" BRICK PAVER. FILL: Brown SAND, little silt, trace gravel, or	coal, few thin (Moist)	1			,					
				₩	silty clay layers.	(IVIOIST)	11-9-8								
ļ	SS			₩		•	(17)								İ
5	ss			▩	4.5': STORM SEWER at edge of hole. Cou past. Moved hole 2 feet east.	ld not auger	4-3-4-4 (7)								
				₩	FILL Brown SAND & GRAVEL, trace silt, for	ew thin silty (Moist)	4-3-3-3								
-	SS			₩	clay layers.	((6)								
-				₩			1-1-1-50/2"								
	SS			₩	9.0 8.5': Abandoned METAL PIPE.		1-1-1-50/2								
- 40				XX	Loose to medium dense brown medium to	coarse SAND, (Moist)	5-7-4-3					ĺ			
10	SS				some gravel, trace silt.		(11)								
					44 OLO Strate Mark January of Ollows OLON	- eldined	0.4.6.7							,	
	SS		SP	1	11.3': 8-inch-thick layer of SILTY CLAY.	MANESON	3-4-6-7 (10)	.							
		_			- V	THE SOLL OF	2000								
-	SS				- THO 307	al ou ams	3-6-9-9 (15)		5.9				1 1	.]	
15			34		150	um SAND.									
	SS			.::	Trace-off DECOMES MEDIUM	DEEDSE TOORS	7-7-9-13 (16)								
			SP			7 Minkesi								. 1	
	ss				BECOTES LOOSE		7-5-4-4 (9)					. 1			
					19.0 Loose brown SILTY SAND, trace gravel.										
20	SS		SM	11	20.0 Lease to will our dense brown fine to medi	(Moist)	6-5-5-6 (10)							İ	
-		,	ļ		trace silt.	(Moist)									
-	ss	(SP)			6-8-8-9 (16)					.		.	
		ì	ı		23.0 Loose brown fine to medium SAND, little gr		ļ					. 1		.	
_	SS		SP		Loose brown line to friedlight SAND, little g	(Moist)	4-3-4-4					. 1	i l		
25			<u> </u>		25.0	N 1911 296 - 4					ادسم	_			
L _	SS				Loose to medium dense brown FINE SANI	Moist)			-7:4		S	1	acc	CRD	ilde Istria
						-	(8)				4	ام		لمدا	
_	ss		SM	H.	\\ \Cu	ty saud	3-4-6-6				,	20 P	43 EV	<i>-</i> 4	SIXIG
	-00		بر کا	M	310	1 0000	(10)				128	T 2			
30	00						6-9-10-12					. 1	i		
	SS				31.0		(19)							, [
_					Loose to medium dense brown FINE SAND), trace silt. (Moist)	3-2-3-5							. [
_	SS				*	(Wet)									
-			SP		·	26.8.4.4	8-10-12-15 (22)								
35	SS					(MOIST)	(22)								, I



BORING NUMBER B-5 PAGE 1 OF 2

						Sewer District										
					.09570x10						/ 14th :	Streets	s, Clev	eland,	Ohio	
						COMPLETED										
						esting Laboratories, Inc.				oey						
						Auger										
LOGG	ED E	BY <u>F</u>	ł. Sp	ella	су	DRILLER J. Deranek										
NOTE	s _															
HOLE	SIZE	E			\ 	AUGER SIZE 4,25 I.D.	WATER AI	FTER _	HRS:							
DEPTH (ft)	- L	SAMPLE 1YPE	U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPT	TION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)		PLASTICITY NEW INDEX	}
0	184	SAM) 	GRAF					mgz	RECO	CON	STRE	DRY	LIN	PLAS1 IND	PLAS
3				XX	0.6	3" ASPHALT, 4" BRICK PAVER.										
		-		₩	3	FILL: Brown SAND, little silt, trace gravesilty clay layers.	vel, coal, few thin	(Moist)	11-9-8							
-	SS			▓	3	,,,			(17)							
 	SS			▓	5.0	4.5': STORM SEWER at edge of hole. past. Moved hole 2 feet east.	Could not auger		4-3-4-4 (7)			•				
	SS			▓		FILL Brown SAND & GRAVEL, trace s clay layers.	silt, few thin silty	(Moist)	4-3-3-3 (6)							
 	SS			▓	9.0	8.5': Abandoned METAL PIPE.			1-1-1-50/2"							
10	SS			XXX	9.0	Loose to medium dense brown medium some gravel, trace silt.	n to coarse SAND,	(Moist)	5-7-4-3 (11)							
 	ss	_	SP			11.3': 8-inch-thick layer of SILTY CLAY	r .		3-4-6-7 (10)							
 15	ss				15.0				3-6-9-9 (15)		5.9					
	SS		SP			Loose to medium dense brown fine to r trace silt.	medium SAND,	(Moist)	7-7-9-13 (16)							
	ss				19.0				7-5-4-4 (9)							
20	SS	1	SM		20.0	Loose brown SILTY SAND, trace grave	el.	(Moist)	6-5-5-6							İ
_			SP			Loose to medium dense brown fine to r trace silt.	medium SAND,	(Moist)	(10) 6-8-8-9							
	SS				23.0	Loose brown fine to medium SAND, litt	tle gravel, trace silt.	(Moist)	(16) 4-3-4-4			i				
25	SS		SP	77	25.0	Loose to medium dense brown FINE S	SAND little silt trace		(7)							
	SS					gravel.		(Moist)	4-3-5-6 (8)		7.4					
	SS		SM						3-4-6-6 (10)							
30	SS				31.0				6-9-10-12 (19)							
	SS		SP		Δ	Loose to medium dense brown FINE S	SAND, trace silt.	(Moist) (Wet)								
35	SS		, ,		:			(Moist)	8-10-12-15 (22)							



BORING NUMBER B-5

PAGE 2 OF 2

CLIENT	Northeast Ohio Regional Sewer District	

PROJECT NAME Welworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

	ц			၅				%	E (%)	i. (tsf)	M.		LIMITS	
S DEPTH	SAMPI E TYPE		U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pof)	LIQUID LIMIT	PLASTICITY INDEX	PLASTIC LIMIT
	SS		SP		Loose to medium dense brown FINE SAND, trace silt. (continued)	oist)	5-8-10-11 (18)							
	SS			П	Medium dense great SILT come sand interlayers of wet	Vet)	4-7-9-12 (16)							
40	SS		پسور	*			5-7-11-13 (18)							
	\$\$		SM- ML	7	IS THIS OR? ?!		6-9-10-11 (19)							
- _45	SS				45.0	-1-4	3-6-8-9 (14) 9-12-14-17							
 	SS		SM		48.0 ▼	oist)	(26) 4-6-9-11							
50	SS				Madium dones army SILT come sand few sithy sand	oist)	(15)					22	3	19
-	SS	,SŢ_	ML.	#	Pressures		8-9-15-19					22	3	13
	SS				hicesonia?		(24) 12-15-19- 23							
55·	SS		M		55.0 Dense gray SILT, little sand, clay. (Me	oist)	(34) 11-16-19- 26		20.1					
		ġт		-	- boatine breakings		(35)					NP	NP	ΝP
- 60	SS	•	ML				16-19-21- 26 (40)			·				
	SS				63.0		14-17-20- 25 (37)		17.6					
 65	SS				Stiff to your stiff gray \$11 TV CI AVI little gand interlayers	oist)	14-11-15- 16 (26)	,						
-	SS				(4)	Vet)	5-6-8-10 (14)							
	SS.		CL- ML		69-71 - LEAN CLAY			0						
70		ŚŤ	""		Zu							29	9	20
	ss						8-11-14-18 (25)		22					
- 75	SS				75.0 Bottom of hole at 75.0 feet.		7-9-12-14 (21)	L	22.5					



BORING NUMBER B-5

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

					.,.					·····				
	l ä	<u>.</u>		90				%	(%E	(tst)	ΜŢ.		ERBE	KG
DEPTH (ft)	ADVT 3 IDMAN	 	U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	⊢⊇	PLASTICITY INDEX	일
<u>В</u>)	I d		U.S	RAPI			M O S	ECO R	MOIS	UN. REN	RY L	LIQUID LIMIT	ASTI	PLASTIC LIMIT
35	Ù) 	L	Ø	1	FINE CAND.		<u>~</u>	0	S	Δ		4	<u></u>
-	ss		SP			Loose to medium dense brown FINE SAND, trace silt. (Moist)	5-8-10-11 (18)							
	00					38': Heaving SAND. (Wet)	4-7-9-12							
 	SS			İ		Medium dense gray SILT, some sand, interlayers of wet FINE SAND, trace silt, stratified. (Moist)	(16)							
40	SS						5-7 - 11-13 (18)							,
	ss		SM- ML				6-9-10-11							
_	33						(19)							
- 45	SS				45	0	3-6-8-9 (14)							
40	SS					Medium dense gray SILTY FINE SAND	9-12-14-17							
			SM				(26)							
	ss				: 48	.0 ▼ Medium dense gray SILT, some sand, few silty sand interlayors (Moist)	4-6-9-11 (15)						ı	
50		ST				interlayers. (Molist)								
			ML				0 0 45 40							
	SS						8-9-15-19 (24)							
-	SS		:				12-15-19- 23							
55					<u>58</u>	Dence grov CII T little good, clay	(34) 11-16-19-							
	SS					Dense gray SiL1, little sand, day. (Moist)	26 (35)		20.1					
		ST			:									
			MŁ		ļ		16-19-21-							
60	SS						26 (40)							
_	SS						14-17-20- 25 (37)		17.6					
					63	Stiff to very stiff gray Sill if CLAY, little sand, interlayers	14-11-15-							
 65	SS					of SILT, stratified. (Moist)	16 (26)							
-	SS					(Wet)	5-6-8-10 (14)	ŀ						,
- 	SS		CL- ML					0						
70		ST	ML.											
							8-11-14-18		20					
 	SS						(25)		22					
	ss						7-9-12-14 (21)		22.5					
75_	1		<u> </u>	raa	ZI 7:	.0 Bottom of hole at 75.0 feet.	I	L	L	<u> </u>	L			



BORING NUMBER B-6 PAGE 1 OF 2

ı						Sewer District												
l					409570x10				_	CATION _	W 11th, Ab	bey, V	/ 14th	Streets	s, Clev	eland,	Ohio	
l .						COMPLE				_								
DRILI	LING	CON	TRA	CT	OR Solar T	esting Laborat	tories, Inc.		_ BORING LOCA	M_ MOITA	. 14th Ram	p to Ab	bey (s	outh e	nd)			
DRILI	LING	MET	HOD	<u>+</u>	lollow Stem	Auger												
LOGG	SED I	BY F	R. Sp	ella	icy	DRILLER	J. Derane	ek	_									
NOTE	:s _								_ ¥ WATER		LETION _	54.0 ft						
HOLE	SIZE	Ē	T	_		AUGER SE	ZE <u>4.25 l.C</u>) <u>.</u>	WATER	AFTER _	HRS:			·		· · · · · ·		
	}	T.		g	: 							%	⊊	(tsf)	ΜŢ.		ERBE IMITS	
Ŧ_	}	<u>-</u>	οj.	120	. .				•		BLOW COUNTS (N VALUE)	X 6	35	ŽE.	\ E_		7	^
DEPTH (ft)		7	U.S.C.	표			MATERI	AL DESCRIP	TION		│ 있중▼	SQ S	ISE TSE	ၓၑၟ	38	LIQUID	EXE	ĭĭ
<u></u>		SAMPLE IYPE	7	GRAPHIC LOG							205	RECOVERY (RQD)	MOISTURE CONTENT (9	UN. COMP. STRENGTH (t	DRY UNIT (pof)	g S	PLASTICIT INDEX	PLAST LIMIT
0		,, 		L									Ŭ	S			귭	
ļ <u>-</u>	SS			X	803	4" TOPSOIL FILL: Brown		silt	·	(Moist)	2-1-2-3							
				₩	8,,					, ,	(3)					٠.		
	ļ	}	= =	X	28.7	FILL: Gray S	SILTY FINE	SAND, trace of	organics.	(Moist)								٠
_	ss	ŀ	SP-	·	1	Loose brown	SAND & G	RAVEL, trace	silt.	(Moist)	3-4-5							
5	00		GP	D.:	5.5				•		(9)							
			-	Š			ise brown fin	e to medium,	SAND, trace silt,	(Moist)								
	SS		SP		3	gravel.		. 2	GRAINED	(WOISI)	6-8-7 (15)		7.2		i			
			35							·	(/							
					9.0						11-18-23							
10	SS					Hard brown	SILTY CLAY	, little sand, t	race CaCO ₃ ,	2 2 (Moist)	(41)							
- 4]		1 CA 1/	NAV										
			CL		7		LEAN	7 7										
					.									l				
	3			<i>!!!!</i>	13.6	Loose brown	MEDIUM S	AND, some o	ravel, trace silt.		3-2-3							
15	SS						3	GRAINED	,	(Moist)	(5)					l		
- 4					1											l		
			SP													İ		
. 4										:						- 1	- 1	
	00			11	19.0						11-16-14		40.0	ł			l	i
20	SS			11		Medium dens lenses, trace	se brown Fill gravel.	NE SAND	le silt, few silty cla	y (Moist)	(30)		10.9	j	1	I	ļ	
-				1				1					İ			.		
				1			(1 ~ A	JID.				1	ľ		İ		İ
					1		$\Rightarrow \iota$	TY SAI					I		1		1	
	-		SM							ŀ	13-10-14		ŀ					
25	SS			:11						1	(24)				Ī		ı	
													Ì		Ì			ļ
. 4														l				
				#	:		•	, and the same of										
_	긁				29.0 ▽						12-3-4		_					
30	SS					Loose to med of SAND,	dium dense l	brown SAND'	Y SILT, interlayers	(Wet)	(7)		30					
.]]						<u> </u>	Į	21	امرده	This	10	05.	
_			ML- SP						-			- \$	THE	er	10	124	ا (د	
			٦٢]													1
. 」				111	.]					f	3-8-13				-			
35	SS		_ }	Ш	1						(21)						-	



BORING NUMBER B-6 PAGE 1 OF 2

CLIEN	1T <u>N</u>	lorthe	east (<u>Ohi</u>	Regional Sewer District PROJECT NAME Wa	worth Run I	ntercer	tor Re	alignm	ent (V	/RIR) [Project	
PROJ	ECT N	NUME	BER	A	09570x10 PROJECT LOCATION	W 11th, At	bey, V	V 14th	Streets	s, Clev	eland,	Ohio	
DATE	STAF	RTEC	1_1	1/28	8/09 COMPLETED 11/28/09 GROUND ELEVATION								
					OR Solar Testing Laboratories, Inc. BORING LOCATION 1	V. 14th Ram	p to At	bey (s	outh e	nd)			
DRILL	.ing N	VETH	IOD	_H	ollow Stem Auger GROUND WATER LEV								
LOGG	ED B	Y <u>R</u>	. Sp	ella	DRILLER J. Deranek WATER ON ENC								
NOTE	s												
HOLE	SIZE	_			AUGER SIZE 4.25 I.D. WATER AFTER	HRS:			1				
, DEРТН (ft)	SAMPLE TYPE		U.S.C.S.	GRAPHIC LOG	MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIMIT	PLASTICITY WE BE INDEX	
0			_	₩.	0.3_, 4" TOPSOIL.	2-1-2-3	\vdash					-	
	SS			₩	FILL: Brown SAND, little silt. (Mois	(3)							
- 1			_=	₩	2.5 2.8. FILL: Gray SILTY FINE SAND, trace organics. (Moist	,	1						
			en.	o : `	Loose brown SAND & GRAVEL trace sitt	ــــــــــــــــــــــــــــــــــــــ	-						
5	SS		SP- GP): : 1	(Moist) 3-4-5 (9)							
			-4	O	5.5 Medium dense brown fine to medium SAND, trace silt,								
_]	SS				gravel. (Moist	′ 0-0- <i>/</i>		7.2					
_			SP			(15)	-						
					9.0	11-18-23	1						l
10	SS				Hard brown SILTY CLAY, little sand, trace CaCO ₃ . (Moist	1445]						
								İ					
			CL										
_]							İ					•	
_]			_		13.6 Loose brown MEDIUM SAND, some gravel, trace silt.	3-2-3	┨		1				Ī
15	SS	- [(Moist	(5)							
_													l
			SP										ł
_]						
_]		ļ			19.0	11-16-14	1	40.0					
20	SS				Medium dense brown FINE SAND, little silt, few silty clay lenses, trace gravel. (Moist	(30)	1	10.9					
_]													
_			Ì										
			Ì										
_			ям (13-10-14	1						
25	SS					(24)	1						
_													[
_			}										
_		ļ		111.	29.0 ▽	12-3-4	1	20					
30	SS				Loose to medium dense brown SANDY SILT, interlayers of SAND. (Wet		-	30					
			ML- SP										
			ا										
	SS		-			3-8-13	1						
35	33		i	11		(21)	<u> </u>						



BORING NUMBER B-6 PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District	PROJECT NAME _Walv	worth Run Inte	erceptor	Realignm	ent (W	RIR) P	roject		
PROJECT NUMBER A09570x10	PROJECT LOCATION	W 11th, Abb	ey, W 14	th Streets	, Cleve	eland, (Ohio		
		1		ے ا			ERBE	RG	
SAMPLE TYPE GRAPHIC LOG GRAPHIC LOG	rion CHEORE		RECOVERY % (RQD) MOISTURE	CONTENT (%) UN. COMP. STRENGTH (tsf)	DRY UNIT WT (pcf)		PLASTICITY WE INDEX	PLASTIC LIMIT	
Loose to medium dense browin SAND of SAND. (continued)	Y SILT linterlayers (Wet)								
Medium dense to dense gray SILTY 5	NE SAND. (Wet)								
SILT'	4 sand	7-13-16 (29)	22	.6					
SS SILT (ML)		7-16-26	21	2	X	NP	NP	NP	
45 3	,	(42)							
48.0				+		_	_		
SS SS SILTY SAND, trace sill SOUTH SILTY SAND	(Moist)	8-10-24 (34)	22	.3		NP	NP	NP)
<u>.</u>									
SS Dense gray SILT, little sand.		13-19-28	11						
55 SO ML ML ML ML ML ML ML ML ML ML ML ML ML	(Moist)	(47)							
Very stiff gray CLAYEY SILT, little sand	d. (Moist)								
SS ML		7-8-9 (17)	21	.1		24	5	19)
			1			7			
SS CL Stiff gray SILTY CLAY, little sand few	silt interlayers. (Moist)	4-4-5	28	.6	<i>i</i>	/_			
65.0 Bettom of hole at 65.0	feet.	(9)			1	HCS 7	- 1		2
			_	-		MIS	771	70	
LEN any Pa	EUISE THIS BURING G								
	BURINE G	6/							
		1						1	



BORING NUMBER B-6

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

					09570X10	PROJECT LOC	AIION	<u> </u>	DCY, V	1-741	Ouces	s, Qiev	ciariu,	Onio	
	Į,	<u> </u>		စ္က					%	<u>@</u>	(st)	Ŀ.	AT	TERBE	RG
DEPTH (ft)	HOVE I IGNAS	SAMITE	U.S.C.S.	GRAPHIC LOG	***	MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIQUID	>	PLASTIC LIMIT
			ML- SP		37.0	Loose to medium dense brown SANDY SILT, interlayers of SAND. (continued)	(Wet)								
	_					Medium dense to dense gray SILTY FINE SAND.	(Wet)	7-13-16							
40	SS		SM					(29)		22.6					
45	SS							7-16-26 (42)		21.2					
-	00	ļ		1	48.0	Dense gray FINE SAND, trace silt.	 (Moist)	8-10-24		00.0					
50	SS		SP					(34)		22.3					
					54.0 ▼			13-19-28							
55 	SS		ML		-	Dense gray SILT, little sand.	(Moist)	(47)		18					
					<u>57.0</u>	Very stiff gray CLAYEY SILT, little sand.	 (Moist)								
 60	ss		ML				:	7-8-9 (17)		21.1					
					62 5									,	
- <i>-</i>	ss		CL		63.5 65.0	Stiff gray SILTY CLAY, little sand, few silt interlayers. Bottom of hole at 65.0 feet.	(Moist)	4-4-5 (9)		28.6					
						Bottom of hole at 65.0 feet.									



BORING NUMBER B-7 PAGE 1 OF 2

1						Sewer District										<u> </u>
					09570x10						v 14th	Street	s, Clev	eland,	Ohio	
1						COMPLETED 12/3/09		_			·1/	م مادم	- 4 1			
i						Testing Laboratories, Inc.				D IO AL	Dey (r	ionn e	na)			
						Auger DRILLER J. Deranek	GROUND WATE			704						
NOTE						DALLER J. Belatier	WATER O						-			
HOLE						AUGER SIZE 4.25 I.D.			HRS:				··			
1.02	T		T	(n	T	AOOER CALL TIED IID.			Ī	Ī.,				AT	TERBE	
DEPTH (#)	F	<u> </u>	C.S.	IC LOG		MATERIAL DESCRIPT	TION		BLOW COUNTS (N VALUE)	ÆRY %	TURE %	OMP.	TW TIS	0.	LIMITS	
DE C	100	SAMPLE 17PE	U.S.	GRAPHIC		WATERIAL DECORNI	ioit		30 ₹	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIMIT	PLASTICITY INDEX	PLASTIC LIMIT
0	<u> </u>	_	┡			10" TOPSOIL.	•			Γ_		S	_		<u>a</u>	<u> </u>
-	ss		\vdash	<u>11.</u>	0.8	FILL: Brown SAND, little silt, trace grav	vel. brick.		2-2-3-4 (5)							
<u> </u>				▓			•	(Moist)	- (0)							
5	ss			▓	3.5	FILL Brown SAND & GRAVEL, trace s	silt, brick.	(Moist)	3-3-5 (8)							
				▓												
-	SS			▓					4-3-3 (6)							
10	ŞS			▓					3-3-4 (7)		7					
-				▓												
-				▓												'
15	SS			❈					10-16-20 (36)		5					
				▓												
	SS		- 617	燚	19.0 19.5	A. C. C. C. C. C. C. C. C. C. C. C. C. C.		(9.4-1-4)	9-13-17		14.5					
20	33		ML		20.5	Medium dense brown SILTY SAND. Medium dense brown SILT, little sand. Dense brown fine to medium SAND, tra	ace slit.	(Moist) (Moist)	(30)		14.5					
								(Moist)								
	SS		SP						12-15-16 (31)							
<u>25</u> 						4100			(31)							
					<u>27.0 ¥</u>	Loose to very dense brown FINE SAND silt layers.), little silt few thin	 (Wet)								
30	SS								9-9-12 (21)		22.1				٠.	
-			SM				~									
						SILTY SA	N t7									
 35	SS								18-19- 50/4"							



BORING NUMBER B-7
PAGE 1 OF 2

																
						Sewer District				-						
i											<u>v 14tn</u>	Street	s, Ciev	eland,	Unio	
ŀ						completed 12/3/09 esting Laboratories, Inc.					abov (n	orth o	nd)			
					Hollow Stem					ID IO AL	buey (I	iorun ei	iiu)			
						DRILLER J. Deranek				7 O ft						
	SIZE					AUGER SIZE 4.25 I.D.			HRS:			•				
			Γ	,			•			T				AT	TERBE	RG
I	SAMPI E TYPE	=	S	OCI JIHQVQU	3				_\Σ <u>Ψ</u>	% }	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	-	LIMITS I≻	
DEPTH (ft)	<u>i</u>	}	U.S.C.S.	١	<u> </u>	MATERIAL DESCRIPT	TION		ALC N		SE SE	8 <u>5</u>	E G	₽⊨	먇	阜上
	AMA	į	٥	2	3				BLOW COUNTS (N VALUE)	RECOVERY (RQD)	88	S.E.	<u>`</u>	LIQUID	PLASTICITY INDEX	PLASTIC LIMIT
0	υ.) 		ſ	1					<u>~</u>	-0	ST	□	_]	۵
	ss		<u> </u>	×>	0.8	10" TOPSOIL.			2-2-3-4							
				×	▓	FILL: Brown SAND, little silt, trace gra	vel, brick.	(Moist)	(5)							
				\bigotimes	× .											
	ss			×	3.5	FILL: Brown SAND & GRAVEL, trace	silt, brick.	 (A dain4)	3-3-5	1						
5	33			\bigotimes	്			(Moist)	(8)							
				\otimes	\aleph											
	ss			\otimes	×				4-3-3							
				燹	8				(6)							
	SS			\bowtie	X .				3-3-4	1	7					
10				燹	X				(7)							
	-			\bigotimes	8						·					
				燹	8										.	
• -				\bigotimes	8										.	
	SS			\otimes	8				10-16-20		5				ļ	
15	-			\otimes	8				(36)							
				燹	Ž											
				\bowtie	ૅ											
				燚	8100											
20	ss			\widetilde{A}	19.0	Medium dense brown SILTY SAND.		(Moist)	9-13-17 (30)		14.5					
20	-	ļ	ML.	Щ	20.5	Medium dense brown SILT, little sand.		(Moist)	(00)							
٠ ٦						Dense brown fine to medium SAND, tra	ace silt.	(Moist)								
`														Ì		
. 1			SP		.]				10 17 10			1		l		
25	SS				.]				12-15-16 (31)					ľ		
											İ					- 1
	ĺ	į			27.0 V					İ		ľ				
					: -	Loose to very dense brown FINE SANI silt layers.), little silt few thin	(Wet)								
. }	_				.]	on layors.			9-9-12		- 1					
30	SS		İ						(21)		22.1					
4			ѕм													
					-											
_																
_	ss								18-19-							
35	1	- 1	ŀ	-1.1	-1			i	50/4"		- 1	- 1	ı			



BORING NUMBER B-7

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

PROJ	ECT	NUM	BER	₹ <u>_</u>	\09570x1	0						PR(DJECT	LOCA	TION .	W 11th, A	bbey, \	<u>V 14th</u>	Street	s, Clev	eland,	Ohio	
25 DEPTH (ft)	TOY II IOMAG	מאולים ביים	U.S.C.S.	GRAPHIC LOG				M	ATERI.	IAL DE	ESCRIF	PTION				BLOW COUNTS (N VALUE)	RECOVERY %	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIMIT	PLASTICITY INDEX	<u>ş</u>
40	SS		SM			Lo silt	ose to ve layers.	ery den (continu	ued)	own Fli			silt few		(Wet)	3-4-5 (9)	_						
45	SS	1	SM		47 <u>.0</u> 49.8	Me	dium dei	nse gra	FINE	E SAN			S:AN	Ø 	 (Wet)	5-6-9 (15) 7-10-13 (23)		25.3					
55		"ST	ML			Der	nse gray	SILT,	little sa	and, cl	ay.			(PP	(Wet) ⊃≃4.5+)	()	13	18.1			24	3	20 20
60	SS				60.0			Во	ttom of	f hole	at 60.0	feet.				16-24-25 (49)		21.2					
	-																			The state of the s			
																						,	



BORING NUMBER B-7

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

					0001001									
35 (#)	SAMDI E TVDE		U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION		BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	PLASTICITY WE HE INDEX	
40	SS		SM			Loose to very dense brown FINE SAND, little silt few thin silt layers. (continued)	(Wet)	3-4-5 (9)						
45	SS		SM		47 <u>.0</u>	Medium dense gray FINE SAND, little silt. Dense gray SILT, little sand, clay.	(Wet)	5-6-9 (15) 7-10-13 (23)		25.3				
 - 55		ST	ML				(Wet) =4.5+)		13	18.1				
60	SS				60.0	Bottom of hole at 60.0 feet.		16-24-25 (49)		21.2				



BORING NUMBER B-8 PAGE 1 OF 2

CLIE	NT _	North	east	Oh	io Regional	Sewer District	PRO	JECT NAM	E Wa	lworth Run la	ntercep	tor Re	alignm	ent (V	/RIR)	Project	<u>t </u>
PRO.	JECT	NUN	IBEF	₹ _/	A09570x10		PRO	JECT LOCA	NOITA	W 11th, At	bey, V	V 14th	Street	s, Clev	eland,	Ohio	
DATE	STA	RTE	D _	12/1	/09	COMPLETED _12/2/09	GRO	UND ELEV	ATION								
DRIL	LING	CON	ITRA	CT	OR Solar	Testing Laboratories, Inc.	BOR	ING LOCAT	по м _/	V. 14th & Fa	irfield						
DRIL	LING	MET	HOD	<u> </u>	lollow Stem	Auger	GRO	UND WATE	R LEV	ELS:							
LOG	BED E	BY _	R. S	pella	icy	DRILLER J. Deranek	<u>\</u>	WATER O	N ENC	OUNTER _2	6,0 ft						
NOTE	:s _						<u>Y</u>	WATER O	N COM	IPLETION _	44.0 ft						
HOLE	SIZI	<u> </u>		1		AUGER SIZE 4.25 I.D.		WATER A	FTER	HRS:				<u> </u>			
		ቪ		99	.]						%	 %	UN. COMP. STRENGTH (tsf)	F.		TERBE LIMITS	
Ħ.C	F		C.S.	길	-[AZATERIAL RE				SES	图	125 125 125 125 125 125 125 125 125 125	SE F	<u>}</u>		≽	O
DEPTH (ft)	Ş	SAMPLE IYPE	U.S.C.S.	GRAPHIC		MATERIAL DE	ESCRIPTION			BLOW COUNTS (N VALUE)	ŠE	욶류	28	58	LIQUID	EA	TIM
	5	Š N		GR.						05	RECOVERY (RQD)	MOISTURE CONTENT (%)	58	DRY UNIT WT. (pdf)	월크	PLASTICITY INDEX	PLASTIC LIMIT
0			\vdash		0.9	2½" ASPHALT, 7¾" CONCRE	ETE.									<u></u>	
				X	X	FILL: Brown SAND & GRAVE	L, trace silt, few	thin layers	(Moist	 	·						
	5\$			燹	3 3.0	of black sandy silt with little cla	ay.		(MDIST	5-6-7-8 (13)							
		1	Г	o.	3.0	Loose to medium dense brown	n SAND & GRA	VEL, trace	(Moist	3-5-4-4							
 5	SS			0	₫	silt.			(IVIOISI,	(9)							
		ĺ		ø						4-2-2-3							
	SS			٥. ((4)							
_	SS	/	SP.		9					2-2-1-2						.	Į
_]	33	(GP-	8						(3)						.	
10	SS	Ì		0						2-2-4-6		5.7					
))	(<u> </u> :					(6)		5.1					
	SS			Ø						4-5-6-8							
				o.	13.2					(11)							
. 4	ss		ML.	Щ	14.0	Medium dense brown SILT, litt			(Moist)	,				ĺ			
15						Medium dense brown fine to m silt.			(Moist)	(13)							
	SS		SP				GRAINE	§O		8-10-11-14 (21)	.	ł					
			ML	Ш	17.0	Medium dense brown SILT, litt	tle sand frace cla	av								1	
• 🚽	55		IVIL	Ш	18.0	Medium dense brown fine to m		•	(Moist)	4-6-7-10 (13)				.			.
` <u>"</u>	\dashv		SP			· .	•		(Moist)	10-13-15-	i					•	- 1
20	SS				21.0	20': 2-inch SILT layer.				20 (28)		8.3			ł		.
1				П	21.0	Medium dense brown SILTY F	NE SAND few	ell orc	(Moist)	10-11-10-							
1	SS					interlayers.	Y SAND		(MOISI)	10 (21)	- 1			.]		l	1
1			SM			3101	1 SHAD			4-6-7-9	1					İ	
25	SS									(13)							
	SS				ュ				/\Aza+\	5-6-7-9							
]	33			11:	26.5 ▽	Medium dense brown SILT, littl	le sand		(Wet)	(13)		ļ	Ì				ŀ
.]	SS		ML	$\ \ $		modelin delice erem elett, ma	o cara.		(Moist)	7-12-11-14	- 1		İ			ĺ	
				Щ	29.0					(23)			ļ				l
30	ss		SM			Medium dense brown FINE SA	-	A. 10	(Wet)	9-11-13-14		1	ŀ				İ
1		Y	M	łł.	310		SILTY S			(24)							
4	ss					interlayers, stratified.	few same	thin silt	(Wet)	7-8-10-11							
4			зм			•,		•		(18)							
-	ss									4-8-9-11						ł	
35	<u>.</u> . İ			1.1:		·				(17)	1	- 1		- 1	- 1	1	1



a di .,,

Solar Testing Laboratories, Inc. 1125 Valley Belt Road Brooklyn Heights, Ohio 44131 Telephone: 216-741-7007 Fax: 216-741-7011

BORING NUMBER B-8 PAGE 1 OF 2

				o i togionai c	Sewer District	PROJECT NAME	= <u>vval</u>	vorth Run in	itercep	tor Re	alignm	ent (V	/RIR) I	roject	
PROJE	CT NUM	BER	<u> </u>	\09570x10		PROJECT LOCA	ATION ,	W 11th, Ab	bey, V	/ 14th	Streets	s, Clev	eland,	Ohio	
DATE	STARTE	<u>1</u>	2/1/	/09	COMPLETED _12/2/09	GROUND ELEV	ATION _								
					esting Laboratories, Inc.										
DRILLI	NG METH	dOb	Н	ollow Stem	Auger	GROUND WATE	R LEVE	LS:							
LOGGI	ED BY <u>F</u>	R. Sp	ella	су	DRILLER J. Deranek	abla water 0	N ENC	DUNTER 2	6.0 ft						
NOTES	3					WATER O	N COM	PLETION _4	14.0 ft						
HOLE	SIZE				AUGER SIZE 4.25 I.D.	WATER A	FTER _	HRS:							
	Щ		၂ ဗ						%	⊋	st)	⊢	ΑТ	TERBE	
DEPTH (ft)	SAMPLE TYPE	U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPT	ΓΙΟΝ		BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	95	γ	
0	SAMI	ם	GRA					mos	REC	Ø N N N N	STRE	DRY	LIQUID	PLAST IND	PLASTIC LIMIT
				0.9	2½" ASPHALT, 7¾" CONCRETE.										
	ss		$\overset{\otimes}{\otimes}$	3.0	FILL: Brown SAND & GRAVEL, trace of black sandy silt with little clay.	silt, few thin layers	(Moist)	5-6-7-8 (13)							
	ss		0		Loose to medium dense brown SAND silt.	& GRAVEL, trace	(Moist)	3-5-4-4 (9)							
	SS		0 (4-2-2-3 (4)							
- +	ss	SP- GP)	d				2-2-1-2 (3)							
10	ss		o (2-2-4-6 (6)		5.7					
	ss) Ø					4-5-6-8							
- +	ss	ML	° Ш	13.2 14.0	Medium dense brown SILT, little sand,		(Moist)	(11) 3-5-8-13							
15	ss	SP			Medium dense brown fine to medium S silt.	SAND, trace gravel,	(Moist)	(13) 8-10-11-14							
.]	33			17.0				(21)							
.	ss	ML.	Щ	18.0	Medium dense brown SILT, little sand, Medium dense brown fine to medium S			4-6-7-10 (13)				i			
20	ss	SP		21.0	20': 2-inch SILT layer.		(Moist)	10-13-15- 20 (28)		8.3					
• +	ss		I	21.0	Medium dense brown SILTY FINE SAI interlayers.	ND, few silt	(Moist)	10-11-10- 10 (21)							
	ss	SM						4-6-7-9 (13)							
25	ss			26.5 V			(Wet)	5-6-7-9 (13)							
. +	ss	ML			Medium dense brown SILT, little sand.		(Moist)	7-12-11-14 (23)							
30	ss	SM		29.0	Medium dense brown FINE SAND, little	e silt.	(Wet)	9-11-13-14							
-	 ss			31.0	Medium dense brown SILTY FINE SAI interlayers, stratified.	ND, few thin silt	(Wet)	7-8-10-11							
. +		SM						(18) 4-8-9-11 (17)							



BORING NUMBER B-8

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10 PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

<u> </u>				,							.,		
		<u>7</u> ਜ		ဗြ			%		. (g	F.		TERBE	
H S		SAMPLE IYPE	C.S.	GRAPHIC LOG	MATERIAL PROPERTION	BLOW COUNTS (N VALUE)	RECOVERY (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT (pcf)			
DEPTH (ft)	}	Ę Z	U.S.C.S.	APH	MATERIAL DESCRIPTION	A SUST	§&	OIS	ENG O	Y Cod	LINGT	STO	PLASTIC LIMIT
35	8	A A		સ		٦	문	≥8	STR	K	J J	PLASTICITY INDEX	7
	ss		SM			5-8-13-15					,		
	33				Medium dense brown fine to medium SAND, trace silt, few silt layers. (We	(21)							
	SS		SP		Heaving Śand.	5-7-9-8 (16)		18.8					
40	SS				41.0	4-9-6-7 (15)							
- -	SS			1	Madium dance brown EINE CAND little site	9-12-11-16							
- -	SS		ابسمر		SILTY SAND	4-5-6-4 (11)							
45 	SS	(SM			4-5-6-4							
 	SS			*		(11) 6-7-10-11							
					49,5	(17)	ŀ						
50	SS				Dense gray SILT, little sand.	9-15-18-21 (33)		20.5			NP	ΝP	NP
			ML.		PRESSURES (We	14-19-25-							
	SS			₩	53.0	28 (44)					/		
		ST	7		Stiff gray CLAYEY SILT little sand. (We)				- /	24	4	20
<u>55</u> 			CL ML		SILTY CLAY					1			
						5-6-8-10		10.2					
	SS		M	Щ		(14)		19.3					
60	ss		•		stratified. (Wel	4-5-7-7 (12)							
• -			CL			<u> </u>							
		ST	CL- ML								25	5	20
. 4	SS					5-7-7-8 (14)							
65					Stiff gray SILTY CLAY, little sand, laminated.	 							
· -	SS				lange	3-4-4-5 (8)		24.1					
_	ss		CL		LEAU CLAY PRESSURES	5-6-6-8 (12)							
70		ST			Pressures						30	10	20
		<u> </u>			71.0 Very sliff gray CLAYEY SILT, little sand.	ļ				Ì	~~	.5	-"
	ss				(Wet	9-10-14-16 (24)		21.1			İ	Ì	
	- CC		ML		CHECKE TH	10-14-16- 17		20.0					
75	SS				75.0 CL-HL	(30)		20.2					

Bottom of hole at 75.0 feet.



Fax: 216-741-7011

BORING NUMBER B-8

PAGE 2 OF 2

CLIENT Northeast Ohio Regional Sewer District

PROJECT NAME Walworth Run Interceptor Realignment (WRIR) Project

PROJECT NUMBER A09570x10

PROJECT LOCATION W 11th, Abbey, W 14th Streets, Cleveland, Ohio

	T		Т	T	Т		1			T	т		TERBE	·nc
ŀ		7PE	١.	99	2			%	ш ^{(%}	[tst]	Ę		LIMITS	
DEPTH (#)		SAMPLE TYPE	U.S.C.S.	GRAPHIC LOG		MATERIAL DESCRIPTION	BLOW COUNTS (N VALUE)	RECOVERY % (RQD)	MOISTURE CONTENT (%)	UN. COMP. STRENGTH (tsf)	DRY UNIT WT. (pcf)	LIQUID	PLASTICITY INDEX	PLASTIC LIMIT
L .	ss		SM			36.0 (Wet)	5-8-13-15							
ļ	-	-				Medium dense brown fine to medium SAND, trace silt, few silt layers. (Wet)	(21)							
	ss	_	SP			Heaving Śand.	5-7-9-8 (16)		18.8					
40	ss					1.0	4-9-6-7 (15)				i			
	ss					Medium dense brown FINE SAND, little silt. (Wet)	9-12-11-16 (23)							
45	ss					Ť	4-5-6-4 (11)							
-	SS		SM				4-5-6-4 (11)							
	ss						6-7-10-11 (17)							
50 50	SS				4	9.5 Dense gray SILT, little sand. (Wet)	9-15-18-21		20.5					
 	ss		ML				14-19-25- 28							
_					5	3.0 Stiff gray CLAYEY SILT, little sand. (Wet)	(44)	İ						
55		ST				(Hely								
			ML											
	ss						5-6-8-10 (14)		19.3					
 60	SS				5	9.0 Stiff gray SILTY CLAY, little sand, interlayers of SILT, stratified. (Wet)	4-5-7-7							
	00					Granina.	(12)							1
- 1		ST	CL-								ŀ			
-	ss						5-7-7-8							
65					6	5.0 Stiff gray SILTY CLAY, little sand, laminated. (Wet)	(14) 3-4-4-5							
 	SS					(wei)	(8)		24.1					
	ss		CL				5-6-6-8 (12)							
70		ST			7	1.0								
-	ss		Ĭ		ľ	Veny stiff gray CLAVEV SILT little sand	9-10-14-16 (24)		21.1					
- 	ss		ML.				10-14-16- 17		20.2					
75				Ш	75	Dottom of halo at 75 0 fact	(30)							

Bottom of hole at 75.0 feet.

13NOV09*		0 10FEB10 18MAY10 70*	10FFB10 19MAR10 28	18MAY10 7	5010 12MAY10 18MAY10 5	06NOV09 Early Bar WRIR	Classic Schedule Layout	1010 06NOV09 1020 13NOV09* 1030 06NOV09 2. 1040 22NOV09 1 1050 25NOV09 1 2010 18DEC09 0 2020 18DEC09 0 2030 18DEC09 0 2030 18DEC09 0 2040 29DEC09 1 2050 06JAN10 2 2060 13JAN10 0 2070 27JAN10 0 2070 03FEB10 1 3000 10FEB10 1 3000 10FEB10 1 3000 10FEB10 1 3000 10FEB10 1 3000 29MAR10 2 4030 29MAR10 2 4040 29MAR10 2 4040 29MAR10 2 4050 26APR10 0 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1 5010 12MAY10 1	24NOV09 24NOV09 17DEC09 16FEB10 05JAN10 05JAN10 05JAN10 026JAN10 026JAN10 027JAN10 02FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 16FEB10 18MAY10 02APR10 02APR10 02APR10 02APR10 02APR10 02APR10 02APR10 19MAR10 19MAR10 19MAR10 19MAR10 07MAY10 18MAY10 07MAY10 18MAY10 07MAY10 18MAY10 06NOV09 17AUG11 06NOV09 R10 10:20	70* 28 28 28 28 28 28 28 28 28 28 28 28 28	Pre-Proposal Meeti Proposal Prepar. Submit Proposal Consultant Consultant Progress Bar Progress Bar Critical Activity Pre-Proposal Meeti Proposal Prepar. Wall Proposal Proposal Proposal Prepar. Wall Wall Wall Wall Wall Wall Wall Wa	Propos Propos Seed occeed of De coept Sulp 50 Propos Sulp 50
06NOV09 0 • RFP Not	06NOV09 0 13NOV09* 0 06NOV09 24NOV09 13 24NOV09 0 25NOV09 17DEC09 15 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 29DEC09 12JAN10 15 13JAN10 26JAN10 15 27JAN10 27JAN10 1 03FEB10 16FEB10 0 16FEB10 0	0 06NOV09 0 ◆Pre-Proposal Meeting 0 13NOV09* 0 ◆Pre-Proposal Meeting 0 06NOV09 24NOV09 0 ◆Pre-Proposal Meeting 0 06NOV09 24NOV09 0 ◆Submit Proposal Preparate 0 25NOV09 17DEC09 15 ◆Submit Proposal Preparate 0 25NOV09 17DEC09 15 ◆Consultant Proposal Preparate 0 18DEC09 16FEB10 10 ◆Consultant Preparate 0 18DEC09 05JAN10 10 ◆Consultant Preparate 0 18DEC09 05JAN10 10 ◆Consultant Preparate 0 18DEC09 05JAN10 15 ◆Preparate 0 29DEC09 12JAN10 15 ◆Preparate 0 05JAN10 15 Preparate 0 13JAN10 02FEB10 1 Preparate 0 27JAN10 10 Preparate Preparate 0 03FEB10 16FEB10 0 </td <td>06NOV09 0 0</td> <td>0 06NOV09 0 RFP Notification Letter 0 13NOV09° 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 15 Proposal Preparation 0 25NOV09 17DEC09 15 NEORSD Evaluation of Proposal Meeting 0 18DEC09 17DEC09 15 NEORSD Evaluation of Proposal Meeting 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 10 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 19JAN10 15 NECORSULTANT Notice to Proce NEORSULTANT Notice to Proce 0 19JAN10 10 NEORSULTANT Notice to Proce NEORSULTANT Notice to Proce <</td> <td>0 06NOV09 0 RFP Notification Letter 0 13NOV09° 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 15 Proposal Preparation 0 25NOV09 17DEC09 15 Notification Letter 0 25NOV09 17DEC09 15 Notification Letter 0 18DEC09 17DEC09 15 Notification Letter 0 18DEC09 15 Notification Letter 0 18DEC09 17DEC09 15 Notification Letter 0 18DEC09 15AN10 10 Notification Letter 0 18DEC09 15AN10 10 Notification Procession 0 18DEC09 12AN10 10 Notification Procession 0 18DEC09 12AN10 15 Notification Procession 0 13AN10 02FEB10 1 Notification Preparate ACE Cite Processi</td> <td>0 06NOV09 0 → Pre-Proposal Meeting 0 13NOV09° 0 → Pre-Proposal Meeting 0 24NOV09 13 → Pre-Proposal Meeting 0 24NOV09 0 → Pre-Proposal Meeting 0 24NOV09 0 → Submit Proposal Meeting 0 25NOV09 17DEC09 15 → Submit Proposal to NEORSD 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 11 → Consultant Notice to Proceed 0 18DEC09 05JAN10 15 → Consultant Notice to Proceed 0 18DEC09 15JAN10 1 → Prepare Basis of be 0 19ANATIO 1 → NEORSD Evaluate Alignment Options Eval 0 19MECORSD Ev</td> <td> OBNOV09</td> <td></td> <td>17DEC09</td> <td>28*</td> <td>Proposal St</td> <th></th>	06NOV09 0 0	0 06NOV09 0 RFP Notification Letter 0 13NOV09° 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 15 Proposal Preparation 0 25NOV09 17DEC09 15 NEORSD Evaluation of Proposal Meeting 0 18DEC09 17DEC09 15 NEORSD Evaluation of Proposal Meeting 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 10 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 18DEC09 05JAN10 15 NECORSULTANT Notice to Proce 0 19JAN10 15 NECORSULTANT Notice to Proce NEORSULTANT Notice to Proce 0 19JAN10 10 NEORSULTANT Notice to Proce NEORSULTANT Notice to Proce <	0 06NOV09 0 RFP Notification Letter 0 13NOV09° 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 15 Proposal Preparation 0 25NOV09 17DEC09 15 Notification Letter 0 25NOV09 17DEC09 15 Notification Letter 0 18DEC09 17DEC09 15 Notification Letter 0 18DEC09 15 Notification Letter 0 18DEC09 17DEC09 15 Notification Letter 0 18DEC09 15AN10 10 Notification Letter 0 18DEC09 15AN10 10 Notification Procession 0 18DEC09 12AN10 10 Notification Procession 0 18DEC09 12AN10 15 Notification Procession 0 13AN10 02FEB10 1 Notification Preparate ACE Cite Processi	0 06NOV09 0 → Pre-Proposal Meeting 0 13NOV09° 0 → Pre-Proposal Meeting 0 24NOV09 13 → Pre-Proposal Meeting 0 24NOV09 0 → Pre-Proposal Meeting 0 24NOV09 0 → Submit Proposal Meeting 0 25NOV09 17DEC09 15 → Submit Proposal to NEORSD 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 10 → Consultant Notice to Proceed 0 18DEC09 05JAN10 11 → Consultant Notice to Proceed 0 18DEC09 05JAN10 15 → Consultant Notice to Proceed 0 18DEC09 15JAN10 1 → Prepare Basis of be 0 19ANATIO 1 → NEORSD Evaluate Alignment Options Eval 0 19MECORSD Ev	OBNOV09		17DEC09	28*	Proposal St	
06NOV09 0	06NOV09 0 0 → RFP Notification Lett 13NOV09* 0 0 → Pre-Proposal Meeti 06NOV09 24NOV09 13 → Submit Proposal Prepara 25NOV09 17DEC09 15 → Submit Proposal Prepara 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 26JAN10 15 06JAN10 26JAN10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 10 16FEB10 0	0 06NOV09 0 ◆RFP Notification Lett 0 13NOV09* 0 ◆Pre-Proposal Meeti 0 06NOV09 24NOV09 13 ◆Pre-Proposal Meeti 0 24NOV09 0 ◆Submit Proposal 0 25NOV09 17DEC09 15 ◆Submit Proposal 0 25NOV09 16FEB10 40* ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 29DEC09 12JAN10 15 AMY Geotect 0 06JAN10 26JAN10 15 AMY Pre 0 27JAN10 27JAN10 1 AMY Pre 0 27JAN10 16FEB10 0 0 03FEB10 16FEB10 0 0 16FEB10 0 16FEB10	0 06NOV09 0 →RFP Notification Lett 0 13NOV09* 0 →Pre-Proposal Meeti 0 06NOV09 24NOV09 13 →Pre-Proposal Meeti 0 24NOV09 0 →Submit Proposal 0 25NOV09 17DEC09 15 →Submit Proposal 0 25NOV09 16FEB10 40* →Consultant I 0 18DEC09 05JAN10 10 →Consultant I 0 18DEC09 05JAN10 10 →Consultant I 0 18DEC09 05JAN10 10 →Consultant I 0 29DEC09 12JAN10 15 →Pre 0 13JAN10 02FEB10 15 →Pre 0 27JAN10 27JAN10 1 →S 0 03FEB10 16FEB10 0 →S 0 03FEB10 16FEB10 0 O	0 06NOV09 0 NFF Notification Letter 0 13NOV09* 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 0 Pre-Proposal Meeting 0 24NOV09 0 Submit Proposal Meeting 0 25NOV09 17DEC09 15 0 25NOV09 17DEC09 15 0 18DEC09 17DEC09 15 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 11 0 18DEC09 05JAN10 15 0 18DEC09 12JAN10 15 0 18DEC09 12JAN10 15 0 25JAN10 15 ACC Prepare Detions Evaluate Alignment Consultant Notice to Proceed Procee	0 06NOV09 0 0 NFFP Notification Letter 0 13NOV09* 0 Pre-Proposal Meeting 0 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 15 Proposal Preparation 0 25NOV09 17DEC09 15 Submit Proposal to NEORSD 0 18DEC09 15 Submit Proposal to NEORSD 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 15 Consultant Notice to Proce 0 18DEC09 05JAN10 15 Consultant Notice to Proce 0 18DEC09 12JAN10 15 Prepare Options E 0 13JAN10 02FEB10 1 Prepare AACE Cpt 0 10FEB10 16FEB10 0 Prepare AACE Cpt 0 10FEB10 10 Submit Reports to Submit Reports to Submit Repo	0 06NOV09 0 NRFP Notification Letter 0 13NOV09° 0 Pre-Proposal Meeting 0 0 Pre-Proposal Meeting 0 24NOV09 0 Pre-Proposal Meeting 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 0 Pre-Proposal Meeting 0 25NOV09 17DEC09 15 Pre-Dossal Meeting 0 18DEC09 15 Preposal Meeting 0 18DEC09 05AN10 10 Pre-Design 0 18DEC09 05AN10 10 Prepare Design 0 18DEC09 05AN10 10 Prepare Design 0 18DEC09 05AN10 11 Prepare Design 0 18DEC09 05AN10 15 Prepare Design 0 13AN10 0 Prepare Basis of Design Prepare Basis of Design Prepare AACE Class Submit Reports to Novelops Submit Reports to Novelops Prepare ACECPISE Prepare AC	0 08MOV09 24MOV09 13	06NOV09	17DEC09	28*	Proposal St	
0	13NOV09* 0 06NOV09 24NOV09 13 24NOV09 0 24NOV09 0 24NOV09 0 24NOV09 15 Proposal Prepara → Submit Proposal ↑ Submit Proposal ↑ Submit Proposal ↑ NEORSD Ev 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 12JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 27JAN10 27JAN10 15 27JAN10 27JAN10 1 02FEB10 0 16FEB10 0	0 13NOV09* 0 ◆Pre-Proposal Meeting 0 0 24NOV09 13 ◆Pre-Proposal Meeting 0 0 24NOV09 0 ◆Submit Proposal Prepara 0 25NOV09 17DEC09 15 ◆Submit Proposal Meeting 0 25NOV09 17DEC09 15 ◆Consultant Proposal Meeting 0 18DEC09 16FEB10 40* ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 29DEC09 12JAN10 15 And Geotech 0 13JAN10 02FEB10 15 And Pre 0 27JAN10 27JAN10 1 And Pre 0 27JAN10 16FEB10 0 And Pre 0 03FEB10 16FEB10 0 And Pre 0 03FEB10 16FEB10 0	0 13NOV09* 0 ◆Pre-Proposal Meeti 0 0 24NOV09 13 ◆Pre-Proposal Meeti 0 24NOV09 0 ◆Submit Proposal 0 25NOV09 17DEC09 15 ◆Submit Proposal 0 25NOV09 17DEC09 15 ◆Submit Proposal 0 18DEC09 16FEB10 40* ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 18DEC09 05JAN10 10 ◆Consultant I 0 29DEC09 12JAN10 15 ▼Pre 0 06JAN10 26JAN10 15 ▼Pre 0 13JAN10 02FEB10 1 ▼Pre 0 27JAN10 27JAN10 1 ▼Pre 0 03FEB10 16FEB10 0 ●S 0 03FEB10 16FEB10 70*	0 13NOV09* 24NOV09 13 0 0 24NOV09 13 0 24NOV09 13 Submit Proposal Meeting 0 25NOV09 17DEC09 15 0 25NOV09 17DEC09 15 0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 29DEC09 12JAN10 15 29DEC09 12JAN10 15 29DEC09 12JAN10 15 29DEC09 12JAN10 15 29DEC09 12JAN10 15 29DEC09 12JAN10 1 29DEC09 16FEB10 1 29DEC09 16FEB10 1 29DEC09 16FEB10 1	0 13NOV09* 24NOV09 13 0 24NOV09 13 Pre-Proposal Meeting 0 24NOV09 13 Proposal Preparation 0 28NOV09 17DEC09 15 Submit Proposal to NEORSD 0 18DEC09 15 Submit Proposal to NEORSD 0 18DEC09 0 NEORSD Evaluation of Proposal Meeting 0 18DEC09 0 NEORSD Evaluation of Proposal Meeting 0 18DEC09 0 NEORSD Evaluation of Proposal Meeting 0 18DEC09 0 NEORSD Evaluation of Proposal Meeting 0 18DEC09 0 NEORSD Evaluation of Proposal Meeting 0 18DEC09 0 NEORSD Evaluation of Proposal Prepare Options Evaluation of Proposal Prepare Options Evaluation of Proposal Prepare Acade City 0 19AERTIO 0 NEORSD Evaluation of Proposal Prepare Acade City 0 10FEB10 10 NEORSD Evaluation of Proposal Prepare Acade City 0 10FEB10 10 NEORSD Evaluation of Neorest in Neorest in Neorest in Neet in Neorest in Neorest in Neorest in Neorest in Neorest in Neor	0 13NOV09° 0 ◆Pre-Proposal Meeting 0 0 24NOV09 13 ◆Pre-Proposal Meeting 0 24NOV09 0 ◆Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★Submit Proposal to NEORSD 0 18DEC09 16FEB10 40° ◆Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ★Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ★Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ★Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ★Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ★Consultant Notice to Proceed 0 18DEC09 12JAN10 15 ★Consultant Notice to Proceed 0 18DEC09 12JAN10 15 ★Submit Reports to Note Prepare Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Options Evaluate Alignment Opti	0 13NOV09' 24NOV09 13	06NOV09		0	◆RFP Notification Let	
A SALONOON	13NOV09 06NOV09 24NOV09 13 Proposal Meetric Proposal Meetric Proposal Meetric Proposal Prepara Assuming Proposal Prepara Proposal Prepara Proposal Prepara Prepar	13NOV095	13NOV099 24NOV09 13	Develor Dev	D 15NOV09 24NOV09 13	D 18NOV09 24NOV09 13	NRIONOVI 24NOV09 13	*)	Dia Diagnost Mont	
	24NOV09 0	24NOV09 0	24NOV09 0	24NOV09 0 24NOV09 17DEC09 15 25NOV09 17DEC09 15 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 12JAN10 10 29DEC09 12JAN10 11 0 06JAN10 02FEB10 15 0 13JAN10 02FEB10 10 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 19MAR10 28 0 10FEB10 02APR10 0 0 23APR10 23APR10 5 0 19APR10 23APR10 0 0 26APR10 07MAY10 10 ○ 26APR10 07MAY10 10 ○ 26APR10 07MAY10 10	24NOV09 0 25NOV09 17DEC09 15 25NOV09 17DEC09 15 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 11 0 06JAN10 26JAN10 15 0 13JAN10 27JAN10 1 0 0 27FEB10 10 0 0 10FEB10 18MAY10 70* 0 10FEB10 23APR10 20 0 19APR10 23APR10 0 0 26APR10 07MAY10 10 0 70MAY10 18MAY10 7 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 7	24NOV09 17DEC09 15	Submit Proposal to NEORSD Salvarius Submit Proposals	06NOV09	24NOV09	13	Proposal Prepar	
06NOV09 24NOV09 13	24NOV09 0 Submit Proposal 25NOV09 17DEC09 15 NEORSD EV 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 26JAN10 15 06JAN10 26JAN10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 10 16FEB10 0	24NOV09 0 25NOV09 17DEC09 15 0 25NOV09 17DEC09 15 0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0 16FEB10 0	24NOV09 0 25NOV09 17DEC09 15 0 25NOV09 17DEC09 15 0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 02FEB10 0 0 03FEB10 16FEB10 0 10FEB10 18MAY10 70*	24NOV09 17DEC09 15	24NOV09 0	24NOV09 0 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 17DEC09 15 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 16FEB10 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 15NOV06 10 25NOV09 10 25NOV09 15NOV06 10 25NOV09 10	Sunvey O					
06NOV09 24NOV09 13	25NOV09 17DEC09 15 18DEC09 16FEB10 40* 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 03FEB10 16FEB10 0	o 25NOV09 17DEC09 15 NEORSD Evign o 18DEC09 16FEB10 40* ◆Consultant I o 18DEC09 05JAN10 10 ★Consultant I o 18DEC09 05JAN10 10 ★W Geotech o 29DEC09 12JAN10 10 ★W Evalua o 29DEC09 12JAN10 15 ★W Pre o 13JAN10 02FEB10 15 ★Pre o 27JAN10 27JAN10 1 ★S o 03FEB10 16FEB10 0 ★S o 16FEB10 0 16FEB10 0	bign 15 NEORSD Every Presentation 0 18DEC09 16FEB10 40* Consultant I 0 18DEC09 05JAN10 10 Consultant I 0 18DEC09 05JAN10 10 Consultant I 0 18DEC09 05JAN10 10 Consultant I 0 18DEC09 12JAN10 10 Consultant I 0 29DEC09 12JAN10 15 Consultant I 0 06JAN10 26JAN10 15 Consultant I 0 13JAN10 02FEB10 15 Consultant I 0 27JAN10 27JAN10 1 Consultant I 0 27JAN10 27JAN10 1 Consultant I 0 27JAN10 27JAN10 1 Consultant I 0 03FEB10 16FEB10 10 Consultant I 0 03FEB10 16FEB10 0 Consultant I 0 03FEB10 18MAY10 70* Consultant I	obligh 25NOV09 17DEC09 15 NEORSD Evaluation of Probligh obligh 18DEC09 16FEB10 40° Consultant Notice to Proce oblight 18DEC09 05JAN10 10 Consultant Notice to Proce oblight 18DEC09 05JAN10 10 Consultant Notice to Proce oblight 18DEC09 05JAN10 10 Consultant Notice to Proce oblight 18DEC09 05JAN10 10 Consultant Notice to Proce oblight 29DEC09 12JAN10 15 Consultant Notice to Proce oblight 29DEC09 12JAN10 15 Consultant Notice to Proce oblight 29DEC09 12JAN10 15 Consultant Notice to Proce oblight 29DEC09 12JAN10 15 Consultant Notice to Proce oblight 29DEC09 12JAN10 15 Consultant Notice to Proce oblight 19JAN10 15 Consultant Notice to Proce Prepare Basis of oblight 19MAN10 10 Consultant Neores NEORSD Eva	o 25NOV09 17DEC09 15 NEORSD Evaluation of Pro Proposign o 18DEC09 16FEB10 40* Consultant Notice to Proce 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 10 Consultant Notice to Proce 0 18DEC09 05JAN10 10 McConsultant Notice to Proce 0 18DEC09 05JAN10 10 McConsultant Notice to Proce 0 18DEC09 05JAN10 10 McConsultant Notice to Proce 0 18DEC09 05JAN10 1 McConsultant Notice to Proce 0 18JAN10 15 McConsultant Notice to Proce 0 16JAN10 15 McConsultant Notice to Proce 0 13JAN10 15 McConsultant Notice to Proce 0 13JAN10 15 McConsultant Notice to Proce 0 13JAN10 15 McConsultant Notice to Proce 0 13JAN10 15 McConsultant Notice to Proce 20JAN10	o 25NOV09 17DEC09 15 NEORSD Evaluation of Proposition dign 18DEC09 16FEB10 40° Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 10 Consultant Notice to Proceed 0 18DEC09 05JAN10 15 Consultant Notice to Proceed 0 15JAN10 15 Prepare Basis of Devaluate Alignment Options Evalua	MEDRIO 17DEC09 15		24NOV09	0	Submit Proposal	ECRSD
06NOV09 24NOV09 13 24NOV09 0	18DEC09 16FEB10 40* 18DEC09 0 Consultant 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 03FEB10 16FEB10 0 16FEB10 0	ign 0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27FEB10 0 0 03FEB10 16FEB10 0	ign 0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 07FEB10 0 0 03FEB10 16FEB10 0 10 03FEB10 16FEB10 0	ign 18DEC09 18DEC09 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 10 10 10 10 10 10 10 10	ign 18DEC09 18DEC09 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 0 18DEC09 12JAN10 10 10 10 10 10 10 10 10 10	igin 18DEC09 16FEB10 40* Consultant Notice to Proceed 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 29DEC09 12JAN10 15 06JAN110 02FEB10 15 07Prepare AACE Class CONSPEB10 16FEB10 0 07FEB10 16FEB10 0 07FEB10 19MAR10 28 07PREPARATIO 228 07PREPARATIO 23APR10 10 07PREPARATIO 23APR10 20 07MAY10 19MAY10 7 0 10APR10 23APR10 0 0 29MAR10 23APR10 5 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 10 26APR10 07MAY10 7 10 0 10MAY10 18MAY10 7	BIDECO99 16FEB10 40"	25NOV09	17DEC09	15	NEORSD E	tion of Proposals
06NOV09 24NOV09 13 → Sub 25NOV09 17DEC09 15	18DEC09 16FEB10 40* 18DEC09 0 Consultant 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 03FEB10 16FEB10 0 16FEB10 0	0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27FEB10 0 0 03FEB10 16FEB10 0	18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 07FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 16FEB10 0	18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 16FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 19MAR10 28 0 10FEB10 02APR10 0 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 26APR10 07MAY10 10 0 26APR10 07MAY10 10 0 0 26APR10 07MAY10 10	18DECO9 16FEB10 40* Consultant Notice to Proce	18DEC09 16FEB10 40* Consultant Notice to Proceed	IndeCode 16FEB10 40' Consultant Notice to Proceed					
06NOV09 24NOV09 13 Pro 24NOV09 0 Sub 25NOV09 17DEC09 15	18DEC09 16FEB10 40* 18DEC09 0 ◆Consultant I 18DEC09 05JAN10 10 ★★ Survey 18DEC09 05JAN10 10 ★▼ Geotech 29DEC09 12JAN10 15 ★▼ Pre 06JAN10 26JAN10 15 ★▼ Pre 13JAN10 02FEB10 1 ★▼ Pre 27JAN10 27JAN10 1 ★▼ Pre 03FEB10 16FEB10 0 ★ S	0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 05JAN10 02FEB10 15 0 13JAN10 02FEB10 1 0 27JAN10 27JAN10 1 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0	0 18DEC09 16FEB10 40* 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 1 0 27JAN10 27JAN10 1 0 27JAN10 27JAN10 10 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 18DEC09 16FEB10 40* ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proce 0 29DEC09 12JAN10 10 ♣Consultant Notice to Proce 0 13JAN10 26JAN10 15 ♣Consultant Notice to Proce 0 13JAN10 02FEB10 15 ♣Colored ♣Prepare Options E 0 13JAN10 02FEB10 0 ♣NEORSD Eval ♣Submit Reports to Proceed Nace ♣Submit NEORSD Eval 0 10FEB10 19MAR10 20 ♣Submit NeoConsultant Nace ♣Submit NeoConsultant Nace ♣Submit Nace ♣Submit Nace ♣Submit Nace </td <td>0 18DEC09 16FEB10 40* ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 12JAN10 10 ★Consultant Notice to Proce 0 18DEC09 12JAN10 10 ★Submit Geofots 1 0 13JAN10 0.2FEB10 10 ★Submit Reports 1 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 10FEB10 18MAY10 70* ★Submit Reports 1 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 19APR10 23APR10 0 ★Submit N</td> <td>0 18DEC09 16FEB10 40* ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 29DEC09 12JAN10 10 ♣Consultant Notice to Proceed 0 29DEC09 12JAN10 10 ♣Consultant Notice to Proceed 0 06JAN10 26JAN10 15 ♣Prepare Acceptions Evaluate Alignment Options Evaluate Alignmen</td> <td> O 18DEC09 16FEB10 40*</td> <td></td> <td></td> <td></td> <td>(10)</td> <th></th>	0 18DEC09 16FEB10 40* ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 12JAN10 10 ★Consultant Notice to Proce 0 18DEC09 12JAN10 10 ★Submit Geofots 1 0 13JAN10 0.2FEB10 10 ★Submit Reports 1 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 10FEB10 18MAY10 70* ★Submit Reports 1 0 10FEB10 18MAY10 70* ★NEORSD Eval 0 19APR10 23APR10 0 ★Submit N	0 18DEC09 16FEB10 40* ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 18DEC09 05JAN10 10 ♣Consultant Notice to Proceed 0 29DEC09 12JAN10 10 ♣Consultant Notice to Proceed 0 29DEC09 12JAN10 10 ♣Consultant Notice to Proceed 0 06JAN10 26JAN10 15 ♣Prepare Acceptions Evaluate Alignment Options Evaluate Alignmen	O 18DEC09 16FEB10 40*				(10)	
06NOV09 24NOV09 13 Pro 24NOV09 0 Sub 25NOV09 17DEC09 15	18DEC09 0 ◆Consultant I 18DEC09 05JAN10 10 ★★ Survey 18DEC09 05JAN10 10 ★▼ Geotect 29DEC09 12JAN10 10 ★▼ Evalue 06JAN10 26JAN10 15 ▼ Pre 13JAN10 02FEB10 1 ▼ Pre 27JAN10 27JAN10 1 ▼ Pre 03FEB10 16FEB10 0 ▼ Pre 16FEB10 0 ▼ Pre	0 18DEC09 0 ◆Consultant I 0 18DEC09 05JAN10 10 ▲★▼ Survey 0 18DEC09 05JAN10 10 ▲▼ Geotech 0 29DEC09 12JAN10 15 ▼ Pre 0 06JAN10 02FEB10 15 ▼ Pre 0 13JAN10 02FEB10 1 ▼ Pre 0 27JAN10 27JAN10 1 ▼ Pre 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0	0 18DEC09 0 ◆Consultant I 0 18DEC09 05JAN10 10 May Survey 0 18DEC09 05JAN10 10 May Geotech 0 29DEC09 12JAN10 15 May Evalue 0 06JAN10 26JAN10 15 May Pre 0 13JAN10 02FEB10 15 May Pre 0 27JAN10 27JAN10 1 May Pre 0 03FEB10 16FEB10 0 0 0 03FEB10 16FEB10 0 0 0 10FEB10 18MAY10 70* 18MAY10	0 18DEC09 0 5JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★M Survey 0 29DEC09 12JAN10 10 ★Fevaluate Alignment Consultant Notice to Proce 0 29DEC09 12JAN10 10 ★Fevaluate Alignment Consultant Notice to Proce 0 29DEC09 12JAN10 10 ★Fevaluate Alignment Consultant Notice to Proce 0 06JAN10 28JAN10 ★Prepare Accertant Consultant Notice to Proce 0 13JAN10 27JAN10 15 ★Prepare Accertant Consultant Notice to Proce 0 13JAN10 26JAN10 15 ★Prepare Accertant Accertant Accertant Reports 1 0 27JAN10 16FEB10 0 ★NEORSD Evaluate Alignment Consultant Reports 1 0 16FEB10 16FEB10 0 ★NEORSD Evaluate Alignment Consultant Reports 1 0 10FEB10 18MAY10 70* ★NEORSD Evaluate Alignment Consultant Reports 1 0 10FEB10 18MAY10 0 ★NEORSD Evaluate Alignment Consultant Reports 2 0 10FEB10 </td <td>0 18DEC09 05JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★MW Survey 0 18DEC09 05JAN10 10 ★W Geotechnical 0 29DEC09 12JAN10 15 ★Veraluate Alignment Control 0 05JAN10 15 ★Veraluate Alignment Control 0 13JAN10 02FEB10 1 ★Veraluate Alignment Control 0 13JAN10 02FEB10 1 ★Veraluate Alignment Control 0 27JAN10 1 1 ★Veraluate Alignment Control 0 27JAN10 1 1 Yerepare Basis of Merepare AACE Classes 0 27JAN10 16FEB10 0 Yerepare AACE Classes 0 16FEB10 10 Yerepare AACE Classes 0 19MAR10 28 Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Cla</td> <td>0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 29DEC09 12JAN10 15 0 13JAN10 27JAN10 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 16FEB10 1 0 1 0 19MAR10 28 Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image:</td> <td>0 18DEC09 0.5JAN10 10 Medical Survey Medical Proceed 0 18DEC09 0.5JAN10 10 Medical Alignment Options 0 28DEC09 1.5JAN10 10 Medical Alignment Options 0 28DEC09 1.5JAN10 15 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Estimate 0 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09</td> <td>18DEC09</td> <td>16FEB10</td> <td>40*</td> <td></td> <th>-Design</th>	0 18DEC09 05JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★MW Survey 0 18DEC09 05JAN10 10 ★W Geotechnical 0 29DEC09 12JAN10 15 ★Veraluate Alignment Control 0 05JAN10 15 ★Veraluate Alignment Control 0 13JAN10 02FEB10 1 ★Veraluate Alignment Control 0 13JAN10 02FEB10 1 ★Veraluate Alignment Control 0 27JAN10 1 1 ★Veraluate Alignment Control 0 27JAN10 1 1 Yerepare Basis of Merepare AACE Classes 0 27JAN10 16FEB10 0 Yerepare AACE Classes 0 16FEB10 10 Yerepare AACE Classes 0 19MAR10 28 Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Classes Yerepare AACE Cla	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 29DEC09 12JAN10 15 0 13JAN10 27JAN10 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 27JAN10 1 1 0 16FEB10 1 0 1 0 19MAR10 28 Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image: NEORSD Evalual Image:	0 18DEC09 0.5JAN10 10 Medical Survey Medical Proceed 0 18DEC09 0.5JAN10 10 Medical Alignment Options 0 28DEC09 1.5JAN10 10 Medical Alignment Options 0 28DEC09 1.5JAN10 15 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 27JAN10 2.7JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment Options 0 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Estimate 0 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09 1.5JAN10 1 Medical Alignment AACE Class 1 Cost Est. 10115% 1 28DEC09	18DEC09	16FEB10	40*		-Design
06NOV09 24NOV09 13 Pro 24NOV09 0 Sub 25NOV09 17DEC09 15	18DEC09 05JAN10 10 18DEC09 05JAN10 10 18DEC09 12JAN10 10 29DEC09 12JAN10 15 06JAN10 26JAN10 15 13JAN10 02FEB10 1 27JAN10 27JAN10 1 03FEB10 10 16FEB10 0	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 26JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0	0 18DEC09 05JAN10 10	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 29DEC09 12JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 27JAN10 1 0 27JAN10 1 Prepare Options E 0 27JAN10 1 Prepare Basis of 0 27JAN10 1 Prepare AACE Class 0 27JAN10 1 Submit Reports t 0 03FEB10 18MAY10 70* 0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 22APR10 0 0 22MAR10 23APR10 0 0 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0	18DECO9 05JAN10 10 10 10 10 10 10 10	18DECO9 05JAN10 10 10 10 10 10 10 10	0 18DEC09 05JAN10 10	18DFC09		5	◆ Consultant	e to Proceed
06NOV09 24NOV09 13 Pro 24NOV09 0 Sub 25NOV09 17DEC09 15 18DEC09 16FEB10 40*	18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 03FEB10 10 16FEB10 0	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0	0 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 1 0 27JAN10 1 Prepare Basis of Prepare AACE Claster 0 27JAN10 1 Submit Reports the Prepare AACE Claster 0 03FEB10 16FEB10 0 NEORSD Evalous 0 16FEB10 10 NEORSD Evalous 0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 02APR10 0 0 22MAR10 02APR10 0 0 23APR10 20 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 1 10 0 27JAN10 1 10 0 27JAN10 1 10 0 27JAN10 1 10 0 27JAN10 1 10 0 27JAN10 1 10 0 27JAN10 1 10 0 16FEB10 10 10 0 19MARTIO 28 19we0rs Devalonts 0 19MARTIO 28 19welonts 0 22MARTIO 20 10 0 23APRTIO 5 10 0 23APRTIO 0 10 0 <t< td=""><td>0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 06JAN10 25JAN10 15 0 13JAN10 27JAN10 1 0 27JAN10 1 27Fepare Basis of Develops o</td><td> Survey</td><td>-00</td><td></td><td>(</td><td></td><th></th></t<>	0 18DEC09 05JAN10 10 0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 06JAN10 25JAN10 15 0 13JAN10 27JAN10 1 0 27JAN10 1 27Fepare Basis of Develops o	Survey	-00		(
06NOV09 24NOV09 13 Pro 24NOV09 0 Sub 25NOV09 17DEC09 15 18DEC09 16FEB10 40*	18DEC09 05JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 16FEB10 0 16FEB10 0	0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27JAN10 27JAN10 1 0 03FEB10 16FEB10 0 0 03FEB10 16FEB10 0	0 18DEC09 05JAN10 10 29DEC09 12JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 18DEC09 05JAN10 10 0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 1 ★Submit Reports to the ports to	0 18DEC09 05JAN10 10 MV Geotechnical 0 29DEC09 12JAN10 10 MV Evaluate Alignment C 0 06JAN10 26JAN10 15 MV Prepare Options E 0 13JAN10 02FEB10 15 MV Prepare Basis of 0 27JAN10 1 Submit Reports 1 0 03FEB10 16FEB10 0 NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 19MAR10 28 NEORSD Eval 0 10FEB10 19MAR10 0 Submit 0 29MAR10 23APR10 0 NEO 0 19APR10 23APR10 0 NEO 0 23APR10 0 NEO NEO	0 18DEC09 05JAN10 10 Image: Geotechnical Sevaluate Alignment Optical Sevaluate	0 18DEC09 05JAN10 10 0 28DEC09 12JAN10 10 0 28DEC09 12JAN10 10 0 28DEC09 12JAN10 10 0 28DEC09 12JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27JAN10 15 0 27JAN10 16FEB10 10 0 02FEB10 10 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 10 0 22MAR10 02APR10 10 0 22APR10 02APR10 10 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 10 0 25APR10 0 0 0 19APR10 0 77MAY10 10 0 25APR10 0 0 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 10 0 25APR10 0 07MAY10 10 0 25APR10 0 07MAY10 10 0 19APR10 19MAY10 7 0 19APR10 19MAY10 7 0 19APR10 19MAY10 10 0 25APR10 0 07MAY10 10 0 19APR10 19MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 19APR10 10 07MAY10 10 0 10APR	18DEC09	05JAN10	10	Survey	
06NOV09 24NOV09 13	29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 16FEB10 0	0 29DEC09 12JAN10 10 Evalus 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0	0 29DEC09 12JAN10 10	0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 22FEB10 15 0 13JAN10 22FEB10 1 0 27JAN10 1 *Submit Reports of the ports of t	0 29DECO9 12JAN10 10 0 06JAN10 26JAN10 15 0 13JAN10 22FEB10 15 0 13JAN10 22FEB10 15 0 27JAN10 15 Prepare ACE Classis of Prepare Basis of Prepare AACE Classis o	0 29DEC09 12JAN10 10 0 06JAN10 26JAN10 15 0 06JAN10 26JAN10 15 0 13JAN10 26JAN10 15 0 27JAN10 15 Prepare Options Eval 0 27JAN10 1 Prepare Basis of De 0 27JAN10 1 Prepare AACE Class 0 02FEB10 10 NEORSD Evaluat 0 03FEB10 18MAY10 70* NEORSD Evaluat 0 19FEB10 19MAR10 28 NEORSD Accept 0 19FEB10 19MAR10 2 NEORSD Accept 0 19MAR10 28 Submit 50 NEORSD Accept 0 19MAR10 20 NEORSD Accept 0 29MAR10 23APR10 0 NEORSD Accept 0 29MAR10 23APR10 0 NEORSD Accept 0 19APR10 23APR10 0 NEORSD Accept 0 19APR10 <td>0 29DEC09 12JAN10 10</td> <td>18DEC09</td> <td>05.IAN10</td> <td>10</td> <td>Geotec</td> <th></th>	0 29DEC09 12JAN10 10	18DEC09	05.IAN10	10	Geotec	
06NOV09 24NOV09 13	29DEC09 12JAN10 10 Evalue 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 16FEB10 0	0 29DEC09 12JAN10 10 Evalue 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0	0 29DEC09 12JAN10 10 Evalue 0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 29DEC09 12JAN10 10 Evaluate Alignment Co 0 06JAN10 26JAN10 15 ✓ Prepare Options E 0 13JAN10 27JAN10 1 ✓ Prepare AACE Cla 0 27JAN10 1 ✓ Submit Reports of 0 27JAN10 1 ✓ NEORSD Eval 0 03FEB10 16FEB10 0 ✓ NEORSD Eval 0 10FEB10 18MAY10 70* ✓ NEORSD Eval 0 10FEB10 19MAR10 28 ✓ NEORSD Acc 0 10FEB10 19MAR10 28 ✓ Submit 0 10FEB10 19MAR10 0 ✓ Submit 0 22MAR10 02APR10 0 ✓ Submit 0 29MAR10 23APR10 5 ✓ Submit 0 19APR10 23APR10 0 ✓ Submit 0 19APR10 23APR10 0 ✓ Submit 0 23APR10 0 ✓ Submit ✓ Submit 0	0 29DEC09 12JAN10 10 Evaluate Alignment Companies of Companies C	0 29DEC09 12JAN10 10 0 06JAN110 26JAN10 15 0 13JAN110 22FEB10 15 0 27JAN110 15 Prepare Options Eval 0 27JAN110 15 Prepare Basis of De 0 27JAN110 1 Prepare AACE Class Submit Reports to N Submit Reports to N NEORSD Evaluate 0 0 23FEB10 10 NEORSD Accept 0 10FEB10 18MAY10 70* NEORSD Accept 0 10FEB10 18MAY10 70* NEORSD Accept 0 10FEB10 18MAY10 28 Submit 50 0 22MAR10 02APR10 0 NEORSD Accept 0 22MAR10 02APR10 0 NEORSD Accept 0 22MAR10 22APR10 0 NEORSD Accept 0 23APR10 20 NEORSD Accept NEORSD Accept 0 23APR10 20 NEORSD Accept NEORSD	0 299EC09 12JAN10 10 Evaluate Alignment Options Evaluation Report 0 13JAN10 28JAN10 15 Frepare Potions Evaluation Report 0 13JAN10 02FEB10 15 Frepare Basis of Design Report 0 27JAN10 15 Frepare Basis of Design Report 0 27JAN10 15 Frepare AACE Class 5 Cost Estimate Submit Reports to NEORSD NEORSD Acceptance of Alignment Option Develop 50% Design Documents NEORSD Review 50% Design Documents NEORSD Review Meeting 0 22MAR10 02APR10 10 0 Perpare AACE Class 1 Cost Est. +10/15% 0 19APR10 23APR10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 23APR10 0 0 Perpare Critical Path Construction Schedule 0 29APR10 07MAY10 10 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 7 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 10 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 7 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 5 Perpare ACE Class 1 Cost Est. +10/15% 0 19APR10 19MAY10 19MA	1000	000711410	-		
06NOV09 24NOV09 13	06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 27JAN10 1 02FEB10 0 03FEB10 16FEB10 0	0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 16FEB10 0	0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 06JAN10 26JAN10 15 0 13JAN10 02FEB10 15 0 27JAN10 1 XPrepare Basis of XPrepare Basis of XPrepare AACE Classis of XPrepar	0 06JAN10 26JAN10 15 Prepare Options E 0 13JAN10 02FEB10 15 Prepare AACE Cla 0 27JAN10 27JAN10 1 Submit Reports 1 0 03FEB10 16FEB10 0 NEORSD Eval 0 03FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Eval 0 10FEB10 18MAY10 70 NEORSD Eval 0 10FEB10 18MAY10 70 NEORSD Eval 0 10FEB10 18MAY10 70 NEORSD Eval 0 10FEB10 18MAY10 70 NEORSD Eval 0 22MAR10 23APR10 0 NEORSD Eval 0 19APR10 23APR10 5 NEORSD Eval 0 19APR10 23APR10 0	0 06JAN10 26JAN10 15 0 13JAN110 02FEB10 15 0 27JAN110 27JAN10 1 0 27JAN110 1 Prepare Basis of De 0 27JAN110 1 Prepare AACE Class 0 0 0 Submit Reports to N NEORSD Evaluat 0 16FEB10 10 NEORSD Accept 0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 28 Submit 50 0 22MAR10 02APR10 0 0 23APR10 20 Submit 50 0 23APR10 5 Pro 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 0 0 23APR10 0 0 26APR10 07MAY10 0 26APR10 07MAY10 <t< td=""><td>0 06.JAN110 26.JAN110 15</td><td>29DEC09</td><td>12JAN10</td><td>10</td><td>Evalu</td><th>lignment Options</th></t<>	0 06.JAN110 26.JAN110 15	29DEC09	12JAN10	10	Evalu	lignment Options
06NOV09 24NOV09 13	13JAN10 02FEB10 15 27JAN10 27JAN10 1 27JAN10 1 02FEB10 0 03FEB10 16FEB10 0	0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0	0 13JAN10 02FEB10 15 0 27JAN10 02FEB10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	13JAN10 02FEB10 15	13JAN10 02FEB10 15	Develop 5 Dev	0 13AAN10 02FEB10 15	OS IANITO	OF IANIO	7	Pre	Ontions Evaluation Report
06NOV09 24NOV09 13 Proposal Pre 24NOV09 0 Submit Proposal Pre 25NOV09 17DEC09 15 NEORSI 18DEC09 16FEB10 40* Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 12JAN10 10 Consult 29DEC09 12JAN10 10 Consult	13JAN10 02FEB10 15 27JAN10 27JAN10 1 27JAN10 02FEB10 0 02FEB10 10 03FEB10 16FEB10 0	0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 16FEB10 0	0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 10FEB10 18MAY10 70*	0 13JAN10 02FEB10 15 0 27JAN10 27JAN10 1 0 27JAN10 1 Submit Reports 1 0 0 16FEB10 10 NEORSD Eval 0 0 16FEB10 10 NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Acc 0 10FEB10 19MAR10 28 Submit 0 10FEB10 19MAR10 0 Submit 0 22MAR10 02APR10 0 Submit 0 23APR10 20 \$50% 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 25APR10 0 0 <td>0 13JAN10 02FEB10 15 ■ Prepare Basis of Submit Reports of Submit</td> <td>0 13JAN10 02FEB10 15 Prepare Basis of De 0 27JAN10 27JAN10 1 Prepare AACE Class 0 02FEB10 10 Submit Reports to N NEORSD Evaluat 0 03FEB10 16FEB10 10 NEORSD Evaluat 0 10FEB10 18MAY10 70* NEORSD Accept 0 10FEB10 19MAR10 28 NEORSD Accept 0 10FEB10 19MAR10 28 Submit 50 0 10FEB10 19MAR10 0 NEORSD Accept 0 19MAR10 28 Submit 50 0 22MAR10 02APR10 0 0 23APR10 20 Pro 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 Submit 50 0 19APR10 23APR10 0 0 23APR10 0 Submit 50 0 23APR10<td>0 27JAN10 02FEB10 15 Prepare AACE Class 5 Cost Estimate 0 27JAN10 1 1</td><td>06JAN10</td><td>26JAN10</td><td>15</td><td>Pic</td><th>Options Evaluation Report</th></td>	0 13JAN10 02FEB10 15 ■ Prepare Basis of Submit Reports of Submit	0 13JAN10 02FEB10 15 Prepare Basis of De 0 27JAN10 27JAN10 1 Prepare AACE Class 0 02FEB10 10 Submit Reports to N NEORSD Evaluat 0 03FEB10 16FEB10 10 NEORSD Evaluat 0 10FEB10 18MAY10 70* NEORSD Accept 0 10FEB10 19MAR10 28 NEORSD Accept 0 10FEB10 19MAR10 28 Submit 50 0 10FEB10 19MAR10 0 NEORSD Accept 0 19MAR10 28 Submit 50 0 22MAR10 02APR10 0 0 23APR10 20 Pro 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 Submit 50 0 19APR10 23APR10 0 0 23APR10 0 Submit 50 0 23APR10 <td>0 27JAN10 02FEB10 15 Prepare AACE Class 5 Cost Estimate 0 27JAN10 1 1</td> <td>06JAN10</td> <td>26JAN10</td> <td>15</td> <td>Pic</td> <th>Options Evaluation Report</th>	0 27JAN10 02FEB10 15 Prepare AACE Class 5 Cost Estimate 0 27JAN10 1 1	06JAN10	26JAN10	15	Pic	Options Evaluation Report
06NOV09 24NOV09 13 Proposal Pre 24NOV09 0 Submit Proposal Pre 25NOV09 17DEC09 15 NEORSI 18DEC09 16FEB10 40* Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 12JAN10 10 Consult 29DEC09 12JAN10 10 Consult 06JAN10 26JAN10 15 Consult	27JAN10 27JAN10 1	0 27JAN10 27JAN10 1 0 02FEB10 0 0 03FEB10 16FEB10 0 0 16FEB10 0	0 27JAN10 27JAN10 1	0 27JAN10 27JAN10 1 0 0 22FEB10 0 0 0 16FEB10 0 0 16FEB10 0 ◆NEORSD Eva 0 19FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 ◆Submit 0 19MAR10 28 ◆Submit NEO 0 22MAR10 02APR10 10 ◆Submit 0 22MAR10 23APR10 20 ◆50% 0 19APR10 23APR10 5 ● 0 19APR10 23APR10 0 ● 0 19APR10 23APR10 0 ● 0 23APR10 0 ● ● ● 0 23APR10 0 ● ● ● ● ● 0 23APR10 0 ● ● ● ● ● ● ● ● ● ● ● ●<	0 27JAN10 27JAN10 1 0 27JAN10 27JAN10 1 0 22FEB10 0 ✓ NEORSD Eva 0 16FEB10 0 ✓ NEORSD Eva 0 19FEB10 18MAY10 70* ✓ NEORSD Acc 0 19FEB10 19MAR10 28 ✓ Submit 0 19FEB10 19MAR10 0 ✓ Submit 0 22MAR10 02APR10 10 ✓ Submit 0 22MAR10 23APR10 20 ✓ So% 0 19APR10 23APR10 5 ✓ 0 19APR10 23APR10 0 ✓ 0 19APR10 23APR10 0 ✓ 0 23APR10 0 ✓ ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 25APR10 0 ✓ 0	0 27JAN10 27JAN10 1 0 0 02FEB10 0 0 0 16FEB10 10 0 16FEB10 0 NW NEORSD Evalual 0 16FEB10 0 NEORSD Evalual 0 10FEB10 18MAY10 70* NEORSD Evalual 0 10FEB10 18MAY10 20* NEORSD Accept 0 10FEB10 19MAR10 28 Submit 50* 0 10FEB10 19MAR10 28 Submit 50* 0 22MAR10 02APR10 0 250% De 0 29MAR10 23APR10 20 250% De 0 19APR10 23APR10 5 30 Submit 50* 0 19APR10 23APR10 5 30 \$Su \$Su 0 19APR10 23APR10 0 \$Su \$Su \$Su 0 26APR10 07MAY10 10 0 \$Su \$Su	0 27JAN10 27JAN10 1	13JAN10	02FEB10	15		re Basis of Design Report
06NOV09 24NOV09 13 Proposal Pre 24NOV09 0 Submit Proposal Pre 25NOV09 17DEC09 15 NEORSI 18DEC09 16FEB10 40* Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 05JAN10 10 Consult 18DEC09 12JAN10 10 Consult 29DEC09 12JAN10 10 Consult 13JAN10 26JAN10 15 Consult	02FEB10 0 \$5 03FEB10 10 1 16FEB10 0	0 02FEB10 0	0 02FEB10 0	0 02FEB10 0 ◆Submit Reports 1 0 03FEB10 16FEB10 0 ◆NEORSD Eva 0 10FEB10 18MAY10 70* ◆NEORSD Acc 0 10FEB10 19MAR10 28 ◆Submit 0 10FEB10 19MAR10 0 ◆Submit 0 22MAR10 02APR10 10 ◆Submit 0 22MAR10 23APR10 20 ◆50% 0 19APR10 23APR10 5 ● 0 19APR10 23APR10 0 ● 0 19APR10 23APR10 0 ● 0 23APR10 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 0 23APR10 0 0 23APR10 0 0 0 0 0 0 0 23APR10 0 0 0 0	0 02FEB10 0 ◆Submit Reports 1 0 03FEB10 16FEB10 0 ◆NEORSD Eva 0 10FEB10 18MAY10 70* ◆NEORSD Acc 0 10FEB10 19MAR10 28 ◆Submit 0 10FEB10 19MAR10 0 ◆Submit 0 22MAR10 02APR10 10 ◆Submit 0 22MAR10 23APR10 20 ◆50% 0 19APR10 23APR10 5 ● 0 19APR10 23APR10 0 ● 0 19APR10 23APR10 0 ● 0 23APR10 0 ● ● 0 23APR10 0 ● ● 0 23APR10 0 ● ● 0 23APR10 0 ● ● 0 25APR10 0 ● ● 0 25APR10 0 ● ● 0 <td>0 02FEB10 0 ◆Submit Reports to N 0 03FEB10 16FEB10 0 ◆NEORSD Evaluat 0 10FEB10 18MAY10 70* ◆NEORSD Accept 0 10FEB10 18MAY10 70* ◆Submit 50 0 10FEB10 19MAR10 28 ◆Submit 50 0 10FEB10 19MAR10 0 ◆Submit 50 0 22MAR10 02APR10 10 ◆Submit 50 0 22MAR10 02APR10 20 ■Property 0 19APR10 23APR10 5 ■Property 0 19APR10 23APR10 0 ●Su 0 19APR10 23APR10 0 ●Su 0 23APR10 0 ●Su ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 <</td> <td>0 02FEB10 0 Submit Reports to NEORSD 0 03FEB10 16FEB10 10 MEORSD Evaluation of Reports 0 16FEB10 0 MEORSD Evaluation of Reports 0 16FEB10 0 MEORSD Acceptance of Alignment Option 0 19MAR10 28 Develop 50% Design Documents 0 19MAR10 28 Develop 50% Design No NEORSD 0 22MAR10 02APR10 10 0 29MAR10 20 Develop 90% Design No NEORSD 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10</td> <td>27JAN10</td> <td>27JAN10</td> <td>_</td> <td>Pr</td> <th>AACE Class 5 Cost Estimate</th>	0 02FEB10 0 ◆Submit Reports to N 0 03FEB10 16FEB10 0 ◆NEORSD Evaluat 0 10FEB10 18MAY10 70* ◆NEORSD Accept 0 10FEB10 18MAY10 70* ◆Submit 50 0 10FEB10 19MAR10 28 ◆Submit 50 0 10FEB10 19MAR10 0 ◆Submit 50 0 22MAR10 02APR10 10 ◆Submit 50 0 22MAR10 02APR10 20 ■Property 0 19APR10 23APR10 5 ■Property 0 19APR10 23APR10 0 ●Su 0 19APR10 23APR10 0 ●Su 0 23APR10 0 ●Su ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 23APR10 0 ●Su 0 <	0 02FEB10 0 Submit Reports to NEORSD 0 03FEB10 16FEB10 10 MEORSD Evaluation of Reports 0 16FEB10 0 MEORSD Evaluation of Reports 0 16FEB10 0 MEORSD Acceptance of Alignment Option 0 19MAR10 28 Develop 50% Design Documents 0 19MAR10 28 Develop 50% Design No NEORSD 0 22MAR10 02APR10 10 0 29MAR10 20 Develop 90% Design No NEORSD 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10	27JAN10	27JAN10	_	Pr	AACE Class 5 Cost Estimate
06NOV09 24NOV09 13 Proposal Proposa	03FEB10 16FEB10 10	0 03FEB10 16FEB10 10 0 16FEB10 0	0 03FEB10 16FEB10 10 0 0 0 10FEB10 18MAY10 70*	0 03FEB10 16FEB10 10 ▲NEORSD Eval 0 10FEB10 18MAY10 70* ◆NEORSD Acc 0 10FEB10 18MAY10 70* ◆Submit 0 10FEB10 19MAR10 28 ◆Submit 0 19MAR10 10 ◆Submit 0 22MAR10 02APR10 10 ◆Submit 0 29MAR10 23APR10 20 ◆50% 0 19APR10 23APR10 5 ● 0 19APR10 23APR10 0 ● 0 23APR10 0 23APR10 0 0 23APR10 0 23APR10 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 0 23APR10 0 0 <t< td=""><td>0 03FEB10 16FEB10 10 ▲NEORSD Eval 0 10FEB10 18MAY10 70* ↓NEORSD Acc 0 10FEB10 18MAY10 70* ↓NEORSD Acc 0 10FEB10 19MAR10 28 ↓Submit 0 10FEB10 19MAR10 0 ↓Submit 0 22MAR10 02APR10 10 ↓Submit 0 23MAR10 23APR10 20 ↓So% 0 19APR10 23APR10 5 ↓ 0 19APR10 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 25APR10 0 ↓ 0 25APR10 0 ↓ 0 2</td><td>0 03FEB10 16FEB10 10 0 10FEB10 18MAY10 70* 0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 28 0 19MAR10 28 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 23APR10 0 \$su 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 23APR10 0 \$su 0 23APR10 0 \$su 0 23APR10 0</td><td>O 0 03FEB10 16FEB10 10</td><td></td><td>035550</td><td>></td><td>0</td><th>Reports to NEORSD</th></t<>	0 03FEB10 16FEB10 10 ▲NEORSD Eval 0 10FEB10 18MAY10 70* ↓NEORSD Acc 0 10FEB10 18MAY10 70* ↓NEORSD Acc 0 10FEB10 19MAR10 28 ↓Submit 0 10FEB10 19MAR10 0 ↓Submit 0 22MAR10 02APR10 10 ↓Submit 0 23MAR10 23APR10 20 ↓So% 0 19APR10 23APR10 5 ↓ 0 19APR10 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 23APR10 0 ↓ 0 25APR10 0 ↓ 0 25APR10 0 ↓ 0 2	0 03FEB10 16FEB10 10 0 10FEB10 18MAY10 70* 0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 28 0 19MAR10 28 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 23APR10 0 \$su 0 19APR10 23APR10 0 0 23APR10 0 \$su 0 23APR10 0 \$su 0 23APR10 0 \$su 0 23APR10 0	O 0 03FEB10 16FEB10 10		035550	>	0	Reports to NEORSD
06NOV09 24NOV09 13 Proposal Proposa	03FEB10 16FEB10 10 10 16FEB10 0	0 03FEB10 16FEB10 10 16FEB10 0	0 03FEB10 16FEB10 10 0 0 0 10FEB10 18MAY10 70*	0 03FEB10 16FEB10 10 NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Acc 0 10FEB10 18MAY10 70* NEORSD Acc 0 10FEB10 19MAR10 28 NEO NEO 0 19MAR10 0 Submit NEO	0 03FEB10 16FEB10 10 NEORSD Eval 0 10FEB10 18MAY10 70* NEORSD Acc 0 10FEB10 18MAY10 70* NEORSD Acc 0 10FEB10 19MAR10 28 NEO Develo 0 19MAR10 0 Submit NEC Submit NEC 0 22MAR10 23APR10 20 NEC NEC NEC 0 19APR10 23APR10 5 NEC NEC NEC 0 19APR10 23APR10 5 NEC	0 03FEB10 16FEB10 10 NEORSD Evaluat 0 10FEB10 18MAY10 70° NEORSD Accept 0 10FEB10 18MAY10 70° NEORSD Accept 0 10FEB10 18MAY10 20° NEORSD Accept 0 10FEB10 19MAR10 28 Submit 50° Nevelop 50° 0 22MAR10 02APR10 10 NEORS Soon Necord 0 23MAR10 23APR10 20 Necord Necord 0 19APR10 23APR10 5 Necord Necord 0 19APR10 23APR10 0 Necord Necord Necord 0 19APR10 23APR10 0 Necord<	0 0 03FEB10 16FEB10 10		0183420	C		it neports to Neonad
06NOV09 24NOV09 13 Proposal Proposa	16FEB10 0	0 16FEB10 0	0 16FEB10 0 0	0 16FEB10 0 ◆NEORSD Acc 0 10FEB10 18MAY10 70* ✓ Develo 0 10FEB10 19MAR10 28 ✓ Submit 0 22MAR10 02APR10 10 ✓ Submit 0 22MAR10 23APR10 20 ✓ Sov 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 25APR10 0 0 25APR10 0 0 25APR10 0	0 16FEB10 0 ◆NEORSD Acc 0 10FEB10 18MAY10 70* ✓ Develo 0 10FEB10 19MAR10 28 ✓ Develo 0 19MAR10 0 ✓ Submit 0 22MAR10 02APR10 10 ✓ Submit 0 22MAR10 23APR10 20 ✓ Sov 0 19APR10 23APR10 5 ✓ 0 19APR10 23APR10 0 ✓ 0 19APR10 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 23APR10 0 ✓ 0 25APR10 0 ✓ 0 25APR10 0 ✓ 0 25APR10 <td< td=""><td>0 16FEB10 0 ◆NEORSD Accept 0 10FEB10 18MAY10 70* ✓ Develop 5 0 10FEB10 19MAR10 28 ✓ Submit 50 0 22MAR10 02APR10 10 ✓ So% De 0 22MAR10 02APR10 0 ✓ So% De 0 29MAR10 23APR10 20 ✓ Pro 0 19APR10 23APR10 5 ✓ Pro 0 19APR10 23APR10 0 ✓ Su 0 19APR10 23APR10 0 ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 26APR10 07MAY10 10 ✓ Su 0 26APR10 07MAY10 7 ✓ Su 0 12MAY10 18MAY10 7</td><td>0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 28APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 7 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 5 </td><td>03FEB10</td><td>16FEB10</td><td>10</td><td></td><th>ORSD Evaluation of Reports</th></td<>	0 16FEB10 0 ◆NEORSD Accept 0 10FEB10 18MAY10 70* ✓ Develop 5 0 10FEB10 19MAR10 28 ✓ Submit 50 0 22MAR10 02APR10 10 ✓ So% De 0 22MAR10 02APR10 0 ✓ So% De 0 29MAR10 23APR10 20 ✓ Pro 0 19APR10 23APR10 5 ✓ Pro 0 19APR10 23APR10 0 ✓ Su 0 19APR10 23APR10 0 ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 23APR10 0 ✓ Su ✓ Su 0 26APR10 07MAY10 10 ✓ Su 0 26APR10 07MAY10 7 ✓ Su 0 12MAY10 18MAY10 7	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 28APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 7 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 5	03FEB10	16FEB10	10		ORSD Evaluation of Reports
06NOV09 24NOV09 13			0 10FEB10 18MAY10 70*	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 29MAY10 10 0 23APR10 0 5 0 19APR10 23APR10 0	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 0 0 22MAR10 02APR10 10 0 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 29MAY10 10 0 23APR10 0 5 0 19APR10 07MAY10 0 0 26APR10 07MAY10 0	O 10FEB10 18MAY10 70* O 10FEB10 19MAR10 28 O 10FEB10 19MAR10 0 O 22MAR10 02APR10 10 O 29MAR10 23APR10 20 O 19APR10 23APR10 5 O 19APR10 23APR10 0 O 19APR10 23APR10 0 O 19APR10 07MAY10 10 O 26APR10 07MAY10 10 O 12MAY10 18MAY10 5	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 22MAR10 02APR10 10 0 23APR10 23 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 28APR10 0 0 0 28APR10 0 0 0 19APR10		16FEB10	0		ORSD Acceptance of Alignment Option
D 06NOV09 24NOV09 13 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Submit Proposal D 18DEC09 16FEB10 40* ♣Consultant D 18DEC09 05JAN10 10 ♣Consultant D 18DEC09 05JAN10 10 ♣Consultant D 18DEC09 05JAN10 10 ♣Consultant D 29DEC09 12JAN10 15 ♣Pre D 13JAN10 02FEB10 15 ♣Pre D 27JAN10 27JAN10 1 ♣S D 03FEB10 16FEB10 10 ♣S D 10FEB10 18MAY10 70* ♣S	0 10FEB10 18MAY10 70*	10FFR10 10MAR10 28		19MAR10 0 22MAR10 02APR10 10 29MAR10 02APR10 0 29MAR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 23APR10 0	19MAR10 0 Submit	19MAR10 0 22MAR10 02APR10 10 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 19APR10 0 23APR10 0 23APR10 0 19APR10 07MAY10 10 10MAY10 18MAY10 5	0 22MAR10 02APR10 10	IOTEDIO	O LUNIVIEL	70		Davelor of the Design Coordinative
D 06NOV09 24NOV09 13 ♣Submit Proposal Prepara D 25NOV09 17DEC09 15 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Consultant I D 18DEC09 05JAN10 10 ♣Consultant I D 18DEC09 05JAN10 10 ♣Consultant I D 29DEC09 12JAN10 10 ♣Consultant I D 29DEC09 12JAN10 15 ♣Pre D 13JAN10 26JAN10 15 ♣Pre D 27JAN10 27JAN10 1 ♣S D 27JAN10 16FEB10 10 ♣S D 03FEB10 16FEB10 0 ♣S D 10FEB10 19MAR10 28 ♣S	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28	10FEB10 19MAR10 28		22MAR10 02APR10 10 ★50% 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 00 23APR10 0 23APR10 0 23APR10 0	22MAR10 02APR10 10 ★50% 29MAR10 23APR10 20 ★50% 19APR10 23APR10 5 ★ 19APR10 23APR10 5 ★ 19APR10 23APR10 0 ★ 23APR10 0 ★ 26APR10 07MAY10 10 10MAY10 18MAY10 7	22MAR10 02APR10 10 22MAR10 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 25APR10 0 26APR10 07MAY10 10MAY10 18MAY10 12MAY10 18MAY10	0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 26APR10 07MAY10 10 0 26APR10 07MAY10 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 18MAY10 5 0 12MAY10 18MAY10		19MAR10	0		◆Submit 50% Design to NEORSD
D 06NOV09 24NOV09 13 ♣Submit Proposal Prepara D 25NOV09 17DEC09 15 ♣Submit Proposal Pr	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0	10FEB10 19MAR10 28 19MAR10 0	19MAR10 0	02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 • 26APR10 07MAY10 10 10MAY10 18MAY10 7	02APR10 0	0 02APR10 0	22MAR10	02APR10	10		NEORSD Review 50% Design
D 06NOV09 24NOV09 13 ♣Submit Proposal Prepara D 25NOV09 17DEC09 15 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Submit Proposal D 25NOV09 17DEC09 15 ♣Consultant I D 18DEC09 05JAN10 10 ♣Consultant I D 18DEC09 05JAN10 10 ♣Consultant I D 18DEC09 05JAN10 10 ♣Consultant I D 29DEC09 12JAN10 15 ♣Fealux D 29DEC09 12JAN10 15 ♣Free D 27JAN10 26JAN10 1 ♣SI D 27JAN10 16FEB10 1 ♣SI D 27JAN10 16FEB10 1 ♣SI D 0 19MAR10 28 ♣SI D 19MAR10 0 22MAR10 0 0	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10	10FEB10 19MAR10 28 19MAR10 0	19MAR10 0 22MAR10 02APR10 10	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 10MAY10 10 10MAY10 18MAY10 7	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 10MAY10 10 10MAY10 18MAY10 7	0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 0 0 23APR10 0 23APR10 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 10 23APR10 0 23APR10 10 0 26APR10 07MAY10 10 0 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 ■ Early Bar ORNOV09		02APR10	0	4 44	◆50% Design Review Meeting
D 06NOV09 24NOV09 13 ♣Submit Proposal Prepara D 25NOV09 17DEC09 15 ♣Submit Proposal Prepara D 25NOV09 17DEC09 15 ♣Submit Proposal Propo	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 0	10FEB10 19MAR10 28 19MAR10 0 22MAR10 02APR10 10	19MAR10 0 22MAR10 02APR10 10	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 0 23APR10 0 23APR10 0 23APR10 0	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 10MAY10 10	29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 4Su 26APR10 07MAY10 10 10MAY10 18MAY10 7	0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 10MAY10 10 0 25APR10 0 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 5 ■ Early Bar 17AUG11 06NOV09 17					
0 06NOV09 24NOV09 13 0 24NOV09 0 ◆Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★NEORSD Evaluation of Proposal to NEORSD 0 18DEC09 16FEB10 40* ★Consultant Notice to Proceed to Proce	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 22APR10 0	10FEB10 19MAR10 28	19MAR10 0 22MAR10 02APR10 10 02APR10 0	19APR10 23APR10 5 19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0 23APR10 0	19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10 10MAY10 18MAY10 7	19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10 07MAY10 0 10MAY10 18MAY10 7	0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 ◆Submit 90% Design to NEORSD 0 23APR10 0 ◆Submit PTI to OEPA 0 26APR10 07MAY10 7 0 10MAY10 7 7 0 12MAY10 7 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 **Bearly Bar Orlical Activity* **Walworth Run Interceptor* **Walworth Run Interceptor* **Walworth Run Interceptor* **Walworth Run Interceptor* **Walworth Run Interceptor* **Total Cost Est. +/-10%* **Walworth Run Interceptor* **Total Cost Est. +/-10%* **Total	29MAR10	23APR10	20	10 min	Develop 90% Design Documents
0 06NOV09 24NOV09 13 0 24NOV09 0 ◆Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★NEORSD Evaluation of Proposal to NEORSD 0 18DEC09 16FEB10 40* ★Consultant Notice to Proceed to Proce	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 0 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20	10FEB10 19MAR10 28 19MAR10 0 22MAR10 02APR10 10 29MAR10 23APR10 20	19MAR10 0	19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10	19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10 07MAY10 0	19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10 07MAY10 0 10MAY10 18MAY10 7	0	19APR10	23APR10	G		
0 06NOV09 24NOV09 13 0 24NOV09 0 0 24NOV09 0 0 25NOV09 15 0 25NOV09 17DEC09 15 0 18DEC09 15 MEORSD Evaluation of Proposals 0 18DEC09 15 MEORSD Evaluation of Proposals 0 18DEC09 15,3AN10 10 MeOnsultant Notice to Proceed 0 18DEC09 05,3AN10 10 MeConsultant Notice to Proceed 0 18DEC09 12,3AN10 10 MeConsultant Notice to Proceed 0 18DEC09 12,3AN10 15 MeConsultant Notice to Proceed 0 18DEC09 12,3AN10 15 MeConsultant Notice to Proceed 0 18DEC09 12,3AN10 15 Mecotechnical 0 13,3AN10 26,3AN10 1 Prepare Dotions Evaluation Report 0 13,4AN10 16,7EB10 1 Prepare ACE Class 5 Cost Estimate 0 16,7EB10 1	O 10FEB10 18MAY10 70* O 10FEB10 19MAR10 28 O 19MAR10 28 Submit 50% Design Documents O 22MAR10 02APR10 10 O 22MAR10 02APR10 0 O 29MAR10 23APR10 20 O 19APR10 23APR10 5	10FEB10 19MAR10 28 19MAR10 0 Submit 50% Design to NEORSD 22MAR10 02APR10 10 02APR10 0 NEORSD Review 50% Design 02APR10 0 50% Design Review Meeting 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5	Submit 50% Design to NEORSD	23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10	23APR10 0 23APR10 0 23APR10 0 26APR10 07MAY10 10 07MAY10 0	23APR10 0	00 23APR10 0 ◆Submit 90% Design to NEORSD 00 23APR10 0 ◆Submit PTI to OEPA 00 26APR10 07MAY10 10 00 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 ### Progress Bar Octivity Walworth Run Interceptor Walworth Run Interceptor	19APR10	23APR10	σ ₁		Prepare Critical Path Construction Schedule
0 06NOV09 24NOV09 13 →Submit Proposal Preparation 0 24NOV09 0 →Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ✓Submit Proposal to NEORSD 0 18DEC09 16FEB10 40* ◆Consultant Notice to Proce 0 18DEC09 05JAN10 10 ✓Consultant Notice to Proce 0 18DEC09 05JAN10 10 ✓Consultant Notice to Proce 0 18DEC09 05JAN10 10 ✓Consultant Notice to Proce 0 18DEC09 05JAN10 10 ✓Consultant Notice to Proce 0 23AN10 10 ✓Consultant Notice to Proce 0 18DEC09 12JAN10 15 ✓Consultant Notice to Proce 0 23AN10 15 ✓Consultant Notice to Proce 0 13JAN10 26JAN10 15 ✓Consultant Notice to Proce 0 13JAN10 15 ✓Consultant Notice to Proce ✓Consultant Notice to Proce 0 13JAN10 15 ✓Consultant Notice to Proce	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5	10FEB10 19MAR10 28 22MAR10 19MAR10 0 22MAR10 02APR10 10 02APR10 0 ◆50% 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5	19MAR10 0 22MAR10 02APR10 10 22MAR10 02APR10 0 02APR10 0 02APR10 0 19APR10 23APR10 5 19APR10 23APR10 5	25APR10 0 Subr 26APR10 07MAY10 10 Subr 07MAY10 0 Subr	23APR10 0 26APR10 07MAY10 10 07MAY10 0 10MAY10 7	26APR10 07MAY10 10 26APR10 07MAY10 0 10MAY10 18MAY10 7 12MAY10 18MAY10 5	23APR10 0 23APR10 0		23APR10	0		Submit 90% Design to NEORSD
0 06NOV09 24NOV09 13 → Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 → Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 → Submit Proposal to NEORSD 0 18DEC09 16FEB10 40* → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Prepare Options E 0 29DEC09 12JAN10 15 → Prepare Options E 0 13JAN10 02FEB10 1 → Submit Reports I 0 10FEB10 16FEB10 0 → NEORSD Acc 0 10FEB10 19MAR10 0 → NEORSD Acc 0 19APR10 23APR10 0 <	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5	10FEB10 19MAR10 28 19MAR10 0 22MAR10 02APR10 10 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5	19MAR10 0 22MAR10 02APR10 10 22MAR10 02APR10 0 02APR10 0 02APR10 0 19APR10 23APR10 5 19APR10 23APR10 5	23APR10 0 26APR10 07MAY10 10 07MAY10 0	23APR10 0 26APR10 07MAY10 10 07MAY10 0 10MAY10 7	26APR10 07MAY10 10 26APR10 0 10 26APR10 07MAY10 0 10 10 10 10 10 10 10 10 10 10 10 10	23APR10 0 23APR10 0		2071 110	c		
D 06NOV09 24NOV09 13 ♣ Submit Proposal Preparation D 24NOV09 0 ♣ Submit Proposal to NEORSD D 25NOV09 17DEC09 15 ♣ Submit Proposal to NEORSD D 18DEC09 16FEB10 40* ♣ Consultant Notice to Proce D 18DEC09 05JAN10 10 ♣ Consultant Notice to Proce D 18DEC09 05JAN10 10 ♣ Consultant Notice to Proce D 18DEC09 05JAN10 10 ♣ Consultant Notice to Proce D 18DEC09 12JAN10 10 ♣ Consultant Notice to Proce D 29DEC09 12JAN10 15 ♣ Prepare Design D 06JAN10 26JAN10 15 ♣ Prepare Options E D 13JAN10 02FEB10 1 ♣ Submit Reports 1 D 27JAN10 1 ♣ Submit NEORSD Eval D 10FEB10 18MAY10 70* ♣ Submit NEORSD Eval D 23APR10 0 ♣ Submit NEORSD Eval <td< td=""><td>0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 02APR10 0 0 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 5</td><td>10FEB10 19MAR10 28 19MAR10 0 ◆Submit 22MAR10 02APR10 10 02APR10 0 ◆50% 29MAR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 5</td><td>19MAR10 0 22MAR10 02APR10 10 22MAR10 02APR10 0 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5</td><td>26APR10 07MAY10 10 ••9</td><td>26APR10 07MAY10 10</td><td>26APR10 07MAY10 10 0 07MAY10 0 18MAY10 7 12MAY10 18MAY10 5</td><td>0 26APR10 07MAY10 10 0 7MAY10 0 0 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 ■ 17AUG11 06NOV09 23MAR10 10:20</td><td></td><td>23APR10</td><td>0</td><td></td><th>Submit PTI to OEPA</th></td<>	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 0 22MAR10 02APR10 10 0 02APR10 0 0 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 5	10FEB10 19MAR10 28 19MAR10 0 ◆Submit 22MAR10 02APR10 10 02APR10 0 ◆50% 29MAR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 5	19MAR10 0 22MAR10 02APR10 10 22MAR10 02APR10 0 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5	26APR10 07MAY10 10 ••9	26APR10 07MAY10 10	26APR10 07MAY10 10 0 07MAY10 0 18MAY10 7 12MAY10 18MAY10 5	0 26APR10 07MAY10 10 0 7MAY10 0 0 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 ■ 17AUG11 06NOV09 23MAR10 10:20		23APR10	0		Submit PTI to OEPA
0 06NOV09 24NOV09 13 → Submit Proposal Preparation 0 24NOV09 0 → Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 → Submit Proposal to NEORSD 0 18DEC09 16FEB10 40* → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Consultant Notice to Proce 0 18DEC09 05JAN10 10 → Prepare Options E 0 18DEC09 12JAN10 15 → Prepare Options E 0 13JAN10 02FEB10 15 → Prepare Basis of 0 27JAN10 15 → Submit Reports to NEORSD Evalous 0 19FEB10 18MAP10 28 → NEORSD Evalous 0 19APR10 20 → NEORSD Evalous → Submit Netores 0 19APR10 23APR10 0 → Submit Netores <td>0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 \$submit 0 22MAR10 02APR10 10 \$submit 0 22MAR10 02APR10 0 \$50% 0 29MAR10 23APR10 20 \$50% 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 0 0 23APR10 0</td> <td>10FEB10 19MAR10 28 22MAR10 02APR10 10 22MAR10 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 5 23APR10 5 23APR10 5 23APR10 0</td> <td> Submit </td> <td>07MAY10 0</td> <td>07MAY10 0 • 99</td> <td>07MAY10 0 10MAY10 18MAY10 7 12MAY10 18MAY10 5</td> <td>00 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 Control 10 10 10 10 10 10 10 10 10 10 10 10 10</td> <td>26APR10</td> <td>07MAY10</td> <td>10</td> <td></td> <th>NEORSD Review 90% Design</th>	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 \$submit 0 22MAR10 02APR10 10 \$submit 0 22MAR10 02APR10 0 \$50% 0 29MAR10 23APR10 20 \$50% 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 23APR10 0 0 23APR10 0	10FEB10 19MAR10 28 22MAR10 02APR10 10 22MAR10 02APR10 0 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 5 23APR10 5 23APR10 5 23APR10 0	Submit Submit	07MAY10 0	07MAY10 0 • 99	07MAY10 0 10MAY10 18MAY10 7 12MAY10 18MAY10 5	00 10MAY10 18MAY10 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10 5 Control 10 10 10 10 10 10 10 10 10 10 10 10 10	26APR10	07MAY10	10		NEORSD Review 90% Design
0 06NOV09 24NOV09 13 ♣Submit Proposal to NEORSD 0 24NOV09 0 ♣Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ♣Submit Proposal to NEORSD 0 18DEC09 16FEB10 40* ♣Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 0.5JAN10 10 ♣Consultant Notice to Proce 0 18DEC09 12JAN10 15 ♣Consultant Notice to Proce 0 29DEC09 12JAN10 15 ♣Consultant Notice to Proce 0 0.6JAN10 26JAN10 15 ♣Consultant Notice to Proce 0 0.6JAN10 15 ♣Consultant Notice to Proce 0 0.6JAN10 15 ♣Consultant Notice to Proce 0 0.6JAN10 15 ♣Submit Geotechnical 0 19APR10 27JAN10 1 ♣Submit Prepare AACE Cla	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 \$submit 0 22MAR10 02APR10 10 \$submit 0 22MAR10 02APR10 0 \$50% 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0	10FEB10 19MAR10 28 22MAR10 02APR10 10 22MAR10 02APR10 10 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 5 23APR10 0 23APR10 0 23APR10 0	Submit Submit		10MAY10 18MAY10 7	10MAY10 18MAY10 7 12MAY10 18MAY10 5	O 10MAY10 18MAY10 7 O 12MAY10 18MAY10 5 O 12MAY10 18		07MAY10	0		◆90% Design Review Meeting
0 06NOV09 24NOV09 13 ★Submit Proposal Preparation 0 24NOV09 0 ★Submit Proposal to NEORSD 0 25NOV09 17DEC09 15 ★Submit Proposal to NEORSD 0 18DEC09 15 ★Submit Proposal to NEORSD 0 18DEC09 16FEB10 40* ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 10 ★Consultant Notice to Proce 0 18DEC09 05JAN10 15 ★Consultant Notice to Proce 0 18DEC09 05JAN10 15 ★Consultant Notice to Proce 0 18DEC09 05JAN10 15 ★Consultant Notice to Proce 0 16ADEC09 05JAN10 15 ★Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Reports to Submit Repor	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 19MAR10 0 Submit 0 22MAR10 02APR10 10 0 22MAR10 23APR10 20 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0	10FEB10 19MAR10 28 22MAR10 02APR10 10 22MAR10 02APR10 10 29MAR10 23APR10 20 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 23APR10 0 23APR10 0 25APR10 0 25APR10 0 25APR10 0	Submit 19MAR10 0 Submit 20 Subm		10MAY10 18MAY10 7	12MAY10 18MAY10 7	O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 5 O 12MAY10 18MAY10 7 O 12MAY10 18MAY10 10 10 10 10 10 10 10 10 10 10 10 10 1			,		
O OBNOVO9 24MOVO9 13	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 22MAR10 02APR10 20 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 29APR10 0 5 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 25APR10 0 0 19APR10 25APR10 0 0 19APR10 25APR10 0 0 19APR10 25APR10 0 0 19APR10 25APR10 0 0 19APR10 10 0	0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 29MAR10 02APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 10 0 19APR10 23APR10 5 0 19APR10 19APR10 5 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 19APR10 10 0 19APR10 10APY10 10 0 19APR10 10A	Submit 50% Design to NEORSD	0 12MAY10 18MAY10 5 Prepare AACE Class 1 Cost Est. +/-10% 6 06NOV09	O6NOV09		23MAR10 10:20 Critical Activity		06NOV09		Tiogless bai	
0 06NOV09 24NOV09 13	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 29MAR10 23APR10 50 0 19APR10 23APR10 50 0 19APR10 23APR10 0 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 26APR10 07MAY10 10 0 77MAY10 118MAY10 7 0 12MAY10 18MAY10 5 0 12MAY10 18MAY10	0 10FEB10 19MAR10 28 0 22MAR10 02APR10 10 0 22MAR10 02APR10 10 0 29MAR10 02APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 07MAY10 10 0 26APR10 07MAY10 10 0 10MAY10 18MAY10 5 ■ Frepare ACE Class 1 Cost Est10/15% ■ Prepare ACE Class 1 Cost Est10/15% ■ Submit 90% Design to NEORSD ■ Submit 91% Develop 90% Design to NEORSD ■ Submit 91% Design Review Meeting □ 10MAY10 18MAY10 5 ■ Frepare ACE Class 1 Cost Est10/15% ■ Submit 91% Design NEORSD Review 90% Design NEORSD □ 26APR10 07MAY10 10 □ 18MAY10 18MAY10 5 ■ Featly Bar NEORSD ■ NE	Submit 50% Design to NEORSD	0 12MAY10 18MAY10 5 Propere AACE Class 1 Cost Est. +/-10% 06NOV09 Farly Bar 06NOV09 Progress Bar 06NOV09 NRIR NEORSD	e 17AUG11 VEARLY Bar NEORSD Sheet 1 of 2 Date Revision	06NOV09		23MA	R10 10:20		Critical Activity	Walworth Run Interceptor
0 06NOV09 24NOV09 13	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 22MAR10 109MAR10 0 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 23APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 23APR10 0 0 23APR10 0 0 23APR10 0 0 19APR10 23APR10 0 0 19APR10 0 0 23APR10 0 0 19APR10 10 0 25APR10 0 0 19APR10 0 0 19APR10 0 0 25APR10 0 0 19APR10 0 0 25APR10 0 0 19APR10 0 0 10MAY10 10 0 10MAY10 10 0 10MAY10 18MAY10 7 0 10MAY10 18MAY10 5 ■ Frepare ACE Class 1 Cost Est10/15% Submit 90% Design Review Meeting ■ NEORSD Review 90% Design to NEORSD Review 90% Design to NEORSD Review 90% Design Review Meeting ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design Documents ■ NEORSD Review Meeting ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design Documents ■ NEORSD Review Meeting ■ NEORSD Review Meeting ■ NEORSD Review 90% Design Documents ■ NEORSD Review Meeting ■ NEORSD Review Meeting ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design Documents ■ NEORSD Review 90% Design NEORSD Review 90% Design NEORSD Review 90% Design Neorting N	0 10FEB10 19MAR10 28 0 29MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 50 0 19APR10 23APR10 0 0 29MAR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 23APR10 5 0 19APR10 53APR10 7 0 19APR10 53APR10 5 0 19APR10 10 5 0 19APR10 53APR10 5 0 19APR10 5 0 19AP	Submit 50% Design to NEORSD	0 12MAY10 18MAY10 5	e 17AUG11 Progress Bar 06NOV09 Critical Activity Walworth Run Interceptor	23MAR10 10:20 Critical Activity						
Consultant Notice to Proposals Summer	0 10FEB10 18MAY10 70* 0 10FEB10 19MAR10 28 0 10FEB10 19MAR10 28 0 22MAR10 19MAR10 0 0 22MAR10 02APR10 10 0 22MAR10 02APR10 0 0 23APR10 23APR10 5 0 19APR10 23APR10 0 0 26APR10 07MAY10 10 0 26APR10 07MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 18MAY10 7	0 10FEB10 19MAR10 28 0 29MAR10 02APR10 10 0 22MAR10 02APR10 10 0 29MAR10 23APR10 20 0 19APR10 23APR10 5 0 19APR10 23APR10 0 0 29MAR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 23APR10 0 0 19APR10 10 0 25APR10 07MAY10 10 0 26APR10 07MAY10 5 0 10MAY10 18MAY10 5 0 10MAY10 10 0 0 10MAY10 18MAY10 5 0 10MAY10 10 0 0 10MAY10 18MAY10 5 0 10MAY10 10 0 0 10MAY	Submit 50% Design to NEORSD Submit 50% Design to NEORSD	O 12MAY10 18MAY10 5 Prepare AACE Class 1 Cost Est. +/-10% O6NOV09 17AUG11 OF Progress Bar O6NOV09 23MAR10 10:20 Progress Bar Walworth Run Interceptor Critical Activity Walworth Run Interceptor Classic Schedule Layout	e 17AUG11 Progress Bar 06NOV09 Critical Activity Walworth Run Interceptor Classic Schedule Layout Sheet 1 of 2 Date Revision Walworth Run Interceptor	23MAR10 10:20 Critical Activity		S Conton				
	Design	3000	2010	5000	5010	Start Date		Proposal Stage 1000 1010 1020 1030 1040 1050 2000 2010 2020 2030 2040 2050 2080 2080 2080 2080 2090 2100 Design 3000 3010 3020 3040 4020 4030 4040 4050 4050 4060 5010 Start Date Finish Date Finish Date Para Date Para Date Para Date Para Date	OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO OGNOVO IBDECC IBDECC OGJANI IJJANI 13JANI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI 10FEBI	06NOV09 06NOV09 18NOV09 18DEC09 18DEC09 18DEC09 18DEC09 18DEC09 13JAN10 10FEB1	06NOV09 17DEC09 28* 06NOV09 000NOV09 000NOV09 24NOV09 13 22NOV09 16FEB10 40* 18DEC09 16FEB10 10 18DEC09 05JAN10 10 18DEC09 05JAN10 10 29DEC09 12JAN10 10 29DEC09 12JAN10 10 06JAN10 26JAN10 15 13JAN10 02FEB10 15 27JAN10 16FEB10 0 03FEB10 18MAY10 70* 10FEB10 19MAR10 28 19MAR10 02APR10 0 02APR10 02APR10 10 02APR10 02APR10 0 19APR10 23APR10 0 19APR10 23APR10 5 19APR10 23APR10 5 19APR10 23APR10 0 10MAY10 18MAY10 7 12MAY10 18MAY10 7 12MAY10 18MAY10 5 12MAY10 18MAY10 5 12MAY10 18MAY10 5	OSNOV09 17DEC09 28* OSNOV09 17DEC09 28* OSNOV09 24NOV09 13 OSNOV09 24NOV09 13 Proposal Meetit 13NOV09 0 24NOV09 15 Proposal Meetit 24NOV09 13 Proposal Meetit 24NOV09 13 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 15 Proposal Meetit 24NOV09 0 10 Proposal Meetit 24NOV0

Red 3/23/2010

		1C	© Primavera Systems Inc.	© Prima
Classic Schedule Layout				
Walworth Run Interceptor	Critical Activity	23MAR10 10:20	23MAR	Run Date
WRIR NEORSD Sheet 2 of 2 Date Revision Checked Approved	Early Bar Progress Bar	06NOV09 17AUG11	0 1 0	Start Date Finish Date
2				
Complete Project	0	17AUG11		8030
Prepare O & M Manual	20	17AUG11	21JUL11	8020
Project As-Builts	20	17AUG11	21JUL11	8010
Project Closeout	20*	17AUG11	21JUL11	8000
				Closeout
Complete Construction◆	0	20JUL11		7040
Resident Project Representation A House Handle Hand	195	20JUL11 ·	120CT10	7030
Contract Administration	215	20JUL11 2	14SEP10	7020
◆ Contractor Issued Notice to Proceed			14SEP10	7010
Contract Administration	215*	20JUL11 2	14SEP10	7000
				Construction
◆ Contractor Signs Contract	O	13SEP10		6110
NEORSD Contract Preparation	20	13SEP10	16AUG10	6100
◆NEORSD Board Approval	0	13AUG10		6090
NEORSD Recommendation to Board	σı	13AUG10	09AUG10	6080
◆Award Recommendation to NEORSD	0	06AUG10		6070
Evaluate Bids	on.	06AUG10	02AUG10	6060
Contractors Submit Bids	0	30JUL10		6050
Contractors Prepare Bids	20	30JUL10	02JUL10	6040
◆Pre-Bid Meeting	0	01JUL10		6030
Second Advertisement Period	σ	01JUL10	25JUN10	6020
First Advertisement Period	σ	24JUN10	18JUN10	6010
Submit Final Documents for Bid	0	02JUN10		5060
Address Final Comments	σ	02JUN10	27MAY10	5050
Final Design Review Meeting	0	26MAY10		5040
NEORSD Review Final Design	σ	26MAY10	19MAY10	5030
Bid and Award	81*	13SEP10 8	19MAY10	5025
				Bidding
◆Submit Final Design to NEORSD	0	0		5020
OCT NOV DEC JAN FEB MAR APR MAY JUN JUL AUG SEP OCT NOV DEC JAN FEB MAR APR MAY JUN JUL AUG SEP S	Orig OCT NOV DEC JA	Finish [Early Start	Activity