


# CONSOLIDATION TEST REPORT

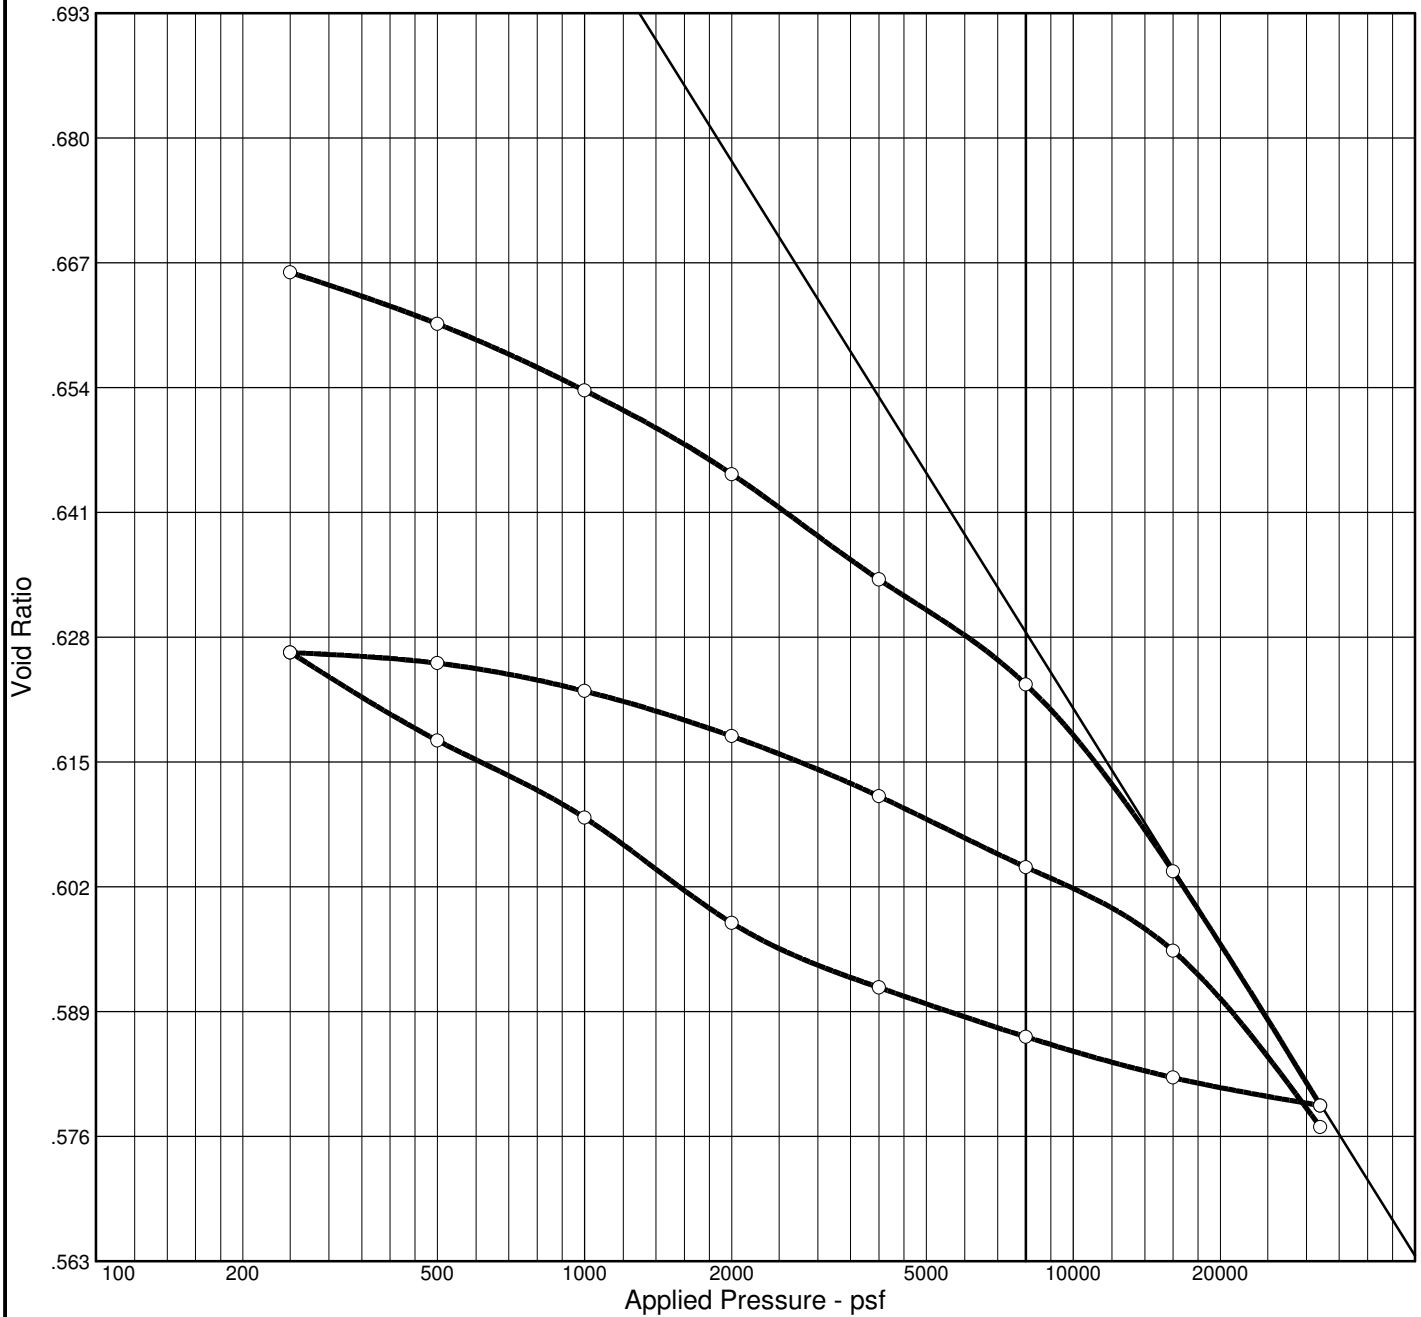

Natural		Dry Dens. (pcf)	LL	PI	Sp. Gr.	USCS	AASHTO	Initial Void Ratio
Saturation	Moisture							
91.9 %	22.7 %	102.3	35	14	2.75	CL	A-6(14)	0.678

### MATERIAL DESCRIPTION

Lean clay Torvane= 3.9

<b>Project No.</b> 0121- <b>Project:</b> SCI-823-0.00 <b>Source:</b> C-92	<b>Client:</b> TranSystems, Inc.  <b>Sample No.:</b> P1 <b>Elev./Depth:</b> 10.0	<b>Remarks:</b>
---	--	-----------------



Figure

# Dial Reading vs. Time





Project No.: 0121-3070.03

Project: SCI-823-0.00

Source: C-92

Sample No.: P1

Elev./Depth: 10.0

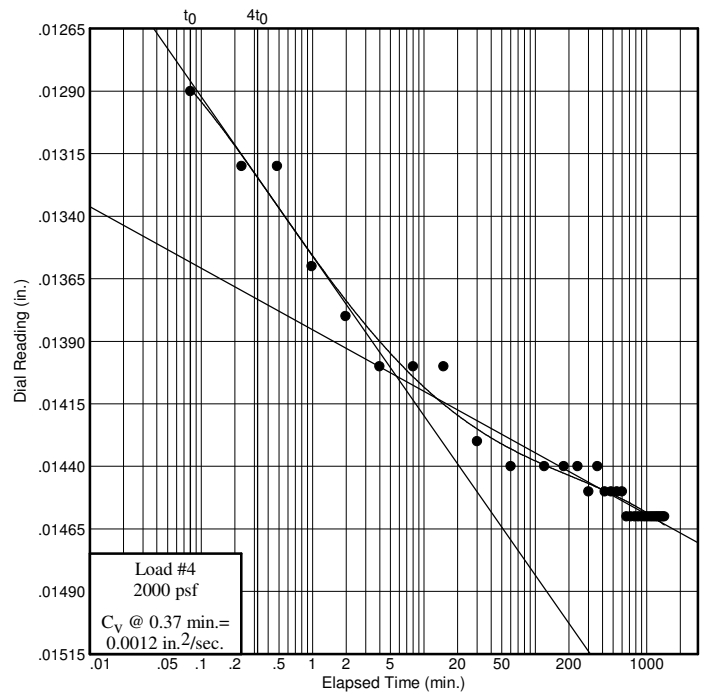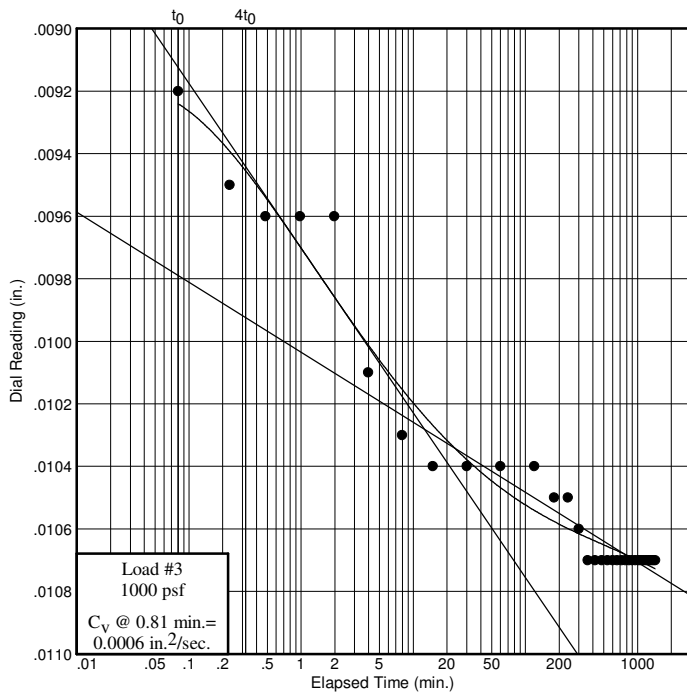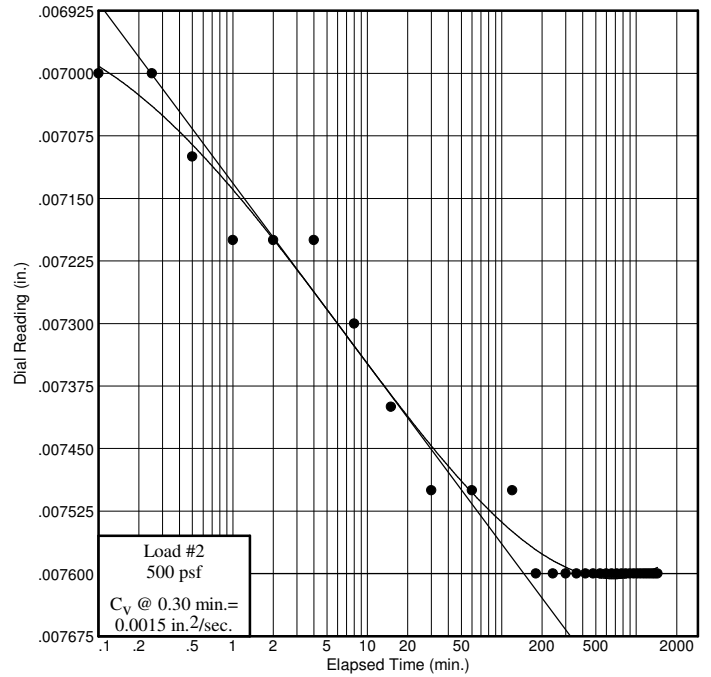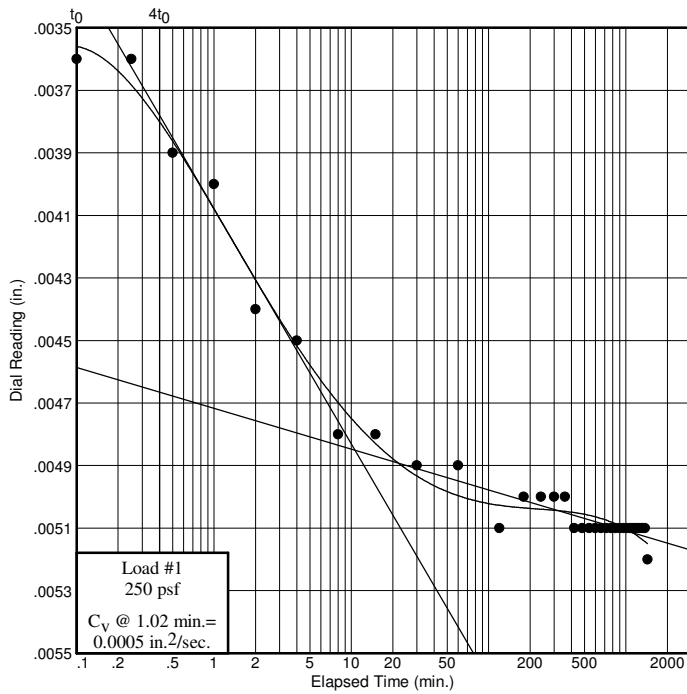

Figure

# Dial Reading vs. Time





Project No.: 0121-3070.03

Project: SCI-823-0.00

Source: C-92

Sample No.: P1

Elev./Depth: 10.0

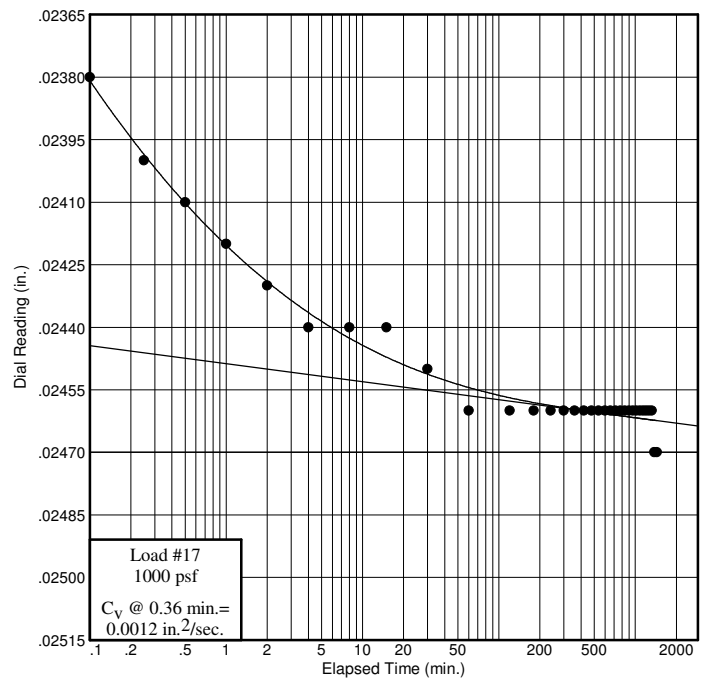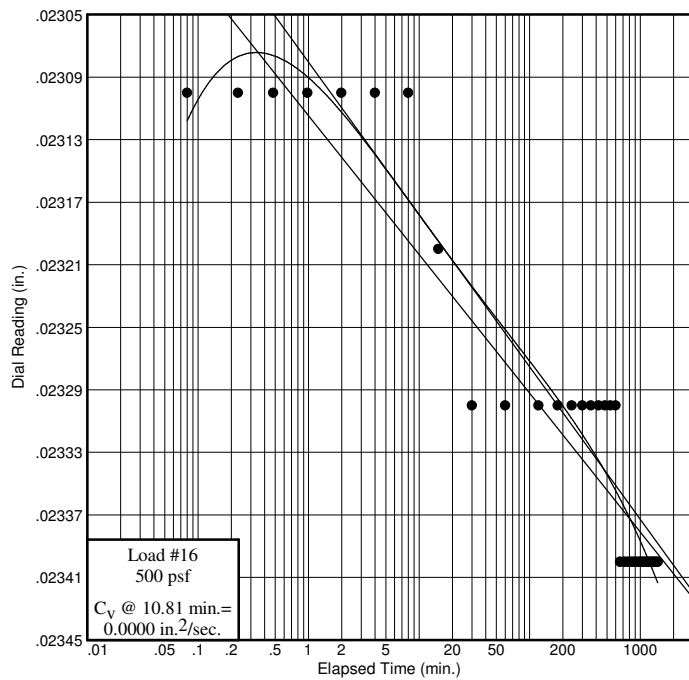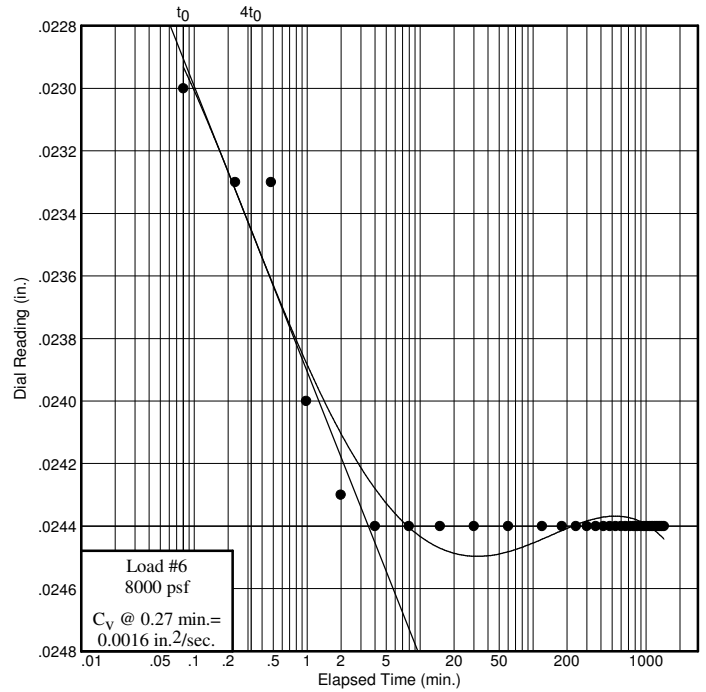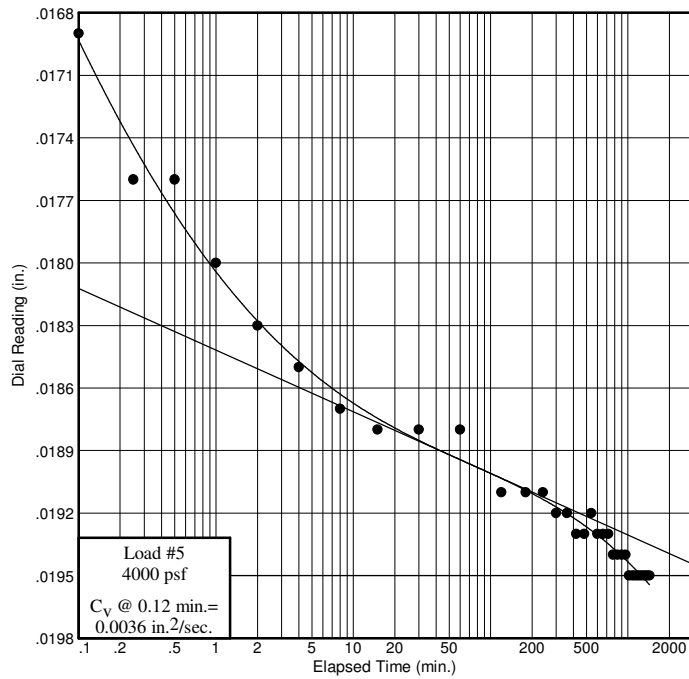

Figure

# Dial Reading vs. Time




Project No.: 0121-3070.03

Project: SCI-823-0.00

Source: C-92

Sample No.: P1

Elev./Depth: 10.0

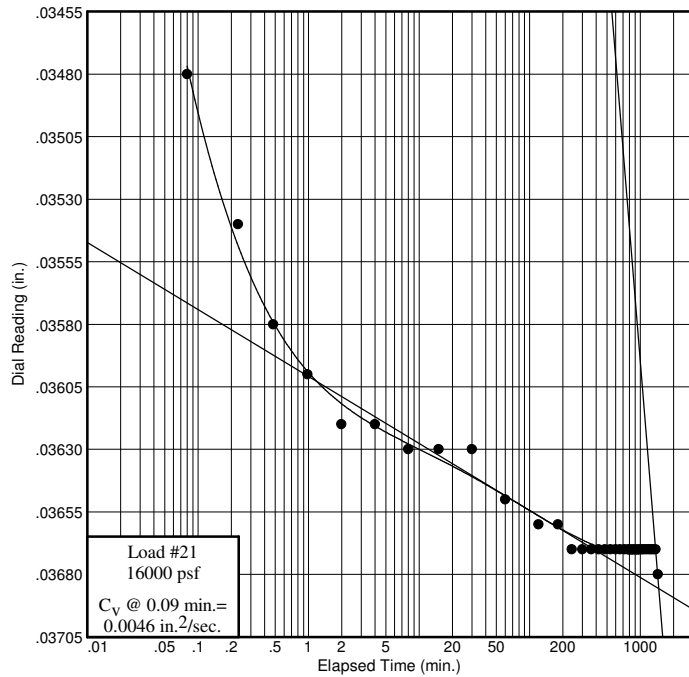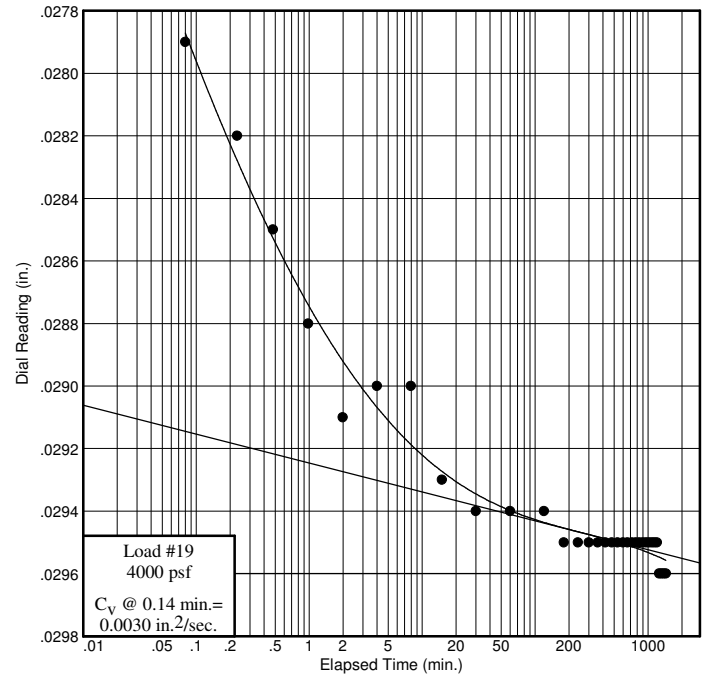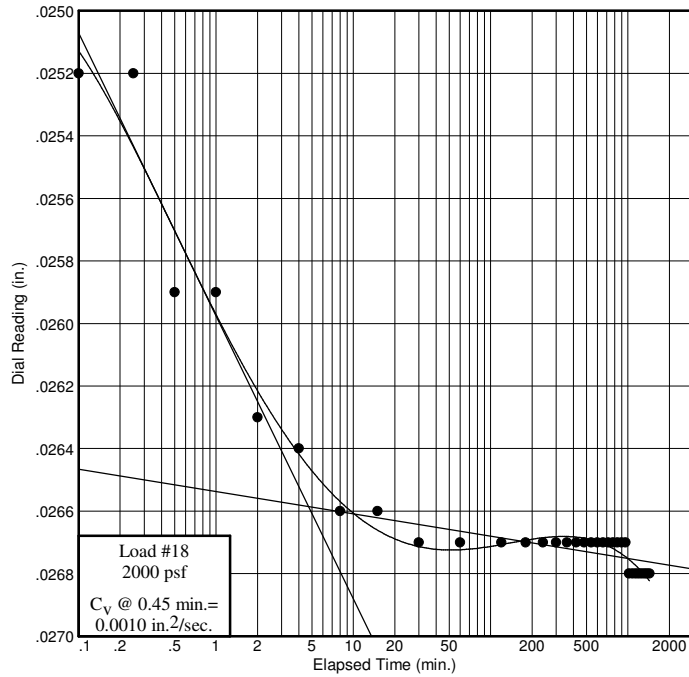

Figure