STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

SCI-SHAWNEE STATE FOREST BRIDGES

WASHINGTON TOWNSHIP

NILE TOWNSHIP

SCIOTO COUNTY

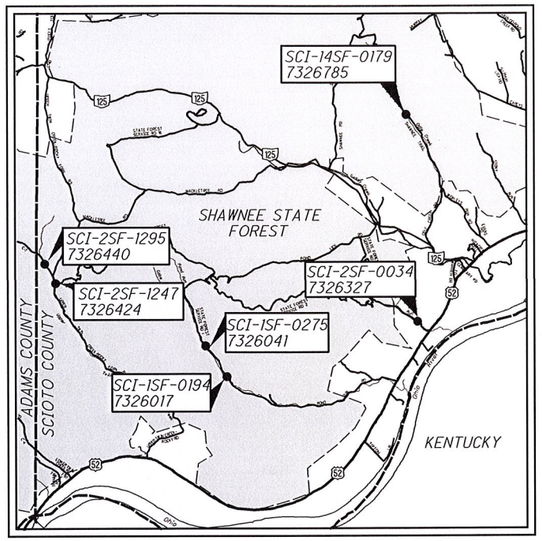

LOCATION MAP

LATITUDE: 38°41'43" LONGITUDE: 83°9'52"

SCALE IN MILES

0 2 4 6 8

N

PORTION TO BE IMPROVED
INTERSTATE HIGHWAY
FEDERAL ROUTES
STATE ROUTES
COUNTY & TOWNSHIP ROADS
OTHER ROADS

INDEX OF SHEETS:

TITLE SHEET	1
SCHEMATIC PLAN	2
GENERAL NOTES SHEET	3
MAINTENANCE OF TRAFFIC	4-9
GENERAL SUMMARY	10
STRUCTURES NOTES & QUANTITIES	11-12
STRUCTURES OVER 20'	
SCI-1SF-0194	13-15
SCI-1SF-0275	16-18
SCI-2SF-0034	19-21
SCI-2SF-1247	22-24
SCI-2SF-1295	25-27
SCI-14SF-0179	28
REINFORCING STEEL LIST	29-30

PROJECT DESCRIPTION

REHABILITATION OF SIX BRIDGES IN SHAWNEE STATE FOREST. WORK INCLUDES INSTALLING CONCRETE FACING ON ABUTMENTS AND FILLING SCOUR HOLES.

EARTH DISTURBED AREAS

PROJECT EARTH DISTURBED AREA:	N/A*
ESTIMATED CONTRACTOR EARTH DISTURBED AREA:	N/A*
NOTICE OF INTENT EARTH DISTURBED AREA:	N/A*

*N/A=MAINTENANCE PROJECT

2019 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PLANS AND CHANGES LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

UNDERGROUND UTILITIES

Contact Two Working Days Before You Dig

OHIO811.org Before You Dig

OHIO811, 8-1-1, or 1-800-362-2764
(Non-members must be called directly)

PLAN PREPARED BY:

Stantec
11687 Lebanon Road
Cincinnati OH 45241
(513) 842-8200

ENGINEERS SEAL:

STATE OF OHIO MICHAEL R. STURDEVANT E-49864 REGISTERED PROFESSIONAL ENGINEER

SIGNED: Michael R. Sturdevant
DATE: JANUARY 7, 2020

STANDARD CONSTRUCTION DRAWINGS	SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
MT-97.10 4/19/19	800-2019 01/17/20	WATERWAY PERMIT CONDITIONS DATED 04/23/2020
MT-101.60 1/20/17	832 10/19/18	
MT-105.10 7/19/13		

I HEREBY APPROVE THESE PLANS AND DECLARE THAT THE MAKING OF THIS IMPROVEMENT WILL REQUIRE THE PART TIME CLOSING OF THE HIGHWAY TO TRAFFIC, AS NOTED ON SHEET 3. DURING WHICH TIME DETOURS WILL BE PROVIDED AS SHOWN HEREIN. PROVISIONS FOR THE MAINTENANCE AND SAFETY OF TRAFFIC WILL BE AS SET FORTH ON THE PLANS AND ESTIMATES.

APPROVED Michael R. Sturdevant
DATE 02-21-2020 DISTRICT DEPUTY DIRECTOR

APPROVED _____
DATE _____ DIRECTOR, DEPARTMENT OF TRANSPORTATION

FEDERAL PROJECT NO. NON-FEDERAL

PID NO. 107284

CONSTRUCTION PROJECT NO.

RAILROAD INVOLVEMENT NONE

SCI-SHAWNEE STATE FOREST

V:\1736\active\173608993\engineering\107284 Task C\Design\Roadway\Sheets\08993_GT001.dgn Sheet 2/12/2020 7:32:26 AM latchley